



# FCC RF Test Report

**APPLICANT** : Quetel Wireless Solutions Co., Ltd.  
**EQUIPMENT** : LTE Module  
**BRAND NAME** : Quetel  
**MODEL NAME** : AG35-LA  
**FCC ID** : XMR201905AG35LA  
**STANDARD** : 47 CFR Part 2, 22(H), 24(E), 27(L), 27(M)  
**CLASSIFICATION** : PCS Licensed Transmitter (PCB)  
**TEST DATE(S)** : Oct. 17, 2022

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.26-2015 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.

Jason Jia

Approved by: Jason Jia



**Sporton International Inc. (Kunshan)**

**No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300  
People's Republic of China**



TABLE OF CONTENTS

REVISION HISTORY... 3
SUMMARY OF TEST RESULT ... 4
1 GENERAL DESCRIPTION ... 5
1.1 Applicant ... 5
1.2 Manufacturer ... 5
1.3 Product Feature of Equipment Under Test ... 5
1.4 Product Specification of Equipment Under Test ... 5
1.5 Modification of EUT ... 6
1.6 Testing Location ... 6
1.7 Test Software ... 6
1.8 Applicable Standards ... 6
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST ... 7
2.1 Test Mode ... 7
2.2 Connection Diagram of Test System ... 7
2.3 Support Unit used in test configuration and system ... 8
2.4 Frequency List of Low/Middle/High Channels ... 8
3 RADIATED TEST ITEMS ... 9
3.1 Measuring Instruments ... 9
3.2 Test Setup ... 9
3.3 Test Result of Radiated Test ... 10
3.4 Radiated Spurious Emission ... 11
4 LIST OF MEASURING EQUIPMENT ... 12
5 UNCERTAINTY OF EVALUATION ... 13
APPENDIX A. TEST RESULTS OF RADIATED TEST
APPENDIX B. TEST SETUP PHOTOGRAPHS
APPENDIX C. ORIGINAL REPORT



### REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FG291701	Rev. 01	Initial issue of report	Nov. 10, 2022



### SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.4	§2.1053 §27.53(m)(4)	Radiated Spurious Emission (Band 7)	$< 55 + 10 \log_{10}(P[\text{Watts}])$	PASS	Under limit 12.93 dB at 5052.00 MHz

**Note:** This is a variant report. The change note could be referred to the AG35-LA\_Operational Description of Product Equality Declaration which is exhibit separately. According to the differences, only the worst case RSE from original report (Sporton Report Number FG932502B) were verified for the differences.

<b>Declaration of Conformity:</b>
The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.
<b>Comments and Explanations:</b>
The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.



# 1 General Description

## 1.1 Applicant

**Quectel Wireless Solutions Co., Ltd.**

Building 5, Shanghai Business Park Phase III (Area B), No.1016 Tianlin Road, Minhang District, Shanghai, 200233, China

## 1.2 Manufacturer

**Quectel Wireless Solutions Co., Ltd.**

Building 5, Shanghai Business Park Phase III (Area B), No.1016 Tianlin Road, Minhang District, Shanghai, 200233, China

## 1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	LTE Module
Brand Name	Quectel
Model Name	AG35-LA
FCC ID	XMR201905AG35LA
IMEI Code	Radiation: 867999040033586
HW Version	R1.1
SW Version	AG35LAVDMR08A11T4G
EUT Stage	Identical Prototype

## 1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx Frequency	LTE Band 2 : 1850 MHz ~ 1910 MHz LTE Band 4 : 1710 MHz ~ 1755 MHz LTE Band 5 : 824 MHz ~ 849 MHz LTE Band 7 : 2500 MHz ~ 2570 MHz
Rx Frequency	LTE Band 2 : 1930 MHz ~ 1990 MHz LTE Band 4 : 2110 MHz ~ 2155 MHz LTE Band 5 : 869 MHz ~ 894 MHz LTE Band 7 : 2620 MHz ~ 2690 MHz
Bandwidth	LTE Band 2 : 1.4MHz / 3MHz / 5MHz / 10MHz / 15MHz / 20MHz LTE Band 4 : 1.4MHz / 3MHz / 5MHz / 10MHz / 15MHz / 20MHz LTE Band 5 : 1.4MHz / 3MHz / 5MHz / 10MHz LTE Band 7 : 5MHz / 10MHz / 15MHz / 20MHz
Antenna Gain	LTE Band 2 : 3.00 dBi LTE Band 4 : 2.00 dBi LTE Band 5 : 2.00 dBi LTE Band 7 : 2.00 dBi
Type of Modulation	QPSK / 16QAM / 64QAM(Downlink only)



### 1.5 Modification of EUT

No modifications are made to the EUT during all test items.

### 1.6 Testing Location

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

<b>Test Firm</b>	Sporton International Inc. (Kunshan)		
<b>Test Site Location</b>	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People’s Republic of China TEL : +86-512-57900158 FAX : +86-512-57900958		
<b>Test Site No.</b>	<b>Sporton Site No.</b>	<b>FCC Designation No.</b>	<b>FCC Test Firm Registration No.</b>
	03CH04-KS	CN1257	314309

### 1.7 Test Software

Item	Site	Manufacture	Name	Version
1.	03CH04-KS	AUDIX	E3	6.2009-8-24al

### 1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 2, 22(H), 24(E), 27(L), 27(M)
- ♦ ANSI C63.26-2015
- ♦ FCC KDB 971168 D01 Power Meas License Digital Systems v03r01
- ♦ FCC KDB 412172 D01 Determining ERP and EIRP v01r01

**Remark:**

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

## 2 Test Configuration of Equipment Under Test


### 2.1 Test Mode

Antenna port conducted and radiated test items listed below are performed according to KDB 971168 D01 Power Meas License Digital Systems v03r01 with maximum output power.

Radiated measurements are performed by rotating the EUT in three different orthogonal test planes to find the maximum emission.

Test Items	Band	Bandwidth (MHz)						Modulation			RB #			Test Channel			
		1.4	3	5	10	15	20	QPSK	16QAM	64QAM	1	Half	Full	L	M	H	
Radiated Spurious Emission	7	-	-	v	v	v	v	v				v				v	
Note	1. The mark "v" means that this configuration is chosen for testing 2. The mark "-" means that this bandwidth is not supported. 3. The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported.																

### 2.2 Connection Diagram of Test System

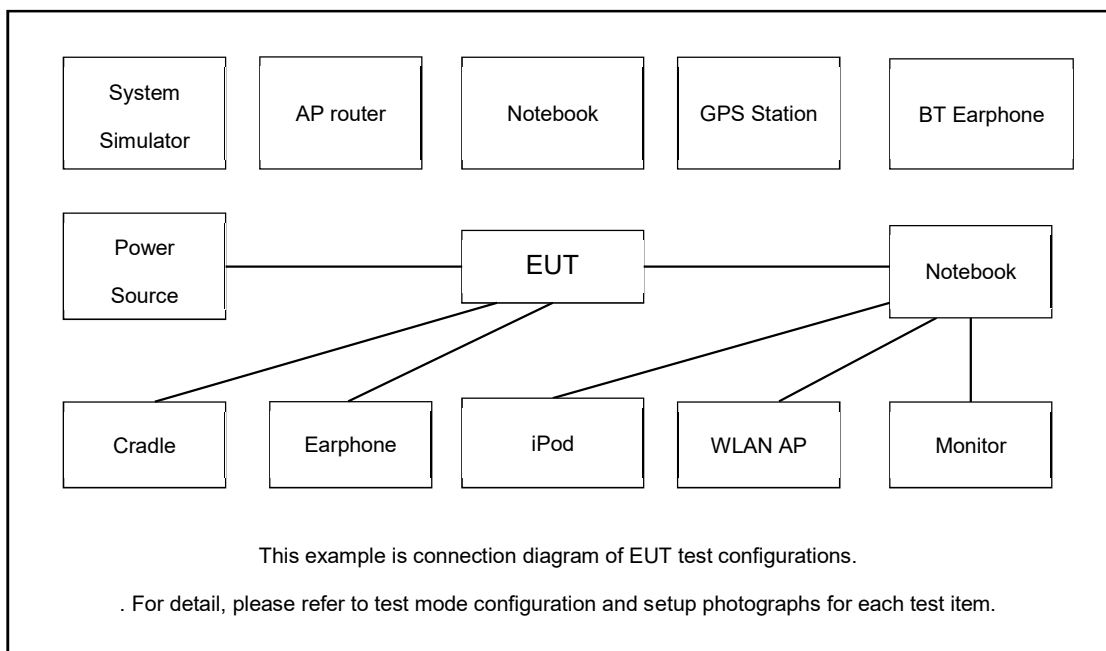



### 2.3 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	Power Supply	GWINSTEK	PSS-2002	N/A	N/A	Unshielded, 1.8 m
2.	LTE Base Station	Anritsu	MT8820C	N/A	N/A	Unshielded, 1.8 m
3.	WWAN Antenna	N/A	N/A	N/A	N/A	N/A
4.	GNSS Antenna	N/A	N/A	N/A	N/A	N/A
5.	Adapter	N/A	N/A	N/A	Unshielded, 1.2m	N/A
6.	Test Jig	N/A	N/A	N/A	N/A	N/A

### 2.4 Frequency List of Low/Middle/High Channels

LTE Band 7 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
20	Channel	20850	21100	21350
	Frequency	2510	2535	2560
15	Channel	20825	21100	21375
	Frequency	2507.5	2535	2562.5
10	Channel	20800	21100	21400
	Frequency	2505	2535	2565
5	Channel	20775	21100	21425
	Frequency	2502.5	2535	2567.5




### 3 Radiated Test Items

#### 3.1 Measuring Instruments


See list of measuring instruments of this test report.

#### 3.2 Test Setup


##### 3.2.1 For radiated test below 30MHz

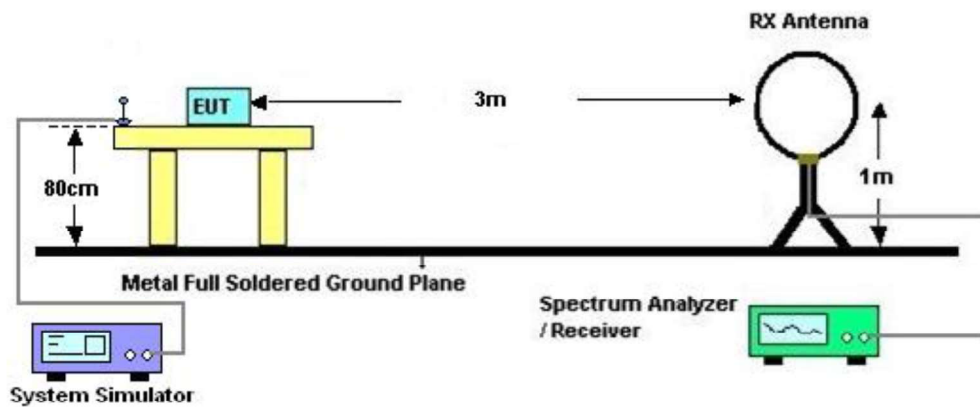

##### 3.2.2 For radiated test from 30MHz to 1GHz

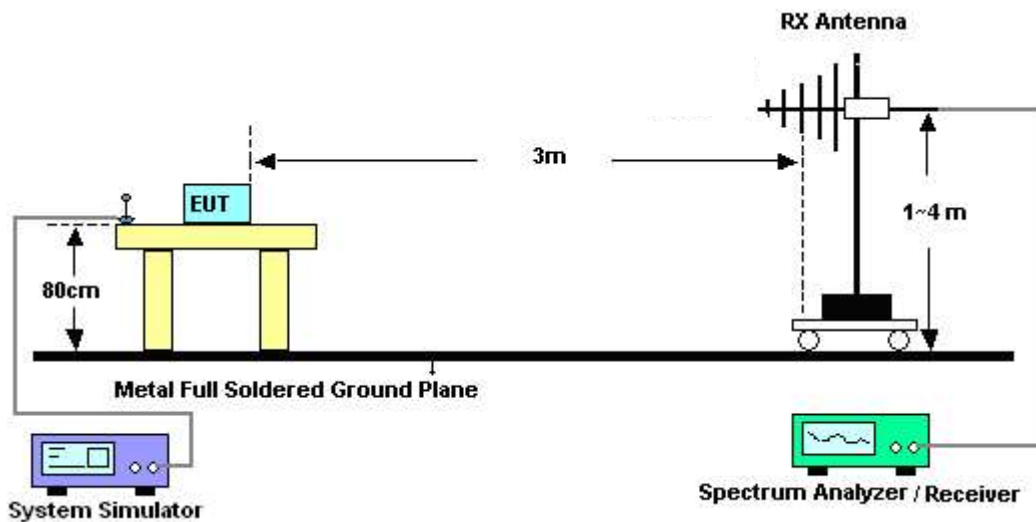

### 3.2.3 For radiated test above 1GHz

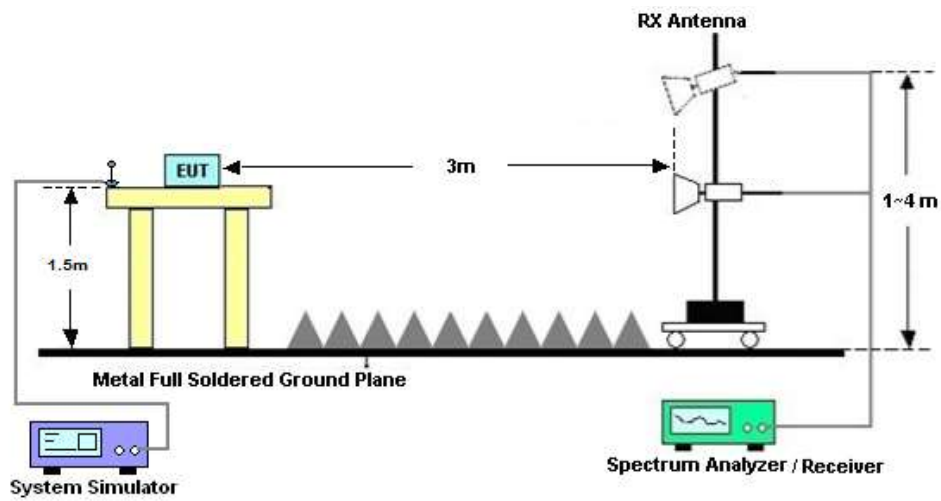

### 3.3 Test Result of Radiated Test

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

Please refer to Appendix A.



## 3.4 Radiated Spurious Emission

### 3.4.1 Description of Radiated Spurious Emission

The radiated spurious emission was measured by substitution method according to ANSI C63.26. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least  $43 + 10 \log (P)$  dB.

For Band 7

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least  $55 + 10 \log (P)$  dB.

The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

### 3.4.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.5
2. The EUT was placed on a turntable with 0.8 meter height for frequency below 1GHz and 1.5 meter height for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the receiving antenna mounted on the antenna tower.
4. The table was rotated 360 degrees to determine the position of the highest spurious emission.
5. The height of the receiving antenna is varied between 1m to 4m to search the maximum spurious emission for both horizontal and vertical polarizations.
6. During the measurement, the system simulator parameters were set to force the EUT transmitting at maximum output power.
7. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
8. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
9. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
10.  $EIRP (dBm) = S.G. Power - Tx Cable Loss + Tx Antenna Gain$
11.  $ERP (dBm) = EIRP - 2.15$
12. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.  
The limit line is derived from  $43 + 10\log(P)$ dB below the transmitter power P(Watts)  
 $= P(W) - [43 + 10\log(P)] (dB)$   
 $= [30 + 10\log(P)] (dBm) - [43 + 10\log(P)] (dB)$   
 $= -13dBm.$
13. For Band 7:  
The limit line is derived from  $55 + 10\log(P)$ dB below the transmitter power P(Watts)



## 4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
EXA Spectrum Analyzer	Keysight	N9010B	MY57471079	10Hz-44G,MAX 30dB	Oct. 12, 2022	Oct. 17, 2022	Oct. 11, 2023	Radiation (03CH04-KS)
Loop Antenna	R&S	HFH2-Z2	100321	9kHz~30MHz	Oct. 30, 2021	Oct. 17, 2022	Oct. 29, 2022	Radiation (03CH04-KS)
Bilog Antenna	TeseQ	CBL6111D	49922	30MHz-1GHz	May 24, 2022	Oct. 17, 2022	May 23, 2023	Radiation (03CH04-KS)
Horn Antenna	Schwarzbeck	BBHA9120D	1284	1GHz~18GHz	Jan. 05, 2022	Oct. 17, 2022	Jan. 04, 2023	Radiation (03CH04-KS)
SHF-EHF Horn	Com-power	AH-840	101070	18GHz~40GHz	Jan. 05, 2022	Oct. 17, 2022	Jan. 04, 2023	Radiation (03CH04-KS)
Amplifier	SONOMA	310N	187289	9KHz-1GHz	Jan. 05, 2022	Oct. 17, 2022	Jan. 04, 2023	Radiation (03CH04-KS)
Amplifier	MITEQ	EM18G40G GA	060728	18~40GHz	Jan. 05, 2022	Oct. 17, 2022	Jan. 04, 2023	Radiation (03CH04-KS)
high gain Amplifier	EM	EM01G18G A	060840	1Ghz-18Ghz	Oct. 12, 2022	Oct. 17, 2022	Oct. 11, 2023	Radiation (03CH04-KS)
Amplifier	Agilent	8449B	3008A02370	1Ghz-18Ghz	Oct. 12, 2022	Oct. 17, 2022	Oct. 11, 2023	Radiation (03CH04-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Oct. 17, 2022	NCR	Radiation (03CH04-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Oct. 17, 2022	NCR	Radiation (03CH04-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Oct. 17, 2022	NCR	Radiation (03CH04-KS)

NCR: No Calibration Required



## 5 Uncertainty of Evaluation

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.26-2015. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	3.3dB
---	-------

### Uncertainty of Radiated Emission Measurement (1 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.8dB
---	-------



## Appendix A. Test Results of Radiated Test

### Radiated Spurious Emission

Test Engineer :	Chris Chen	Temperature :	23~25°C
		Relative Humidity :	41~42%

LTE Band 7 / 5MHz / QPSK								
Channel	Frequency ( MHz )	EIRP ( dBm )	Limit ( dBm )	Over Limit ( dB )	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	5064	-47.86	-25	-22.86	-58.07	3.03	13.24	H
	7600	-62.88	-25	-37.88	-72.33	3.56	13.01	H
	10130	-61.70	-25	-36.70	-71.22	3.92	13.44	H
	5064	-40.20	-25	-15.20	-50.12	4.44	14.36	V
	7600	-58.81	-25	-33.81	-69.18	4.77	15.14	V
	10130	-59.99	-25	-34.99	-70.87	4.86	15.74	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

LTE Band 7 / 10MHz / QPSK								
Channel	Frequency ( MHz )	EIRP ( dBm )	Limit ( dBm )	Over Limit ( dB )	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	5060	-39.31	-25	-14.31	-49.52	3.03	13.24	H
	7592	-59.02	-25	-34.02	-68.47	3.56	13.01	H
	10120	-61.53	-25	-36.53	-71.05	3.92	13.44	H
	5060	-38.68	-25	-13.68	-48.60	4.44	14.36	V
	7592	-58.21	-25	-33.21	-68.58	4.77	15.14	V
	10120	-59.77	-25	-34.77	-70.65	4.86	15.74	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

LTE Band 7 / 15MHz / QPSK								
Channel	Frequency ( MHz )	EIRP ( dBm )	Limit ( dBm )	Over Limit ( dB )	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	5056	-38.55	-25	-13.55	-48.76	3.03	13.24	H
	7584	-58.52	-25	-33.52	-67.97	3.56	13.01	H
	10110	-61.47	-25	-36.47	-70.99	3.92	13.44	H
	5056	-38.60	-25	-13.60	-48.52	4.44	14.36	V
	7584	-58.35	-25	-33.35	-68.72	4.77	15.14	V
	10110	-59.23	-25	-34.23	-70.11	4.86	15.74	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.




LTE Band 7 / 20MHz / QPSK								
Channel	Frequency ( MHz )	EIRP ( dBm )	Limit ( dBm )	Over Limit ( dB )	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	5052	-38.25	-25	-13.25	-48.46	3.03	13.24	H
	7580	-59.12	-25	-34.12	-68.57	3.56	13.01	H
	10100	-61.94	-25	-36.94	-71.46	3.92	13.44	H
	5052	-37.93	-25	-12.93	-47.85	4.44	14.36	V
	7580	-59.99	-25	-34.99	-70.36	4.77	15.14	V
	10100	-59.70	-25	-34.70	-70.58	4.86	15.74	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

## Appendix B. Setup Photographs

### <Radiated Emission>

LF

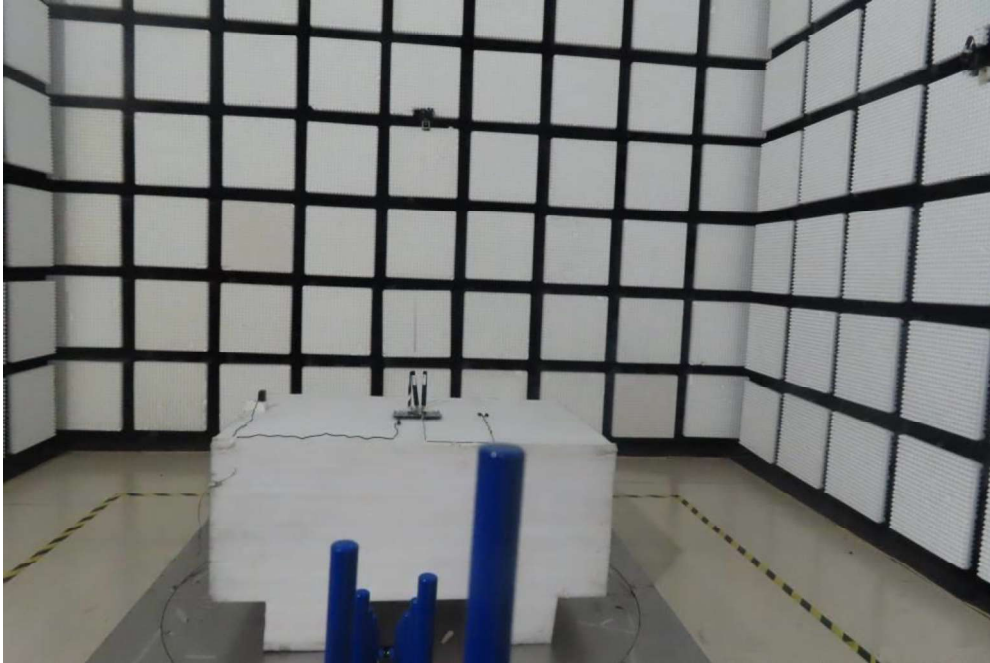

HF







## **Appendix C. Original Report**



# FCC RF Test Report

**APPLICANT** : Quetel Wireless Solutions Co., Ltd.  
**EQUIPMENT** : LTE Module  
**BRAND NAME** : Quetel  
**MODEL NAME** : AG35-LA  
**FCC ID** : XMR201905AG35LA  
**STANDARD** : 47 CFR Part 2, 22(H), 24(E), 27(L), 27(M)  
**CLASSIFICATION** : PCS Licensed Transmitter (PCB)

The product was received on Mar. 25, 2019 and completely tested on Apr. 08, 2019. We, Sporton International (Kunshan) Inc., would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.26-2015 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International (Kunshan) Inc., the test report shall not be reproduced except in full.

*Jason Jia*

Reviewed by: Jason Jia / Supervisor

*James Huang*

Approved by: James Huang / Manager



**Sporton International (Kunshan) Inc.**

**No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300  
People's Republic of China**



TABLE OF CONTENTS

REVISION HISTORY..... 3
SUMMARY OF TEST RESULT ..... 4
1 GENERAL DESCRIPTION ..... 5
1.1 Applicant ..... 5
1.2 Product Feature of Equipment Under Test..... 5
1.3 Product Specification of Equipment Under Test..... 6
1.4 Modification of EUT ..... 6
1.5 Maximum ERP/EIRP Power, Frequency Tolerance, and Emission Designator ..... 7
1.6 Testing Location ..... 8
1.7 Applicable Standards..... 8
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST ..... 9
2.1 Test Mode ..... 9
2.2 Connection Diagram of Test System..... 11
2.3 Support Unit used in test configuration and system ..... 11
2.4 Measurement Results Explanation Example..... 12
2.5 Frequency List of Low/Middle/High Channels ..... 12
3 CONDUCTED TEST ITEMS ..... 15
3.1 Measuring Instruments ..... 15
3.2 Test Setup ..... 15
3.3 Test Result of Conducted Test ..... 15
3.4 Conducted Output Power and ERP/EIRP ..... 16
3.5 Peak-to-Average Ratio ..... 17
3.6 Occupied Bandwidth..... 18
3.7 Conducted Band Edge ..... 19
3.8 Conducted Spurious Emission ..... 21
3.9 Frequency Stability ..... 22
4 RADIATED TEST ITEMS ..... 23
4.1 Measuring Instruments ..... 23
4.2 Test Setup ..... 23
4.3 Test Result of Radiated Test ..... 23
4.4 Radiated Spurious Emission ..... 24
5 LIST OF MEASURING EQUIPMENT ..... 25
6 UNCERTAINTY OF EVALUATION ..... 26
APPENDIX A. TEST RESULTS OF CONDUCTED TEST
APPENDIX B. TEST RESULTS OF RADIATED TEST
APPENDIX C. TEST SETUP PHOTOGRAPHS



### REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FG932502B	Rev. 01	Initial issue of report	Jun. 26, 2019



## SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.4	§2.1046	Conducted Output Power	Reporting Only	PASS	-
	§22.913(a)(5)	Effective Radiated Power (Band 5)	ERP < 7 Watt	PASS	-
	§24.232(c) §27.50(h)(2)	Equivalent Isotropic Radiated Power (Band 2) (Band 7)	EIRP < 2Watt	PASS	-
	§27.50(d)(4)	Equivalent Isotropic Radiated Power (Band 4)	EIRP < 1Watt	PASS	-
3.5	§24.232(d)	Peak-to-Average Ratio	<13 dB	PASS	-
3.6	§2.1049	Occupied Bandwidth	Reporting Only	PASS	-
3.7	§2.1051 §22.917(a) §24.238(a) §27.53(h)	Conducted Band Edge Measurement (Band 2) (Band 4) (Band 5)	< 43+10log <sub>10</sub> (P[Watts])	PASS	-
	§27.53(m)(4)	Conducted Band Edge Measurement (Band 7)	§27.53(m)(4)		
3.8	§2.1051 §22.917(a) §24.238(a) §27.53(h)	Conducted Spurious Emission (Band 2) (Band 4) (Band 5)	< 43+10log <sub>10</sub> (P[Watts])	PASS	-
	§2.1051 §27.53(m)(4)	Conducted Spurious Emission (Band 7)	< 55+10log <sub>10</sub> (P[Watts])		
3.9	§2.1055 §22.355	Frequency Stability Temperature & Voltage	< 2.5 ppm for Part 22H	PASS	-
	§2.1055 §24.235 §27.54		Within Authorized Band		
4.4	§2.1053 §22.917(a) §24.238(a) §27.53(h)	Radiated Spurious Emission (Band 2) (Band 4) (Band 5)	< 43+10log <sub>10</sub> (P[Watts])	PASS	Under limit 28.31 dB at 5613.000 MHz
	§2.1053 §27.53(m)(4)	Radiated Spurious Emission (Band 7)	< 55+10log <sub>10</sub> (P[Watts])		



# 1 General Description

## 1.1 Applicant

Quectel Wireless Solutions Co., Ltd.

7th Floor, Hongye Building, No.1801 Hongmei Road, Xuhui District, Shanghai 200233, China

## 1.2 Product Feature of Equipment Under Test

Product Feature	
Equipment	LTE Module
Brand Name	Quectel
Model Name	AG35-LA
FCC ID	XMR201905AG35LA
EUT supports Radios application	GSM/GPRS/EGPRS/WCDMA/HSPA/ DC-HSDPA/HSPA+(16QAM uplink is not supported)/LTE GNSS
IMEI Code	Conducted: N/A Radiation: 864506031249668
HW Version	R1.0
SW Version	AG35LAVAR08A01T4G
EUT Stage	Identical Prototype



### 1.3 Product Specification of Equipment Under Test

Standards-related Product Specification	
<b>Tx Frequency</b>	LTE Band 2 : 1850.7 MHz ~ 1909.3 MHz LTE Band 4 : 1710.7 MHz ~ 1754.3 MHz LTE Band 5 : 824.7 MHz ~ 848.3 MHz LTE Band 7 : 2502.5 MHz ~ 2567.5 MHz
<b>Rx Frequency</b>	LTE Band 2 : 1930.7 MHz ~ 1989.3 MHz LTE Band 4 : 2110.7 MHz ~ 2154.3 MHz LTE Band 5 : 869.7 MHz ~ 893.3 MHz LTE Band 7 : 2622.5MHz ~ 2687.5 MHz
<b>Bandwidth</b>	LTE Band 2 : 1.4MHz / 3MHz / 5MHz / 10MHz / 15MHz / 20MHz LTE Band 4 : 1.4MHz / 3MHz / 5MHz / 10MHz / 15MHz / 20MHz LTE Band 5 : 1.4MHz / 3MHz / 5MHz / 10MHz LTE Band 7 : 5MHz / 10MHz / 15MHz / 20MHz
<b>Maximum Output Power to Antenna</b>	LTE Band 2 : 23.52 dBm LTE Band 4 : 23.61 dBm LTE Band 5 : 23.39 dBm LTE Band 7 : 23.30 dBm
<b>Antenna Gain</b>	LTE Band 2 : 3.00 dBi LTE Band 4 : 2.00 dBi LTE Band 5 : 2.00 dBi LTE Band 7 : 2.00 dBi
<b>Type of Modulation</b>	QPSK / 16QAM / 64QAM(Downlink only)

### 1.4 Modification of EUT

No modifications are made to the EUT during all test items.



### 1.5 Maximum ERP/EIRP Power, Frequency Tolerance, and Emission Designator

LTE Band 2		QPSK			16QAM		
BW (MHz)	Frequency Range (MHz)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum EIRP(W)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum EIRP(W)
1.4	1850.7 ~ 1909.3	1M10G7D	-	0.4365	1M10W7D	-	0.3573
3	1851.5 ~ 1908.5	2M73G7D	-	0.4436	2M74W7D	-	0.3342
5	1852.5 ~ 1907.5	4M51G7D	-	0.4406	4M52W7D	-	0.3319
10	1855.0 ~ 1905.0	9M01G7D	0.0030	0.4416	9M03W7D	-	0.3420
15	1857.5 ~ 1902.5	13M5G7D	-	0.4395	13M4W7D	-	0.3499
20	1860.0 ~ 1900.0	18M3G7D	-	0.4487	18M3W7D	-	0.3296
LTE Band 4		QPSK			16QAM		
BW (MHz)	Frequency Range (MHz)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum EIRP(W)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum EIRP(W)
1.4	1710.7 ~ 1754.3	1M09G7D	-	0.3548	1M10W7D	-	0.2877
3	1711.5 ~ 1753.5	2M72G7D	-	0.3388	2M73W7D	-	0.2799
5	1712.5 ~ 1752.5	4M51G7D	-	0.3548	4M51W7D	-	0.2692
10	1715.0 ~ 1750.0	9M11G7D	0.0038	0.3548	9M01W7D	-	0.2786
15	1717.5 ~ 1747.5	13M4G7D	-	0.3639	13M5W7D	-	0.2805
20	1720.0 ~ 1745.0	18M3G7D	-	0.3428	18M4W7D	-	0.2924
LTE Band 5		QPSK			16QAM		
BW (MHz)	Frequency Range (MHz)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum ERP(W)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum ERP(W)
1.4	824.7 ~ 848.3	1M10G7D	-	0.2070	1M10W7D	-	0.1714
3	825.5 ~ 847.5	2M73G7D	-	0.2028	2M73W7D	-	0.1585
5	826.5 ~ 846.5	4M50G7D	-	0.2070	4M52W7D	-	0.1570
10	829.0 ~ 844.0	9M01G7D	0.0083	0.2109	9M01W7D	-	0.1570
LTE Band 7		QPSK			16QAM		
BW (MHz)	Frequency Range (MHz)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum EIRP(W)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum EIRP(W)
5	2502.5 ~ 2567.5	4M49G7D	-	0.3373	4M48W7D	-	0.2844
10	2505.0 ~ 2565.0	9M05G7D	0.0038	0.3319	9M05W7D	-	0.2858
15	2507.5 ~ 2562.5	13M5G7D	-	0.3381	13M5W7D	-	0.2844
20	2510.0 ~ 2560.0	18M3G7D	-	0.3388	18M3W7D	-	0.2786





### 1.6 Testing Location

Sporton International (Kunshan) Inc. is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

<b>Test Firm</b>	Sporton International (Kunshan) Inc.		
<b>Test Site Location</b>	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158 FAX : +86-512-57900958		
<b>Test Site No.</b>	<b>Sporton Site No.</b>	<b>FCC Designation No.</b>	<b>FCC Test Firm Registration No.</b>
	03CH06-KS TH01-KS	CN1257	314309

### 1.7 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- 47 CFR Part 2, 22(H), 24(E), 27(L), 27(M)
- ANSI C63.26-2015
- FCC KDB 971168 D01 Power Meas License Digital Systems v03r01
- FCC KDB 412172 D01 Determining ERP and EIRP v01r01

**Remark:**

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



## 2 Test Configuration of Equipment Under Test

### 2.1 Test Mode

Antenna port conducted and radiated test items listed below are performed according to KDB 971168 D01 Power Meas License Digital Systems v03r01 with maximum output power.


Radiated measurements are performed by rotating the EUT in three different orthogonal test planes to find the maximum emission.

Test Items	Band	Bandwidth (MHz)						Modulation			RB #			Test Channel		
		1.4	3	5	10	15	20	QPSK	16QAM	64QAM	1	Half	Full	L	M	H
Max. Output Power	2	v	v	v	v	v	v	v	v		v	v	v	v	v	v
	4	v	v	v	v	v	v	v	v		v	v	v	v	v	v
	5	v	v	v	v	-	-	v	v		v	v	v	v	v	v
	7	-	-	v	v	v	v	v	v		v	v	v	v	v	v
Peak-to-Average Ratio	2						v	v	v		v		v	v	v	v
	4						v	v	v		v		v	v	v	v
	5				v	-	-	v	v		v		v	v	v	v
	7	-	-				v	v	v		v		v	v	v	v
26dB and 99% Bandwidth	2	v	v	v	v	v	v	v	v				v	v	v	v
	4	v	v	v	v	v	v	v	v				v	v	v	v
	5	v	v	v	v	-	-	v	v				v	v	v	v
	7	-	-	v	v	v	v	v	v				v	v	v	v
Conducted Band Edge	2	v	v	v	v	v	v	v	v		v		v	v		v
	4	v	v	v	v	v	v	v	v		v		v	v		v
	5	v	v	v	v	-	-	v	v		v		v	v		v
	7	-	-	v	v	v	v	v	v		v		v	v		v



Test Items	Band	Bandwidth (MHz)						Modulation			RB #			Test Channel		
		1.4	3	5	10	15	20	QPSK	16QAM	64QAM	1	Half	Full	L	M	H
Conducted Spurious Emission	2	v	v	v	v	v	v	v	v		v			v	v	v
	4	v	v	v	v	v	v	v	v		v			v	v	v
	5	v	v	v	v	-	-	v	v		v			v	v	v
	7	-	-	v	v	v	v	v	v		v			v	v	v
Frequency Stability	2				v			v					v		v	
	4				v			v					v		v	
	5				v	-	-	v					v		v	
	7	-	-		v			v					v		v	
E.R.P / E.I.R.P	2	v	v	v	v	v	v	v	v		v			v	v	v
	4	v	v	v	v	v	v	v	v		v			v	v	v
	5	v	v	v	v	-	-	v	v		v			v	v	v
	7	-	-	v	v	v	v	v	v		v			v	v	v
Radiated Spurious Emission	2	Worst Case												v		
	4	Worst Case												v		
	5	Worst Case												v		
	7	Worst Case												v		
Note	1. The mark "v " means that this configuration is chosen for testing 2. The mark "-" means that this bandwidth is not supported. 3. The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported.															

## 2.2 Connection Diagram of Test System

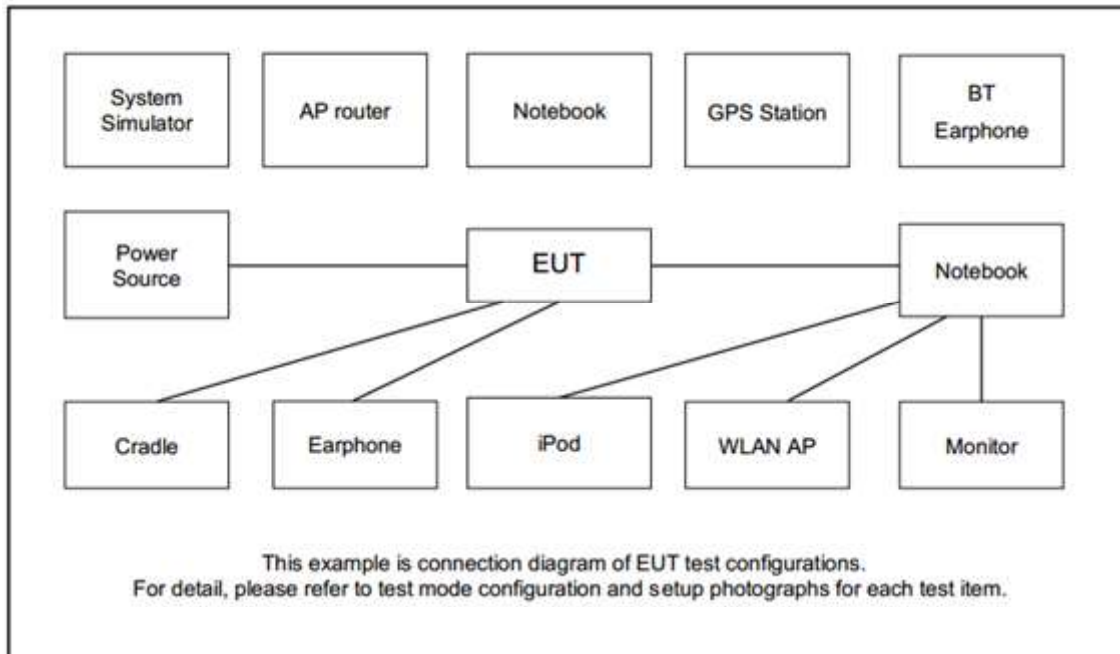

## 2.3 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	System Simulator	Anritsu	MT8820C	N/A	N/A	Unshielded, 1.8 m
2.	DC Power Supply	GW INSTEK	GPS-3030D	N/A	N/A	Unshielded, 1.8 m
3.	WWAN Antenna	N/A	N/A	N/A	N/A	N/A
4.	GNSS Antenna	N/A	N/A	N/A	N/A	N/A
5.	Adapter	N/A	N/A	N/A	Unshielded, 1.2m	N/A
6.	Test Jig	N/A	N/A	N/A	N/A	N/A



## 2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss.

$$\text{Offset} = \text{RF cable loss.}$$

Following shows an offset computation example with cable loss 4.8 dB.

Example :

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)}. \\ &= 4.8 \text{ (dB)} \end{aligned}$$

## 2.5 Frequency List of Low/Middle/High Channels

LTE Band 2 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
20	Channel	18700	18900	19100
	Frequency	1860	1880	1900
15	Channel	18675	18900	19125
	Frequency	1857.5	1880	1902.5
10	Channel	18650	18900	19150
	Frequency	1855	1880	1905
5	Channel	18625	18900	19175
	Frequency	1852.5	1880	1907.5
3	Channel	18615	18900	19185
	Frequency	1851.5	1880	1908.5
1.4	Channel	18607	18900	19193
	Frequency	1850.7	1880	1909.3



LTE Band 4 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
20	Channel	20050	20175	20300
	Frequency	1720	1732.5	1745
15	Channel	20025	20175	20325
	Frequency	1717.5	1732.5	1747.5
10	Channel	20000	20175	20350
	Frequency	1715	1732.5	1750
5	Channel	19975	20175	20375
	Frequency	1712.5	1732.5	1752.5
3	Channel	19965	20175	20385
	Frequency	1711.5	1732.5	1753.5
1.4	Channel	19957	20175	20393
	Frequency	1710.7	1732.5	1754.3

LTE Band 5 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
10	Channel	20450	20525	20600
	Frequency	829	836.5	844
5	Channel	20425	20525	20625
	Frequency	826.5	836.5	846.5
3	Channel	20415	20525	20635
	Frequency	825.5	836.5	847.5
1.4	Channel	20407	20525	20643
	Frequency	824.7	836.5	848.3



LTE Band 7 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
20	Channel	20850	21100	21350
	Frequency	2510	2535	2560
15	Channel	20825	21100	21375
	Frequency	2507.5	2535	2562.5
10	Channel	20800	21100	21400
	Frequency	2505	2535	2565
5	Channel	20775	21100	21425
	Frequency	2502.5	2535	2567.5


### 3 Conducted Test Items

#### 3.1 Measuring Instruments


See list of measuring instruments of this test report.

#### 3.2 Test Setup


##### 3.2.1 Conducted Output Power



##### 3.2.2 Peak-to-Average Ratio, Occupied Bandwidth ,Conducted Band-Edge and Conducted Spurious Emission

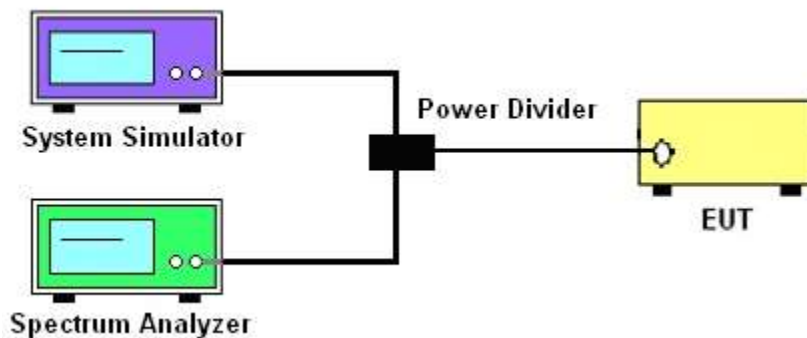

##### 3.2.3 Frequency Stability

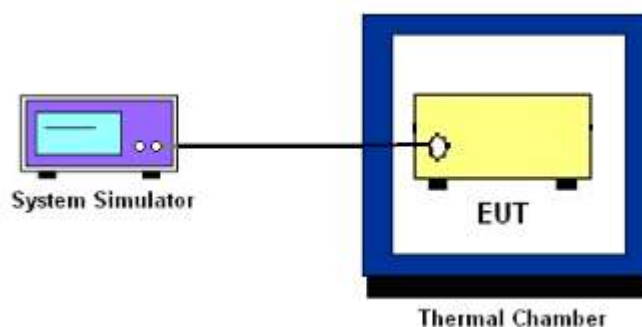

### 3.3 Test Result of Conducted Test

Please refer to Appendix A.





### 3.4 Conducted Output Power and ERP/EIRP

#### 3.4.1 Description of the Conducted Output Power Measurement and ERP/EIRP Measurement

A system simulator was used to establish communication with the EUT. Its parameters were set to force the EUT transmitting at maximum output power. The measured power in the radio frequency on the transmitter output terminals shall be reported.

The ERP of mobile transmitters must not exceed 7 Watts for LTE Band 5.

The EIRP of mobile transmitters must not exceed 2 Watts for LTE Band 2 and Band 7

The EIRP of mobile transmitters must not exceed 1 Watts for LTE Band 4 .

According to KDB 412172 D01 Power Approach,

$EIRP = P_T + G_T - L_C$ ,  $ERP = EIRP - 2.15$ , where

$P_T$  = transmitter output power in dBm

$G_T$  = gain of the transmitting antenna in dBi

$L_C$  = signal attenuation in the connecting cable between the transmitter and antenna in dB

#### 3.4.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.2
2. The transmitter output port was connected to the system simulator.
3. Set EUT at maximum power through the system simulator.
4. Select lowest, middle, and highest channels for each band and different modulation.
5. Measure and record the power level from the system simulator.



## **3.5 Peak-to-Average Ratio**

### **3.5.1 Description of the PAR Measurement**

Power Complementary Cumulative Distribution Function (CCDF) curves provide a means for characterizing the power peaks of a digitally modulated signal on a statistical basis. A CCDF curve depicts the probability of the peak signal amplitude exceeding the average power level. Most contemporary measurement instrumentation include the capability to produce CCDF curves for an input signal provided that the instrument's resolution bandwidth can be set wide enough to accommodate the entire input signal bandwidth. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

### **3.5.2 Test Procedures**

1. The testing follows ANSI C63.26 Section 5.2.3.4 (CCDF).
2. The EUT was connected to spectrum and system simulator via a power divider.
3. Set the CCDF (Complementary Cumulative Distribution Function) option in spectrum analyzer.
4. The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1 %.
5. Record the deviation as Peak to Average Ratio.



### 3.6 Occupied Bandwidth

#### 3.6.1 Description of Occupied Bandwidth Measurement

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The 26 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

#### 3.6.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.4
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be between two and five times the anticipated OBW.
4. The nominal resolution bandwidth (RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
5. Set the detection mode to peak, and the trace mode to max hold.
6. Determine the reference value: Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace.  
(this is the reference value)
7. Determine the “-26 dB down amplitude” as equal to (Reference Value – X).
8. Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below the “-X dB down amplitude” determined in step 6. If a marker is below this “-X dB down amplitude” value it shall be placed as close as possible to this value. The OBW is the positive frequency difference between the two markers.
9. Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.



### 3.7 Conducted Band Edge

#### 3.7.1 Description of Conducted Band Edge Measurement

22.917(a)

For operations in the 824 – 849 MHz band, the FCC limit is  $43 + 10\log_{10}(P[\text{Watts}])$  dB below the transmitter power P(Watts) in a 100kHz bandwidth. However, in the 1MHz bands immediately outside and adjacent to the licensee's frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

24.238 (a)

For operations in the 1850-1910 and 1930-1990 MHz band, the FCC limit is  $43 + 10\log_{10}(P[\text{Watts}])$  dB below the transmitter power P(Watts) in a 1MHz bandwidth. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

27.53 (h)

For operations in the 1710 – 1755 MHz band, the FCC limit is  $43 + 10\log_{10}(P[\text{Watts}])$  dB below the transmitter power P(Watts) in a 1 MHz bandwidth. However, in the 1MHz bands immediately outside and adjacent to the licensee's frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

27.53(m)(4)

For mobile digital stations, the attenuation factor shall be not less than  $40 + 10 \log (P)$  dB on all frequencies between the channel edge and 5 megahertz from the channel edge,  $43 + 10 \log (P)$  dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and  $55 + 10 \log (P)$  dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less that  $43 + 10 \log (P)$  dB on all frequencies between 2490.5 MHz and 2496 MHz and  $55 + 10 \log (P)$  dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.



### 3.7.2 Test Procedures

1. The testing follows ANSI C63.26 section 5.7
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The band edges of low and high channels for the highest RF powers were measured.
4. Set RBW  $\geq$  1% EBW in the 1MHz band immediately outside and adjacent to the band edge.
5. Beyond the 1 MHz band from the band edge, RBW=1MHz was used Set spectrum analyzer with RMS detector.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
7. Checked that all the results comply with the emission limit line.

Example:

The limit line is derived from  $43 + 10\log(P)$ dB below the transmitter power P(Watts)

$$= P(W) - [43 + 10\log(P)] \text{ (dB)}$$

$$= [30 + 10\log(P)] \text{ (dBm)} - [43 + 10\log(P)] \text{ (dB)} = -13\text{dBm}.$$

8. For LTE Band 7, the other 40 dB, and 55 dB have additionally applied same calculation above.



### 3.8 Conducted Spurious Emission

#### 3.8.1 Description of Conducted Spurious Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least  $43 + 10 \log (P)$  dB.

For Band 7:

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least  $55 + 10 \log (P)$  dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10<sup>th</sup> harmonic.

#### 3.8.2 Test Procedures

1. The testing follows ANSI C63.26 section 5.7
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
4. The middle channel for the highest RF power within the transmitting frequency was measured.
5. The conducted spurious emission for the whole frequency range was taken.
6. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz.
7. Set spectrum analyzer with RMS detector.
8. Taking the record of maximum spurious emission.
9. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
10. The limit line is derived from  $43 + 10\log(P)$ dB below the transmitter power P(Watts)  
 $= P(W) - [43 + 10\log(P)]$  (dB)  
 $= [30 + 10\log(P)]$  (dBm) -  $[43 + 10\log(P)]$  (dB)  
 $= -13$ dBm.
11. For Band 7  
The limit line is derived from  $55 + 10\log(P)$ dB below the transmitter power P(Watts)  
 $= P(W) - [55 + 10\log(P)]$  (dB)  
 $= [30 + 10\log(P)]$  (dBm) -  $[55 + 10\log(P)]$  (dB)  
 $= -25$ dBm.



## 3.9 Frequency Stability

### 3.9.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within  $\pm 0.00025\%$  ( $\pm 2.5\text{ppm}$ ) of the center frequency.

### 3.9.2 Test Procedures for Temperature Variation

1. The testing follows ANSI C63.26 section 5.6.4
2. The EUT was set up in the thermal chamber and connected with the system simulator.
3. With power OFF, the temperature was decreased to  $-30^{\circ}\text{C}$  and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
4. With power OFF, the temperature was raised in  $10^{\circ}\text{C}$  step up to  $50^{\circ}\text{C}$ . The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

### 3.9.3 Test Procedures for Voltage Variation

1. The testing follows ANSI C63.26 section 5.6.5
2. The EUT was placed in a temperature chamber at  $20\pm 5^{\circ}\text{C}$  and connected with the system simulator.
3. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value for other than hand carried battery equipment.
4. For hand carried, battery powered equipment, reduce the primary ac or dc supply voltage to the battery operating end point, which shall be specified by the manufacturer.
5. The variation in frequency was measured for the worst case.


## 4 Radiated Test Items

### 4.1 Measuring Instruments


See list of measuring instruments of this test report.

### 4.2 Test Setup

#### 4.2.1 For radiated test from 30MHz to 1GHz

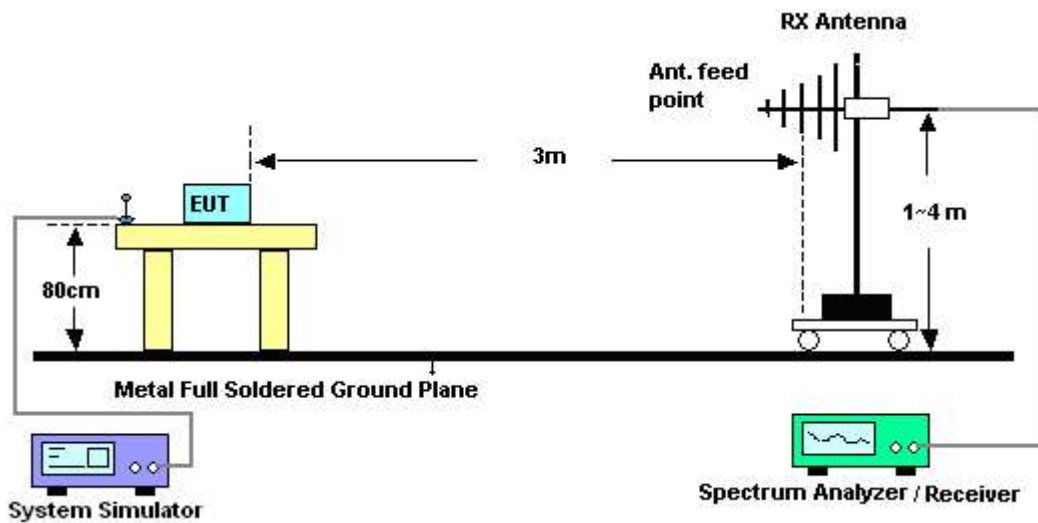

#### 4.2.2 For radiated test above 1GHz

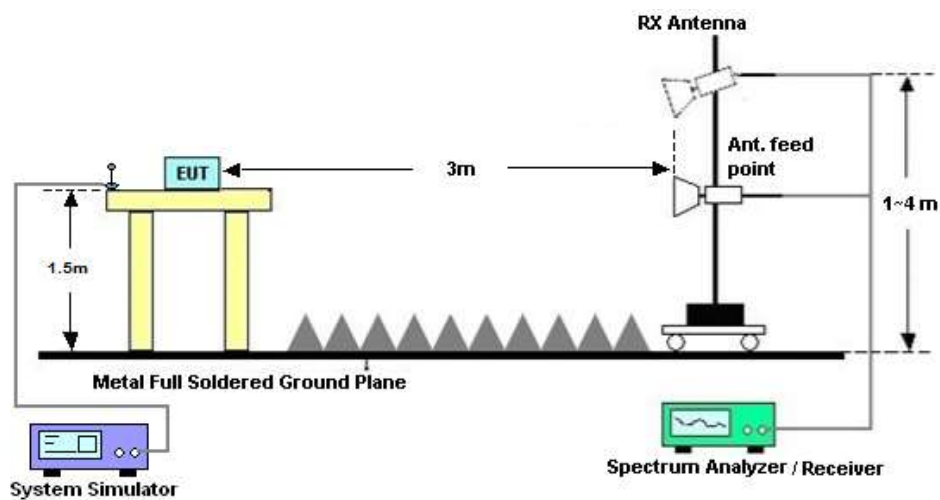

### 4.3 Test Result of Radiated Test

Please refer to Appendix B.





## 4.4 Radiated Spurious Emission

### 4.4.1 Description of Radiated Spurious Emission

The radiated spurious emission was measured by substitution method according to ANSI C63.26. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least  $43 + 10 \log (P)$  dB.

For Band 7

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least  $55 + 10 \log (P)$  dB.

The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

### 4.4.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.5
2. The EUT was placed on a turntable with 0.8 meter height for frequency below 1GHz and 1.5 meter height for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the receiving antenna mounted on the antenna tower.
4. The table was rotated 360 degrees to determine the position of the highest spurious emission.
5. The height of the receiving antenna is varied between 1m to 4m to search the maximum spurious emission for both horizontal and vertical polarizations.
6. During the measurement, the system simulator parameters were set to force the EUT transmitting at maximum output power.
7. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
8. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
9. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
10.  $EIRP (dBm) = S.G. Power - Tx Cable Loss + Tx Antenna Gain$
11.  $ERP (dBm) = EIRP - 2.15$
12. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.  
The limit line is derived from  $43 + 10\log(P)$ dB below the transmitter power P(Watts)  
 $= P(W) - [43 + 10\log(P)] (dB)$   
 $= [30 + 10\log(P)] (dBm) - [43 + 10\log(P)] (dB)$   
 $= -13dBm.$
13. For Band 7:  
The limit line is derived from  $55 + 10\log(P)$ dB below the transmitter power P(Watts)



## 5 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Aug. 07, 2018	Apr. 06, 2019~ Apr. 07, 2019	Aug. 06, 2019	Conducted (TH01-KS)
Thermal Chamber	Ten Billion	TTC-B3S	TBN-960502	-40~+150°C	Nov. 19, 2018	Apr. 06, 2019~ Apr. 07, 2019	Nov. 18, 2019	Conducted (TH01-KS)
EXA Spectrum Analyzer	Keysight	N9010B	MY5747108 4	10Hz-44GHz	Jun. 25, 2018	Apr. 08, 2019	Jun. 24, 2019	Radiation (03CH06-KS)
Bilog Antenna	TeseQ	CBL6111D	44483	30MHz-1GHz	Dec. 28, 2018	Apr. 08, 2019	Dec. 27, 2019	Radiation (03CH06-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	75957	1GHz~18GHz	Oct. 20, 2018	Apr. 08, 2019	Oct. 19, 2019	Radiation (03CH06-KS)
SHF-EHF Horn	Com-power	AH-840	101070	18GHz~40GHz	Jan. 05, 2019	Apr. 08, 2019	Jan. 04, 2020	Radiation (03CH06-KS)
Amplifier	SONOMA	310N	187289	9KHz ~1GHZ	Aug. 06, 2018	Apr. 08, 2019	Aug. 05, 2019	Radiation (03CH06-KS)
Amplifier	MITEQ	TTA1840-35-HG	2014749	18~40GHz	Jan. 14, 2019	Apr. 08, 2019	Jan. 13, 2020	Radiation (03CH06-KS)
high gain Amplifier	MITEQ	AMF-7D-001 01800-30-10 P	2025788	1Ghz-18Ghz	Apr. 17, 2018	Apr. 08, 2019	Apr. 16, 2019	Radiation (03CH06-KS)
Amplifier	Keysight	83017A	MY5327020 3	500MHz~26.5GHz	Apr. 18, 2018	Apr. 08, 2019	Apr. 17, 2019	Radiation (03CH06-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Apr. 08, 2019	NCR	Radiation (03CH06-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Apr. 08, 2019	NCR	Radiation (03CH06-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Apr. 08, 2019	NCR	Radiation (03CH06-KS)

NCR: No Calibration Required



## 6 Uncertainty of Evaluation

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.26-2015. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.5dB
---	-------

### Uncertainty of Radiated Emission Measurement (1 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.1dB
---	-------



### Appendix A. Test Results of Conducted Test

#### Conducted Output Power(Average power)

LTE Band 2 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
20	1	0	QPSK	23.16	23.04	23.06
20	1	49		23.51	23.52	23.45
20	1	99		23.22	23.10	23.17
20	50	0		22.52	22.36	22.38
20	50	24		22.46	22.39	22.34
20	50	50		22.09	22.21	22.33
20	100	0		22.17	22.33	22.30
20	1	0	16-QAM	22.07	22.09	22.09
20	1	49		22.05	22.08	22.18
20	1	99		21.87	21.98	22.04
20	50	0		21.15	21.26	21.30
20	50	24		21.13	21.31	21.35
20	50	50		21.08	21.15	21.33
20	100	0		21.16	21.26	21.20
15	1	0	QPSK	23.19	23.40	23.17
15	1	37		23.24	23.42	23.43
15	1	74		23.02	23.20	23.22
15	36	0		22.30	22.49	22.34
15	36	20		22.23	22.36	22.44
15	36	39		22.16	22.29	22.43
15	75	0		22.30	22.41	22.52
15	1	0	16-QAM	22.16	22.22	22.20
15	1	37		22.08	22.10	22.30
15	1	74		22.02	21.94	22.44
15	36	0		21.23	21.40	21.34
15	36	20		21.12	21.31	21.45
15	36	39		21.07	21.14	21.36
15	75	0		21.32	21.34	21.43



LTE Band 2 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
10	1	0	QPSK	23.11	23.35	23.28
10	1	25		23.24	23.37	23.45
10	1	49		22.95	23.19	23.04
10	25	0		22.36	22.46	22.57
10	25	12		22.33	22.48	22.36
10	25	25		22.27	22.34	22.42
10	50	0		22.32	22.40	22.41
10	1	0	16-QAM	22.34	22.26	22.16
10	1	25		22.12	22.09	22.16
10	1	49		22.04	22.10	22.19
10	25	0		21.28	21.31	21.59
10	25	12		21.27	21.34	21.59
10	25	25		21.20	21.30	21.37
10	50	0		21.26	21.35	21.14
5	1	0	QPSK	23.44	23.24	23.22
5	1	12		23.36	23.42	23.29
5	1	24		23.38	23.10	22.98
5	12	0		22.36	22.32	22.35
5	12	7		22.24	22.33	22.31
5	12	13		22.24	22.37	22.30
5	25	0		22.30	22.29	22.35
5	1	0	16-QAM	22.05	22.08	21.95
5	1	12		21.87	21.88	21.86
5	1	24		21.96	22.21	22.06
5	12	0		21.22	21.06	21.09
5	12	7		21.30	21.01	21.10
5	12	13		21.40	21.00	21.12
5	25	0		21.14	21.23	21.31



LTE Band 2 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
3	1	0	QPSK	23.31	23.47	23.25
3	1	8		23.13	23.29	23.37
3	1	14		23.29	23.31	23.05
3	8	0		22.39	22.51	22.50
3	8	4		22.40	22.41	22.36
3	8	7		22.34	22.38	22.35
3	15	0		22.25	22.39	22.42
3	1	0	16-QAM	22.24	22.16	22.18
3	1	8		22.14	22.03	22.01
3	1	14		22.15	22.16	22.11
3	8	0		21.31	21.31	21.05
3	8	4		21.34	21.32	21.47
3	8	7		21.22	21.30	21.21
3	15	0		21.12	21.45	21.33
1.4	1	0	QPSK	23.08	23.02	23.14
1.4	1	3		23.22	23.05	23.12
1.4	1	5		23.13	22.97	23.10
1.4	3	0		23.25	23.33	23.26
1.4	3	1		23.33	23.35	23.24
1.4	3	3		23.15	23.40	23.09
1.4	6	0		22.19	22.33	22.18
1.4	1	0	16-QAM	22.07	22.05	22.53
1.4	1	3		22.19	22.10	22.46
1.4	1	5		22.00	22.04	22.37
1.4	3	0		21.97	22.49	22.26
1.4	3	1		21.99	22.51	22.26
1.4	3	3		22.05	22.42	22.20
1.4	6	0		21.10	21.34	21.04



LTE Band 4 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
20	1	0	QPSK	23.09	23.35	23.09
20	1	49		23.29	23.27	23.29
20	1	99		22.97	23.25	22.97
20	50	0		22.34	22.42	22.34
20	50	24		22.33	22.37	22.33
20	50	50		22.43	22.25	22.43
20	100	0		22.39	22.35	22.39
20	1	0	16-QAM	22.07	22.66	22.07
20	1	49		22.24	22.16	22.14
20	1	99		22.14	22.08	22.04
20	50	0		21.44	21.44	21.44
20	50	24		21.33	21.39	21.33
20	50	50		21.26	21.27	21.26
20	100	0		21.39	21.37	21.39
15	1	0	QPSK	23.35	23.54	23.38
15	1	37		23.61	23.53	23.47
15	1	74		23.29	23.43	23.55
15	36	0		22.39	22.50	22.51
15	36	20		22.44	22.39	22.52
15	36	39		22.36	22.39	22.51
15	75	0		22.41	22.41	22.54
15	1	0	16-QAM	22.10	22.31	22.31
15	1	37		22.14	22.16	22.21
15	1	74		22.32	22.48	22.43
15	36	0		21.31	21.45	21.54
15	36	20		21.37	21.32	21.43
15	36	39		21.41	21.32	21.44
15	75	0		21.33	21.44	21.45



LTE Band 4 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
10	1	0	QPSK	23.10	23.24	23.21
10	1	25		23.46	23.27	23.31
10	1	49		23.27	23.28	23.50
10	25	0		22.43	22.50	22.45
10	25	12		22.38	22.37	22.41
10	25	25		22.34	22.43	22.50
10	50	0		22.34	22.36	22.53
10	1	0	16-QAM	22.13	22.30	22.32
10	1	25		22.06	22.24	22.14
10	1	49		22.20	22.17	22.45
10	25	0		21.46	21.27	21.38
10	25	12		21.50	21.14	21.46
10	25	25		21.40	21.18	21.33
10	50	0		21.38	21.21	21.38
5	1	0	QPSK	23.20	23.34	23.41
5	1	12		23.39	23.41	23.50
5	1	24		23.25	23.20	23.32
5	12	0		22.17	22.36	22.46
5	12	7		22.44	22.38	22.50
5	12	13		22.34	22.37	22.44
5	25	0		22.31	22.36	22.39
5	1	0	16-QAM	21.96	22.19	22.25
5	1	12		21.95	22.08	22.30
5	1	24		22.03	21.99	22.29
5	12	0		21.21	21.32	21.19
5	12	7		21.17	21.17	21.26
5	12	13		21.27	21.15	21.23
5	25	0		21.35	21.23	21.45





LTE Band 4 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
3	1	0	QPSK	22.99	23.21	23.29
3	1	8		23.15	23.03	23.30
3	1	14		23.20	23.09	23.30
3	8	0		22.14	22.32	22.35
3	8	4		22.28	22.38	22.31
3	8	7		22.32	22.29	22.28
3	15	0		22.23	22.35	22.36
3	1	0	16-QAM	22.02	22.16	22.12
3	1	8		21.96	22.07	22.23
3	1	14		22.12	22.06	22.47
3	8	0		21.20	21.41	21.34
3	8	4		21.34	21.36	21.28
3	8	7		21.48	21.29	21.37
3	15	0		21.25	21.23	21.23
1.4	1	0	QPSK	23.04	23.10	23.22
1.4	1	3		23.16	23.18	23.37
1.4	1	5		23.15	23.19	23.22
1.4	3	0		23.27	23.48	23.31
1.4	3	1		23.24	23.50	23.44
1.4	3	3		23.25	23.42	23.50
1.4	6	0		22.16	22.38	22.35
1.4	1	0	16-QAM	21.97	22.14	22.47
1.4	1	3		22.09	22.21	22.59
1.4	1	5		21.92	21.95	22.51
1.4	3	0		22.12	22.35	22.53
1.4	3	1		22.20	22.40	22.30
1.4	3	3		22.15	22.19	22.27
1.4	6	0		21.02	21.38	21.36



LTE Band 5 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
10	1	0	QPSK	23.07	22.96	23.03
10	1	25		23.39	23.22	23.09
10	1	49		23.01	22.90	22.99
10	25	0		22.25	22.22	22.29
10	25	12		22.29	22.28	22.21
10	25	25		22.22	22.28	22.21
10	50	0		22.25	22.23	22.18
10	1	0	16-QAM	22.11	21.95	22.00
10	1	25		21.96	22.05	21.93
10	1	49		21.86	21.89	21.98
10	25	0		21.31	21.26	21.39
10	25	12		21.24	21.23	21.38
10	25	25		21.23	21.09	21.19
10	50	0		21.21	21.21	21.26
5	1	0	QPSK	23.23	22.97	23.01
5	1	12		23.21	23.25	23.31
5	1	24		22.77	22.83	22.97
5	12	0		22.40	22.06	22.18
5	12	7		22.22	22.15	22.30
5	12	13		22.10	22.13	22.24
5	25	0		22.21	22.16	22.25
5	1	0	16-QAM	21.99	21.77	22.02
5	1	12		21.97	22.11	21.88
5	1	24		21.81	21.93	21.93
5	12	0		21.29	21.11	21.27
5	12	7		21.30	20.93	21.20
5	12	13		21.18	21.20	21.12
5	25	0		21.29	21.11	21.24



LTE Band 5 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
3	1	0	QPSK	23.22	23.09	23.07
3	1	8		23.18	23.01	23.09
3	1	14		22.85	22.91	23.06
3	8	0		22.45	22.00	22.23
3	8	4		22.31	22.27	22.34
3	8	7		22.24	22.32	22.27
3	15	0		22.34	22.11	22.20
3	1	0	16-QAM	21.96	22.02	22.01
3	1	8		22.00	21.91	21.90
3	1	14		22.01	22.15	22.01
3	8	0		21.39	21.30	21.27
3	8	4		21.35	21.25	21.35
3	8	7		21.27	20.91	21.30
3	15	0		21.33	21.07	21.20
1.4	1	0	QPSK	23.23	23.00	23.10
1.4	1	3		23.15	23.10	23.12
1.4	1	5		23.17	23.08	23.09
1.4	3	0		23.17	23.04	23.20
1.4	3	1		23.31	23.16	23.12
1.4	3	3		23.27	23.18	23.27
1.4	6	0		22.30	22.12	22.18
1.4	1	0	16-QAM	22.31	22.26	21.95
1.4	1	3		22.26	22.42	22.15
1.4	1	5		22.09	22.27	21.96
1.4	3	0		22.26	22.06	22.04
1.4	3	1		22.28	22.20	22.03
1.4	3	3		22.49	22.13	22.04
1.4	6	0		21.07	21.07	21.04



LTE Band 7 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
20	1	0	QPSK	23.30	23.08	23.20
20	1	49		23.09	23.11	23.28
20	1	99		23.22	23.01	23.06
20	50	0		22.38	22.23	22.39
20	50	24		22.28	22.36	22.37
20	50	50		22.22	22.39	22.42
20	100	0		22.24	22.34	22.34
20	1	0	16-QAM	22.00	22.05	22.18
20	1	49		21.96	22.45	22.21
20	1	99		21.96	22.10	22.14
20	50	0		21.09	21.31	21.39
20	50	24		21.36	21.37	21.47
20	50	50		21.31	21.40	21.44
20	100	0		21.22	21.23	21.33
15	1	0	QPSK	23.07	23.01	23.26
15	1	37		22.80	23.17	23.14
15	1	74		23.29	23.17	23.18
15	36	0		22.17	22.29	22.40
15	36	20		22.15	22.36	22.31
15	36	39		22.19	22.39	22.31
15	75	0		22.16	22.31	22.29
15	1	0	16-QAM	22.04	22.08	22.25
15	1	37		21.96	22.09	22.39
15	1	74		22.06	22.09	22.54
15	36	0		21.15	21.29	21.37
15	36	20		21.13	21.28	21.32
15	36	39		21.16	21.30	21.33
15	75	0		21.14	21.31	21.28



LTE Band 7 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
10	1	0	QPSK	23.16	23.15	22.99
10	1	25		23.11	23.21	23.08
10	1	49		23.04	23.11	22.89
10	25	0		22.25	22.29	22.35
10	25	12		22.25	22.33	22.29
10	25	25		22.19	22.36	22.28
10	50	0		22.23	22.34	22.33
10	1	0	16-QAM	21.99	22.51	22.04
10	1	25		22.19	22.56	22.33
10	1	49		22.01	22.18	22.09
10	25	0		21.14	21.40	21.45
10	25	12		21.14	21.25	21.40
10	25	25		21.19	21.23	21.30
10	50	0		21.23	21.25	21.39
5	1	0	QPSK	23.28	23.07	23.17
5	1	12		23.02	23.23	23.20
5	1	24		23.15	23.13	22.99
5	12	0		22.32	22.34	22.31
5	12	7		22.16	22.26	22.28
5	12	13		22.16	22.34	22.21
5	25	0		22.18	22.29	22.31
5	1	0	16-QAM	22.54	21.94	21.93
5	1	12		21.86	22.00	21.94
5	1	24		21.88	22.00	22.15
5	12	0		21.07	21.35	21.12
5	12	7		21.07	21.19	21.29
5	12	13		21.00	21.06	21.13
5	25	0		21.10	21.34	21.22



**ERP/EIRP**

LTE Band 2 (GT - LC = 3.00 dB) QPSK									
Bandwidth	1.4M			3M			5M		
Channel	18607	18900	19193	18615	18900	19185	18625	18900	19175
	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)
Frequency	1850.7	1880	1909.3	1851.5	1880	1908.5	1852.5	1880	1907.5
(MHz)									
Conducted Power (dBm)	23.15	23.40	23.09	23.31	23.47	23.25	23.44	23.24	23.22
Conducted Power (Watts)	0.2065	0.2188	0.2037	0.2143	0.2223	0.2113	0.2208	0.2109	0.2099
EIRP(dBm)	26.15	26.40	26.09	26.31	26.47	26.25	26.44	26.24	26.22
EIRP(Watts)	0.4121	0.4365	0.4064	0.4276	0.4436	0.4217	0.4406	0.4207	0.4188

LTE Band 2 (GT - LC = 3.00 dB) QPSK									
Bandwidth	10M			15M			20M		
Channel	18650	18900	19150	18675	18900	19125	18650	18900	19100
	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)
Frequency	1855	1880	1905	1857.5	1880	1902.5	1860	1880	1900
(MHz)									
Conducted Power (dBm)	23.24	23.37	23.45	23.24	23.42	23.43	23.51	23.52	23.45
Conducted Power (Watts)	0.2109	0.2173	0.2213	0.2109	0.2198	0.2203	0.2244	0.2249	0.2213
EIRP(dBm)	26.24	26.37	26.45	26.24	26.42	26.43	26.51	26.52	26.45
EIRP(Watts)	0.4207	0.4335	0.4416	0.4207	0.4385	0.4395	0.4477	0.4487	0.4416



LTE Band 2 (GT - LC = 3.00 dB) 16QAM									
Bandwidth	1.4M			3M			5M		
Channel	18607	18900	19193	18615	18900	19185	18625	18900	19175
	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)
Frequency (MHz)	1850.7	1880	1909.3	1851.5	1880	1908.5	1852.5	1880	1907.5
Conducted Power (dBm)	22.07	22.05	22.53	22.24	22.16	22.18	21.96	22.21	22.06
Conducted Power (Watts)	0.1611	0.1603	0.1791	0.1675	0.1644	0.1652	0.1570	0.1663	0.1607
EIRP(dBm)	25.07	25.05	25.53	25.24	25.16	25.18	24.96	25.21	25.06
EIRP(Watts)	0.3214	0.3199	0.3573	0.3342	0.3281	0.3296	0.3133	0.3319	0.3206

LTE Band 2 (GT - LC = 3.00 dB) 16QAM									
Bandwidth	10M			15M			20M		
Channel	18650	18900	19150	18675	18900	19125	18650	18900	19100
	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)
Frequency (MHz)	1855	1880	1905	1857.5	1880	1902.5	1860	1880	1900
Conducted Power (dBm)	22.34	22.26	22.16	22.02	21.94	22.44	22.05	22.08	22.18
Conducted Power (Watts)	0.1714	0.1683	0.1644	0.1592	0.1563	0.1754	0.1603	0.1614	0.1652
EIRP(dBm)	25.34	25.26	25.16	25.02	24.94	25.44	25.05	25.08	25.18
EIRP(Watts)	0.3420	0.3357	0.3281	0.3177	0.3119	0.3499	0.3199	0.3221	0.3296



LTE Band 4 (GT - LC = 2.00 dB) QPSK									
Bandwidth	1.4M			3M			5M		
Channel	19957	20175	20393	19965	20175	20385	19975	20175	20375
	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)
Frequency (MHz)	1710.7	1732.5	1754.3	1711.5	1732.5	1753.5	1712.5	1732.5	1752.5
Conducted Power (dBm)	23.25	23.42	23.50	23.15	23.03	23.30	23.39	23.41	23.50
Conducted Power (Watts)	0.2113	0.2198	0.2239	0.2065	0.2009	0.2138	0.2183	0.2193	0.2239
EIRP(dBm)	25.25	25.42	25.50	25.15	25.03	25.30	25.39	25.41	25.50
EIRP(Watts)	0.3350	0.3483	0.3548	0.3273	0.3184	0.3388	0.3459	0.3475	0.3548

LTE Band 4 (GT - LC = 2.00 dB) QPSK									
Bandwidth	10M			15M			20M		
Channel	20000	20175	20350	20025	20175	20325	20050	20175	20300
	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)
Frequency (MHz)	1715	1732.5	1750	1717.5	1732.5	1747.5	1720	1732.5	1745
Conducted Power (dBm)	23.27	23.28	23.50	23.61	23.53	23.47	23.09	23.35	23.09
Conducted Power (Watts)	0.2123	0.2128	0.2239	0.2296	0.2254	0.2223	0.2037	0.2163	0.2037
EIRP(dBm)	25.27	25.28	25.50	25.61	25.53	25.47	25.09	25.35	25.09
EIRP(Watts)	0.3365	0.3373	0.3548	0.3639	0.3573	0.3524	0.3228	0.3428	0.3228





LTE Band 4 (GT - LC = 2.00 dB) 16QAM									
Bandwidth	1.4M			3M			5M		
Channel	19957	20175	20393	19965	20175	20385	19975	20175	20375
	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)
Frequency (MHz)	1710.7	1732.5	1754.3	1711.5	1732.5	1753.5	1712.5	1732.5	1752.5
Conducted Power (dBm)	22.09	22.21	22.59	22.12	22.06	22.47	21.95	22.08	22.30
Conducted Power (Watts)	0.1618	0.1663	0.1816	0.1629	0.1607	0.1766	0.1567	0.1614	0.1698
EIRP(dBm)	24.09	24.21	24.59	24.12	24.06	24.47	23.95	24.08	24.30
EIRP(Watts)	0.2564	0.2636	0.2877	0.2582	0.2547	0.2799	0.2483	0.2559	0.2692

LTE Band 4 (GT - LC = 2.00 dB) 16QAM									
Bandwidth	10M			15M			20M		
Channel	20000	20175	20350	20025	20175	20325	20050	20175	20300
	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)
Frequency (MHz)	1715	1732.5	1750	1717.5	1732.5	1747.5	1720	1732.5	1745
Conducted Power (dBm)	22.20	22.17	22.45	22.32	22.48	22.43	22.07	22.66	22.07
Conducted Power (Watts)	0.1660	0.1648	0.1758	0.1706	0.1770	0.1750	0.1611	0.1845	0.1611
EIRP(dBm)	24.20	24.17	24.45	24.32	24.48	24.43	24.07	24.66	24.07
EIRP(Watts)	0.2630	0.2612	0.2786	0.2704	0.2805	0.2773	0.2553	0.2924	0.2553



LTE Band 5 (GT - LC = 2.00 dB) QPSK									
Bandwidth	1.4M			3M			5M		
Channel	20407	20525	20643	20415	20525	20635	20425	20525	20625
	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)
Frequency	824.7	836.5	848.3	825.5	836.5	847.5	826.5	836.5	846.5
(MHz)									
Conducted Power (dBm)	23.31	23.16	23.12	23.22	23.09	23.07	23.21	23.25	23.31
Conducted Power (Watts)	0.2143	0.2070	0.2051	0.2099	0.2037	0.2028	0.2094	0.2113	0.2143
ERP(dBm)	23.16	23.01	22.97	23.07	22.94	22.92	23.06	23.10	23.16
ERP(Watts)	0.2070	0.2000	0.1982	0.2028	0.1968	0.1959	0.2023	0.2042	0.2070

LTE Band 5 (GT - LC = 2.00 dB) QPSK			
Bandwidth	10M		
Channel	20450	20525	20600
	(Low)	(Mid)	(High)
Frequency	829	836.5	844
(MHz)			
Conducted Power (dBm)	23.39	23.22	23.09
Conducted Power (Watts)	0.2183	0.2099	0.2037
ERP(dBm)	23.24	23.07	22.94
ERP(Watts)	0.2109	0.2028	0.1968



LTE Band 5 (GT - LC = 2.00 dB) 16QAM									
Bandwidth	1.4M			3M			5M		
Channel	20407	20525	20643	20415	20525	20635	20425	20525	20625
	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)
Frequency (MHz)	824.7	836.5	848.3	825.5	836.5	847.5	826.5	836.5	846.5
Conducted Power (dBm)	22.49	22.13	22.04	22.01	22.15	22.01	21.97	22.11	21.88
Conducted Power (Watts)	0.1774	0.1633	0.1600	0.1589	0.1641	0.1589	0.1574	0.1626	0.1542
ERP(dBm)	22.34	21.98	21.89	21.86	22.00	21.86	21.82	21.96	21.73
ERP(Watts)	0.1714	0.1578	0.1545	0.1535	0.1585	0.1535	0.1521	0.1570	0.1489

LTE Band 5 (GT - LC = 2.00 dB) 16QAM			
Bandwidth	10M		
Channel	20450	20525	20600
	(Low)	(Mid)	(High)
Frequency (MHz)	829	836.5	844
Conducted Power (dBm)	22.11	21.95	22.00
Conducted Power (Watts)	0.1626	0.1567	0.1585
ERP(dBm)	21.96	21.80	21.85
ERP(Watts)	0.1570	0.1514	0.1531



LTE Band 7 (GT - LC = 2.00 dB) QPSK			
Bandwidth	5M		
Channel	20775	21100	21425
	(Low)	(Mid)	(High)
Frequency (MHz)	2502.5	2535	2567.5
	Conducted Power (dBm)	23.28	23.07
Conducted Power (Watts)	0.2128	0.2028	0.2075
EIRP(dBm)	25.28	25.07	25.17
EIRP(Watts)	0.3373	0.3214	0.3289

LTE Band 7 (GT - LC = 2.00 dB) QPSK									
Bandwidth	10M			15M			20M		
Channel	20800	21100	21400	20825	21100	21375	20850	21100	21350
	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)
Frequency (MHz)	2505	2535	2565	2507.5	2535	2562.5	2510	2535	2560
	Conducted Power (dBm)	23.11	23.21	23.08	23.29	23.17	23.18	23.30	23.08
Conducted Power (Watts)	0.2046	0.2094	0.2032	0.2133	0.2075	0.2080	0.2138	0.2032	0.2089
EIRP(dBm)	25.11	25.21	25.08	25.29	25.17	25.18	25.30	25.08	25.20
EIRP(Watts)	0.3243	0.3319	0.3221	0.3381	0.3289	0.3296	0.3388	0.3221	0.3311



LTE Band 7 (GT - LC = 2.00 dB) 16QAM			
Bandwidth	5M		
Channel	20775	21100	21425
	(Low)	(Mid)	(High)
Frequency (MHz)	2502.5	2535	2567.5
	Conducted Power (dBm)	22.54	21.94
Conducted Power (Watts)	0.1795	0.1563	0.1560
EIRP(dBm)	24.54	23.94	23.93
EIRP(Watts)	0.2844	0.2477	0.2472

LTE Band 7 (GT - LC = 2.00 dB) 16QAM									
Bandwidth	10M			15M			20M		
Channel	20800	21100	21400	20825	21100	21375	20850	21100	21350
	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)
Frequency (MHz)	2505	2535	2565	2507.5	2535	2562.5	2510	2535	2560
	Conducted Power (dBm)	22.19	22.56	22.33	22.06	22.09	22.54	21.96	22.45
Conducted Power (Watts)	0.1656	0.1803	0.1710	0.1607	0.1618	0.1795	0.1570	0.1758	0.1663
EIRP(dBm)	24.19	24.56	24.33	24.06	24.09	24.54	23.96	24.45	24.21
EIRP(Watts)	0.2624	0.2858	0.2710	0.2547	0.2564	0.2844	0.2489	0.2786	0.2636



**Peak-to-Average Ratio**

Mode	LTE Band 2 / 20MHz				
Mod.	QPSK		16QAM		Limit: 13dB
RB Size	1RB	Full RB	1RB	Full RB	Result
Lowest CH	4.32	4.96	5.51	5.94	PASS
Middle CH	4.29	4.84	5.48	5.97	
Highest CH	4.43	4.93	5.16	6.03	

Mode	LTE Band 4 / 20MHz				
Mod.	QPSK		16QAM		Limit: 13dB
RB Size	1RB	Full RB	1RB	Full RB	Result
Lowest CH	4.14	4.75	5.07	5.74	PASS
Middle CH	4.35	4.99	5.19	6.03	
Highest CH	4.58	4.75	5.39	5.77	


Mode	LTE Band 5 / 10MHz				
Mod.	QPSK		16QAM		Limit: 13dB
RB Size	1RB	Full RB	1RB	Full RB	Result
Lowest CH	4.23	4.78	5.45	5.74	PASS
Middle CH	4.23	5.07	5.04	6.06	
Highest CH	4.17	4.52	5.39	5.48	

Mode	LTE Band 7 / 20MHz				
Mod.	QPSK		16QAM		Limit: 13dB
RB Size	1RB	Full RB	1RB	Full RB	Result
Lowest CH	4.29	4.81	5.22	5.83	PASS
Middle CH	3.83	4.67	4.46	5.65	
Highest CH	4.67	4.52	5.33	5.54	




LTE Band 2 / 20MHz / QPSK

Lowest Channel / 1RB

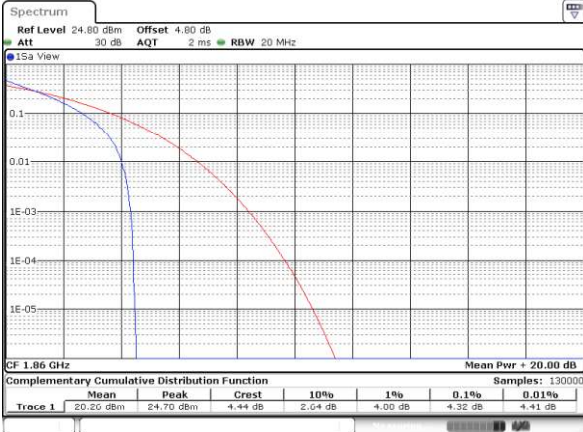


Date: 7 APR 2019 13:42:48

Lowest Channel / Full RB

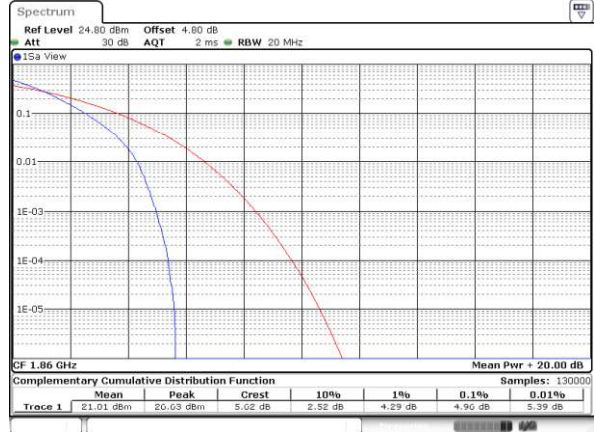


Date: 7 APR 2019 13:42:59

Middle Channel / 1RB

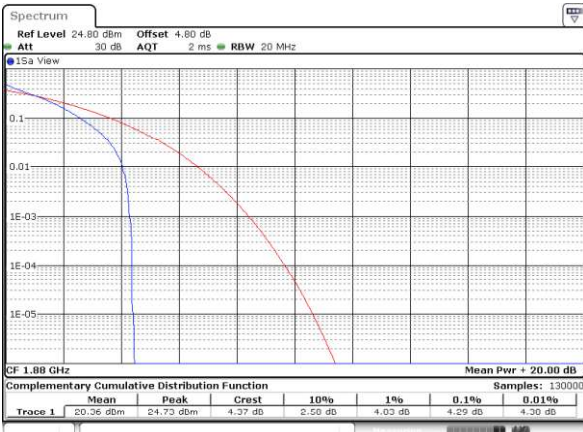

Date: 7 APR 2019 13:43:31

Middle Channel / Full RB

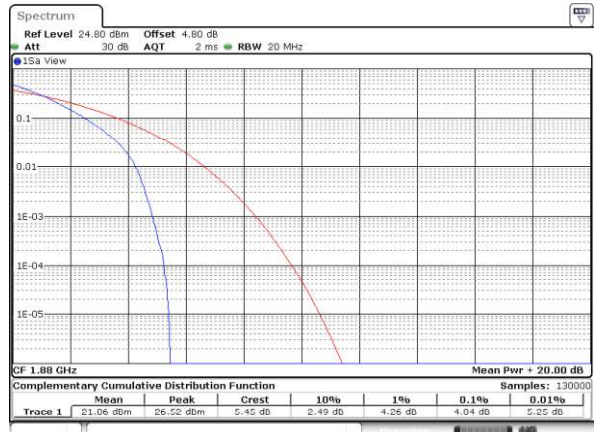

Date: 7 APR 2019 13:43:16

Highest Channel / 1RB



Date: 7 APR 2019 13:43:58

Highest Channel / Full RB




Date: 7 APR 2019 13:44:34




LTE Band 2 / 20MHz / 16QAM

Lowest Channel / 1RB

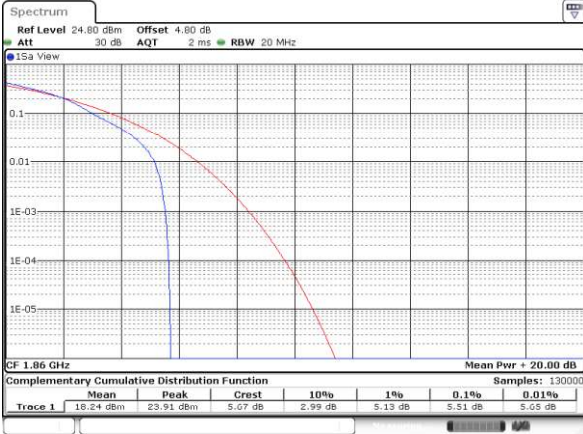


Date: 6 APR 2019 15:33:55

Lowest Channel / Full RB

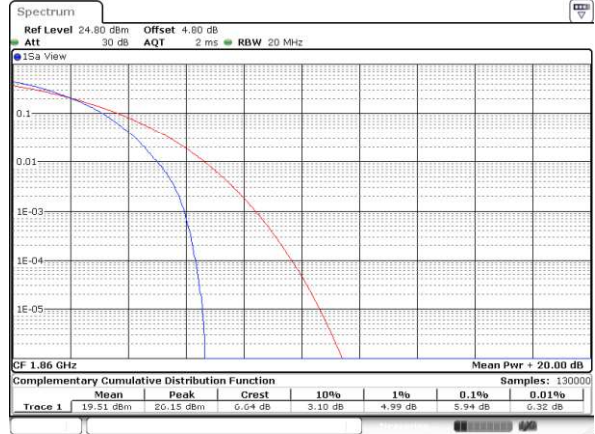


Date: 6 APR 2019 15:34:04

Middle Channel / 1RB

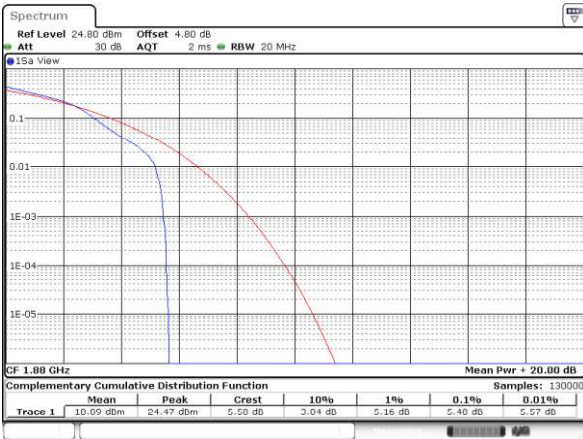

Date: 6 APR 2019 15:34:13

Middle Channel / Full RB

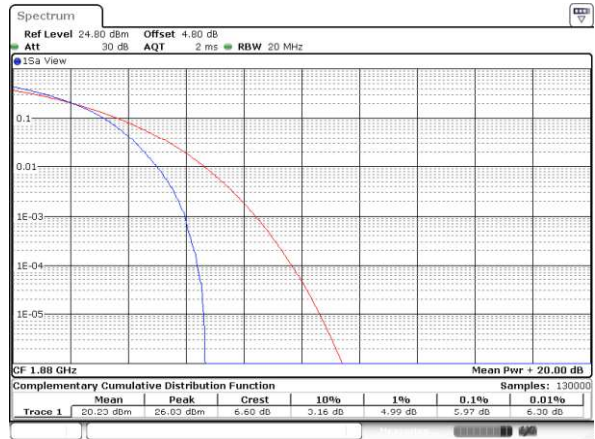


Date: 6 APR 2019 15:34:22

Highest Channel / 1RB



Date: 6 APR 2019 15:34:31

Highest Channel / Full RB

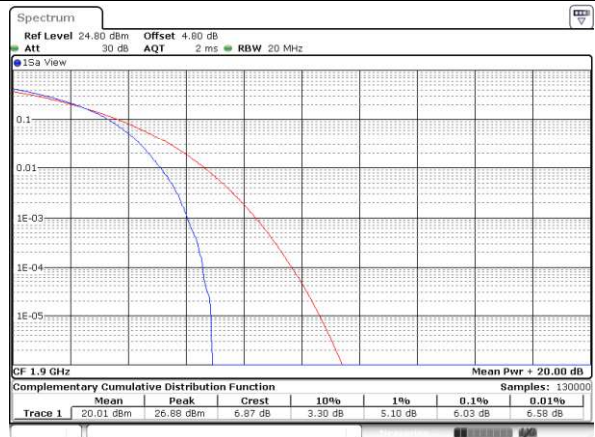


Date: 6 APR 2019 15:34:40






LTE Band 4 / 20MHz / QPSK

Lowest Channel / 1RB

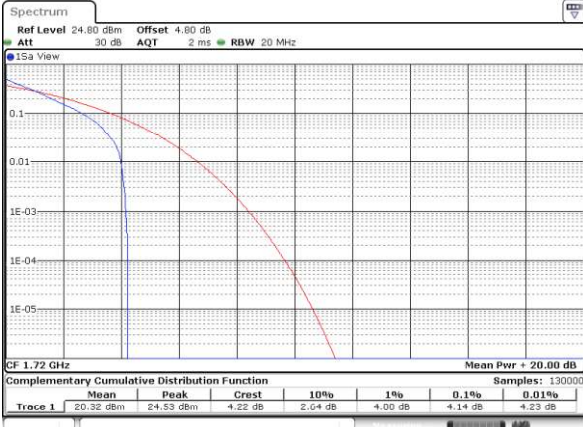

Date: 6 APR 2019 20:47:56

Lowest Channel / Full RB

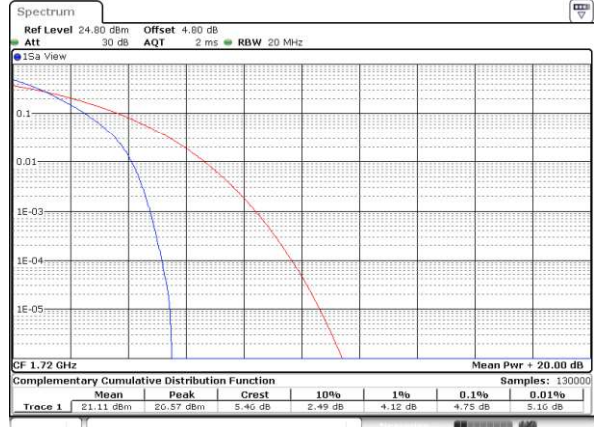


Date: 6 APR 2019 20:50:33

Middle Channel / 1RB




Date: 6 APR 2019 20:48:09

Middle Channel / Full RB

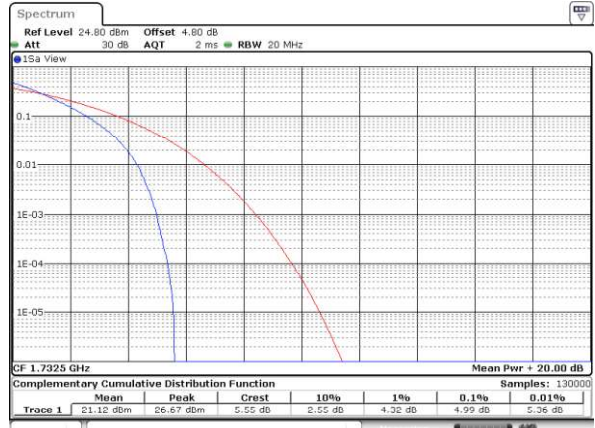


Date: 6 APR 2019 20:50:20

Highest Channel / 1RB

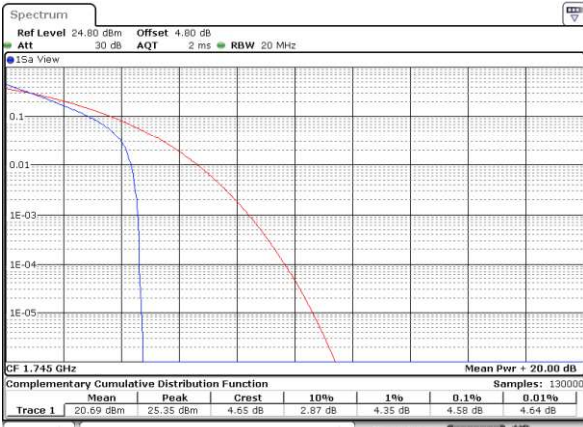

Date: 6 APR 2019 20:49:11

Highest Channel / Full RB

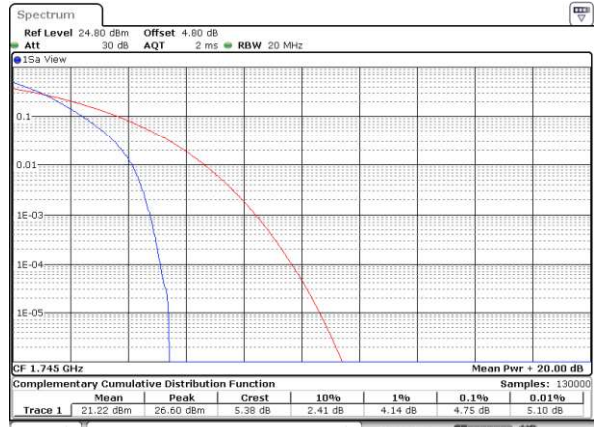

Date: 6 APR 2019 20:49:23




LTE Band 4 / 20MHz / 16QAM

Lowest Channel / 1RB




Date: 6 APR 2019 20:47:45

Lowest Channel / Full RB

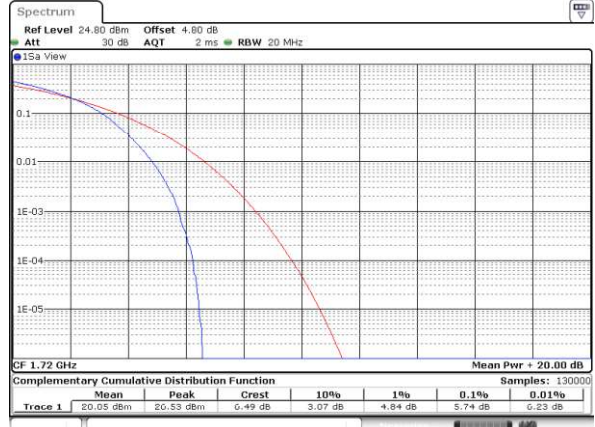


Date: 6 APR 2019 20:50:45

Middle Channel / 1RB

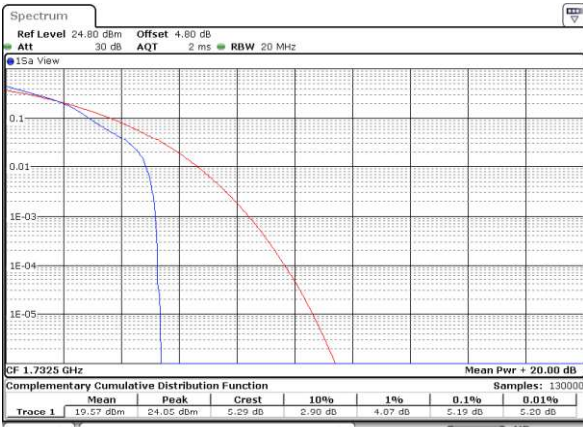

Date: 6 APR 2019 20:48:21

Middle Channel / Full RB

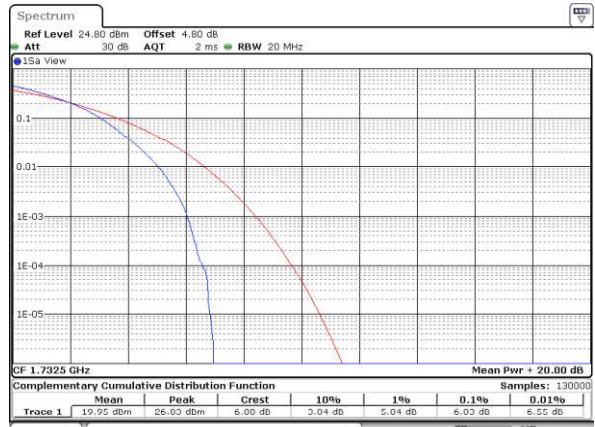


Date: 6 APR 2019 20:50:08

Highest Channel / 1RB



Date: 6 APR 2019 20:48:59

Highest Channel / Full RB

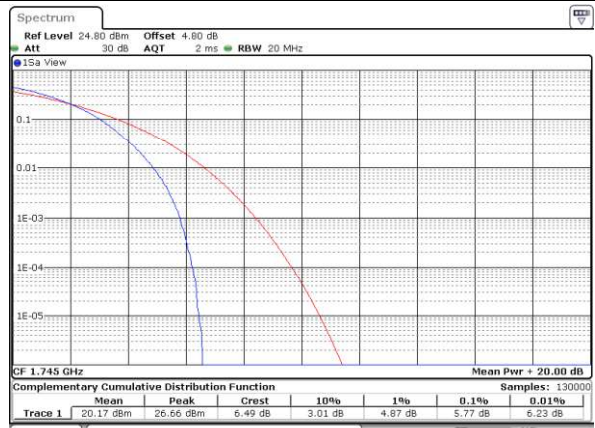

Date: 6 APR 2019 20:49:35



LTE Band 5 / 10MHz / QPSK

Lowest Channel / 1RB



Date: 6 APR 2019 20:24:34

Lowest Channel / Full RB



Date: 6 APR 2019 20:24:18

Middle Channel / 1RB



Date: 6 APR 2019 20:25:31

Middle Channel / Full RB



Date: 6 APR 2019 20:22:32

Highest Channel / 1RB



Date: 6 APR 2019 20:25:43

Highest Channel / Full RB




Date: 6 APR 2019 20:22:20



LTE Band 5 / 10MHz / 16QAM

Lowest Channel / 1RB

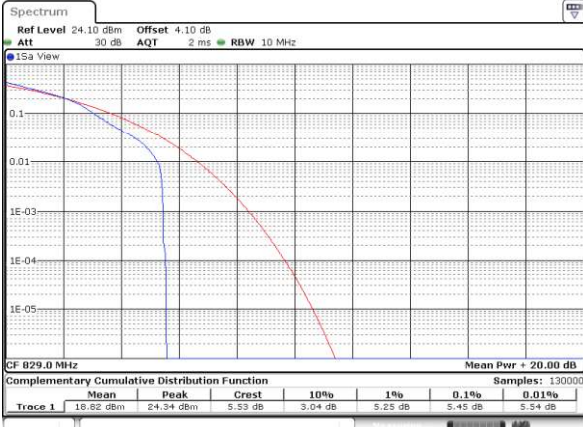


Date: 6 APR 2019 20:24:45

Lowest Channel / Full RB




Date: 6 APR 2019 20:24:05

Middle Channel / 1RB

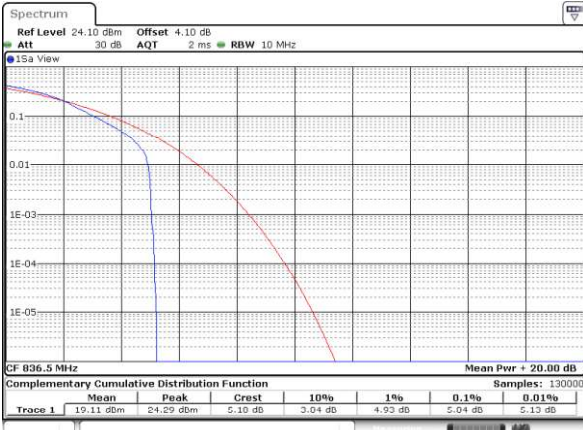

Date: 6 APR 2019 20:25:20

Middle Channel / Full RB

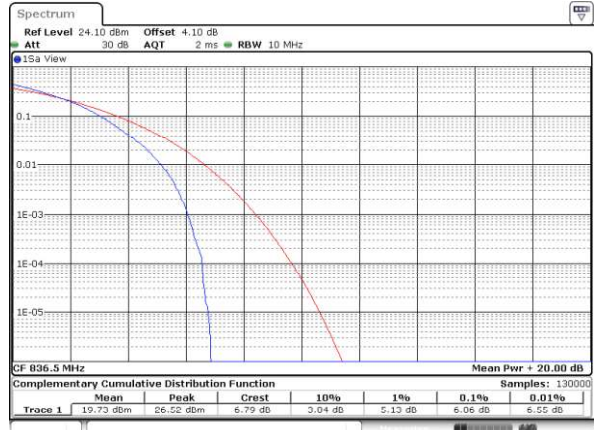


Date: 6 APR 2019 20:22:43

Highest Channel / 1RB



Date: 6 APR 2019 20:25:55

Highest Channel / Full RB

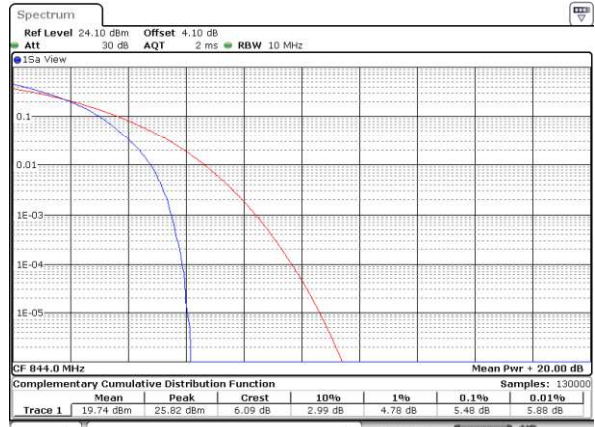


Date: 6 APR 2019 20:22:09




LTE Band 7 / 20MHz / QPSK

Lowest Channel / 1RB

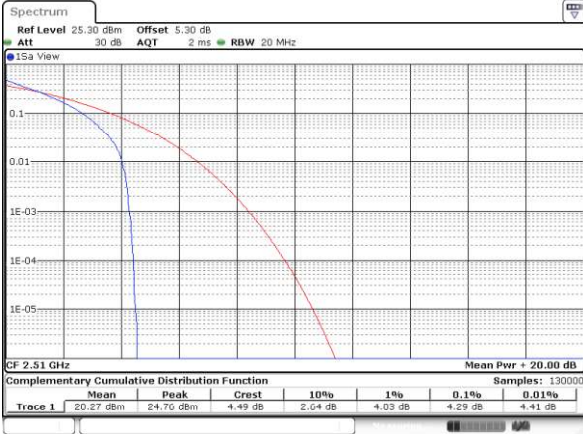


Date: 6 APR 2019 13:45:11

Lowest Channel / Full RB

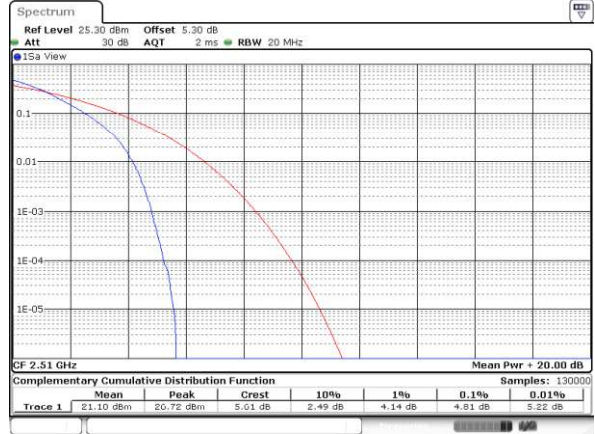


Date: 6 APR 2019 13:45:21

Middle Channel / 1RB

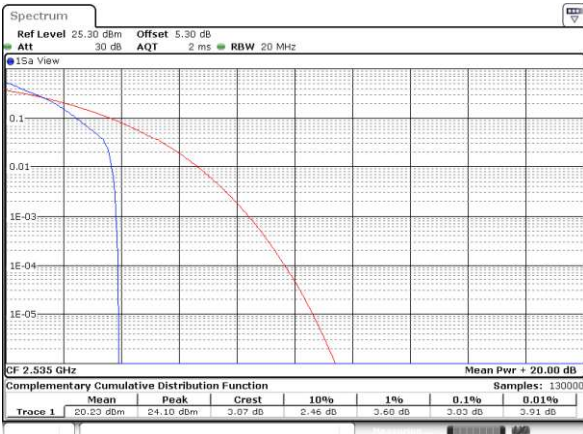


Date: 6 APR 2019 13:45:57

Middle Channel / Full RB

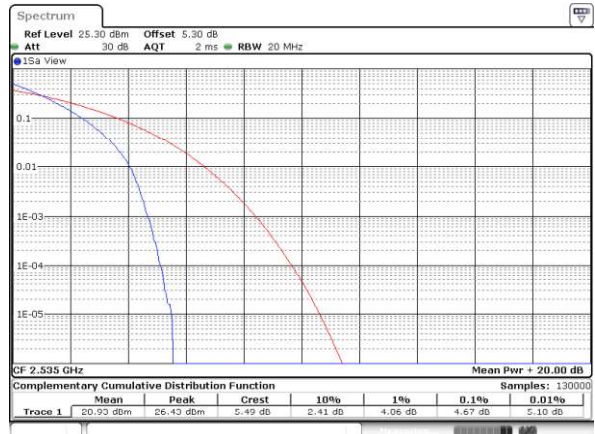


Date: 6 APR 2019 13:45:46

Highest Channel / 1RB

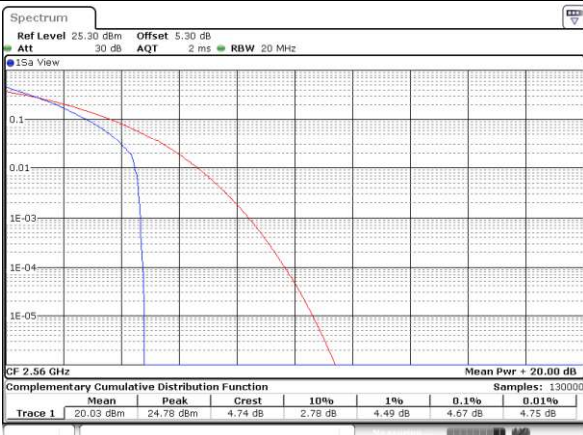

Date: 6 APR 2019 13:46:24

Highest Channel / Full RB

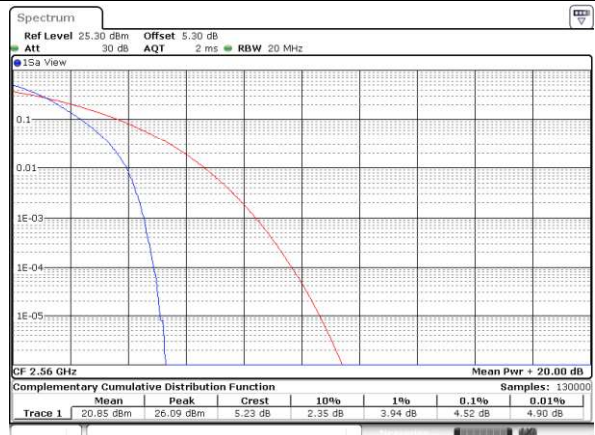

Date: 6 APR 2019 13:46:32