



FCC TEST REPORT FOR

Shenzhen Jintaiyi Electronics Co., Ltd
smart handheld terminal

Test Model: KP36

Additional Model No.: Please Refer to Page 7

Prepared for : Shenzhen Jintaiyi Electronics Co., Ltd
Address : Room 12A, E4 build, TCL Science Park, No 1001,
Zhongshanyuan Road, Nanshan District, Shenzhen, china

Prepared by : Shenzhen LCS Compliance Testing Laboratory Ltd.
Address : 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park
Yabianxueziwei, Shajing Street, Baoan District, Shenzhen,
518000, China
Tel : (+86)755-82591330
Fax : (+86)755-82591332
Web : www.LCS-cert.com
Mail : webmaster@LCS-cert.com

Date of receipt of test sample : March 12, 2024
Number of tested samples : 2
Sample No. : A240311119-1, A240311119-2
Serial number : Prototype
Date of Test : March 12, 2024 ~ March 25, 2024
Date of Report : March 26, 2024





FCC TEST REPORT

FCC Part 22 /Part 24

Report Reference No.....: **LCSA01224052EI**

FCC ID.....: **2BF3I-KP36**

Date of Issue.....: **March 26, 2024**

Testing Laboratory Name.....: **Shenzhen LCS Compliance Testing Laboratory Ltd.**

Address.....: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Applicant's name.....: **Shenzhen Jintaiyi Electronics Co., Ltd**

Address.....: Room 12A, E4 build, TCL Science Park, No 1001, Zhongshanyuan Road, Nanshan District, Shenzhen, china

Test specification.....:

Standard.....: **FCC Part 22: Public Mobile Services**
FCC Part 24: Personal Communication Services

Test Report Form No: LCSEMC-1.0

TRF Originator.....: Shenzhen LCS Compliance Testing Laboratory Ltd.

Master TRF.....: Dated 2011-03

Shenzhen LCS Compliance Testing Laboratory Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen LCS Compliance Testing Laboratory Ltd. is acknowledged as copyright owner and source of the material. Shenzhen LCS Compliance Testing Laboratory Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test item description.....: **smart handheld terminal**

Trade Mark.....: N/A

Test Model.....: KP36

Ratings.....: Input: 5.0V $\overline{\text{---}}$ 2.0A
For AC Adapter Input: 100-240V~, 50/60Hz, 0.3A
Adapter Output: 5.0V $\overline{\text{---}}$ 2.0A, 10.0W
DC 3.85V by Rechargeable Li-ion Battery, 5000mAh

Frequency.....: GSM 850MHz; PCS 1900MHz

Result.....: **PASS**

Compiled by:

Kevin Huang/ Administrator

Supervised by:

Cary Luo/ Technique principal

Approved by:

Gavin Liang/ Manager





TEST REPORT

| | |
|---|---------------------------------|
| Test Report No. : LCSA01224052EI | March 26, 2024 Date of issue |
|---|---------------------------------|

| | |
|--------------------------|---|
| EUT..... | : smart handheld terminal |
| Test Model..... | : KP36 |
| Applicant..... | : Shenzhen Jintaiyi Electronics Co., Ltd |
| Address..... | : Room 12A, E4 build, TCL Science Park, No 1001, Zhongshanyuan Road, Nanshan District, Shenzhen, china |
| Telephone..... | : / |
| Fax..... | : / |
| Manufacturer..... | : Shenzhen Jintaiyi Electronics Co., Ltd |
| Address..... | : Room 12A, E4 build, TCL Science Park, No 1001, Zhongshanyuan Road, Nanshan District, Shenzhen, china |
| Telephone..... | : / |
| Fax..... | : / |
| Factory..... | : Dongguan Jintaiyi Electronics Co., Ltd |
| Address..... | : Room 1301, Building 1, Ofei Photoelectric Imaging Industry Research Center, No. 2 Huahai Road, Marina Bay New Area, Dongguan City, Guangdong, china |
| Telephone..... | : / |
| Fax..... | : / |

| | |
|---------------------|-------------|
| Test Result: | PASS |
|---------------------|-------------|

The test report merely corresponds to the test sample.
It is not permitted to copy extracts of these test result without the written permission of the test laboratory.





Revision History

| Report Version | Issue Date | Revision Content | Revised By |
|----------------|----------------|------------------|------------|
| 000 | March 26, 2024 | Initial Issue | --- |
| | | | |
| | | | |





Contents

- 1 TEST STANDARDS 6**
- 2 SUMMARY7**
- 2.1 Product Description 7**
- 2.2 Equipment under Test 10**
- 2.3 Short description of the Equipment under Test (EUT) 11**
- 2.4 Support equipment List 11**
- 2.5 External I/O Cable 11**
- 2.6 Normal Accessory setting 11**
- 2.7 Test Sample 11**
- 2.8 EUT configuration 11**
- 2.9 Related Submittal(s) / Grant (s) 11**
- 2.10 Modifications 11**
- 2.11 General Test Conditions/Configurations 12**
- 3 TEST ENVIRONMENT 13**
- 3.1 Address of the test laboratory 13**
- 3.2 Test Facility 13**
- 3.3 Environmental conditions 13**
- 3.4 Test Description 14**
- 3.5 Equipments Used during the Test 15**
- 3.6 Measurement uncertainty 16**
- 4 TEST CONDITIONS AND RESULTS 17**
- 4.1 Output Power 17**
- 4.2 Radiated Spurious Emssion 21**
- 4.3 Occupied Bandwidth and Emission Bandwidth 25**
- 4.4 Band Edge Complicance 28**
- 4.5 Spurious Emission on Antenna Port 31**
- 4.6 Frequency Stability Test 41**
- 4.7 Peak-to-Average Ratio (PAR) 44**
- 5 TEST SETUP PHOTOGRAPHS OF EUT47**
- 6 EXTERIOR PHOTOGRAPHS OF THE EUT47**
- 7 INTERIOR PHOTOGRAPHS OF THE EUT47**





1 TEST STANDARDS

The tests were performed according to following standards:

[FCC Part 22 \(10-1-16 Edition\)](#): Cellular Radiotelephone Service.

[FCC Part 24\(10-1-16 Edition\)](#): Broadband PCS.

[ANSI/TIA-603-E-2016](#): Land Mobile FM or PM Communications Equipment Measurement and Performance Standards.

[47 CFR FCC Part 15 Subpart B](#): Unintentional Radiators.

[FCC Part 2](#): Frequency Allocations And Radio Treaty Matters: General Rules And Regulations.

[ANSI C63.4:2014](#): Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz.

[ANSI C63.26-2015](#): Compliance Testing of Transmitters Used in Licensed Radio Services.

[FCC KDB971168 D01](#) Power Meas License Digital Systems v03r01.



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



2 SUMMARY

2.1 Product Description

The **Shenzhen Jintaiyi Electronics Co., Ltd's** Model: smart handheld terminal or the "EUT" as referred to in this report; more general information as follows, for more details, refer to the user's manual of the EUT.

| | |
|----------------------|--|
| EUT | : smart handheld terminal |
| Test Model | : KP36 |
| Additional Model No. | : KP36D, KP36DH, KP36H, KP36DL, KP36L, KP36W, KP36Y, KP36A, KP36B, KP36C, KP36E, KP36F, KP36G, KP36P |
| Model Declaration | : PCB board, structure and internal of these model(s) are the same, So no additional models were tested |
| Power Supply | : Input: 5.0V \pm 2.0A For AC Adapter Input: 100-240V~, 50/60Hz, 0.3A Adapter Output: 5.0V \pm 2.0A, 10.0W DC 3.85V by Rechargeable Li-ion Battery, 5000mAh |
| Hardware Version | : KT60_E221_V1.1_20230525 |
| Software Version | : KP36H_V1.0_20230918 |

| | |
|---------------------|--|
| Bluetooth | : |
| Frequency Range | : 2402MHz~2480MHz |
| Channel Number | : 79 channels for Bluetooth V5.0 (DSS) 40 channels for Bluetooth V5.0 (DTS) |
| Channel Spacing | : 1MHz for Bluetooth V5.0 (DSS) 2MHz for Bluetooth V5.0 (DTS) |
| Modulation Type | : GFSK, $\pi/4$ -DQPSK, 8-DPSK for Bluetooth V5.0 (DSS) GFSK for Bluetooth V5.0 (DTS) |
| Bluetooth Version | : V5.0 |
| Antenna Description | : PIFA Antenna, 3.58dBi(Max.) |

| | |
|---------------------|--|
| WIFI(2.4G Band) | : |
| Frequency Range | : 2412MHz~2462MHz |
| Channel Spacing | : 5MHz |
| Channel Number | : 11 Channels for 20MHz bandwidth (2412~2462MHz) 7 Channels for 40MHz bandwidth (2422~2452MHz) |
| Modulation Type | : IEEE 802.11b: DSSS (CCK, DQPSK, DBPSK) IEEE 802.11g: OFDM (64QAM, 16QAM, QPSK, BPSK) IEEE 802.11n: OFDM (64QAM, 16QAM, QPSK, BPSK) |
| Antenna Description | : Ant1: PIFA Antenna, 3.58dBi(Max.) Ant2: PIFA Antenna, 3.58dBi(Max.) |

| | |
|---------------------|---|
| WIFI(5.2G Band) | : |
| Frequency Range | : 5180MHz~5240MHz |
| Channel Number | : 4 Channels for 20MHz bandwidth(5180MHz~5240MHz) 2 channels for 40MHz bandwidth(5190MHz~5230MHz) 1 channels for 80MHz bandwidth(5210MHz) |
| Modulation Type | : IEEE 802.11a/n: OFDM (64QAM, 16QAM, QPSK, BPSK) IEEE 802.11ac: OFDM (256QAM, 64QAM, 16QAM, QPSK, BPSK) |
| Antenna Description | : Ant1: PIFA Antenna, 1.52dBi(Max.) Ant2: PIFA Antenna, 1.52dBi(Max.) |

| | |
|-----------------|---|
| WIFI(5.3G Band) | : |
|-----------------|---|



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Frequency Range : 5260MHz~5320MHz
Channel Number : 4 Channels for 20MHz bandwidth(5260MHz~5320MHz)
2 channels for 40MHz bandwidth(5270MHz~5310MHz)
1 channels for 80MHz bandwidth(5290MHz)
Modulation Type : IEEE 802.11a/n: OFDM (64QAM, 16QAM, QPSK, BPSK)
IEEE 802.11ac: OFDM (256QAM, 64QAM, 16QAM, QPSK, BPSK)
Antenna Description : Ant1: PIFA Antenna, 1.52dBi(Max.)
Ant2: PIFA Antenna, 1.52dBi(Max.)

WIFI(5.5G Band) :

Frequency Range : 5500MHz~5700MHz
Channel Number : 11 Channels for 20MHz bandwidth(5500MHz~5700MHz)
5 Channels for 40MHz bandwidth(5510MHz~5670MHz)
2 Channels for 80MHz bandwidth(5530MHz, 5610MHz)
Modulation Type : IEEE 802.11a/n: OFDM (64QAM, 16QAM, QPSK, BPSK)
IEEE 802.11ac: OFDM (256QAM, 64QAM, 16QAM, QPSK, BPSK)
Antenna Description : Ant1: PIFA Antenna, 1.52dBi(Max.)
Ant2: PIFA Antenna, 1.52dBi(Max.)

WIFI(5.8G Band) :

Frequency Range : 5745MHz~5825MHz
Channel Number : 5 channels for 20MHz bandwidth(5745MHz~5825MHz)
2 channels for 40MHz bandwidth(5755MHz~5795MHz)
1 channels for 80MHz bandwidth(5775MHz)
Modulation Type : IEEE 802.11a/n: OFDM (64QAM, 16QAM, QPSK, BPSK)
IEEE 802.11ac: OFDM (256QAM, 64QAM, 16QAM, QPSK, BPSK)
Antenna Description : Ant1: PIFA Antenna, 1.52dBi(Max.)
Ant2: PIFA Antenna, 1.52dBi(Max.)

2G :

Support Band : GSM 900 (EU-Band) DCS 1800 (EU-Band)
 GSM 850 (U.S.-Band) PCS 1900 (U.S.-Band)
Release Version : R99
GPRS Class : Class 12
EGPRS Class : Class 12
Type Of Modulation : GMSK for GSM/GPRS; GMSK/8PSK for EGPRS
Antenna Description : PIFA Antenna
-4.92dBi(max.) For GSM 850
-1.96dBi(max.) For PCS 1900

3G :

Support Band : WCDMA Band I (EU-Band)
 WCDMA Band II (U.S.-Band)
 WCDMA Band V (U.S.-Band)
 WCDMA Band VIII (EU-Band)
Release Version : R8
Type Of Modulation : QPSK,16QAM
Antenna Description : PIFA Antenna
-1.96dBi(max.) For WCDMA Band II
-4.92dBi(max.) For WCDMA Band V

LTE :

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Support Band : E-UTRA Band 2(U.S.-Band)
 E-UTRA Band 4(U.S.-Band)
 E-UTRA Band 5(U.S.-Band)
 E-UTRA Band 7(U.S.-Band)
 E-UTRA Band 8(Non U.S.-Band)
 E-UTRA Band 12(U.S.-Band)
 E-UTRA Band 17(U.S.-Band)
 E-UTRA Band 28(Non U.S.-Band))
 E-UTRA Band 38(U.S.-Band)

LTE Release Version : R11

Type Of Modulation : QPSK/16QAM

Antenna Description : PIFA Antenna
-1.96dBi(max.) For E-UTRA Band 2
0.95dBi(max.) For E-UTRA Band 4
-4.92dBi(max.) For E-UTRA Band 5
3.03dBi(max.) For E-UTRA Band 7
-7.68dBi(max.) For E-UTRA Band 12
-7.68dBi(max.) For E-UTRA Band 17
1.62dBi(max.) For E-UTRA Band 38

Power Class : Class 3

NFC :

Operating Frequency : 13.56MHz

Modulation Type : ASK

Antenna Description : PIFA Antenna, 1.2dBi(Max.)

Extreme temp. : -30°C to +50°C

Tolerance

Extreme vol. Limits : 3.5VDC to 4.4VDC (nominal: 3.85VDC)



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



2.2 Equipment under Test

Power supply system utilised

| | | | |
|----------------------|---|--|---|
| Power supply voltage | : | <input type="radio"/> 120V / 60 Hz | <input type="radio"/> 115V / 60Hz |
| | | <input type="radio"/> 12 V DC | <input checked="" type="radio"/> 5 V DC |
| | | <input type="radio"/> Other (specified in blank below) | |

Test frequency list

| Test Mode | TX/RX | RF Channel | | |
|-----------|-------|-------------|-------------|-------------|
| | | Low(L) | Middle (M) | High (H) |
| GSM850 | TX | Channel 128 | Channel 190 | Channel 251 |
| | | 824.2 MHz | 836.6 MHz | 848.8 MHz |
| | RX | Channel 128 | Channel 190 | Channel 251 |
| | | 869.2 MHz | 881.6 MHz | 893.8 MHz |
| Test Mode | TX/RX | RF Channel | | |
| PCS1900 | TX | Channel 512 | Channel 661 | Channel 810 |
| | | 1850.2 MHz | 1880.0 MHz | 1909.8 MHz |
| | RX | Channel 512 | Channel 661 | Channel 810 |
| | | 1930.2 MHz | 1960.0 MHz | 1989.8 MHz |





2.3 Short description of the Equipment under Test (EUT)

2.3.1 General Description

smart handheld terminal is subscriber equipment in the BT/BLE/2.4GWIFI/5.2GWIFI /5.3GWIFI/5.5GWIFI/5.8GWIFI/GSM/WCDMA/LTE/NFC system. GSM/GPRS/EGPRS frequency band is Band II/V. The HSPA/UMTS frequency band is Band II/V. LTE frequency band is band 2/4/5/7/12/17/38. The HSPA/UMTS frequency band II and Band V test data included in this report. The smart handheld terminal implements such functions as RF signal receiving/transmitting, GSM/GPRS/EGPRS HSPA/UMTS/LTE protocol processing, video MMS service and etc. Externally it provides SIM card interface.

2.4 Support equipment List

| Manufacturer | Description | Model | Serial Number | Certificate |
|--|---------------------|--------------------|---------------|-------------|
| ShenZhenJunJiaYuanTec hnoogy Co., Ltd | AC Power Adapter | JJY-0502000- US | --- | FCC |

2.5 External I/O Cable

| I/O Port Description | Quantity | Cable |
|----------------------|----------|-----------------------------|
| Type-C USB Port | 1 | USB Cable: 1.2m, unshielded |

2.6 Normal Accessory setting

Fully charged battery was used during the test.

2.7 Test Sample

The application provides 2 samples to meet requirement;

| Sample Number | Description |
|------------------------|---------------------------------------|
| Sample 1(A240311119-1) | Engineer sample – continuous transmit |
| Sample 2(A240311119-2) | Normal sample – Intermittent transmit |

2.8 EUT configuration

The following peripheral devices and interface cables were connected during the measurement:

- - supplied by the manufacturer
- - supplied by the lab

| | | |
|---------------|----------------|---|
| ○ Power Cable | Length (m) : | / |
| | Shield : | / |
| | Detachable : | / |
| ○ Multimeter | Manufacturer : | / |
| | Model No. : | / |

2.9 Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for **FCC ID: 2BF3I-KP36** filing to comply with FCC Part 22 and Part 24 Rules.

2.10 Modifications

No modifications were implemented to meet testing criteria.



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



2.11 General Test Conditions/Configurations

2.11.1 Test Modes

NOTE: The test mode(s) are selected according to relevant radio technology specifications.

| Test Mode | Test Modes Description |
|-----------|---|
| GSM/TM1 | GSM system, GSM, GMSK modulation |
| GSM/TM2 | GSM system, GPRS, GMSK modulation |
| GSM/TM3 | GSM system, EDGE, GMSK, 8PSK modulation |

Note:

- As GSM and GPRS with the same emission designator, test result recorded in this report at the worst case GSM/TM1 only after exploratory scan.

2.11.2 Test Environment

| Environment Parameter | Selected Values During Tests | |
|-----------------------|------------------------------|----------|
| Relative Humidity | Ambient | |
| Temperature | TN | Ambient |
| Voltage | VL | DC 3.85V |
| | VN | DC 3.5V |
| | VH | DC 4.4V |

NOTE: VL=lower extreme test voltage VN=nominal voltage
VH=upper extreme test voltage TN=normal temperature





3 TEST ENVIRONMENT

3.1 Address of the test laboratory

Shenzhen LCS Compliance Testing Laboratory Ltd

101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China
The sites are constructed in conformance with the requirements of ANSI C63.4 (2014) and CISPR Publication 32.

3.2 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

NVLAP Accreditation Code is 600167-0.

FCC Designation Number is CN5024.

CAB identifier is CN0071.

CNAS Registration Number is L4595.

Test Firm Registration Number: 254912

3.3 Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

| | |
|-----------------------|--------------|
| Temperature: | 15-35 ° C |
| Humidity: | 30-60 % |
| Atmospheric pressure: | 950-1050mbar |





3.4 Test Description

3.4.1 Cellular Band (824-849MHz paired with 869-894MHz)

| Test Item | FCC Rule No. | Requirements | Verdict |
|--|---------------------|---|---------|
| Effective(Isotropic) Radiated Output Power | §2.1046, §22.913 | FCC: ERP ≤ 7W. | Pass |
| Modulation Characteristics | §2.1047 | Digital modulation | N/A |
| Bandwidth | §2.1049 | OBW: No limit. EBW: No limit. | Pass |
| Band Edges Compliance | §2.1051, §22.917 | ≤-13dBm/1%*EBW, in 1MHz bands immediately outside and adjacent to The frequency block. | Pass |
| Spurious Emission at Antenna Terminals | §2.1051, §22.917 | ≤ -13dBm/100kHz, from 9kHz to 10th harmonics but outside authorized operating frequency ranges. | Pass |
| Field Strength of Spurious Radiation | §2.1053, §22.917 | ≤ -13dBm/100kHz. | Pass |
| Frequency Stability | §2.1055, §22.355 | ≤ ±2.5ppm. | Pass |
| Peak-Average Ratio | §22.913 | FCC:Limit≤13dB | N/A |
| Receiver Spurious Emissions | N/A | -- | Pass |

NOTE 1: For the verdict, the "N/A" denotes "not applicable", the "N/T" de notes "not tested".

3.4.2 PCS Band (1850-1910MHz paired with 1930-1990MHz)

| Test Item | FCC Rule No. | Requirements | Verdict |
|--|---------------------|---|---------|
| Effective(Isotropic) Radiated Output Power | §2.1046, §24.232 | EIRP ≤ 2W | Pass |
| Peak-Average Ratio | §2.1046, §24.232 | ≤13dB | Pass |
| Modulation Characteristics | §2.1047 | Digital modulation | N/A |
| Bandwidth | §2.1049 | OBW: No limit. EBW: No limit. | Pass |
| Band Edges Compliance | §2.1051, §24.238 | ≤ -13dBm/1%*EBW, In 1MHz bands immediately outside and adjacent to The frequency block. | Pass |
| Spurious Emission at Antenna Terminals | §2.1051, §24.238 | ≤-13dBm/1MHz, from 9kHz to10th harmonics but outside authorized Operating frequency ranges. | Pass |
| Field Strength of Spurious Radiation | §2.1053, §24.238 | ≤ -13dBm/1MHz. | Pass |
| Frequency Stability | §2.1055, §24.235 | ≤ ±2.5ppm. | Pass |
| Peak-Average Ratio | §24.232 | FCC:Limit≤13dB | Pass |
| Receiver Spurious Emissions | N/A | -- | Pass |

NOTE 1: For the verdict, the "N/A" denotes "not applicable", the "N/T" de notes "not tested".

Remark: The measurement uncertainty is not included in the test result.



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



3.5 Equipments Used during the Test

| Item | Equipment | Manufacturer | Model No. | Serial No. | Cal Date | Due Date |
|------|-------------------------------------|-------------------|------------|-------------|------------|------------|
| 1 | Power Meter | R&S | NRVS | 100444 | 2023-06-09 | 2024-06-08 |
| 2 | Power Sensor | R&S | NRV-Z81 | 100458 | 2023-06-09 | 2024-06-08 |
| 3 | Power Sensor | R&S | NRV-Z32 | 10057 | 2023-06-09 | 2024-06-08 |
| 4 | LTE Test Software | Tonscend | JS1120-1 | N/A | N/A | N/A |
| 5 | RF Control Unit | Tonscend | JS0806-1 | 158060009 | 2023-10-18 | 2024-10-17 |
| 6 | MXA Signal Analyzer | Agilent | N9020A | MY51250905 | 2023-10-18 | 2024-10-17 |
| 7 | WIDEBAND RADIO COMMUNICATION TESTER | R&S | CMW 500 | 103818 | 2023-06-09 | 2024-06-08 |
| 8 | DC Power Supply | Agilent | E3642A | N/A | 2023-10-18 | 2024-10-17 |
| 9 | EMI Test Software | AUDIX | E3 | / | N/A | N/A |
| 10 | 3m Semi Anechoic Chamber | SIDT FRANKONIA | SAC-3M | 03CH03-HY | 2023-06-09 | 2024-06-08 |
| 11 | Positioning Controller | Max-Full | MF7802BS | MF780208586 | N/A | N/A |
| 12 | Active Loop Antenna | SCHWARZBECK | FMZB 1519B | 00005 | 2021-08-29 | 2024-08-28 |
| 13 | By-log Antenna | SCHWARZBECK | VULB9163 | 9163-470 | 2021-09-12 | 2024-09-11 |
| 14 | By-log Antenna | SCHWARZBECK | VULB9163 | 9163-471 | 2021-09-12 | 2024-09-11 |
| 15 | Horn Antenna | SCHWARZBECK | BBHA 9120D | 9120D-1925 | 2021-09-05 | 2024-09-04 |
| 16 | Horn Antenna | SCHWARZBECK | BBHA 9120D | 9120D-1926 | 2021-09-05 | 2024-09-04 |
| 17 | Broadband Horn Antenna | SCHWARZBECK | BBHA 9170 | 791 | 2021-08-29 | 2024-08-28 |
| 18 | Broadband Horn Antenna | SCHWARZBECK | BBHA 9170 | 792 | 2021-08-29 | 2024-08-28 |
| 19 | Broadband Preamplifier | SCHWARZBECK | BBV9719 | 9719-025 | 2021-08-29 | 2024-08-28 |
| 20 | EMI Test Receiver | R&S | ESR 7 | 101181 | 2023-08-15 | 2024-08-14 |
| 21 | RS SPECTRUM ANALYZER | R&S | FSP40 | 100503 | 2023-07-17 | 2024-07-16 |
| 22 | Low-frequency amplifier | SchwarzZBECK | BBV9745 | 00253 | 2023-10-18 | 2024-10-17 |
| 23 | High-frequency amplifier | JS Denki Pte | PA0118-43 | JSPA21009 | 2023-10-18 | 2024-10-17 |
| 24 | 6dB Attenuator | / | 100W/6dB | 1172040 | 2023-06-09 | 2024-06-08 |
| 26 | 3dB Attenuator | / | 2N-3dB | / | 2023-10-18 | 2024-10-17 |
| 27 | Temperature & Humidity Chamber | GUANGZHOU GOGNWEN | GDS-100 | 70932 | 2023-10-05 | 2024-10-04 |
| 28 | EMI Test Software | Farad | EZ | / | N/A | N/A |
| 29 | RADIO COMMUNICATION TESTER | R&S | CMU 200 | 105988 | 2023-06-09 | 2024-06-08 |
| 30 | Antenna Mast | Max-Full | MFA-515BSN | 1308572 | N/A | N/A |



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



3.6 Measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to ETSI TR 100 028 “ Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics” and is documented in the Shenzhen LCS Compliance Testing Laboratory Ltd. quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for Shenzhen LCS Compliance Testing Laboratory Ltd. is reported:

| Test | Range | Measurement Uncertainty | Notes |
|-------------------------------------|------------|-------------------------|-------|
| Radiated Emission | 30~1000MHz | 3.10 dB | (1) |
| Radiated Emission | 1~18GHz | 3.80 dB | (1) |
| Radiated Emission | 18-40GHz | 3.90 dB | (1) |
| Conducted Disturbance | 0.15~30MHz | 1.63 dB | (1) |
| Conducted Power | 9KHz~18GHz | 0.61 dB | (1) |
| Spurious RF Conducted Emission | 9KHz~40GHz | 1.22 dB | (1) |
| Band Edge Compliance of RF Emission | 9KHz~40GHz | 1.22 dB | (1) |
| Occupied Bandwidth | 9KHz~40GHz | - | (1) |

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=1.96.





4 TEST CONDITIONS AND RESULTS


4.1 Output Power

TEST APPLICABLE

During the process of testing, the EUT was controlled via R&S Digital Radio Communication tester (CMU200) to ensure max power transmission and proper modulation. This result contains output power and EIRP measurements for the EUT. In all cases, output power is within the specified limits.

4.1.1 Conducted Output Power

TEST CONFIGURATION

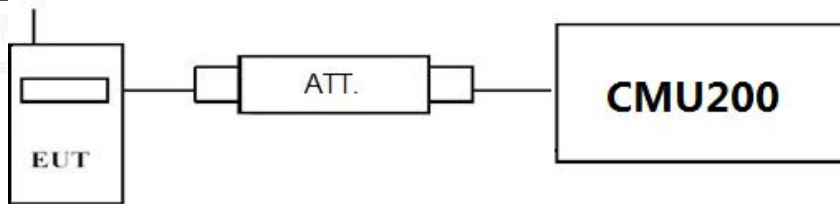

TEST PROCEDURE

Conducted Power Measurement:

- a) Place the EUT on a bench and set it in transmitting mode.
- b) Connect a low loss RF cable from the antenna port to a CMU200 by an Att.
- c) EUT Communicate with CMU200 then selects a channel for testing.
- d) Add a correction factor to the display CMU200, and then test.

TEST RESULTS

| GSM 850 | | Burst Average Conducted power (dBm) | | |
|-------------|----------|-------------------------------------|-----------|-----------|
| | | Channel/Frequency(MHz) | | |
| | | 128/824.2 | 190/836.6 | 251/848.8 |
| GSM | | 32.70 | 32.71 | 32.68 |
| GPRS (GMSK) | 1TX slot | 32.54 | 32.53 | 32.50 |
| | 2TX slot | 30.98 | 31.00 | 30.99 |
| | 3TX slot | 29.50 | 29.49 | 29.47 |
| | 4TX slot | 28.01 | 27.99 | 27.97 |
| EDGE (8PSK) | 1TX slot | 25.96 | 26.00 | 25.97 |
| | 2TX slot | 24.50 | 24.52 | 24.45 |
| | 3TX slot | 23.00 | 23.01 | 22.94 |
| | 4TX slot | 21.47 | 21.52 | 21.44 |

| PCS 1900 | | Burst Average Conducted power (dBm) | | |
|-------------|----------|-------------------------------------|----------|------------|
| | | Channel/Frequency(MHz) | | |
| | | 512/1850.2 | 661/1880 | 810/1909.8 |
| GSM | | 29.68 | 29.69 | 29.67 |
| GPRS (GMSK) | 1TX slot | 29.51 | 29.54 | 29.48 |
| | 2TX slot | 27.95 | 27.98 | 27.92 |
| | 3TX slot | 26.46 | 26.48 | 26.43 |
| | 4TX slot | 24.96 | 25.00 | 24.97 |
| EDGE (8PSK) | 1TX slot | 25.49 | 25.47 | 25.45 |
| | 2TX slot | 23.96 | 24.02 | 23.96 |
| | 3TX slot | 22.45 | 22.48 | 22.47 |
| | 4TX slot | 20.96 | 21.02 | 20.93 |



4.1.2 Radiated Output Power


TEST DESCRIPTION

This is the test for the maximum radiated power from the EUT.

Per rule Part 24.232(c) specifies, "Mobile/portable stations are limited to 2 watts e.i.r.p. Peak power" and 24.232(e) specifies that "Peak transmit power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage."

Per rule Part 22.913(a) specifies "The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts."

TEST CONFIGURATION

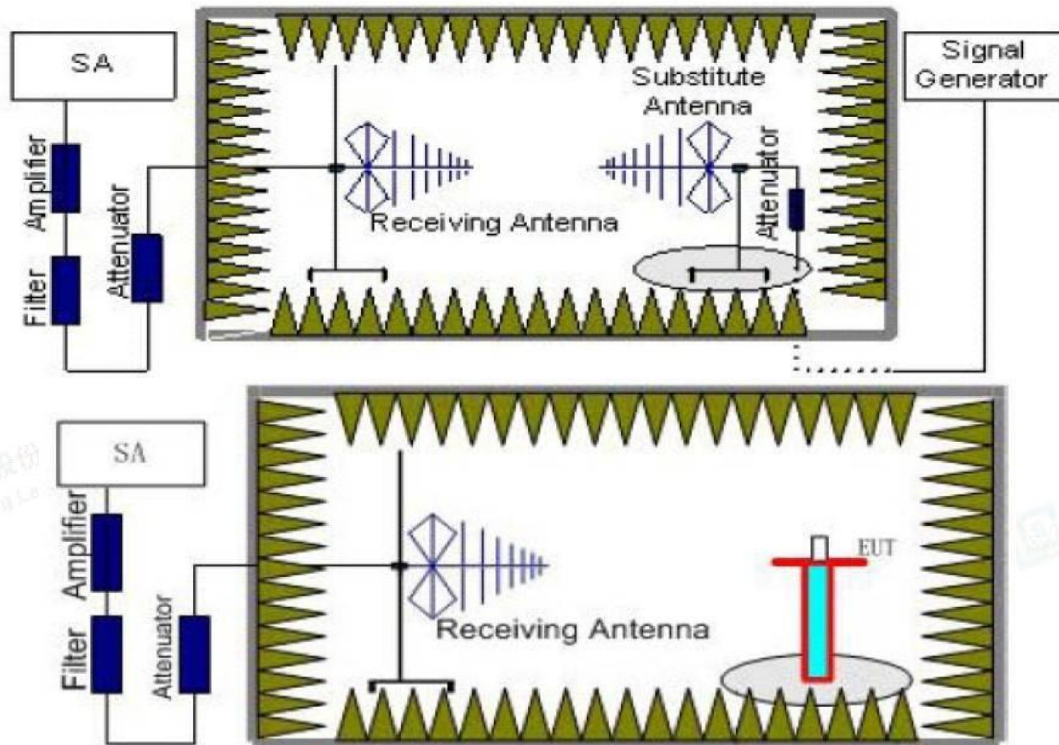

TEST PROCEDURE

1. EUT was placed on a 1.50 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The height of receiving antenna is 1.50 m. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all transmit frequencies in three channels (High, Middle, Low) were measured with peak detector.
2. A log-periodic antenna or double-ridged waveguide horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.
3. The EUT is then put into continuously transmitting mode at its maximum power level during the test. Set Test Receiver or Spectrum RBW=1MHz, VBW=3MHz, And the maximum value of the receiver should be recorded as (P_r).
4. The EUT shall be replaced by a substitution antenna. In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (P_{Mea}) is applied to the input of the substitution





antenna, and adjust the level of the signal generator output until the value of the receiver reach the previously recorded (P_r). The power of signal source (P_{Mea}) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.

- 5. A amplifier should be connected to the Signal Source output port. And the cable should be connect between the Amplifier and the Substitution Antenna. The cable loss (P_{cl}), the Substitution Antenna Gain (G_a) and the Amplifier Gain (P_{Ag}) should be recorded after test.

The measurement results are obtained as described below:

$$\text{Power(EIRP)} = P_{Mea} + P_{Ag} - P_{cl} + G_a$$

- 6. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi) and known input power.
- 7. ERP can be calculated from EIRP by subtracting the gain of the dipole, $ERP = EIRP - 2.15\text{dBi}$.

TEST LIMIT

According to 22.913(a), 24.232(c) , the ERP should be not exceed following table limits:

| GSM850(GPRS850,EDGE850) | | |
|-------------------------|------------|----------------------------------|
| Function | Power Step | Burst Peak ERP (dBm) |
| GSM | 5 | FCC: $\leq 38.45\text{dBm}$ (7W) |
| GPRS | 3 | FCC: $\leq 38.45\text{dBm}$ (7W) |
| EDGE | 8 | FCC: $\leq 38.45\text{dBm}$ (7W) |

| PCS1900(GPRS1900,EDGE1900) | | |
|----------------------------|------------|-----------------------------|
| Function | Power Step | Burst Peak EIRP (dBm) |
| GSM | 0 | $\leq 33.01\text{dBm}$ (2W) |
| GPRS | 3 | $\leq 33.01\text{dBm}$ (2W) |
| EDGE | 2 | $\leq 33.01\text{dBm}$ (2W) |

TEST RESULTS

Remark:

- 1. We were tested all Configuration refer 3GPP TS151 010.
- 2. $EIRP = P_{Mea}(\text{dBm}) - P_{cl}(\text{dB}) + P_{Ag}(\text{dB}) + G_a(\text{dBi})$
- 3. $ERP = EIRP - 2.15\text{dBi}$ as EIRP by subtracting the gain of the dipole.
- 4. Margin = Emission Level - Limit
- 5. We tested the worst-case records for H and V directions, and only the worst-case records for V direction were recorded in the report.



**GSM/TM1/GSM850**

| Frequency (MHz) | P _{Mea} (dBm) | P _{cl} (dB) | G _a Antenna Gain(dB) | Correction (dB) | P _{Ag} (dB) | Burst Average ERP (dBm) | Limit (dBm) | Margin (dB) | Polarization |
|-----------------|------------------------|----------------------|---------------------------------|-----------------|----------------------|-------------------------|-------------|-------------|--------------|
| 824.20 | -7.05 | 3.45 | 8.45 | 2.15 | 33.79 | 29.59 | 38.45 | -8.86 | V |
| 836.60 | -7.03 | 3.49 | 8.45 | 2.15 | 33.85 | 29.63 | 38.45 | -8.82 | V |
| 848.80 | -6.93 | 3.55 | 8.36 | 2.15 | 33.88 | 29.61 | 38.45 | -8.84 | V |

GSM/TM3/EDGE850

| Frequency (MHz) | P _{Mea} (dBm) | P _{cl} (dB) | G _a Antenna Gain(dB) | Correction (dB) | P _{Ag} (dB) | Burst Average ERP (dBm) | Limit (dBm) | Margin (dB) | Polarization |
|-----------------|------------------------|----------------------|---------------------------------|-----------------|----------------------|-------------------------|-------------|-------------|--------------|
| 824.20 | -12.05 | 3.45 | 8.45 | 2.15 | 33.79 | 24.59 | 38.45 | -13.86 | V |
| 836.60 | -11.98 | 3.49 | 8.45 | 2.15 | 33.85 | 24.68 | 38.45 | -13.77 | V |
| 848.80 | -12.01 | 3.55 | 8.36 | 2.15 | 33.88 | 24.53 | 38.45 | -13.92 | V |

GSM/TM1/PCS1900

| Frequency (MHz) | P _{Mea} (dBm) | P _{cl} (dB) | G _a Antenna Gain(dB) | P _{Ag} (dB) | Burst Average EIRP (dBm) | Limit (dBm) | Margin (dB) | Polarization |
|-----------------|------------------------|----------------------|---------------------------------|----------------------|--------------------------|-------------|-------------|--------------|
| 1850.20 | -12.08 | 4.03 | 8.38 | 35.51 | 27.78 | 33.01 | -5.23 | V |
| 1880.00 | -12.07 | 4.08 | 8.33 | 35.56 | 27.74 | 33.01 | -5.27 | V |
| 1909.80 | -12.00 | 4.14 | 8.26 | 35.63 | 27.75 | 33.01 | -5.26 | V |

GSM/TM3/EDGE1900

| Frequency (MHz) | P _{Mea} (dBm) | P _{cl} (dB) | G _a Antenna Gain(dB) | P _{Ag} (dB) | Burst Average EIRP (dBm) | Limit (dBm) | Margin (dB) | Polarization |
|-----------------|------------------------|----------------------|---------------------------------|----------------------|--------------------------|-------------|-------------|--------------|
| 1850.20 | -16.93 | 4.03 | 8.38 | 35.51 | 22.93 | 33.01 | -10.08 | V |
| 1880.00 | -16.94 | 4.08 | 8.33 | 35.56 | 22.87 | 33.01 | -10.14 | V |
| 1909.80 | -16.91 | 4.14 | 8.26 | 35.63 | 22.84 | 33.01 | -10.17 | V |



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity

4.2 Radiated Spurious Emission

TEST APPLICABLE

According to the TIA/EIA 603D:2010 and FCC Part 2.1033 test method, The Receiver or Spectrum was scanned from lowest frequency frequency generated within the equipment to the 10th harmonic of the highest frequency generated within the equipment, which is the transmitted carrier that can be as high as 1910 MHz. The resolution bandwidth is set as outlined in Part 24.238, Part 22.917, RSS-132 §5.5 and RSS-133 §6.5. The spectrum is scanned with the mobile station transmitting at carrier frequencies that pertain to low, mid and high channels of PCS1900 and GSM850.

TEST CONFIGURATION

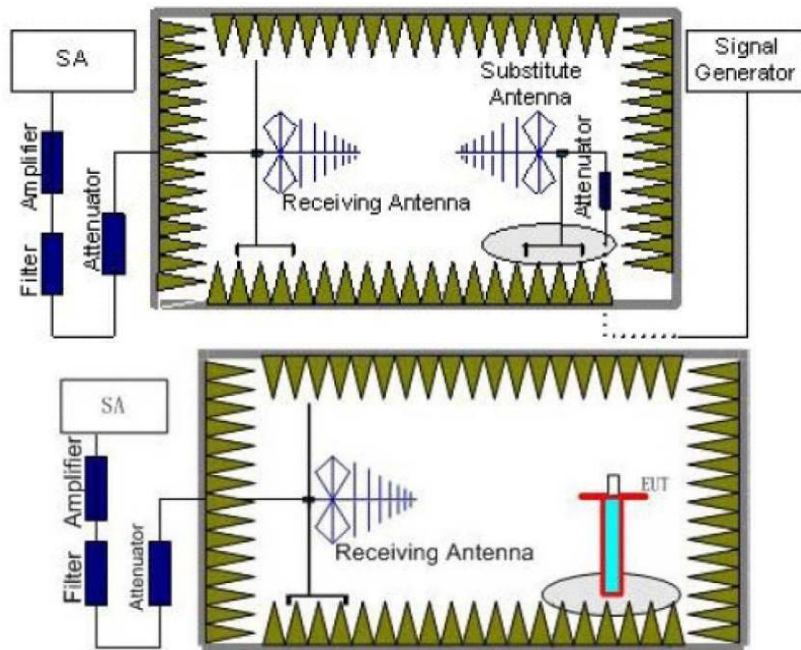

TEST PROCEDURE

1. EUT was placed on a 1.50 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The height of receiving antenna is 1.50 m. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all transmit frequencies in three channels (High, Middle, Low) were measured with peak detector.
2. A log-periodic antenna or double-ridged waveguide horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.
3. The EUT is then put into continuously transmitting mode at its maximum power level during the test. Set Test Receiver or Spectrum RBW=1MHz, VBW=3MHz, And the maximum value of the receiver should be recorded as (P_r).
4. The EUT shall be replaced by a substitution antenna. In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (P_{Mea}) is applied to the input of the substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach the previously recorded (P_r). The power of signal source (P_{Mea}) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.





5. A amplifier should be connected to the Signal Source output port. And the cable should be connect between the Amplifier and the Substitution Antenna. The cable loss (P_{cl}), the Substitution Antenna Gain (G_a) and the Amplifier Gain (P_{Ag}) should be recorded after test.

The measurement results are obtained as described below:

$$\text{Power(EIRP)} = P_{\text{Mea}} + P_{\text{Ag}} - P_{\text{cl}} + G_a$$

6. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi) and known input power.
7. ERP can be calculated from EIRP by subtracting the gain of the dipole, $\text{ERP} = \text{EIRP} - 2.15\text{dBi}$.
8. In order to make sure test results more clearly, we set frequency range and sweep time for difference frequency range as follows table:

| Working Frequency | Subrange (GHz) | RBW | VBW | Sweep time (s) |
|-------------------|----------------|--------|--------|----------------|
| TM1/GSM 850 | 0.00009~0.15 | 1KHz | 3KHz | 30 |
| | 0.00015~0.03 | 10KHz | 30KHz | 10 |
| | 0.03~1 | 100KHz | 300KHz | 10 |
| | 1~2 | 1 MHz | 3 MHz | 2 |
| | 2~5 | 1 MHz | 3 MHz | 3 |
| | 5~8 | 1 MHz | 3 MHz | 3 |
| | 8~10 | 1 MHz | 3 MHz | 3 |
| TM1/PCS 1900 | 0.00009~0.15 | 1KHz | 3KHz | 30 |
| | 0.00015~0.03 | 10KHz | 30KHz | 10 |
| | 0.03~1 | 100KHz | 300KHz | 10 |
| | 1~2 | 1 MHz | 3 MHz | 2 |
| | 2~5 | 1 MHz | 3 MHz | 3 |
| | 5~8 | 1 MHz | 3 MHz | 3 |
| | 8~11 | 1 MHz | 3 MHz | 3 |
| | 11~14 | 1 MHz | 3 MHz | 3 |
| | 14~18 | 1 MHz | 3 MHz | 3 |
| 18~20 | 1 MHz | 3 MHz | 2 | |

TEST LIMITS

According to 24.238 and 22.917 specify that the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. The specification that emissions shall be attenuated below the transmitter power (P) by at least $43 + 10 \log(P)$ dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB, which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.

| Frequency | Channel | Frequency Range | Verdict |
|--------------|---------|-----------------|---------|
| TM1/GSM 850 | Low | 9KHz -10GHz | PASS |
| | Middle | 9KHz -10GHz | PASS |
| | High | 9KHz -10GHz | PASS |
| TM1/PCS 1900 | Low | 9KHz -20GHz | PASS |
| | Middle | 9KHz -20GHz | PASS |
| | High | 9KHz -20GHz | PASS |

TEST RESULTS

Remark:

1. We were tested all refer 3GPP TS151 010.
2. $\text{EIRP} = P_{\text{Mea}}(\text{dBm}) - P_{\text{cl}}(\text{dB}) + G_a(\text{dBi})$
3. We were not recorded other points as values lower than limits.
4. $\text{Margin} = \text{EIRP} - \text{Limit}$



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

*GSM/TM1/GSM850_Low Channel*

| Frequency (MHz) | P _{Mea} (dBm) | P _{cl} (dB) | Diatance | G _a Antenna Gain(dB) | Peak EIRP (dBm) | Limit (dBm) | Margin (dB) | Polarization |
|-----------------|------------------------|----------------------|----------|---------------------------------|-----------------|-------------|-------------|--------------|
| 1648.40 | -42.94 | 3.86 | 3.00 | 8.56 | -38.24 | -13.00 | -25.24 | H |
| 2472.60 | -44.35 | 4.29 | 3.00 | 6.98 | -41.66 | -13.00 | -28.66 | H |
| 1648.40 | -39.47 | 3.86 | 3.00 | 8.56 | -34.77 | -13.00 | -21.77 | V |
| 2472.60 | -42.07 | 4.29 | 3.00 | 6.98 | -39.38 | -13.00 | -26.38 | V |

GSM/TM1/GSM850_Middle Channel

| Frequency (MHz) | P _{Mea} (dBm) | P _{cl} (dB) | Diatance | G _a Antenna Gain(dB) | Peak EIRP (dBm) | Limit (dBm) | Margin (dB) | Polarization |
|-----------------|------------------------|----------------------|----------|---------------------------------|-----------------|-------------|-------------|--------------|
| 1673.20 | -41.72 | 3.9 | 3.00 | 8.58 | -37.04 | -13.00 | -24.04 | H |
| 2509.80 | -46.61 | 4.32 | 3.00 | 6.8 | -44.13 | -13.00 | -31.13 | H |
| 1673.20 | -37.44 | 3.9 | 3.00 | 8.58 | -32.76 | -13.00 | -19.76 | V |
| 2509.80 | -43.00 | 4.32 | 3.00 | 6.8 | -40.52 | -13.00 | -27.52 | V |

GSM/TM1/GSM850_High Channel

| Frequency (MHz) | P _{Mea} (dBm) | P _{cl} (dB) | Diatance | G _a Antenna Gain(dB) | Peak EIRP (dBm) | Limit (dBm) | Margin (dB) | Polarization |
|-----------------|------------------------|----------------------|----------|---------------------------------|-----------------|-------------|-------------|--------------|
| 1697.60 | -46.94 | 3.91 | 3.00 | 9.06 | -41.79 | -13.00 | -28.79 | H |
| 2546.40 | -49.28 | 4.32 | 3.00 | 6.65 | -46.95 | -13.00 | -33.95 | H |
| 1697.60 | -43.38 | 3.91 | 3.00 | 9.06 | -38.23 | -13.00 | -25.23 | V |
| 2546.40 | -44.76 | 4.32 | 3.00 | 6.65 | -42.43 | -13.00 | -29.43 | V |

GSM/TM3/EDGE850_Low Channel

| Frequency (MHz) | P _{Mea} (dBm) | P _{cl} (dB) | Diatance | G _a Antenna Gain(dB) | Peak EIRP (dBm) | Limit (dBm) | Margin (dB) | Polarization |
|-----------------|------------------------|----------------------|----------|---------------------------------|-----------------|-------------|-------------|--------------|
| 1648.40 | -45.07 | 3.86 | 3.00 | 8.56 | -40.37 | -13.00 | -27.37 | H |
| 2472.60 | -46.12 | 4.29 | 3.00 | 6.98 | -43.43 | -13.00 | -30.43 | H |
| 1648.40 | -41.38 | 3.86 | 3.00 | 8.56 | -36.68 | -13.00 | -23.68 | V |
| 2472.60 | -43.94 | 4.29 | 3.00 | 6.98 | -41.25 | -13.00 | -28.25 | V |

GSM/TM3/EDGE850_Middle Channel

| Frequency (MHz) | P _{Mea} (dBm) | P _{cl} (dB) | Diatance | G _a Antenna Gain(dB) | Peak EIRP (dBm) | Limit (dBm) | Margin (dB) | Polarization |
|-----------------|------------------------|----------------------|----------|---------------------------------|-----------------|-------------|-------------|--------------|
| 1673.20 | -44.06 | 3.9 | 3.00 | 8.58 | -39.38 | -13.00 | -26.38 | H |
| 2509.80 | -48.41 | 4.32 | 3.00 | 6.8 | -45.93 | -13.00 | -32.93 | H |
| 1673.20 | -39.76 | 3.9 | 3.00 | 8.58 | -35.08 | -13.00 | -22.08 | V |
| 2509.80 | -44.73 | 4.32 | 3.00 | 6.8 | -42.25 | -13.00 | -29.25 | V |

GSM/TM3/EDGE850_High Channel

| Frequency (MHz) | P _{Mea} (dBm) | P _{cl} (dB) | Diatance | G _a Antenna Gain(dB) | Peak EIRP (dBm) | Limit (dBm) | Margin (dB) | Polarization |
|-----------------|------------------------|----------------------|----------|---------------------------------|-----------------|-------------|-------------|--------------|
| 1697.60 | -48.46 | 3.91 | 3.00 | 9.06 | -43.31 | -13.00 | -30.31 | H |
| 2546.40 | -51.13 | 4.32 | 3.00 | 6.65 | -48.80 | -13.00 | -35.80 | H |
| 1697.60 | -45.42 | 3.91 | 3.00 | 9.06 | -40.27 | -13.00 | -27.27 | V |
| 2546.40 | -47.04 | 4.32 | 3.00 | 6.65 | -44.71 | -13.00 | -31.71 | V |



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

**GSM/TM1/PCS1900_Low Channel**

| Frequency (MHz) | P _{Mea} (dBm) | P _{cl} (dB) | Diatance | G _a Antenna Gain(dB) | Peak EIRP (dBm) | Limit (dBm) | Margin (dB) | Polarization |
|-----------------|------------------------|----------------------|----------|---------------------------------|-----------------|-------------|-------------|--------------|
| 3700.40 | -45.36 | 5.26 | 3.00 | 9.88 | -40.74 | -13.00 | -27.74 | H |
| 5550.60 | -46.65 | 6.11 | 3.00 | 11.36 | -41.40 | -13.00 | -28.40 | H |
| 3700.40 | -41.89 | 5.26 | 3.00 | 9.88 | -37.27 | -13.00 | -24.27 | V |
| 5550.60 | -44.26 | 6.11 | 3.00 | 11.36 | -39.01 | -13.00 | -26.01 | V |

GSM/TM1/PCS1900_Middle Channel

| Frequency (MHz) | P _{Mea} (dBm) | P _{cl} (dB) | Diatance | G _a Antenna Gain(dB) | Peak EIRP (dBm) | Limit (dBm) | Margin (dB) | Polarization |
|-----------------|------------------------|----------------------|----------|---------------------------------|-----------------|-------------|-------------|--------------|
| 3760.00 | -44.11 | 5.32 | 3.00 | 10.03 | -39.40 | -13.00 | -26.40 | H |
| 5640.00 | -48.60 | 6.19 | 3.00 | 11.41 | -43.38 | -13.00 | -30.38 | H |
| 3760.00 | -39.54 | 5.32 | 3.00 | 10.03 | -34.83 | -13.00 | -21.83 | V |
| 5640.00 | -45.27 | 6.19 | 3.00 | 11.41 | -40.05 | -13.00 | -27.05 | V |

GSM/TM1/PCS1900_High Channel

| Frequency (MHz) | P _{Mea} (dBm) | P _{cl} (dB) | Diatance | G _a Antenna Gain(dB) | Peak EIRP (dBm) | Limit (dBm) | Margin (dB) | Polarization |
|-----------------|------------------------|----------------------|----------|---------------------------------|-----------------|-------------|-------------|--------------|
| 3819.60 | -48.70 | 5.36 | 3.00 | 9.62 | -44.44 | -13.00 | -31.44 | H |
| 5729.40 | -51.88 | 6.24 | 3.00 | 11.46 | -46.66 | -13.00 | -33.66 | H |
| 3819.60 | -45.51 | 5.36 | 3.00 | 9.62 | -41.25 | -13.00 | -28.25 | V |
| 5729.40 | -47.16 | 6.24 | 3.00 | 11.46 | -41.94 | -13.00 | -28.94 | V |

GSM/TM3/EDGE1900_Low Channel

| Frequency (MHz) | P _{Mea} (dBm) | P _{cl} (dB) | Diatance | G _a Antenna Gain(dB) | Peak EIRP (dBm) | Limit (dBm) | Margin (dB) | Polarization |
|-----------------|------------------------|----------------------|----------|---------------------------------|-----------------|-------------|-------------|--------------|
| 3700.40 | -47.18 | 5.26 | 3.00 | 9.88 | -42.56 | -13.00 | -29.56 | H |
| 5550.60 | -48.39 | 6.11 | 3.00 | 11.36 | -43.14 | -13.00 | -30.14 | H |
| 3700.40 | -43.95 | 5.26 | 3.00 | 9.88 | -39.33 | -13.00 | -26.33 | V |
| 5550.60 | -45.61 | 6.11 | 3.00 | 11.36 | -40.36 | -13.00 | -27.36 | V |

GSM/TM3/EDGE1900_Middle Channel

| Frequency (MHz) | P _{Mea} (dBm) | P _{cl} (dB) | Diatance | G _a Antenna Gain(dB) | Peak EIRP (dBm) | Limit (dBm) | Margin (dB) | Polarization |
|-----------------|------------------------|----------------------|----------|---------------------------------|-----------------|-------------|-------------|--------------|
| 3760.00 | -45.73 | 5.32 | 3.00 | 10.03 | -41.02 | -13.00 | -28.02 | H |
| 5640.00 | -50.25 | 6.19 | 3.00 | 11.41 | -45.03 | -13.00 | -32.03 | H |
| 3760.00 | -41.15 | 5.32 | 3.00 | 10.03 | -36.44 | -13.00 | -23.44 | V |
| 5640.00 | -46.99 | 6.19 | 3.00 | 11.41 | -41.77 | -13.00 | -28.77 | V |

GSM/TM3/EDGE1900_High Channel

| Frequency (MHz) | P _{Mea} (dBm) | P _{cl} (dB) | Diatance | G _a Antenna Gain(dB) | Peak EIRP (dBm) | Limit (dBm) | Margin (dB) | Polarization |
|-----------------|------------------------|----------------------|----------|---------------------------------|-----------------|-------------|-------------|--------------|
| 3819.60 | -50.77 | 5.36 | 3.00 | 9.62 | -46.51 | -13.00 | -33.51 | H |
| 5729.40 | -53.40 | 6.24 | 3.00 | 11.46 | -48.18 | -13.00 | -35.18 | H |
| 3819.60 | -47.67 | 5.36 | 3.00 | 9.62 | -43.41 | -13.00 | -30.41 | V |
| 5729.40 | -48.85 | 6.24 | 3.00 | 11.46 | -43.63 | -13.00 | -30.63 | V |



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity

4.3 Occupied Bandwidth and Emission Bandwidth

TEST APPLICABLE

Similar to conducted emissions; occupied bandwidth measurements are only provided for selected frequencies in order to reduce the amount of submitted data. Data were taken at the extreme and mid frequencies of PCS1900 band and GSM850 band. The table below lists the measured 99% Bandwidth and -26dBc Bandwidth.

TEST CONFIGURATION

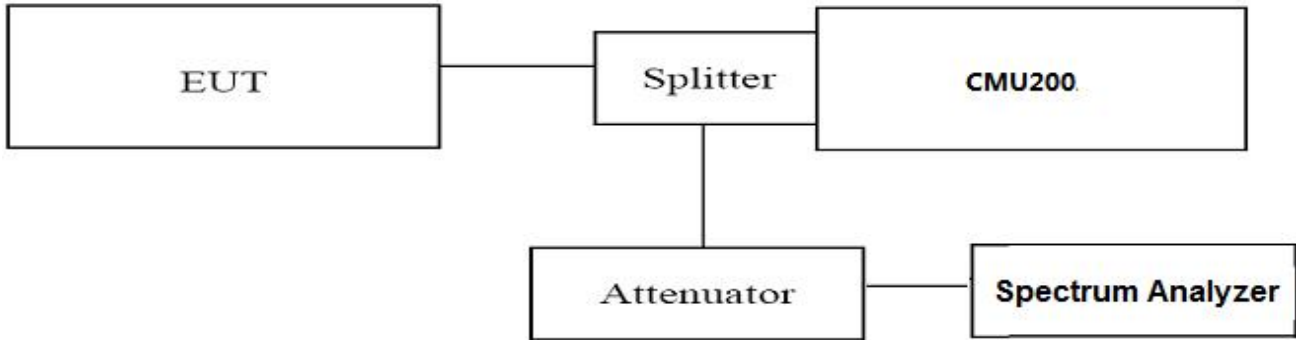

TEST PROCEDURE

1. The EUT was set up for the max output power with pseudo random data modulation;
2. The Occupied bandwidth and Emission Bandwidth were measured with Spectrum AnalyzerN9020A;
3. Set RBW=5.1KHz,VBW=15KHz,Span=1MHz,SWT=Auto;
4. Set SPA Max hold and View, Set 99% Occupied Bandwidth/ Set -26dBc Occupied Bandwidth
5. These measurements were done at 3 frequencies, 1850.20 MHz, 1880.00 MHz and 1909.80 MHz for PCS1900 band; 824.20MHz, 836.60 MHz and 848.80 MHz for GSM850 band. (Low, middle and high of operational frequency range).

TEST RESULTS

| Test Mode | Channel | Frequency (MHz) | Occupied Bandwidth (99% BW) (KHz) | Emission Bandwidth (-26 dBc BW) (KHz) | Verdict |
|-------------------|---------|-----------------|-----------------------------------|---------------------------------------|---------|
| GSM/TM1 /GSM850 | 128 | 824.2 | 246.80 | 317.6 | PASS |
| | 190 | 836.6 | 247.02 | 311.9 | PASS |
| | 251 | 848.8 | 246.89 | 307.6 | PASS |
| GSM/TM3 /EDGE850 | 128 | 824.2 | 247.07 | 308.9 | PASS |
| | 190 | 836.6 | 247.11 | 306.3 | PASS |
| | 251 | 848.8 | 245.38 | 309.5 | PASS |
| GSM/TM1 /PCS1900 | 512 | 1850.2 | 245.37 | 317.8 | PASS |
| | 661 | 1880.0 | 248.15 | 315.3 | PASS |
| | 810 | 1909.8 | 246.84 | 311.0 | PASS |
| GSM/TM3 /EDGE1900 | 512 | 1850.2 | 247.12 | 308.3 | PASS |
| | 661 | 1880.0 | 245.09 | 304.2 | PASS |
| | 810 | 1909.8 | 246.16 | 309.4 | PASS |

Remark:


1. Test results including cable loss;
2. Please refer to following plots;






Occupied Bandwidth and Emission Bandwidth


GSM/TM1/GSM850

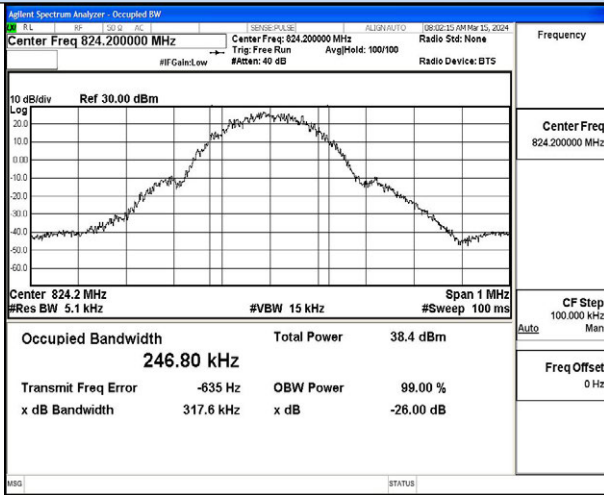


GSM/TM3/EDGE850

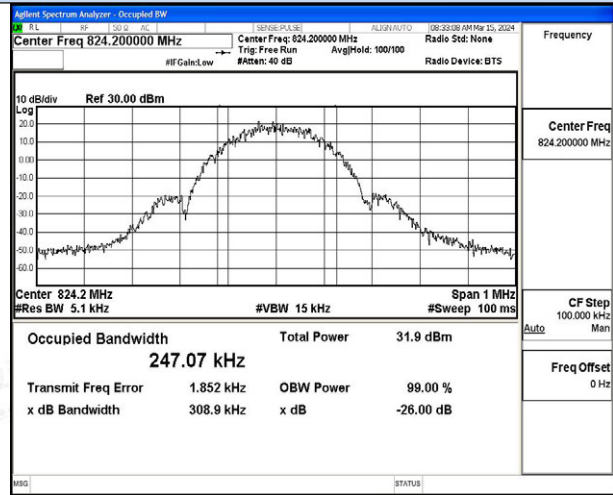


Channel 128 / 824.2 MHz

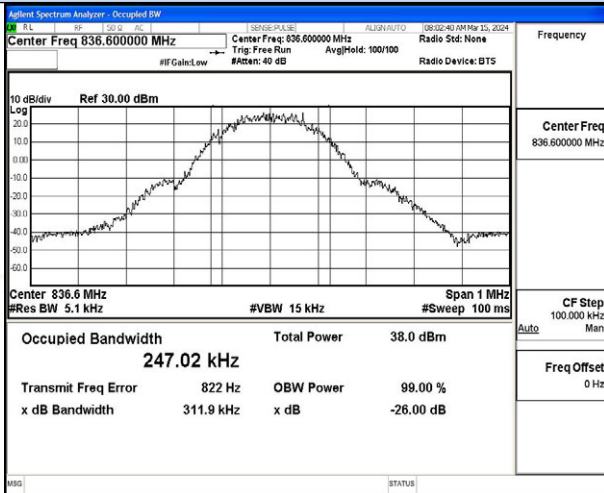


Channel 128 / 824.2 MHz

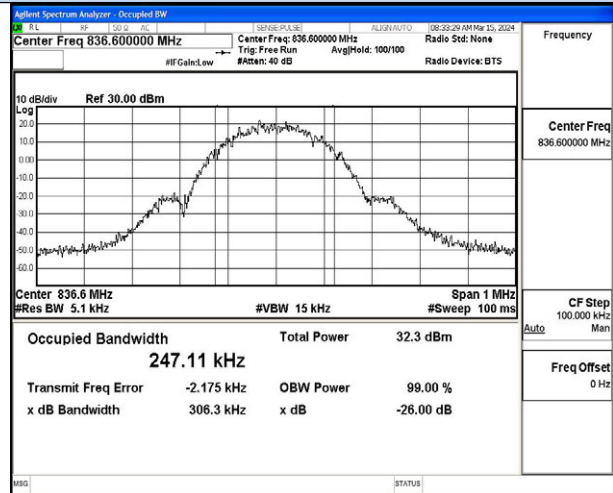

Channel 190 / 836.6 MHz

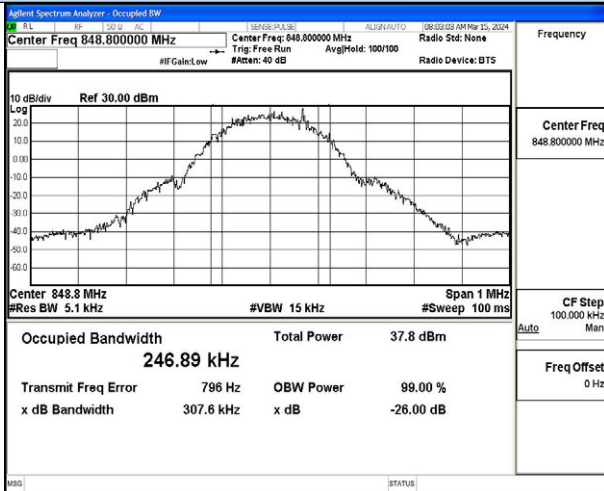

Channel 190 / 836.6 MHz

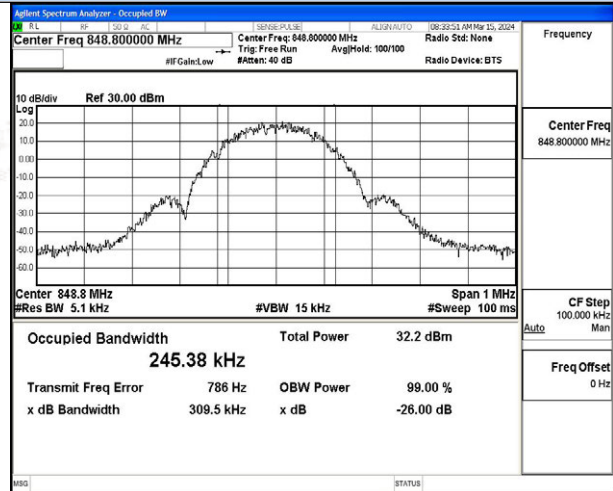

Channel 251 / 848.8 MHz

Channel 251 / 848.8 MHz



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China


Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity




Occupied Bandwidth and Emission Bandwidth


GSM/TM1/PCS1900

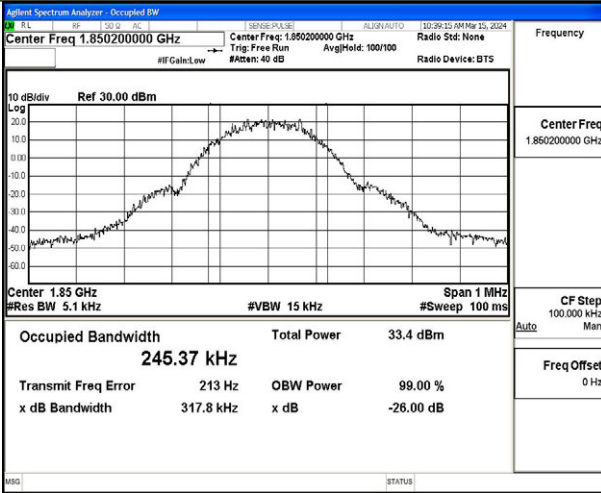


GSM/TM3/EDGE1900

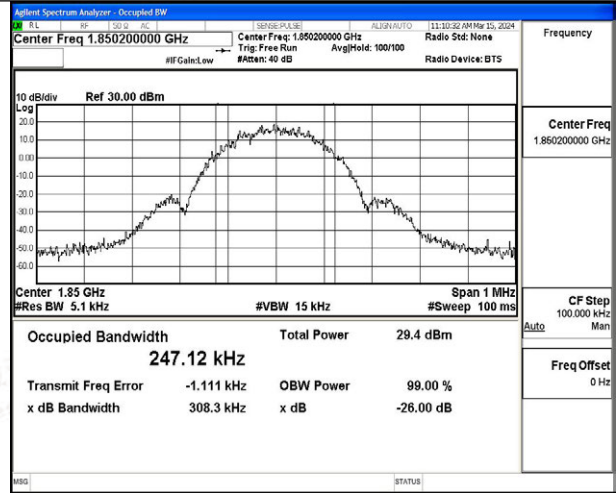


Channel 512 / 1850.2 MHz

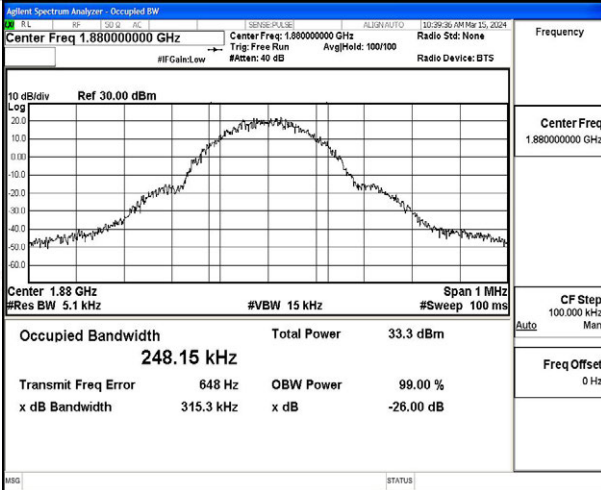


Channel 512 / 1850.2 MHz

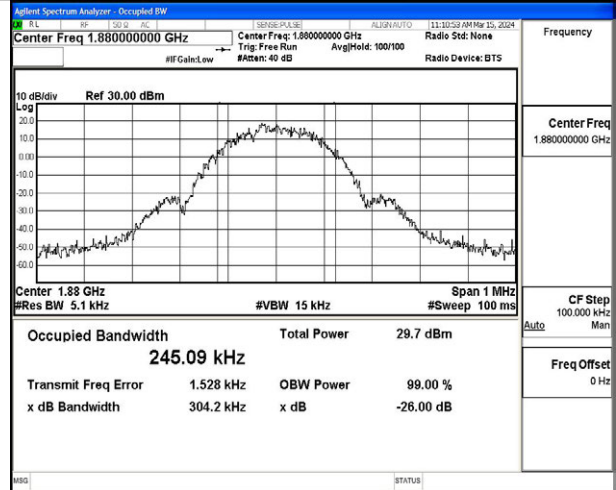

Channel 661 / 1880.0MHz

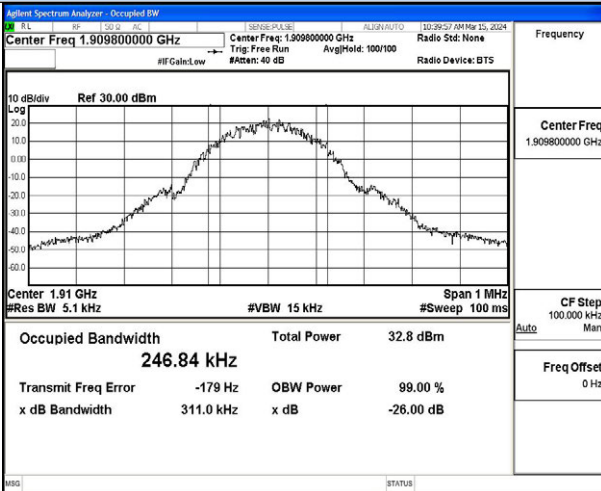

Channel 661 / 1880.0MHz

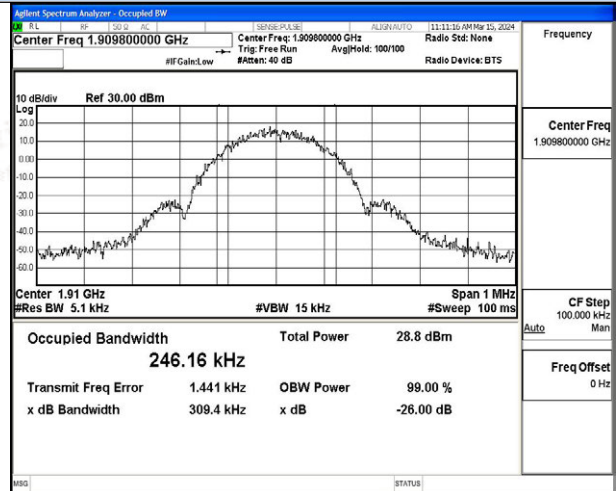

Channel 810 / 1909.8 MHz

Channel 810 / 1909.8 MHz



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity




4.4 Band Edge Compliance

TEST APPLICABLE

During the process of testing, the EUT was controlled via Digital Radio Communication tester (CMU200) to ensure max power transmission and proper modulation.

TEST CONFIGURATION

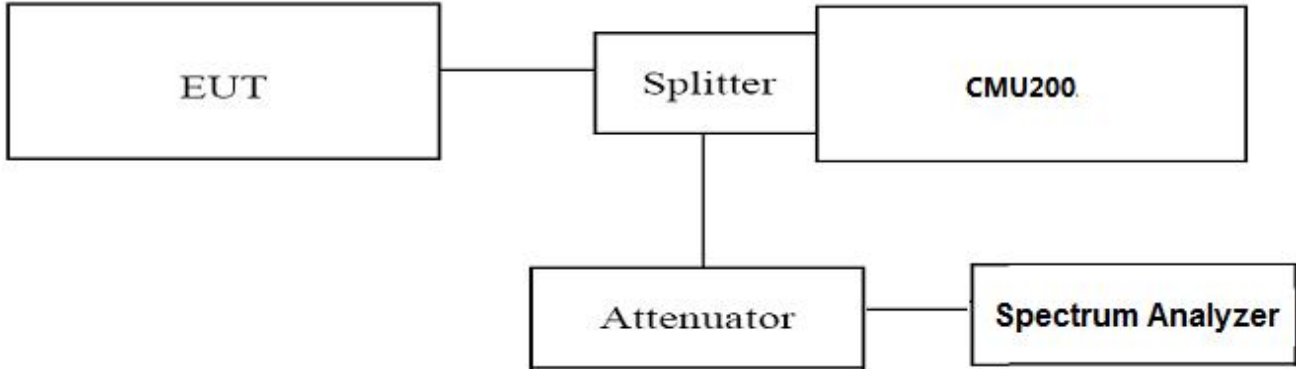

TEST PROCEDURE

1. The EUT was set up for the max output power with pseudo random data modulation;
2. The power was measured with Spectrum Analyzer N9020A;
3. Set RBW=5.1KHz,VBW=15KHz,Span=2MHz,SWT=Auto, Dector: RMS;
1. These measurements were done at 2 frequencies, 1850.20 MHz and 1909.80 MHz for PCS1900 band; 824.20 MHz and 848.80 MHz for GSM850 band. (bottom and top of operational frequency range).

TEST RESULTS

| Test Mode | Channel | Frequency (MHz) | Band Edge Compliance (dBm) | Limits (dBm) | Verdict |
|------------------|---------|-----------------|----------------------------|--------------|---------|
| GSM/TM1/GSM850 | 128 | 824.2 | <-13dBm | -13dBm | PASS |
| | 251 | 848.8 | <-13dBm | -13dBm | |
| GSM/TM3/EDGE850 | 128 | 824.2 | <-13dBm | -13dBm | PASS |
| | 251 | 848.8 | <-13dBm | -13dBm | |
| GSM/TM1/PCS1900 | 512 | 1850.2 | <-13dBm | -13dBm | PASS |
| | 810 | 1909.8 | <-13dBm | -13dBm | |
| GSM/TM3/EDGE1900 | 512 | 1850.2 | <-13dBm | -13dBm | PASS |
| | 810 | 1909.8 | <-13dBm | -13dBm | |

Remark:


1. Test results including cable loss;
2. Please refer to following plots;






Band-edge Compliance


GSM/TM1/GSM850

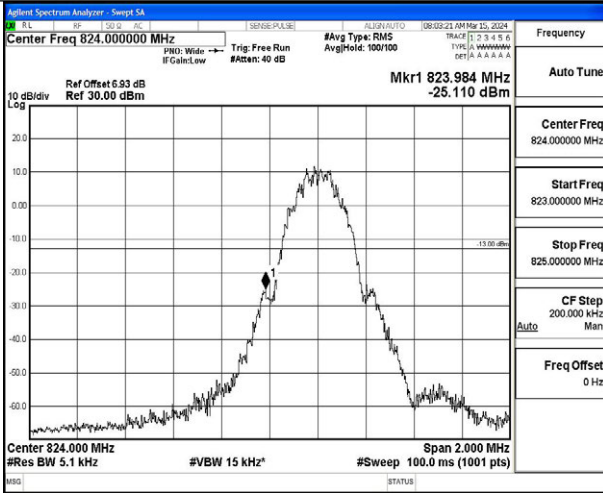


GSM/TM3/EDGE850

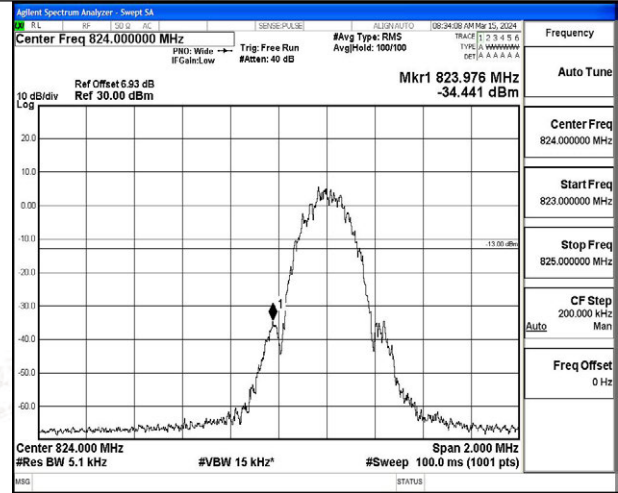

Channel 128 / 824.2 MHz

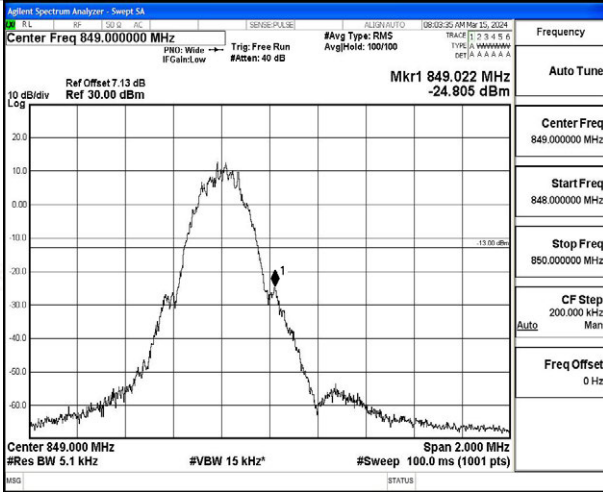

Channel 128 / 824.2 MHz

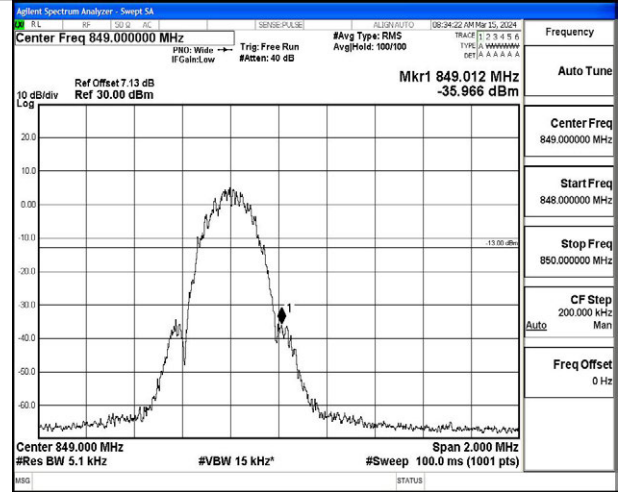

Channel 251 / 848.8 MHz


Channel 251 / 848.8 MHz





Band-edge Compliance


GSM/TM1/PCS1900

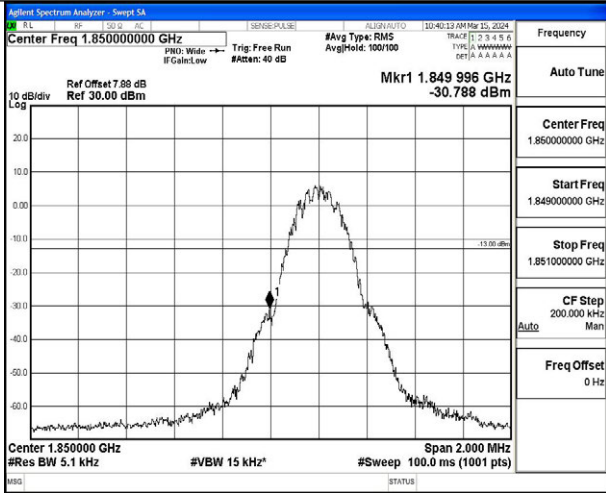


GSM/TM3/EDGE1900



Channel 512 / 1850.2 MHz

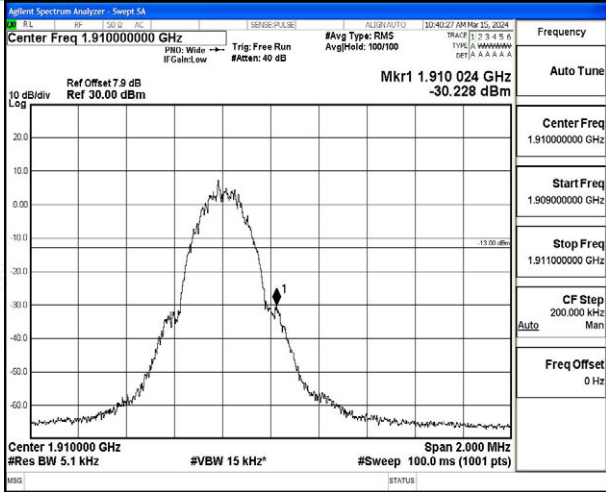

Channel 512 / 1850.2 MHz

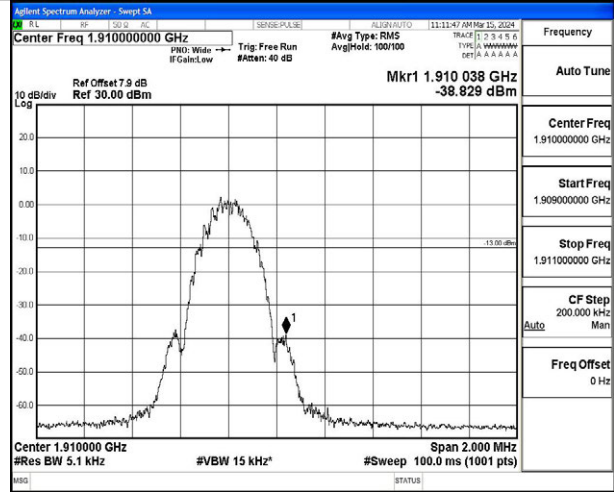

Channel 810 / 1909.8 MHz

Channel 810 / 1909.8 MHz



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity


4.5 Spurious Emission on Antenna Port

TEST APPLICABLE

The following steps outline the procedure used to measure the conducted emissions from the EUT.

1. Determine frequency range for measurements: From CFR 2.1057 and RSS-GEN the spectrum should be investigated from the lowest radio frequency generated in the equipment up to at least the 10th harmonic of the carrier frequency. For the equipment of PCS1900 band, this equates to a frequency range of 9 KHz to 20 GHz, data taken from 30 MHz to 20 GHz. For GSM850, this equates to a frequency range of 9 KHz to 9 GHz, data taken from 30 MHz to 9 GHz.
2. The sweep time is set automatically by instrument itself. That should be the optimal sweep time for the span and the RBW. If the sweep time is too short, that is sweep is too fast, the sweep result is not accurate; if the sweep time is too long, that is sweep is too low, some frequency components may be lost. The instrument will give an optimal sweep time according the selected span and RBW.
3. The procedure to get the conducted spurious emission is as follows:
The trace mode is set to MaxHold to get the highest signal at each frequency;
Wait 25 seconds;
Get the result.
4. Determine EUT transmit frequencies: below outlines the band edge frequencies pertinent to conducted emissions testing.

TEST CONFIGURATION

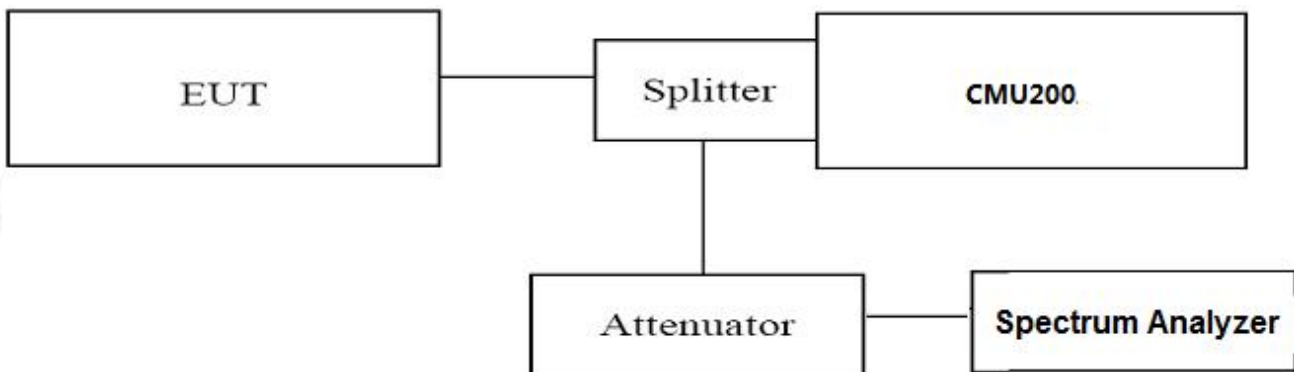

TEST PROCEDURE

1. The EUT was set up for the max output power with pseudo random data modulation;
2. The power was measured with Spectrum Analyzer N9020A;
3. These measurements were done at 3 frequencies, 1850.20 MHz, 1880.00 MHz and 1909.80 MHz for PCS1900 band; 824.20 MHz, 836.60 MHz and 848.80 MHz for GSM850 band. (Low, middle and high of operational frequency range).

TEST LIMIT

Part 24.238, Part 22.917 specify that the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. The specification that emissions shall be attenuated below the transmitter power (P) by at least $43 + 10 \log(P)$ dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB, which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.





TEST RESULTS

| Test Mode | Channel | Frequency (MHz) | Spurious RF Conducted Emission (dBm) | Limits (dBm) | Verdict |
|------------------|---------|-----------------|--------------------------------------|--------------|---------|
| GSM/TM1/GSM850 | 128 | 824.2 | <-13dBm | -13dBm | PASS |
| | 190 | 836.6 | <-13dBm | -13dBm | |
| | 251 | 848.8 | <-13dBm | -13dBm | |
| GSM/TM3/EDGE850 | 128 | 824.2 | <-13dBm | -13dBm | PASS |
| | 190 | 836.6 | <-13dBm | -13dBm | |
| | 251 | 848.8 | <-13dBm | -13dBm | |
| GSM/TM1/PCS1900 | 512 | 1850.2 | <-13dBm | -13dBm | PASS |
| | 661 | 1880.0 | <-13dBm | -13dBm | |
| | 810 | 1909.8 | <-13dBm | -13dBm | |
| GSM/TM3/EDGE1900 | 512 | 1850.2 | <-13dBm | -13dBm | PASS |
| | 661 | 1880.0 | <-13dBm | -13dBm | |
| | 810 | 1909.8 | <-13dBm | -13dBm | |

Remark:

1. Test results including cable loss;
2. Please refer to following plots;
3. Not reorded test plots from 9 KHz to 30 MHz as emission levels 20dB lower than emission limit;






Spurious Emission on Antenna Port


GSM/TM1/GSM850

Channel 128 / 824.2 MHz

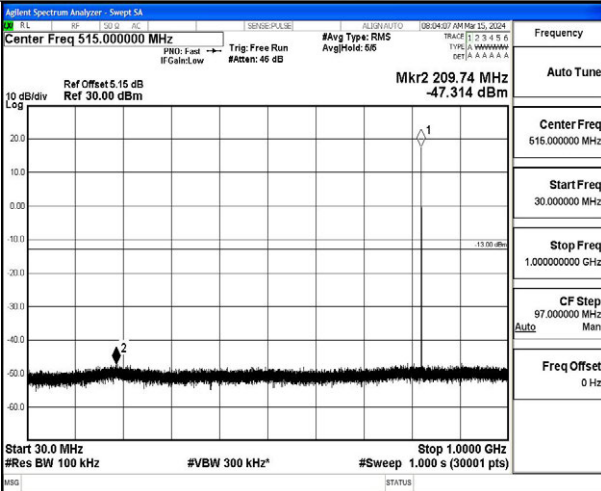



GSM/TM3/EDGE850

Channel 128 / 824.2 MHz

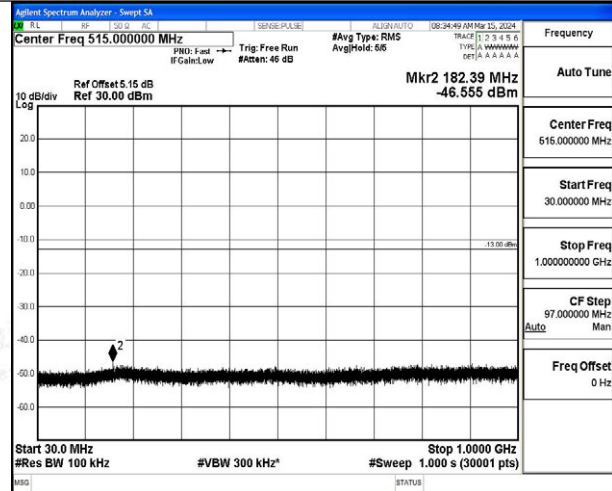

30 MHz – 1000 MHz

30 MHz – 1000 MHz

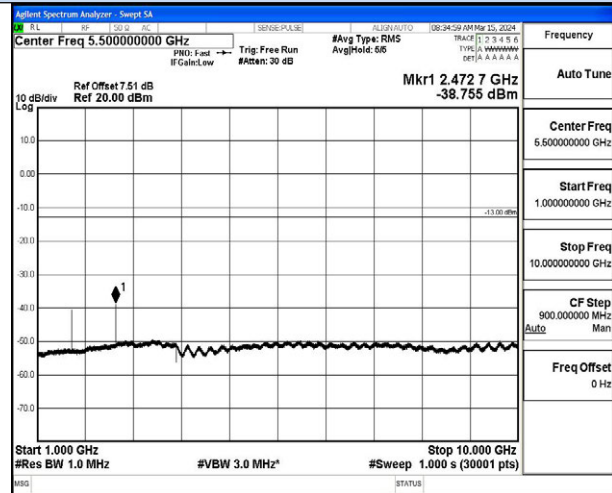
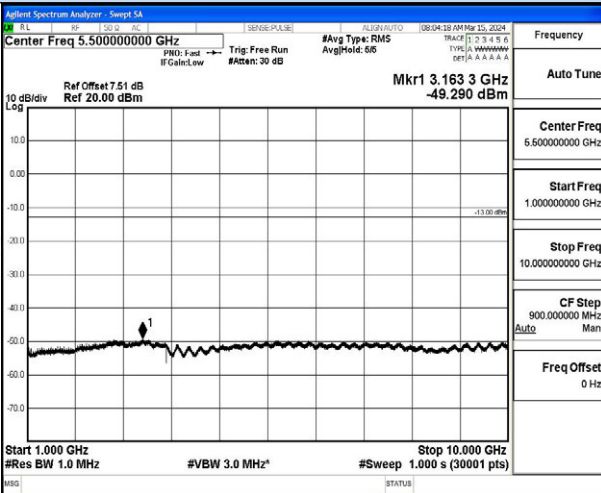


1 GHz – 10 GHz

1 GHz – 10 GHz

Channel 190 / 836.6 MHz

Channel 190 / 836.6 MHz

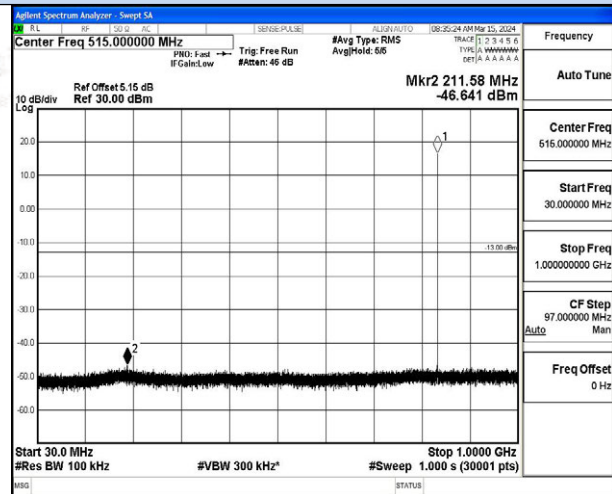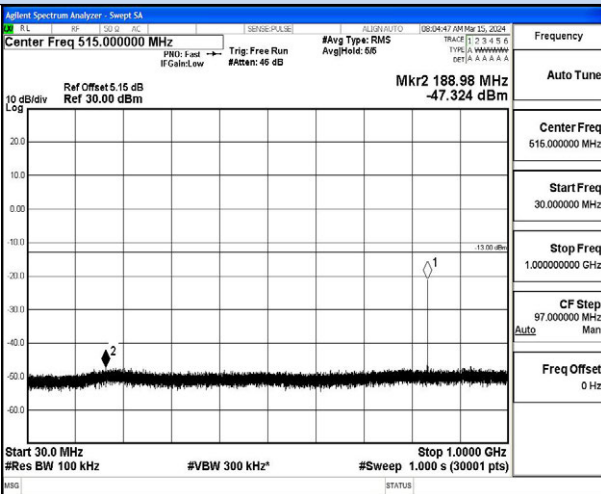

30 MHz – 1000 MHz

30 MHz – 1000 MHz



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



Spurious Emission on Antenna Port


GSM/TM1/GSM850

Channel 190 / 836.6 MHz

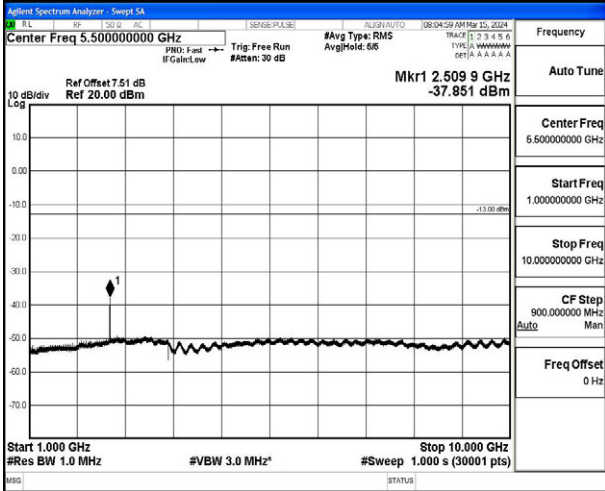

1 GHz – 10 GHz


Channel 251 / 848.8 MHz

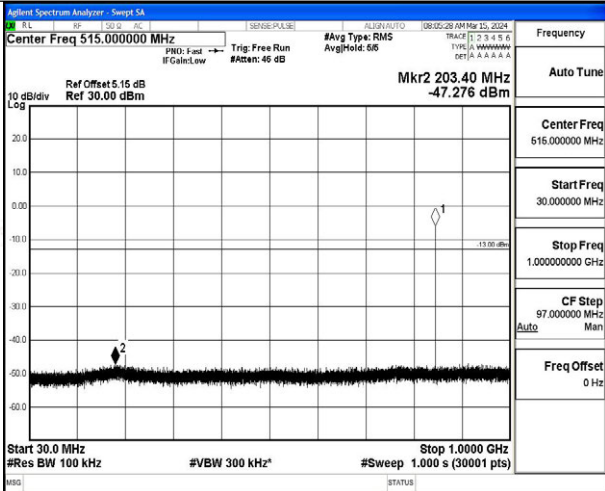

30 MHz – 1000 MHz


GSM/TM3/EDGE850

Channel 190 / 836.6 MHz

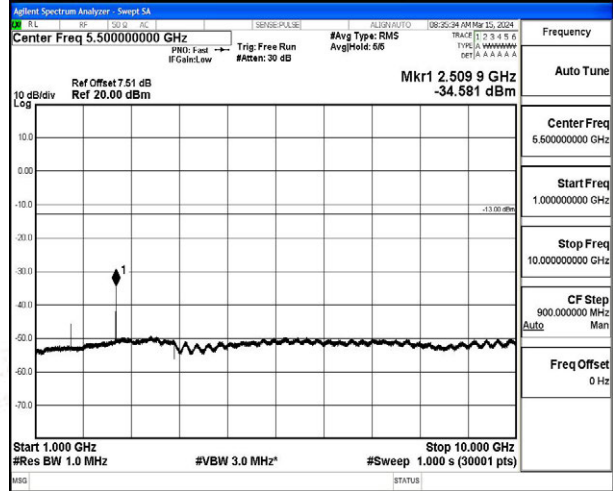


1 GHz – 10 GHz


Channel 251 / 848.8 MHz

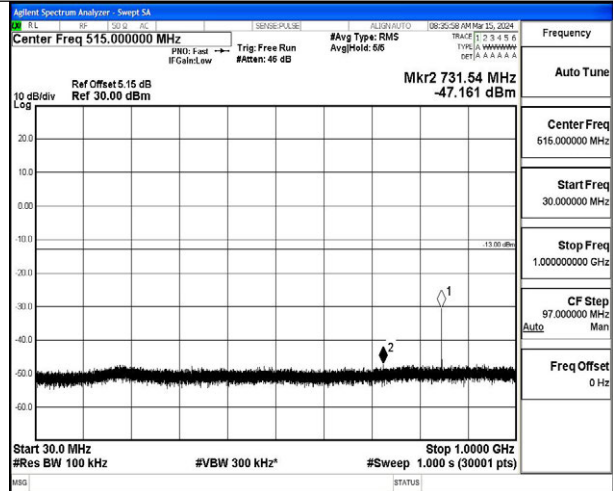

30 MHz – 1000 MHz

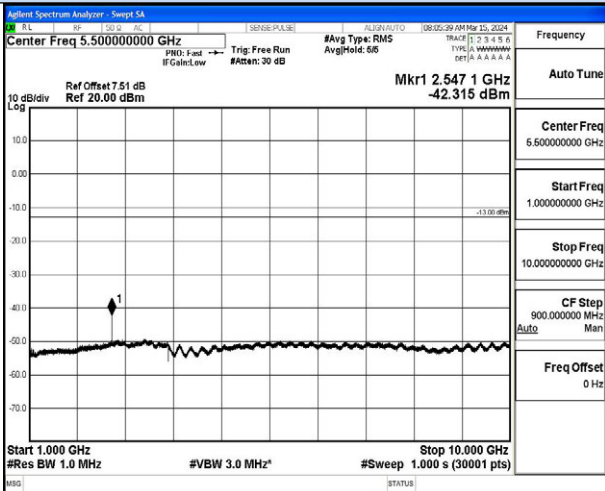

1 GHz – 10 GHz

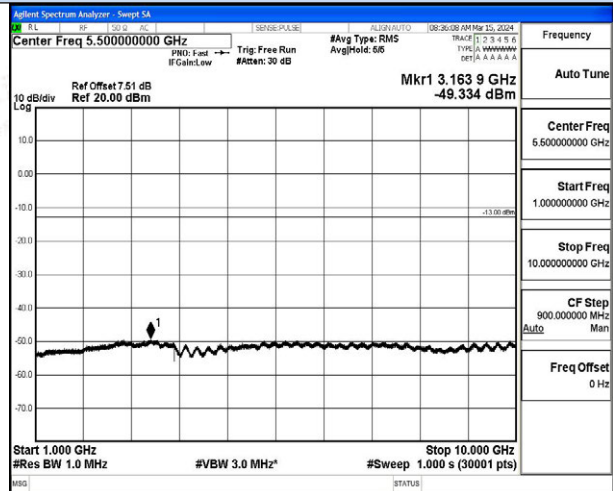

1 GHz – 10 GHz



Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity




Spurious Emission on Antenna Port GSM/TM1/PCS1900 Channel 512 / 1850.2 MHz

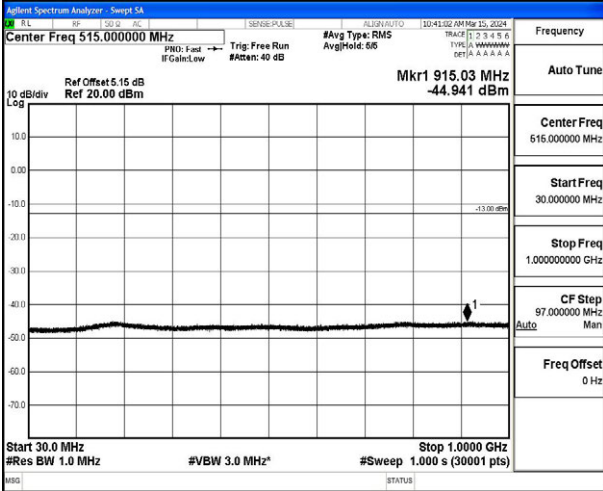

30 MHz – 1000 MHz

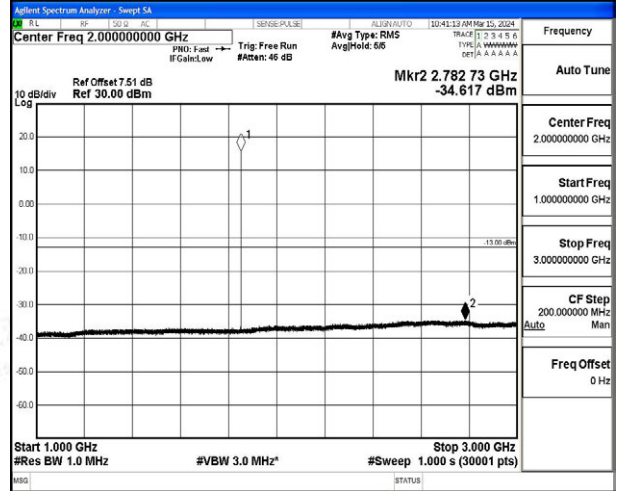

1 GHz – 3 GHz

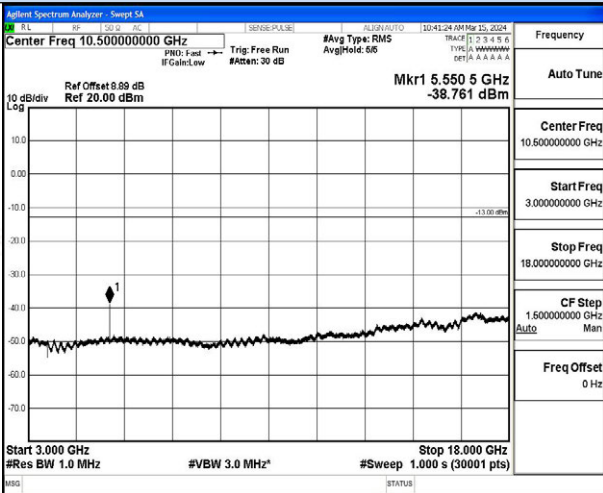


3 GHz – 18 GHz







Spurious Emission on Antenna Port GSM/TM1/PCS1900 Channel 661 / 1880 MHz

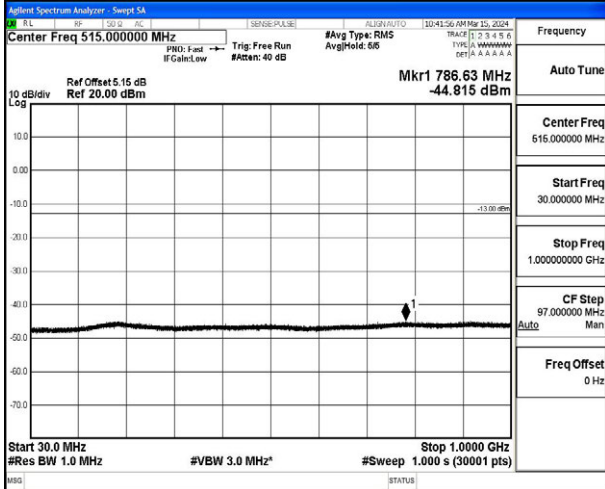

30 MHz – 1000 MHz

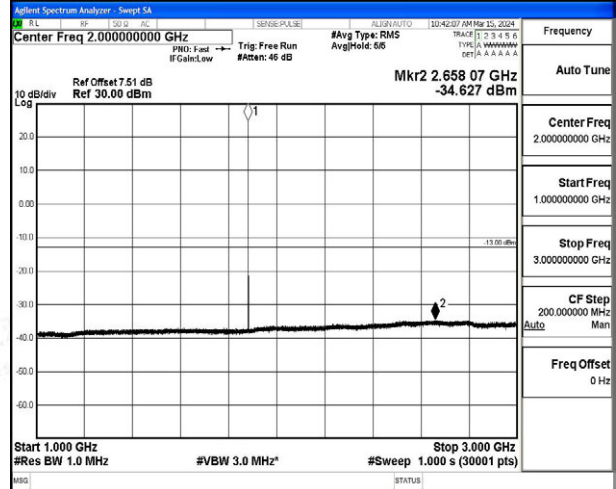

1 GHz – 3 GHz

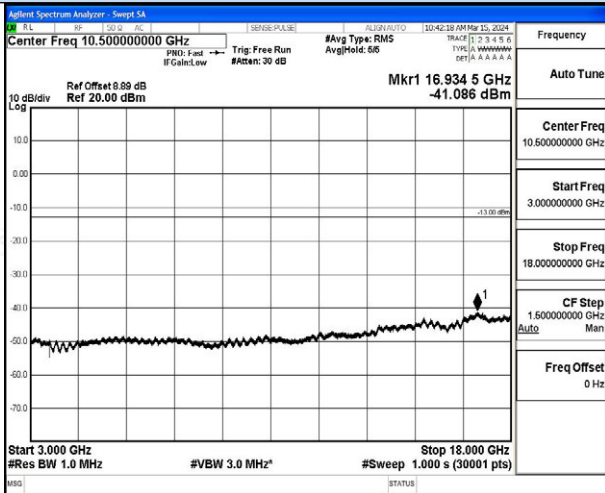


3 GHz – 18 GHz







Spurious Emission on Antenna Port
GSM/TM1/PCS1900
Channel 810 / 1909.8 MHz

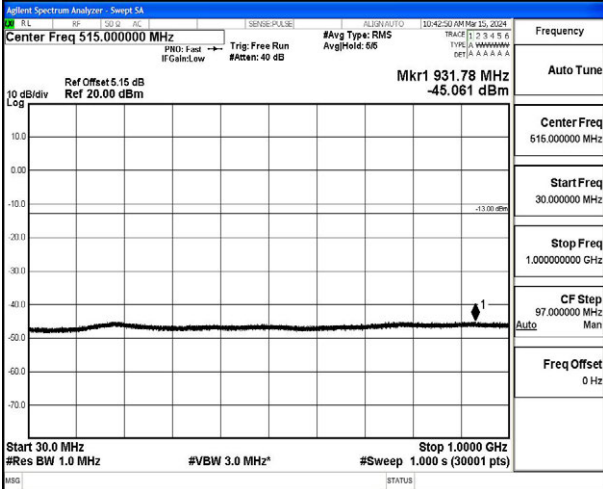

30 MHz – 1000 MHz

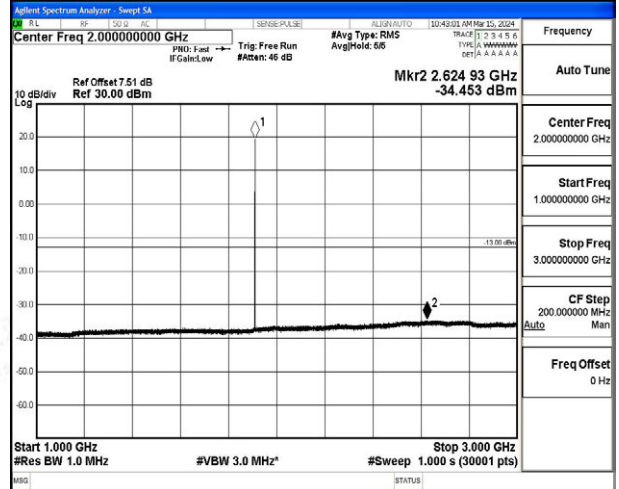

1 GHz – 3 GHz

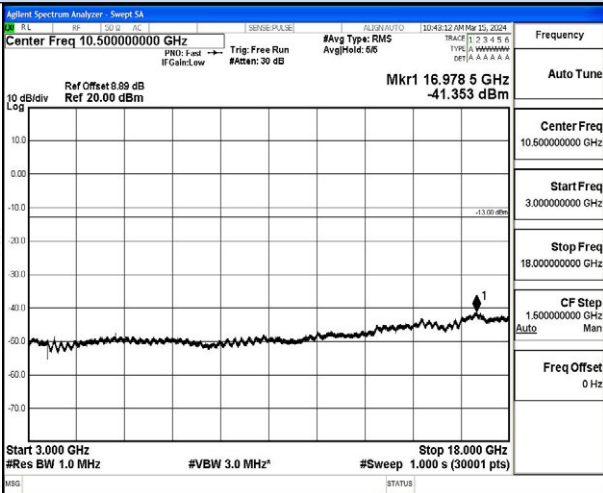


3 GHz – 18 GHz







Spurious Emission on Antenna Port
GSM/TM3/EDGE1900
Channel 512 / 1850.2 MHz

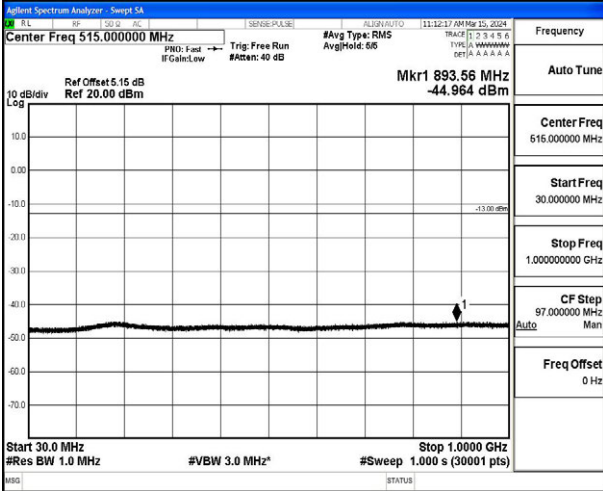

30 MHz – 1000 MHz

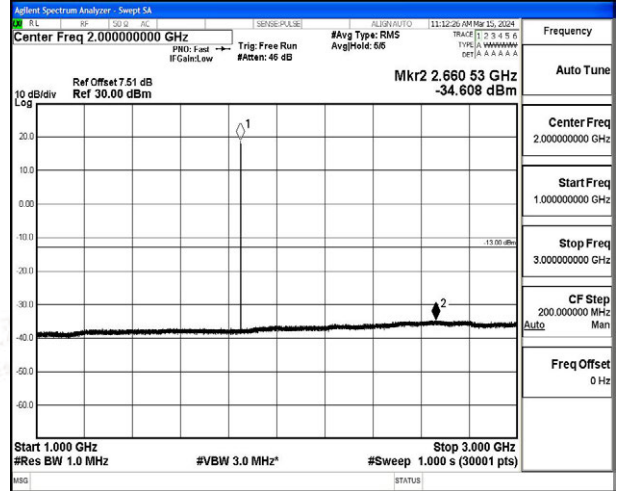

1 GHz – 3 GHz

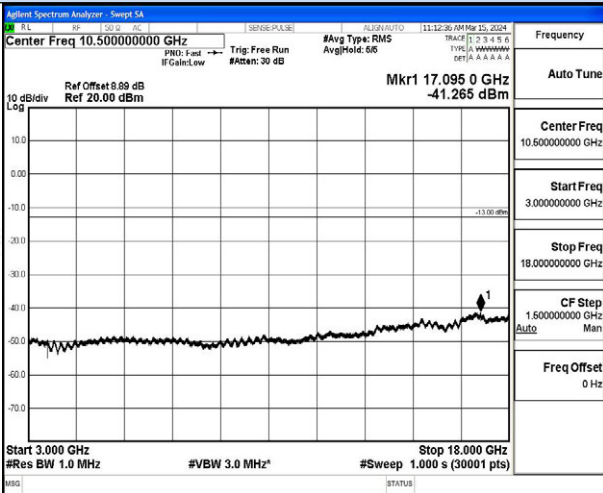


3 GHz – 18 GHz







Spurious Emission on Antenna Port GSM/TM3/EDGE1900 Channel 661 / 1880 MHz

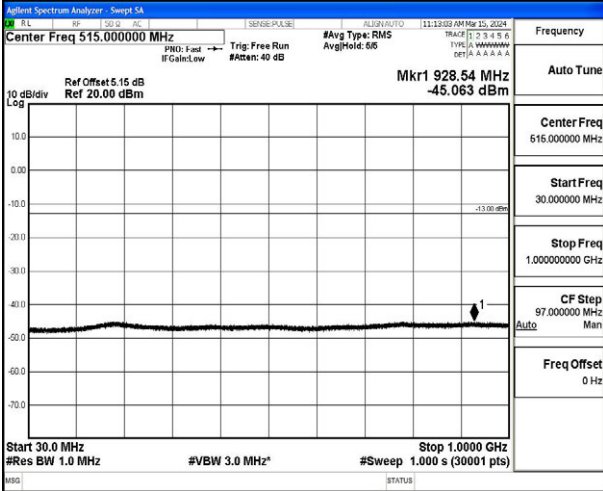

30 MHz – 1000 MHz

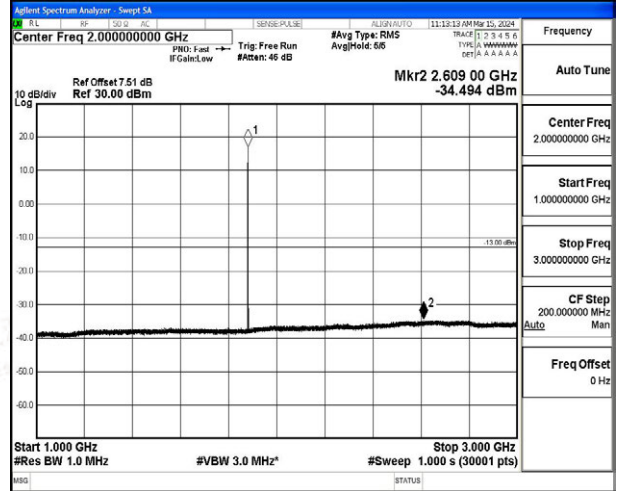

1 GHz – 3 GHz

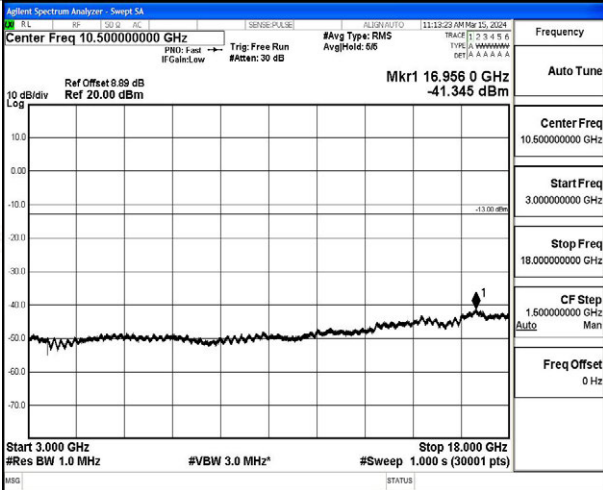


3 GHz – 18 GHz







Spurious Emission on Antenna Port GSM/TM3/EDGE1900 Channel 810 / 1909.8 MHz

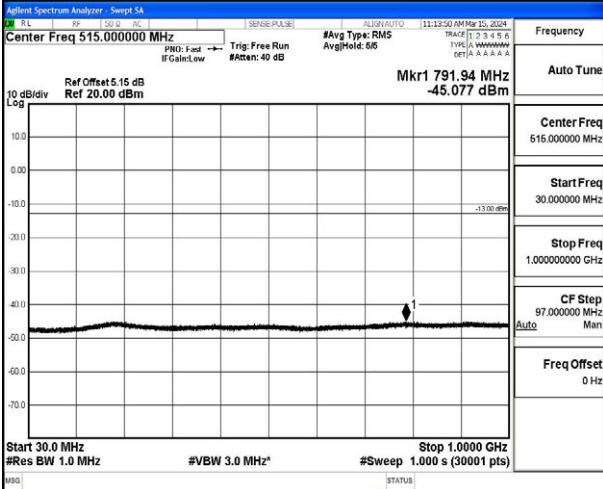

30 MHz – 1000 MHz

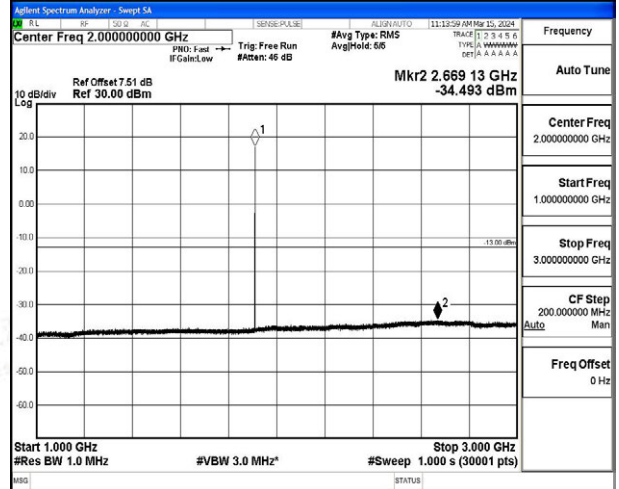

1 GHz – 3 GHz

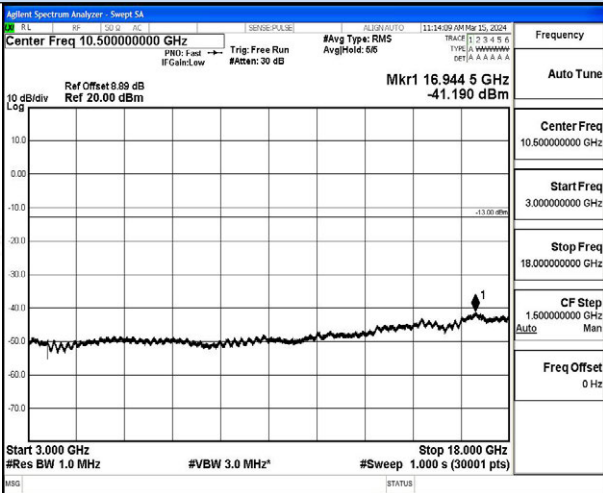

3 GHz – 18 GHz



4.6 Frequency Stability Test

TEST APPLICABLE


1. According to FCC Part 2 Section 2.1055 (a)(1), the frequency stability shall be measured with variation of ambient temperature from -30°C to +50°C centigrade.
2. According to FCC Part 2 Section 2.1055 (E) (2), for battery powered equipment, the frequency stability shall be measured with reducing primary supply voltage to the battery operating end point, which is specified by the manufacture.
3. Vary primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried voltage equipment and the end voltage point was 3.3V.

TEST PROCEDURE

In order to measure the carrier frequency under the condition of AFC lock, it is necessary to make measurements with the EUT in a "call mode". This is accomplished with the use of R&S CMU200 DIGITAL RADIO COMMUNICATION TESTER.

1. Measure the carrier frequency at room temperature;
2. Subject the EUT to overnight soak at -30°C;
3. With the EUT, powered via nominal voltage, connected to the CMU200 and in a simulated call on middle channel of PCS 1900 and GSM850, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming;
4. Repeat the above measurements at 10°C increments from -30°C to +50°C. Allow at least 0.5 hours at each temperature, unpowered, before making measurements;
5. Remeasure carrier frequency at room temperature with nominal voltage. Vary supply voltage from minimum voltage to maximum voltage, in 0.1Volt increments remeasuring carrier frequency at each voltage. Pause at nominal voltage for 0.5 hours unpowered, to allow any self-heating to stabilize, before continuing;
6. Subject the EUT to overnight soak at +50°C;
7. With the EUT, powered via nominal voltage, connected to the CMU200 and in a simulated call on the centre channel, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming;
8. Repeat the above measurements at 10°C increments from +50°C to -30°C. Allow at least 0.5 hours at each temperature, unpowered, before making measurements;
9. At all temperature levels hold the temperature to +/- 0.5°C during the measurement procedure;

TEST CONFIGURATION

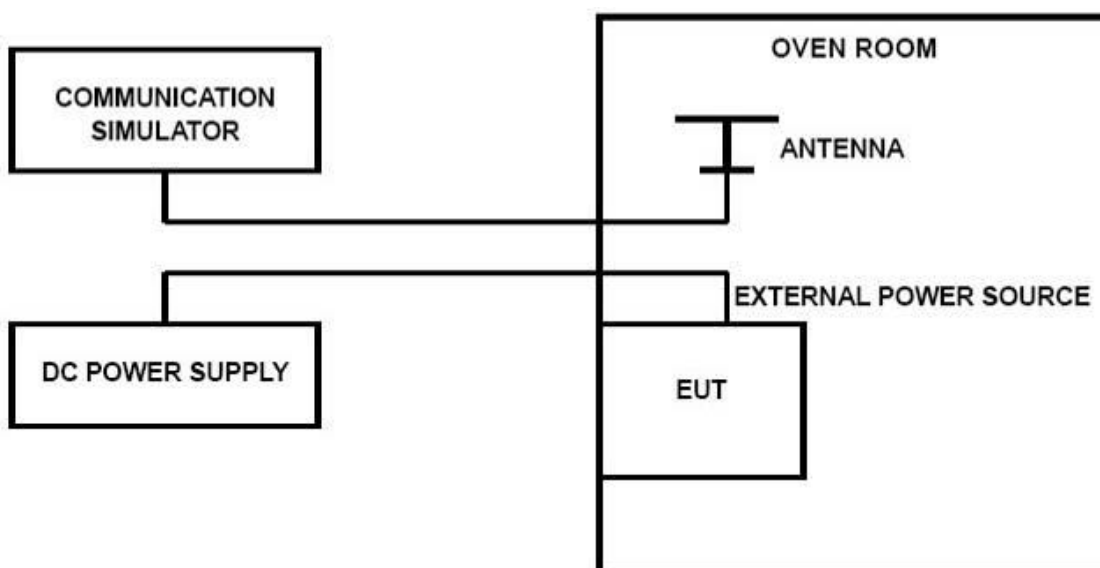

**TEST LIMITS****For Hand carried battery powered equipment**

According to the JTC standard the frequency stability of the carrier shall be accurate to within 0.1 ppm of the received frequency from the base station. This accuracy is sufficient to meet Sec. 24.235, Frequency Stability. The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. As this transceiver is considered "Hand carried, battery powered equipment" Section 2.1055(d)(2) applies. This requires that the lower voltage for frequency stability testing be specified by the manufacturer. This transceiver is specified to operate with an input voltage of between 3.3VDC and 4.35VDC, with a nominal voltage of 3.8VDC. Operation above or below these voltage limits is prohibited by transceiver software in order to prevent improper operation as well as to protect components from overstress. These voltages represent a tolerance of -10 % and +12.5 %. For the purposes of measuring frequency stability these voltage limits are to be used.

For equipment powered by primary supply voltage

According to the JTC standard the frequency stability of the carrier shall be accurate to within 0.1 ppm of the received frequency from the base station. This accuracy is sufficient to meet Sec. 24.235, Frequency Stability. The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. For this EUT section 2.1055(d)(1) applies. This requires varying primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment.

TEST RESULTS

| GSM/TM1/GSM850 | | | | | |
|----------------|------------------|---------------------|----------------------|-------------|---------|
| DC Power | Temperature (°C) | Frequency error(Hz) | Frequency error(ppm) | Limit (ppm) | Verdict |
| VL | 25 | -5 | -0.006 | 2.50 | PASS |
| VN | 25 | -15 | -0.018 | 2.50 | PASS |
| VH | 25 | -47 | -0.057 | 2.50 | PASS |
| VN | -30 | 5 | 0.006 | 2.50 | PASS |
| VN | -20 | -3 | -0.004 | 2.50 | PASS |
| VN | -10 | -32 | -0.039 | 2.50 | PASS |
| VN | 0 | -17 | -0.021 | 2.50 | PASS |
| VN | 10 | 18 | 0.022 | 2.50 | PASS |
| VN | 20 | 38 | 0.046 | 2.50 | PASS |
| VN | 30 | 22 | 0.027 | 2.50 | PASS |
| VN | 40 | -38 | -0.046 | 2.50 | PASS |
| VN | 50 | -1 | -0.001 | 2.50 | PASS |

| GSM/TM3/EDGE850 | | | | | |
|-----------------|------------------|---------------------|----------------------|-------------|---------|
| DC Power | Temperature (°C) | Frequency error(Hz) | Frequency error(ppm) | Limit (ppm) | Verdict |
| VL | 25 | -29 | -0.035 | 2.50 | PASS |
| VN | 25 | -27 | -0.033 | 2.50 | PASS |
| VH | 25 | -24 | -0.029 | 2.50 | PASS |
| VN | -30 | -7 | -0.008 | 2.50 | PASS |
| VN | -20 | -12 | -0.015 | 2.50 | PASS |
| VN | -10 | 30 | 0.036 | 2.50 | PASS |
| VN | 0 | -15 | -0.018 | 2.50 | PASS |
| VN | 10 | -32 | -0.039 | 2.50 | PASS |
| VN | 20 | -26 | -0.032 | 2.50 | PASS |
| VN | 30 | -6 | -0.007 | 2.50 | PASS |
| VN | 40 | -42 | -0.051 | 2.50 | PASS |
| VN | 50 | -45 | -0.055 | 2.50 | PASS |



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



| GSM/TM1/PCS1900 | | | | | |
|-----------------|------------------|---------------------|----------------------|-------------|---------|
| DC Power | Temperature (°C) | Frequency error(Hz) | Frequency error(ppm) | Limit (ppm) | Verdict |
| VL | 25 | -33 | -0.018 | 2.50 | PASS |
| VN | 25 | -5 | -0.003 | 2.50 | PASS |
| VH | 25 | -3 | -0.002 | 2.50 | PASS |
| VN | -30 | 36 | 0.019 | 2.50 | PASS |
| VN | -20 | -1 | -0.001 | 2.50 | PASS |
| VN | -10 | -50 | -0.027 | 2.50 | PASS |
| VN | 0 | 25 | 0.013 | 2.50 | PASS |
| VN | 10 | -37 | -0.020 | 2.50 | PASS |
| VN | 20 | 12 | 0.006 | 2.50 | PASS |
| VN | 30 | -14 | -0.007 | 2.50 | PASS |
| VN | 40 | -20 | -0.011 | 2.50 | PASS |
| VN | 50 | 6 | 0.003 | 2.50 | PASS |

| GSM/TM3/EDGE1900 | | | | | |
|------------------|------------------|---------------------|----------------------|-------------|---------|
| DC Power | Temperature (°C) | Frequency error(Hz) | Frequency error(ppm) | Limit (ppm) | Verdict |
| VL | 25 | -36 | -0.019 | 2.50 | PASS |
| VN | 25 | 21 | 0.011 | 2.50 | PASS |
| VH | 25 | 39 | 0.021 | 2.50 | PASS |
| VN | -30 | 18 | 0.010 | 2.50 | PASS |
| VN | -20 | 36 | 0.019 | 2.50 | PASS |
| VN | -10 | 23 | 0.012 | 2.50 | PASS |
| VN | 0 | -7 | -0.004 | 2.50 | PASS |
| VN | 10 | 7 | 0.004 | 2.50 | PASS |
| VN | 20 | 23 | 0.012 | 2.50 | PASS |
| VN | 30 | 6 | 0.003 | 2.50 | PASS |
| VN | 40 | 45 | 0.024 | 2.50 | PASS |
| VN | 50 | -8 | -0.004 | 2.50 | PASS |






4.7 Peak-to-Average Ratio (PAR)

LIMIT

The Peak-to-Average Ratio (PAR) of the transmission may not exceed 13 dB.

TEST CONFIGURATION

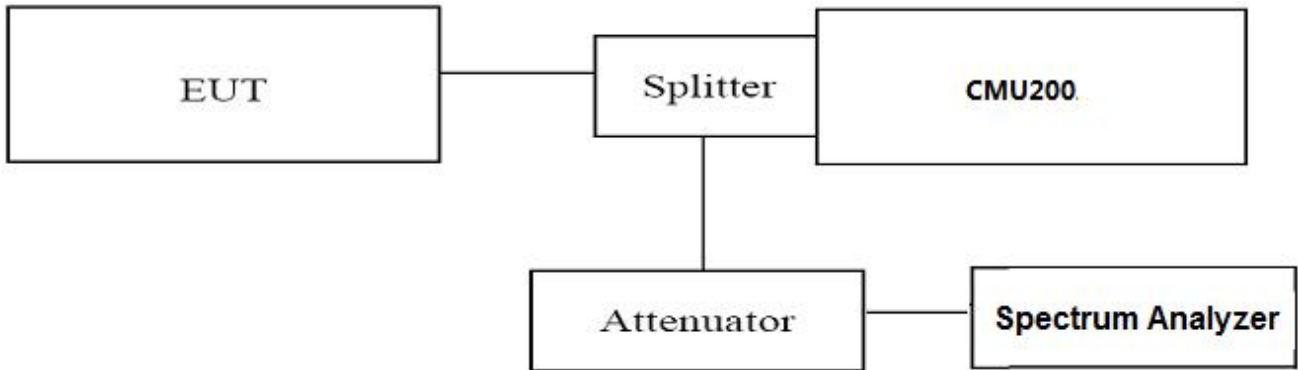

TEST PROCEDURE

Use spectrum to measure the total peak power and record as P_{Pk}. Use spectrum to measure the total average power and record as P_{Avg}. Both the peak and average power levels must be expressed in the same logarithmic units (e.g., dBm).

Determine the PAPR from:

$$PAPR (dB) = P_{Pk} (dBm) - P_{Avg} (dBm).$$

Record the maximum PAPR level associated with a probability of 0.1%.

TEST RESULTS

| Test Mode | Channel | Frequency (MHz) | PAPR Value (dB) | Limits (dB) | Verdict |
|------------------|---------|-----------------|-----------------|-------------|---------|
| GSM/TM1/GSM850 | 128 | 824.2 | 9.75 | 13.0 | PASS |
| | 190 | 836.6 | 9.52 | 13.0 | |
| | 251 | 848.8 | 9.43 | 13.0 | |
| GSM/TM3/EDGE850 | 128 | 824.2 | 12.53 | 13.0 | PASS |
| | 190 | 836.6 | 12.55 | 13.0 | |
| | 251 | 848.8 | 12.41 | 13.0 | |
| GSM/TM1/PCS1900 | 512 | 1850.20 | 9.52 | 13.0 | PASS |
| | 661 | 1880.00 | 9.65 | 13.0 | |
| | 810 | 1909.80 | 9.53 | 13.0 | |
| GSM/TM3/EDGE1900 | 512 | 1850.20 | 12.65 | 13.0 | PASS |
| | 661 | 1880.00 | 12.56 | 13.0 | |
| | 810 | 1909.80 | 12.67 | 13.0 | |



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com



Scan code to check authenticity



Peak-to-Average Ratio (PAR)



GSM/TM1/GSM850

GSM/TM3/EDGE850

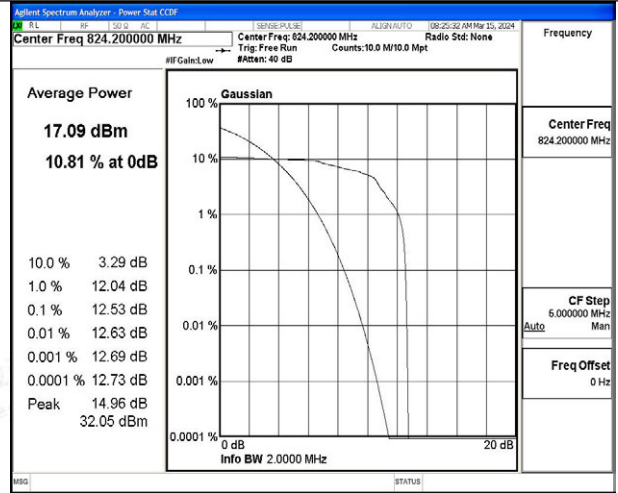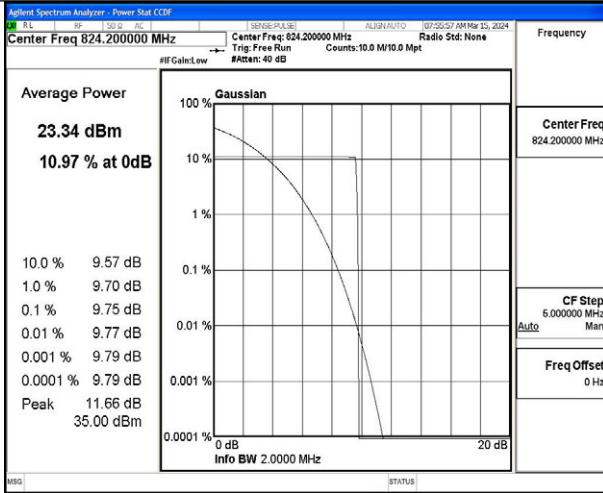



Channel 128 / 824.2 MHz

Channel 128 / 824.2 MHz

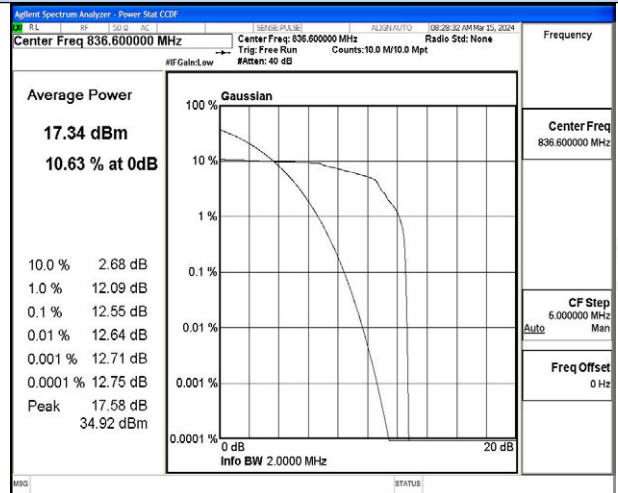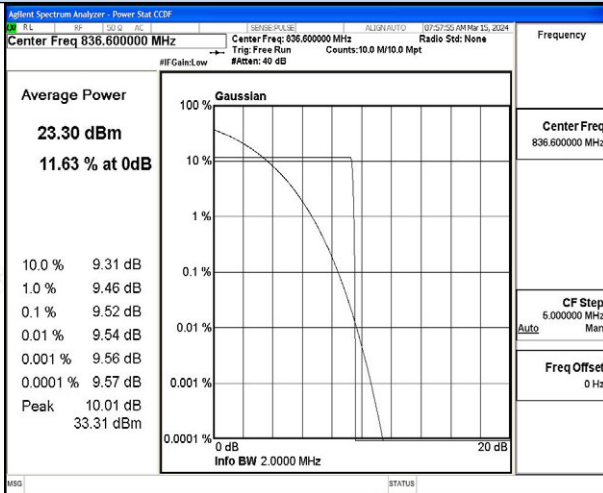

Channel 190 / 836.6 MHz

Channel 190 / 836.6 MHz

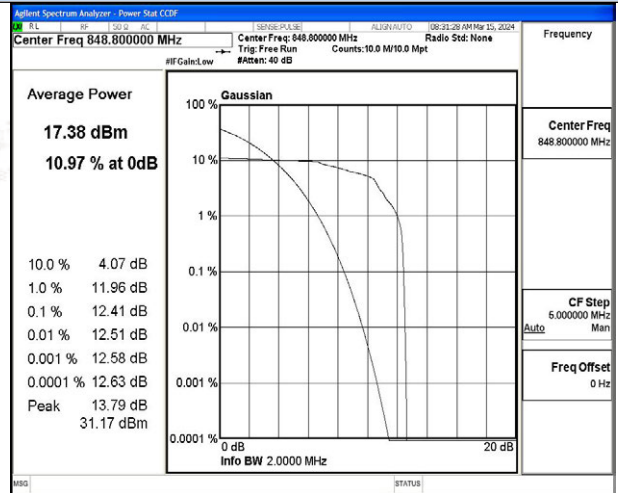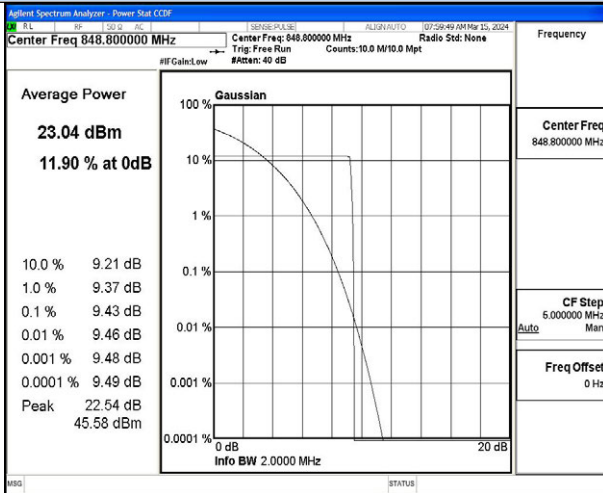

Channel 251 / 848.8 MHz

Channel 251 / 848.8 MHz



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com



Scan code to check authenticity



Peak-to-Average Ratio (PAR)



GSM/TM1/PCS1900

GSM/TM3/EDGE1900

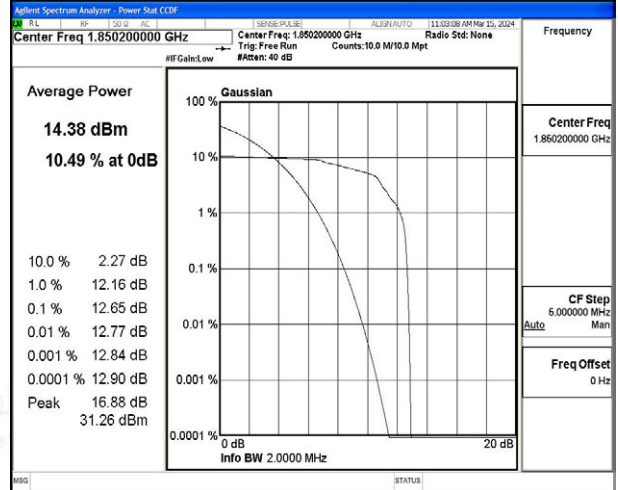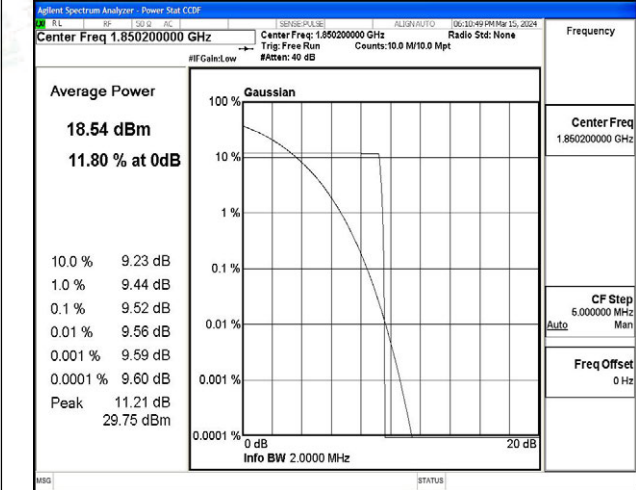



Channel 512 / 1850.2 MHz

Channel 512 / 1850.2 MHz

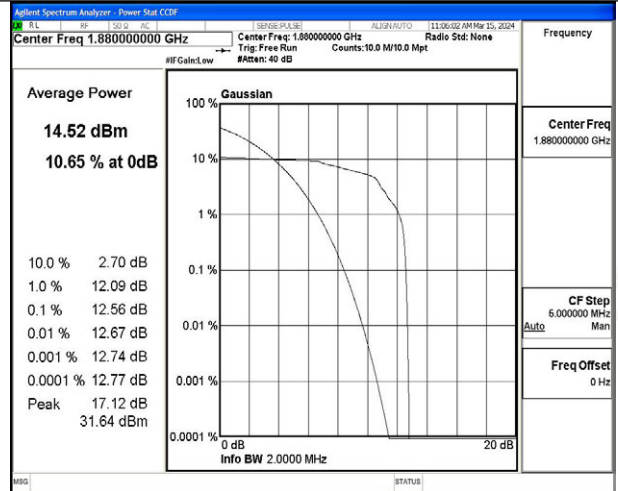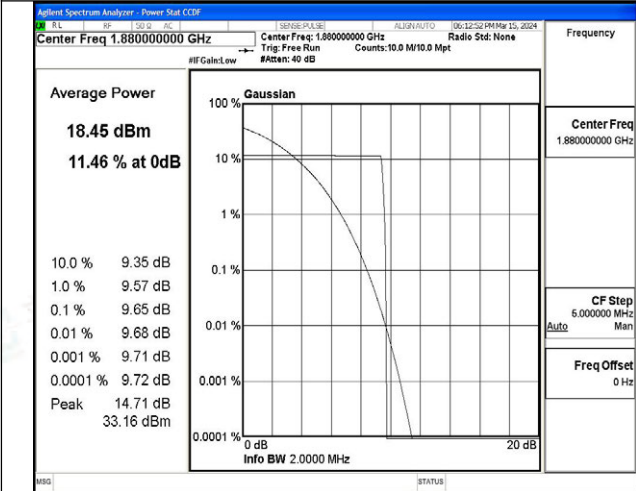

Channel 661 / 1880 MHz

Channel 661 / 1880 MHz

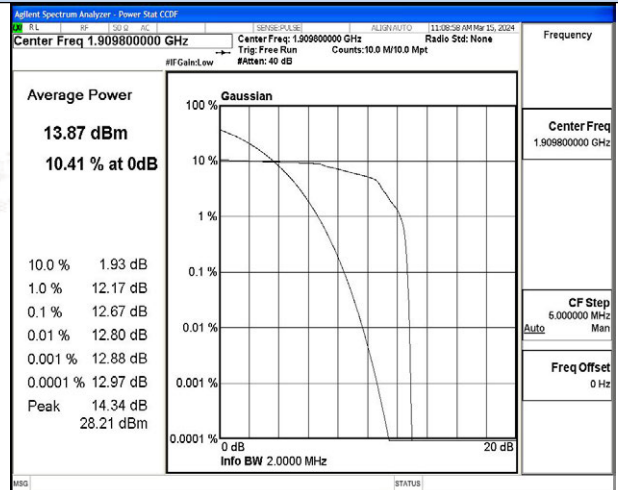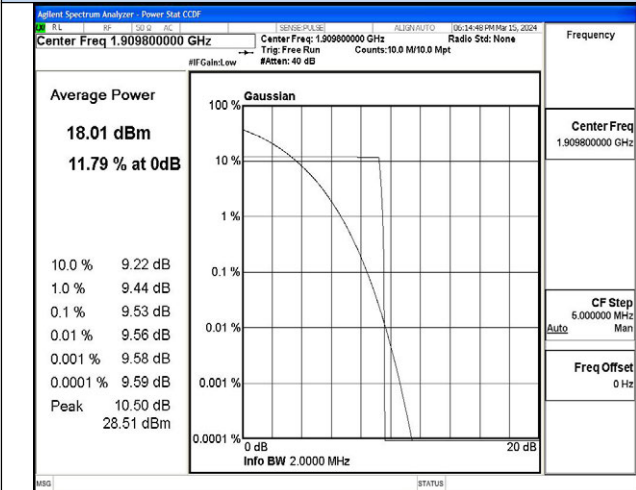

Channel 810 / 1909.8 MHz

Channel 810 / 1909.8 MHz



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



5 TEST SETUP PHOTOGRAPHS OF EUT

Please refer to separated files for Test Setup Photos of the EUT.

6 EXTERIOR PHOTOGRAPHS OF THE EUT

Please refer to separated files for External Photos of the EUT.

7 INTERIOR PHOTOGRAPHS OF THE EUT

Please refer to separated files for Internal Photos of the EUT.

-----THE END OF TEST REPORT-----



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity