FCC Test Report

Report No.: AGC15705240481FR01

FCC ID	:	2BF45-MT1191
APPLICATION PURPOSE	:	Original Equipment
PRODUCT DESIGNATION	:	Walkie Takie
BRAND NAME	:	N/A
MODEL NAME	:	MT1191
APPLICANT	:	SHANTOU TS TOYS CO.,LTD.
DATE OF ISSUE	:	May 28, 2024
STANDARD(S)	:	FCC Part 15 Subpart C §15.235
REPORT VERSION	:	V1.0

Attestation of Global Compliance (Shenzhen) Co., Ltd

Report Revise Record

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	May 28, 2024	Valid	Initial Release

Table of Contents

1. General Information

Applicant	SHANTOU TS TOYS CO.,LTD.
Address	A420,1ST BUILDING, XIANGYUBINJIANG, CHENGHAI, SHANTOU, GUANGDONG, CHINA
Manufacturer	SHANTOU TS TOYS CO.,LTD.
Address	A420,1ST BUILDING, XIANGYUBINJIANG, CHENGHAI, SHANTOU, GUANGDONG, CHINA
Factory	SHANTOU TS TOYS CO.,LTD.
Address	A420,1ST BUILDING, XIANGYUBINJIANG, CHENGHAI, SHANTOU, GUANGDONG, CHINA
Product Designation	Walkie Takie
Brand Name	N/A
Test Model	MT1191
Date of receipt of test item	May 06, 2024
Date of Test	May 06, 2024~May 28, 2024
Deviation from Standard	No any deviation from the test method
Condition of Test Sample	Normal
Test Result	Pass
Test Report Form No	AGCER-FCC-SRD40MHz-V1

Note: The test results of this report relate only to the tested sample identified in this report.

Prepared By	Bibo Zhang (Project Engineer)	May 28, 2024
Reviewed By	Calvin Liu (Reviewer)	May 28, 2024
Approved By	Max Zhang Authorized Officer	May 28, 2024

2. Product Information

2.1 Product Technical Description

Operation Frequency	49.82MHZ-49.90MHZ
Hardware Version	V1.0
Software Version	V1.2
Modulation Type	FSK
Number of channels	1
Field Strength of Fundamental	62.38 dBμV/m(Peak)@3m
Antenna Designation	Non-detachable antenna
Antenna Gain	0dBi
Power Supply	DC 4.5V (alkaline dry battery AAA*3)

2.2 Test Frequency List

Frequency Band	Channel Number	Test Frequency
49.82~49.90 MHz	01	49.86MHz

2.3 Related Submittal(S) / Grant (S)

This submittal(s) (test report) is intended for FCC ID: **2BF45-MT1191,** filing to comply with Part 2, Part 15 of the Federal Communication Commission rules.

2.4 Test Methodology

The tests were performed according to following standards:

No.	Identity	Document Title
1	FCC 47 CFR Part 2	Frequency allocations and radio treaty matters; general rules and regulations
2	FCC 47 CFR Part 15	Radio Frequency Devices
3	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices

2.5 Special Accessories

Not available for this EUT intended for grant.

2.6 Equipment Modifications

Not available for this EUT intended for grant.

2.7 Antenna Requirement

Standard Requirement
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.
EUT Antenna:
The non-detachable antenna inside the device cannot be replaced by the user at will.

3. Test Environment

3.1 Address of The Test Laboratory

Laboratory: Attestation of Global Compliance (Shenzhen) Co., Ltd.

Address: 1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

3.2 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L5488

Attestation of Global Compliance (Shenzhen) Co., Ltd. has been assessed and proved to follow CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories.)

A2LA-Lab Cert. No.: 5054.02

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to follow ISO/IEC 17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

FCC-Registration No.: 975832

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files with Registration 975832.

IC-Registration No.: 24842(CAB identifier: CN0063)

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the Certification and Engineering Bureau of Industry Canada. The acceptance letter from the IC is maintained in our files with Registration 24842.

3.3 Environmental Conditions

	Normal Conditions
Temperature range (℃)	15 - 35
Relative humidity range	20 % - 75 %
Pressure range (kPa)	86 - 106
Power supply	DC 4.5V

3.4 Measurement Uncertainty

The reported uncertainty of measurement y ±U, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95%.

Item	Measurement Uncertainty
Uncertainty of Conducted Emission for AC Port	U_c = ±2.9 dB
Uncertainty of Radiated Emission below 150kHz	U_c = ±4.2 dB
Uncertainty of Radiated Emission below 30MHz	U_c = ±3.8 dB
Uncertainty of Radiated Emission below 1GHz	U_c = ±3.9 dB
Uncertainty of total RF power, conducted	U_c = ±0.8 dB
Uncertainty of RF power density, conducted	U_c = ±2.6 dB
Uncertainty of spurious emissions, conducted	U_c = ±2 %
Uncertainty of Occupied Channel Bandwidth	U_c = ±2.7 %

3.5 List of Equipment Used

● RF Conducted Test System							
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)
☒	AGC-ER-E036	Spectrum Analyzer	Agilent	N9020A	MY49100060	2023-06-01	2024-05-31
☒	AGC-ER-E062	Power Sensor	Agilent	U2021XA	MY54110007	2023-03-03	2024-03-02
☒	AGC-ER-E063	Power Sensor	Agilent	U2021XA	MY54110009	2023-03-03	2024-03-02
☒	AGC-EM-A152	6dB Attenuator	Eeatsheep	LM-XX-6-5W	N/A	2023-06-09	2024-06-08
☒	N/A	RF Connection Cable	N/A	1#	N/A	Each time	N/A
☒	N/A	RF Connection Cable	N/A	2#	N/A	Each time	N/A

● Radiated Spurious Emission							
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)
☐	AGC-EM-E046	EMI Test Receiver	R&S	ESCI	10096	2023-02-18	2024-02-17
☒	AGC-EM-E116	EMI Test Receiver	R&S	ESCI	100034	2023-06-03	2024-06-02
☒	AGC-EM-E061	Spectrum Analyzer	Agilent	N9010A	MY53470504	2023-06-01	2024-05-31
☒	AGC-EM-E086	Loop Antenna	ZHINAN	ZN30900C	18051	2022-03-12	2024-03-11
☒	AGC-EM-E001	Wideband Antenna	SCHWARZBECK	VULB9168	D69250	2023-05-11	2025-05-10
☐	AGC-EM-E029	Broadband Ridged Horn Antenna	ETS	3117	00034609	2024-03-31	2025-03-30
☐	AGC-EM-E082	Horn Antenna	SCHWARZBECK	BBHA 9170	#768	2021-10-31	2023-10-30
☐	AGC-EM-E146	Pre-amplifier	ETS	3117-PA	00246148	2022-08-04	2024-08-03
☐	AGC-EM-A119	2.4G Filter	SongYi	N/A	N/A	2023-06-01	2024-05-31
☒	AGC-EM-A138	6dB Attenuator	Eeatsheep	LM-XX-6-5W	N/A	2023-06-09	2024-06-08
☐	AGC-EM-A139	6dB Attenuator	Eeatsheep	LM-XX-6-5W	N/A	2023-06-09	2024-06-08

● Test Software					
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Version Information
☒	AGC-EM-S003	RE Test System	FARA	EZ-EMC	V.RA-03A

4. System Test Configuration

4.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commission's requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

4.2 EUT Exercise

The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

4.3 Configuration of Tested System

Radiated Emission Configure:



Conducted Emission Configure:



4.4 Equipment Used in Tested System

The following peripheral devices and interface cables were connected during the measurement:

☐ Test Accessories Come From The Laboratory

☐ Test Accessories Come From The Manufacturer

No.	Equipment	Model No.	Manufacturer	Specification Information	Cable
1	/	/	/	/	/

4.5 Summary of Test Results

Item	FCC Rules	Description Of Test	Result
1	§15.203	Antenna Equipment	Pass
2	15.235(a)	Field Strength of Fundamental	Pass
3	15.235(a)	Band Edges of Fundamental Emission	Pass
4	§15.209	Radiated Emission	Pass
5	§15.215(c)	20dB Bandwidth	Pass
6	§15.205(a)	Restricted Bands of Operation	Pass
7	§15.207	AC Power Line Conducted Emission	N/A

Note: 1.N/A means not applicable

Note: 2. The device under test is battery-powered and does not require evaluation of AC Power Line Conducted Emission.

5. Description of Test Modes

Summary table of Test Cases	
Test Item	Equipment Type / Modulation
	Short Range Wireless Device/ FSK
Radiated & Conducted Test Cases	Mode 1: TX _49.86 MHz
AC Conducted Emission	N/A

Note:
1. Only the result of the worst case was recorded in the report, if no other cases.
2. The battery is full-charged during the test.
3. For Radiated Emission, 3axis were chosen for testing for each applicable mode.
4. For Conducted Test method, a temporary antenna connector is provided by the manufacture.

6. Duty Cycle of Correction Factor

6.1 Provisions Applicable

According to 15.35 (c), For pulse operation transmitter, the averaging pulsed emissions are calculated by peak value of measured emission plus duty cycle factor.

6.2 Measurement Procedure

After the antenna of the EUT is connected, the output signal of the EUT is received by the connected test antenna
To the spectrum analyzer. Set the center frequency to the actual working frequency of the EUT, and then set the spectrum analyzer to Zero Span for
Release time reading. During the test, the switch is released and the EUT is automatically closed

1. Set the parameters of SPA as below:
   Centre frequency = Operation Frequency
   RBW=8MHz, VBW=50MHz
   Span: 0Hz
   Sweep time: more than two pulse trains or more than each type of pulse occupancy time
2. Set the EUT to transmit by manually operated. Use the “Delta mark” function of SPA to find the period time between two pulse trains and each type of pulse occupancy time.
3. Record the plots and Reported.

6.3 Measurement Setup (Block Diagram of Configuration)

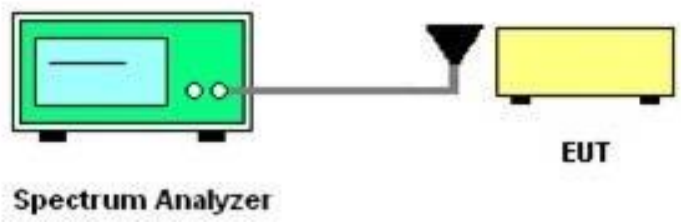

6.4 Measurement Result

Test Period (Tp) (ms)	Total Time (Ton) (ms)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)
-	-	100	0

Note 1: Duty Cycle Factor=20 log (Duty Cycle) =0
Note 2: The maximum reference value of the test cycle is 100ms.

Test Graphs of Pulse Emission Time Test

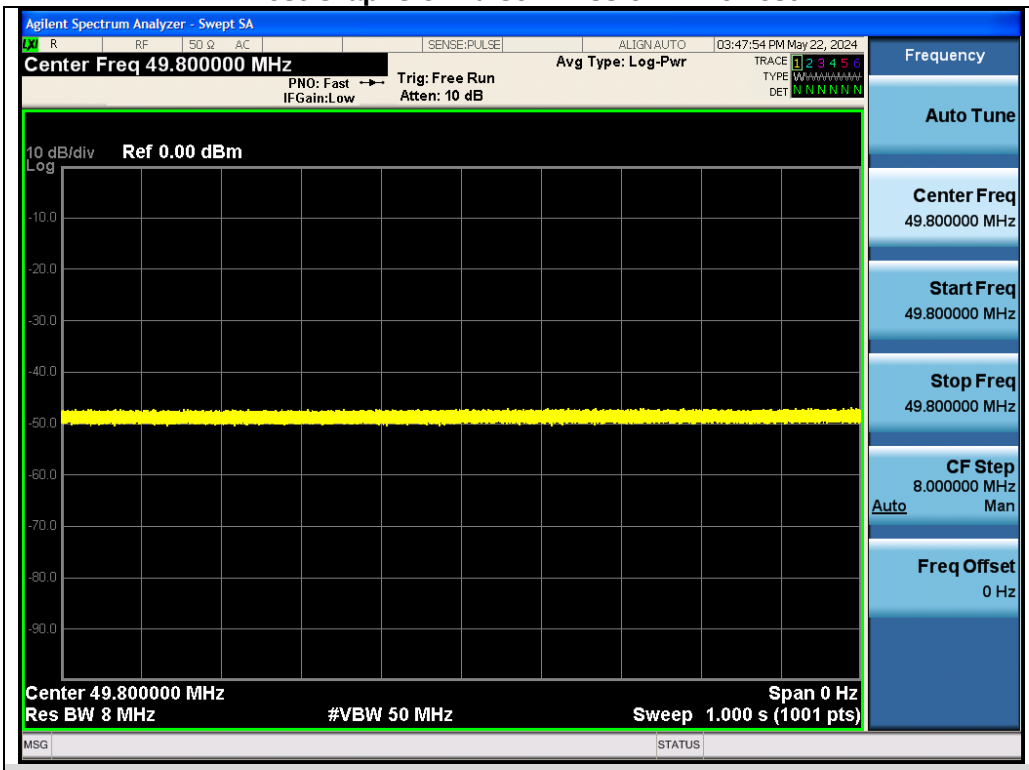

Test_Graph_ Full Cycle Testing Demonstration

7. Field Strength of Fundamental and Radiated Emission

7.1 Provisions Applicable

15.209 Limit in the below table has to be followed:

Frequency (MHz)	Distance Meters	Field Strengths Limit	
		μV/m	dBμV/m
0.009 ~ 0.490	300	2400/F(kHz)	---
0.490 ~ 1.705	30	24000/F(kHz)	---
1.705 ~ 30	30	30	---
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Above 1000	3	74.0 dB(μV)/m (Peak) 54.0 dB(μV)/m (Average)	

Remark:
1) Emission level dBμV = 20 log Emission level μV/m
2) The smaller limit shall apply at the cross point between two frequency bands.
3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.

Note: All modes were tested for restricted band radiated emission, the test records reported below are the worst result compared to other modes.

15.235(a) Limit in the below table has to be followed:

Fundamental Frequency	Field Strength of Fundamental (microvolts/3 meter)
49.82-49.90MHz	10000

15.235(b) Limits for Band edges of Fundamental Emission:
The field strength of any emissions appearing between the band edges and up to 10 kHz above and below the band edges shall be attenuated at least 26 dB below the level of the unmodulated carrier or to the general limits in §15.209, whichever permits the higher emission levels.

7.2 Measurement Procedure

1. The EUT was placed on the top of the turntable 0.8 or 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emission, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz RBW and 3MHz VBW for peak reading. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.
8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High - Low scan is not required in this case.

The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Test Setting
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP
Start ~Stop Frequency	1GHz~26.5GHz 1MHz/3MHz for Peak, 1MHz/3MHz for Average

Receiver Parameter	Test Setting
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP

7.3 Measurement Setup (Block Diagram of Configuration)

Radiated Emission Test Setup 9kHz-30MHz

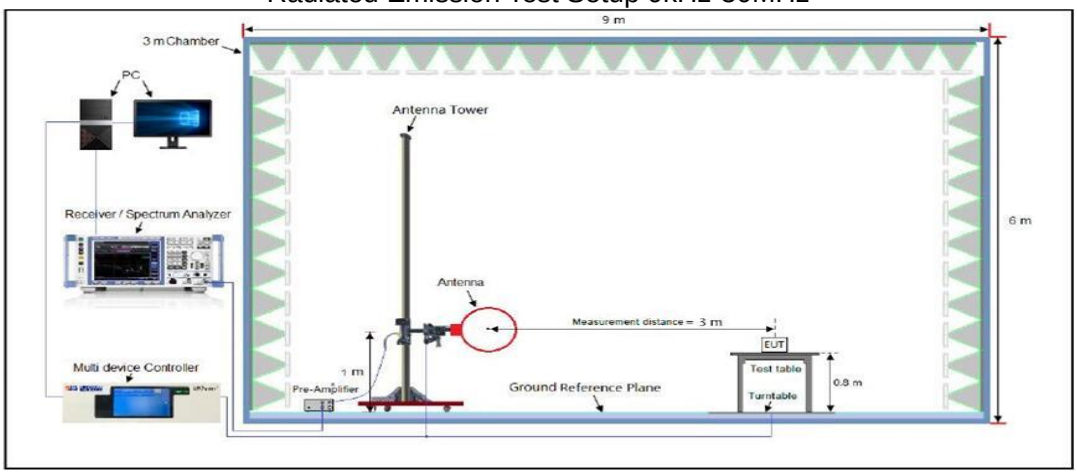

Radiated Emission Test Setup 30MHz-1000MHz

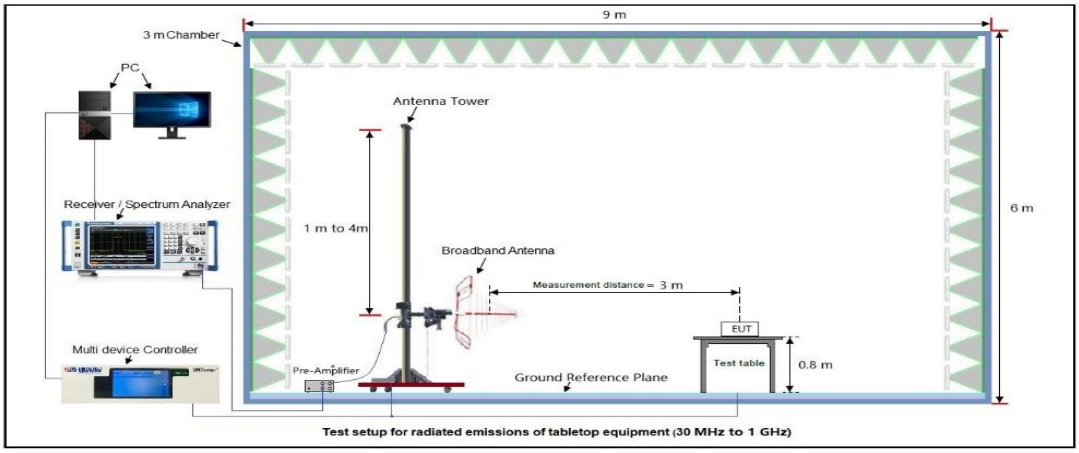

Test setup for radiated emissions of tabletop equipment (30 MHz to 1 GHz)

7.4 Measurement Result

Field Strength of Fundamental

EUT Name	Walkie Takie	**Model Name**	MT1191
Temperature	23.2℃	**Relative Humidity**	58.8 %
Pressure	960hPa	**Test Voltage**	Normal Voltage
Test Mode	Mode 1	**Antenna**	Vertical or Horizontal

Peak Value					
Frequency (MHz)	Reading Level [dBμV/m]	Correction Factor (dB/m)	Field Strength (dBμV/m)	Limit @3m (dBμV/m)	Polarity
49.86	29.59	13.21	42.80	100	Horizontal
49.86	45.38	17.00	62.38	100	Vertical

EUT Name	Walkie Takie	**Model Name**	MT1191
Temperature	23.2℃	**Relative Humidity**	58.8 %
Pressure	960hPa	**Test Voltage**	Normal Voltage
Test Mode	Mode 1	**Antenna**	Vertical or Horizontal

AV Value					
Frequency (MHz)	Reading Level [dBμV/m]	Correction Factor (dB/m)	Field Strength (dBμV/m)	Limit @3m (dBμV/m)	Polarity
49.86	17.42	13.21	30.63	80	Horizontal
49.86	32.71	17.00	49.71	80	Vertical

According to FCC 47CFR15.35, the limit on the radio frequency emissions as measured using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit for the frequency being investigated unless a different peak emission limit is otherwise specified in the rules.

RESULT: Pass

Note: The correction coefficient here is compensated for the corresponding test results in section 6 of the report.

Radiated Emission from 9kHz~30MHz

The amplitude of spurious emissions from 9kHz to 30MHz which are attenuated more than 20 dB below the permissible value need not be reported.

Radiated Emission from 30MHz~1000MHz

EUT Name	Walkie Takie	**Model Name**	MT1191
Temperature	25° C	**Relative Humidity**	55.4%
Pressure	960hPa	**Test Voltage**	Normal Voltage
Test Mode	Mode 1	**Antenna**	Horizontal

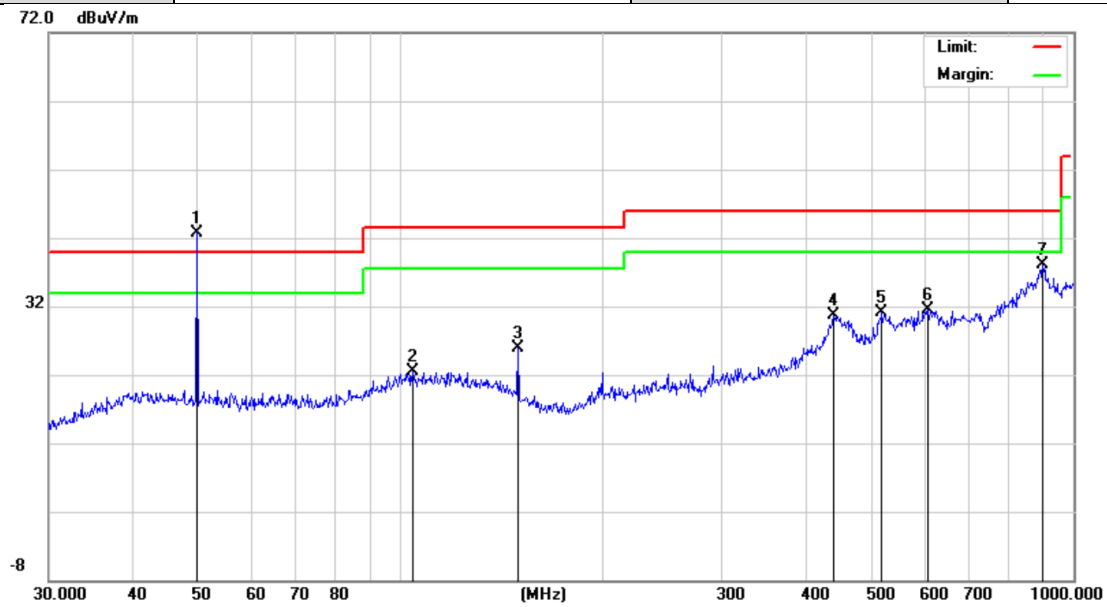

NO.	Freq. [MHz]	Reading Level [dBμV/m]	Factor [dB]	Measurement [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	49.8600	29.59	13.21	42.80	--	--	150	100	Horizontal
2	104.1701	6.21	16.24	22.45	43.50	21.05	150	150	Horizontal
3	149.4857	12.10	13.82	25.92	43.50	17.58	150	80	Horizontal
4	440.1963	5.56	25.09	30.65	46.00	15.35	150	140	Horizontal
5	519.0648	6.02	25.05	31.07	46.00	14.93	150	90	Horizontal
6	607.7866	6.27	25.14	31.41	46.00	14.59	150	150	Horizontal
7	900.1473	6.39	31.78	38.17	46.00	7.83	150	120	Horizontal

EUT Name	Walkie Takie	Model Name	MT1191
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Antenna	Vertical

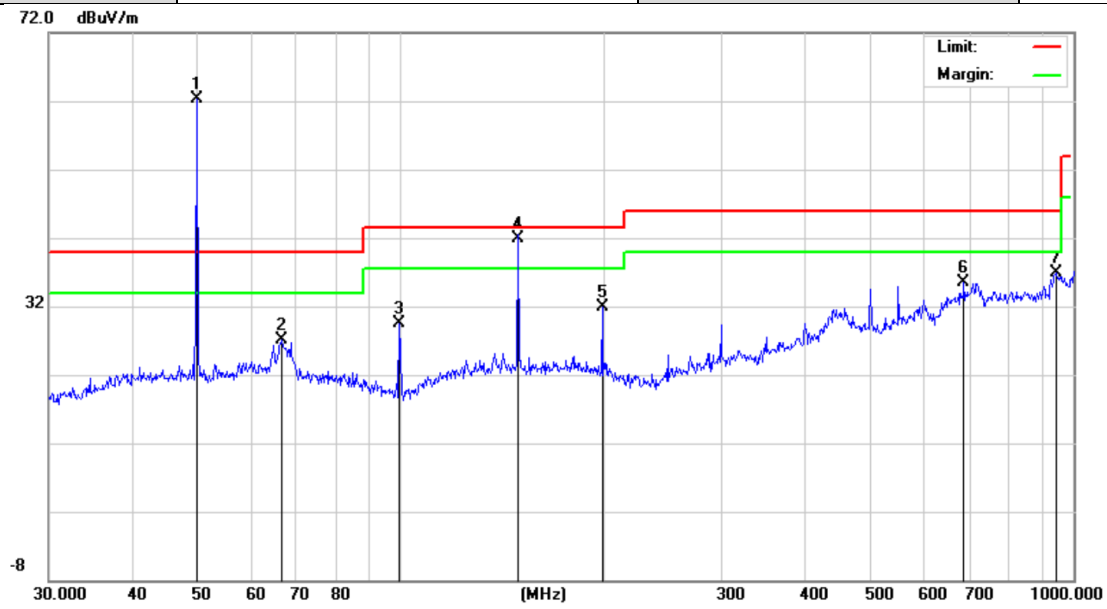

NO.	Freq. [MHz]	Reading Level [dBµV/m]	Factor [dB]	Measurement [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	49.8600	45.38	17.00	62.38	--	--	150	108	Vertical
2	66.4989	10.03	17.03	27.06	40.00	12.94	150	132	Vertical
3	99.5281	15.33	14.26	29.59	43.50	13.91	150	95	Vertical
4	149.4587	23.71	18.20	41.91	43.50	1.59	150	125	Vertical
5	199.2855	13.99	17.92	31.91	43.50	11.59	150	47	Vertical
6	687.15.7	7.71	27.84	35.55	46.00	10.45	150	169	Vertical
7	942.1305	6.01	30.91	36.92	46.00	9.08	150	135	Vertical

Result: Pass

Note:

1. Factor=Antenna Factor + Cable loss, Margin=Limit-Measurement.
2. The “Factor” value can be calculated automatically by software of measurement system.

Limits for Band edges of Fundamental Emission

EUT Name	Walkie Takie	**Model Name**	MT1191
Temperature	25°C	**Relative Humidity**	55.4%
Pressure	960hPa	**Test Voltage**	Normal Voltage
Test Mode	Mode 1	**Antenna**	Vertical

Test Graph for Peak Measurement

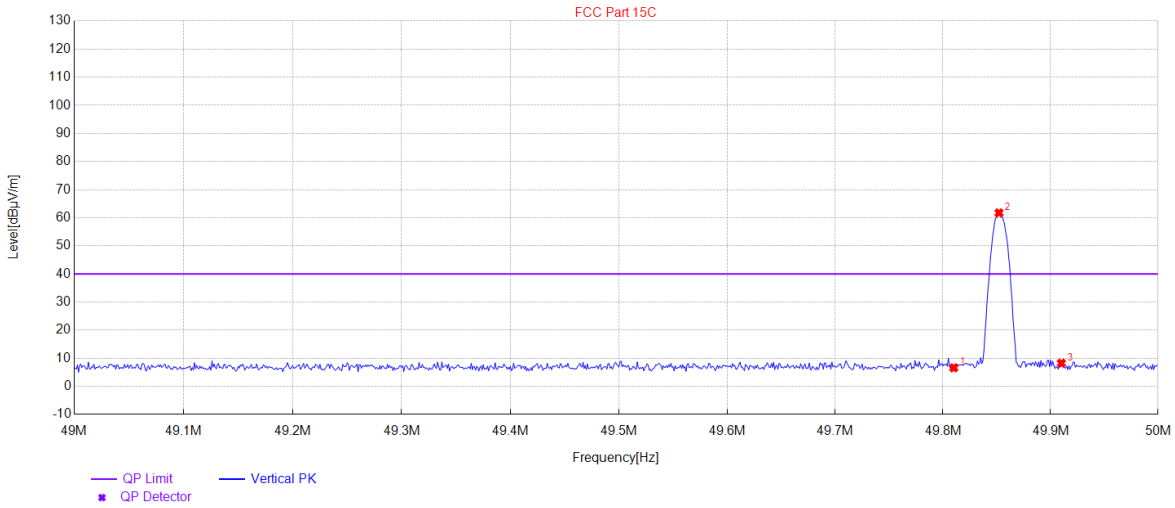

NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	49.81	6.60	15.13	40.00	33.40	150	0	Vertical
2	49.860	61.75	15.15	40.00	-21.75	150	289	Vertical
3	49.91	8.26	15.18	40.00	31.74	150	125	Vertical

Result: Pass

Note: Both Vertical and Horizontal have been tested, with only the worst data reflected in the report.

8. 20dB Bandwidth Measurement

8.1 Provisions Applicable

Intentional radiators must be designed to ensure that the 20dB and 99% emission bandwidth in the specific band 49.82~49.90MHz.

8.2 Measurement Procedure

Set the parameters of SPA as below:

1. The spectrum analyzer connected via a receive antenna placed near the EUT in peak Max hold mode.
2. Centre frequency = Operation Frequency
3. The resolution bandwidth of 1 kHz and the video bandwidth of 3 kHz were used.
4. Span: 500kHz, Sweep time: Auto
5. Set the EUT to continue transmitting mode. Allow the trace to stabilize. Use the “N dB down” function of SPA to define the bandwidth.
6. Measured the spectrum width with power higher than 20dB below carrier.
7. Measured the 99% OBW.
8. Record the plots and Reported.

8.3 Measurement Setup (Block Diagram of Configuration)

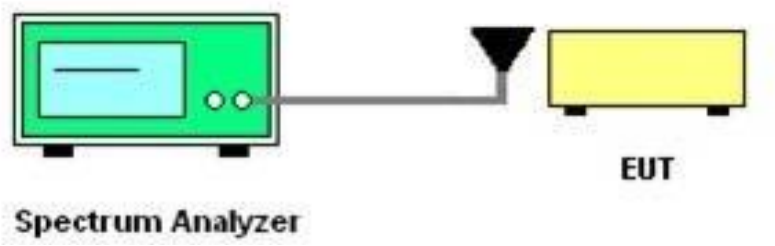

8.4 Measurement Result

Low& Upper Test Frequency Point (MHz)	Test Channel (MHz)	Limits (kHz)	Pass or Fail
Lower	49.83	Within 49.81~49.91	Pass
Upper	49.86		Pass

Test Graphs of Occupied Bandwidth and -26dB Bandwidth

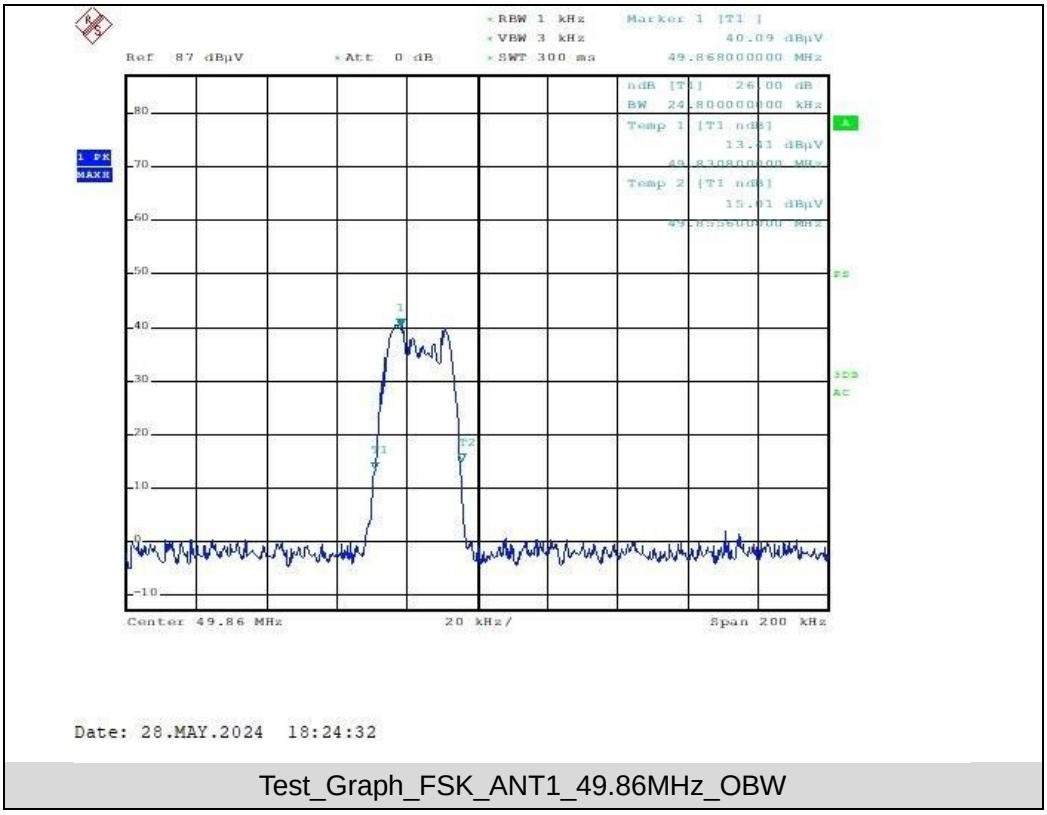

Test_Graph_FSK_ANT1_49.86MHz_OBW

Low& Upper Test Frequency Point (MHz)	Test Channel (MHz)	Limits (kHz)	Pass or Fail
Lower	49.84	Within 49.81~49.91	Pass
Upper	49.85		Pass

Test Graphs of Occupied Bandwidth and -20dB Bandwidth

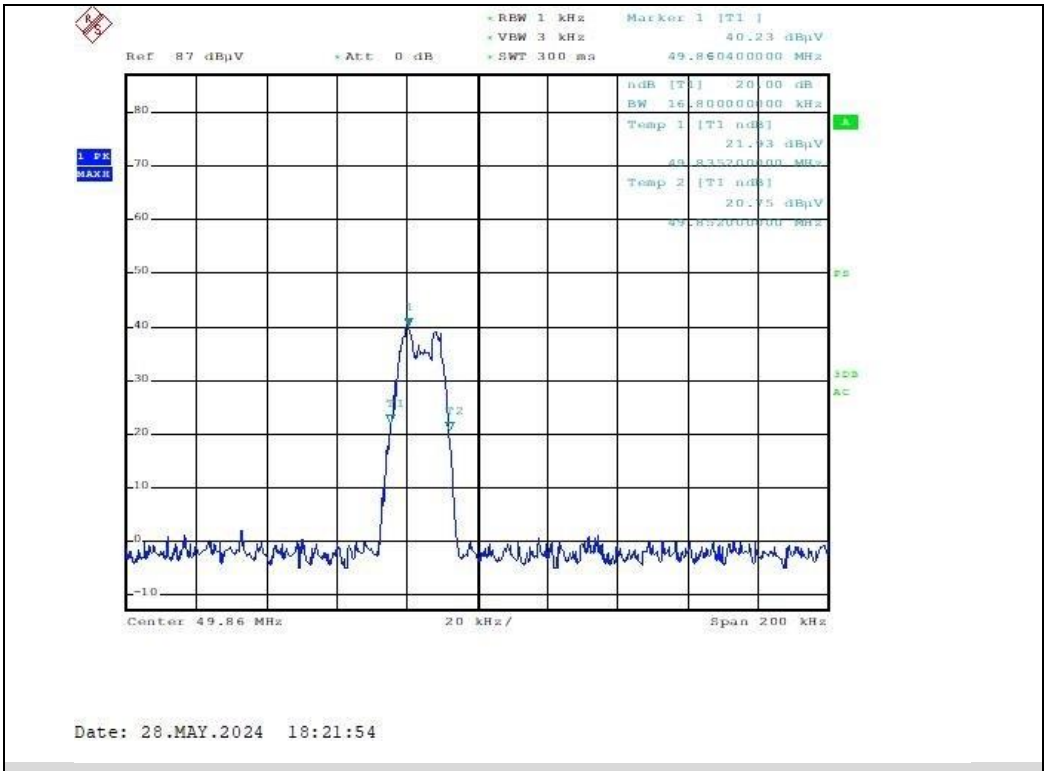

Test_Graph_FSK_ANT1_49.86MHz_OBW

9. AC Power Line Conducted Emission Test

9.1 Measurement Limit

Frequency Range	Maximum RF Line Voltage	
	Q.P. (dBμV)	Average (dBμV)
150kHz~500kHz	66-56	56-46
500kHz~5MHz	56	46
5MHz~30MHz	60	50

Note:

1. The lower limit shall apply at the transition frequency.
2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz

9.2 Measurement Setup (Block Diagram of Configuration)

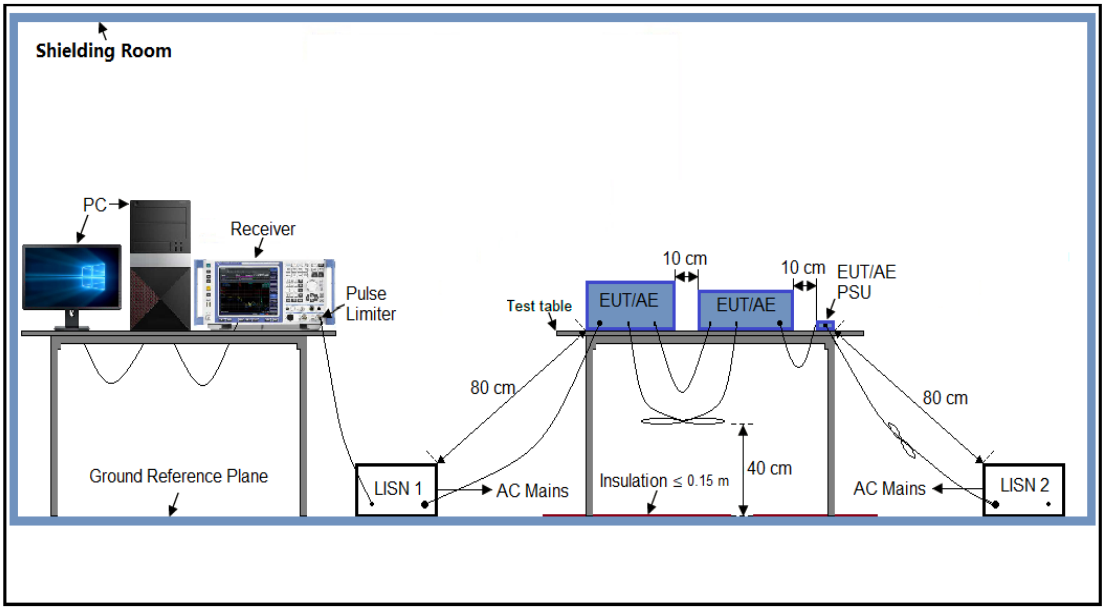

9.3 Preliminary Procedure of Line Conducted Emission Test

1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
2. Support equipment, if needed, was placed as per ANSI C63.10.
3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.
4. All support equipment received AC120V/60Hz power from a LISN, if any.
5. The EUT received DC 5V power from adapter which received AC120V/60Hz power from a LISN.
6. The test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
7. Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
8. During the above scans, the emissions were maximized by cable manipulation.
9. The test mode(s) were scanned during the preliminary test.

Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.

9.4 Final Procedure of Line Conducted Emission Test

1. EUT and support equipment was set up on the test bench as per step 2 of the preliminary test.
2. A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less –2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.
3. The test data of the worst case condition(s) was reported on the Summary Data page.

9.5 Measurement Result

Not Applicable
Note: This device is battery powered, there is no AC power supply

Appendix I: Photographs of Test Setup

Refer to the Report No.: AGC15705240481AP01

Appendix II: Photographs of Test EUT

Refer to the Report No.: AGC15705240481AP02

-----End of Report-----

Conditions of Issuance of Test Reports

1. All samples and goods are accepted by the Attestation of Global Compliance (Shenzhen) Co., Ltd (the "Company") solely for testing and reporting in accordance with the following terms and conditions. The company provides its services on the basis that such terms and conditions constitute express agreement between the company and any person, firm or company requesting its services (the "Clients").

2. Any report issued by Company as a result of this application for testing services (the "Report") shall be issued in confidence to the Clients and the Report will be strictly treated as such by the Company. It may not be reproduced either in its entirety or in part and it may not be used for advertising or other unauthorized purposes without the written consent of the Company. The Clients to whom the Report is issued may, however, show or send it, or a certified copy thereof prepared by the Company to its customer, supplier or other persons directly concerned. The Company will not, without the consent of the Clients, enter into any discussion or correspondence with any third party concerning the contents of the Report, unless required by the relevant governmental authorities, laws or court orders.

3.The Company shall not be called or be liable to be called to give evidence or testimony on the Report in a court of law without its prior written consent, unless required by the relevant governmental authorities, laws or court orders.

4. In the event of the improper use of the report as determined by the Company, the Company reserves the right to withdraw it, and to adopt any other additional remedies which may be appropriate.

5. Samples submitted for testing are accepted on the understanding that the Report issued cannot form the basis of, or be the instrument for, any legal action against the Company.

6. The Company will not be liable for or accept responsibility for any loss or damage however arising from the use of information contained in any of its Reports or in any communication whatsoever about its said tests or investigations.

7.Clients wishing to use the Report in court proceedings or arbitration shall inform the Company to that effect prior to submitting the sample for testing.

8. The Company is not responsible for recalling the electronic version of the original report when any revision is made to them. The Client assumes the responsibility to providing the revised version to any interested party who uses them.

9. Subject to the variable length of retention time for test data and report stored hereinto as otherwise specifically required by individual accreditation authorities, the Company will only keep the supporting test data and information of the test report for a period of six years. The data and information will be disposed of after the aforementioned retention period has elapsed. Under no circumstances shall we provide any data and information which has been disposed of after retention period. Under no circumstances shall we be liable for damage of any kind, including (but not limited to) compensatory damages, lost profits, lost data, or any form of special, incidental, indirect, consequential or punitive damages of any kind, whether based on breach of contract of warranty, tort (including negligence), product liability or otherwise, even if we are informed in advance of the possibility of such damages.