

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-04-24

Tested By:

Juchang Du

EUT:

Senza Cloud Connector

Model Number:

SZC004

Test Mode:

11AC20 TX 5320MHz

Power Supply:

DC 5V

Condition:

Temp:23.5°C;Humi:59.7%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24021902-2E\FCC ABOVE 1G 5G\40

Memo:

Sample Number:S24021902-002 Power Setting:38

Test Graph

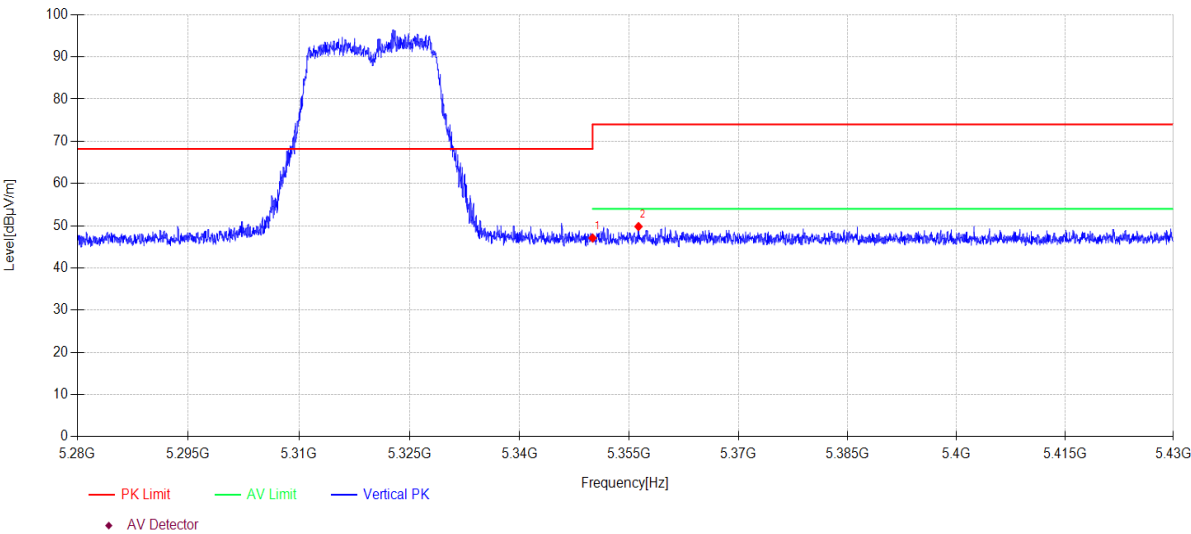

Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	8.30	33.10	5.69	0.00	47.09	74.00	26.91	PK	Vertical
2	5356.275	11.02	33.10	5.69	0.00	49.81	74.00	24.19	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-04-24

Tested By:

Juchang Du

EUT:

Senza Cloud Connector

Model Number:

SZC004

Test Mode:

11A TX 5500MHz

Power Supply:

DC 5V

Condition:

Temp:23.5°C;Humi:59.7%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24021902-2E\FCC ABOVE 1G 5G\41

Memo:

Sample Number:S24021902-002 Power Setting:38

Test Graph

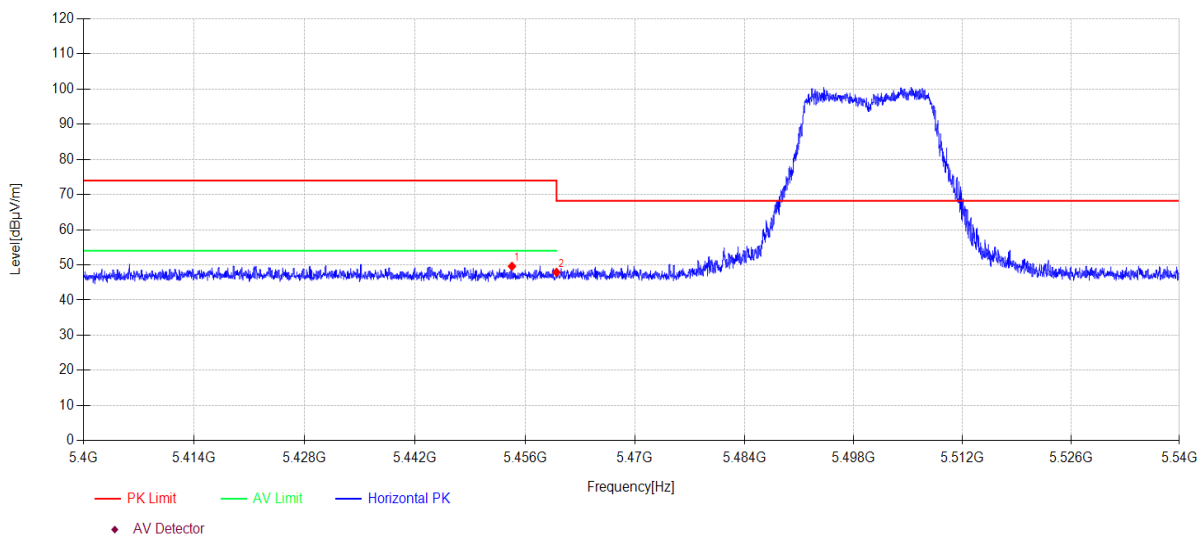

Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5454.320	10.86	33.00	5.74	0.00	49.60	74.00	24.40	PK	Horizontal
2	5460.000	9.18	33.00	5.74	0.00	47.92	68.20	20.28	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP


2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2024-04-24 **Tested By:** Juchang Du
EUT: Senza Cloud Connector **Model Number:** SZC004
Test Mode: 11A TX 5500MHz **Power Supply:** DC 5V
Condition: Temp:23.5°C;Humi:59.7% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2024 report data\Q24021902-2E\FCC ABOVE 1G 5G\42
Memo: Sample Number:S24021902-002 Power Setting:38

Test Graph

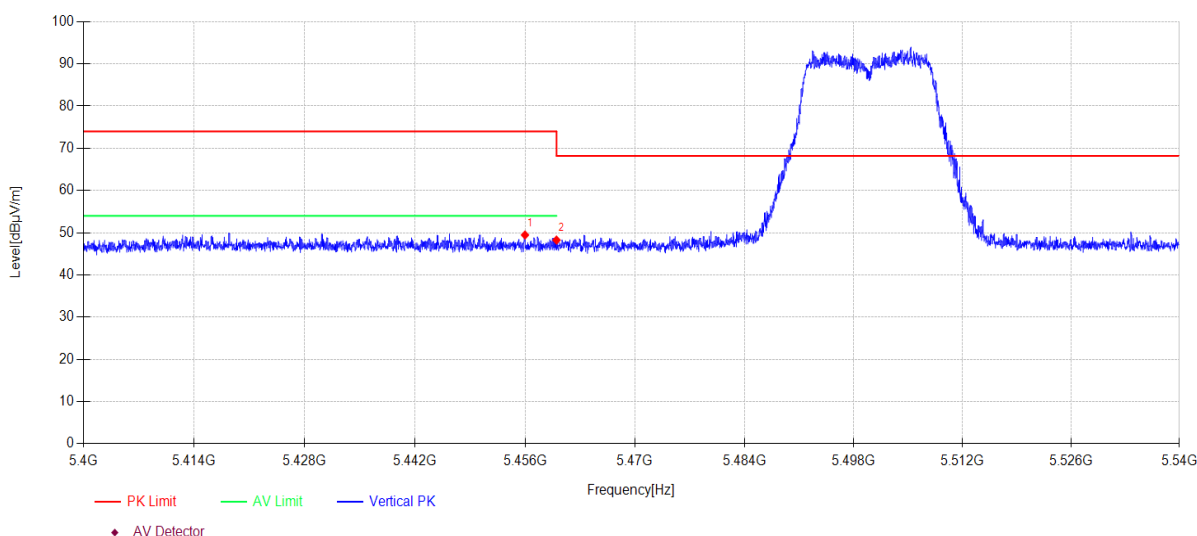

Data List

N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5455.986	10.72	33.00	5.74	0.00	49.46	74.00	24.54	PK	Vertical
2	5460.000	9.52	33.00	5.74	0.00	48.26	68.20	19.94	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-04-24

Tested By:

Juchang Du

EUT:

Senza Cloud Connector

Model Number:

SZC004

Test Mode:

11N20 TX 5500MHz

Power Supply:

DC 5V

Condition:

Temp:23.5°C;Humi:59.7%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24021902-2E\FCC ABOVE 1G 5G\43

Memo:

Sample Number:S24021902-002 Power Setting:38

Test Graph

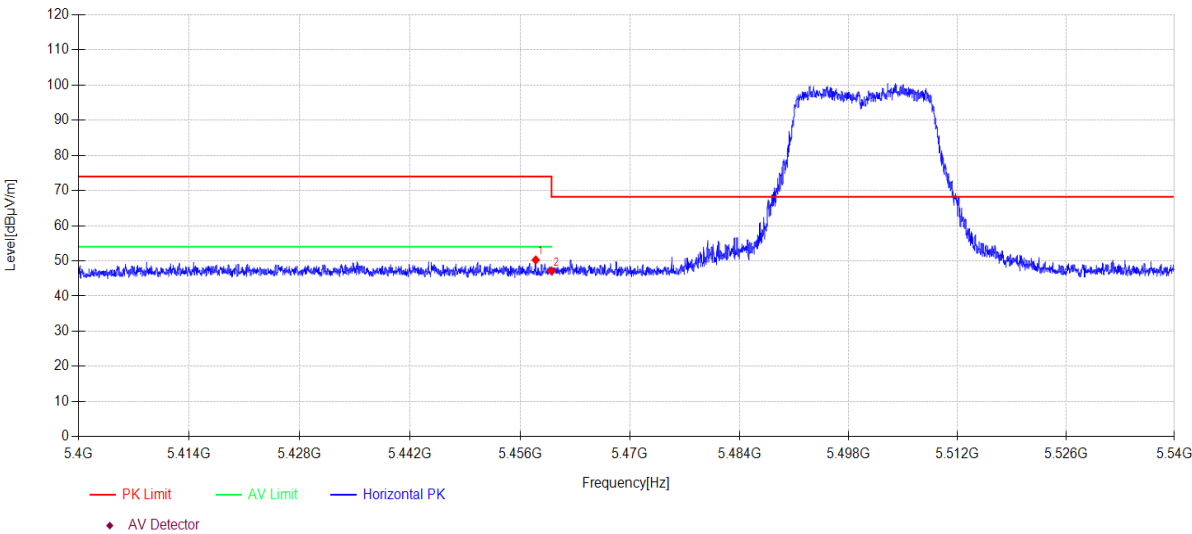

Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5457.988	11.55	33.00	5.74	0.00	50.29	74.00	23.71	PK	Horizontal
2	5460.000	8.40	33.00	5.74	0.00	47.14	68.20	21.06	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-04-24

Tested By:

Juchang Du

EUT:

Senza Cloud Connector

Model Number:

SZC004

Test Mode:

11N20 TX 5500MHz

Power Supply:

DC 5V

Condition:

Temp:23.5°C;Humi:59.7%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24021902-2E\FCC ABOVE 1G 5G\44

Memo:

Sample Number:S24021902-002 Power Setting:38

Test Graph

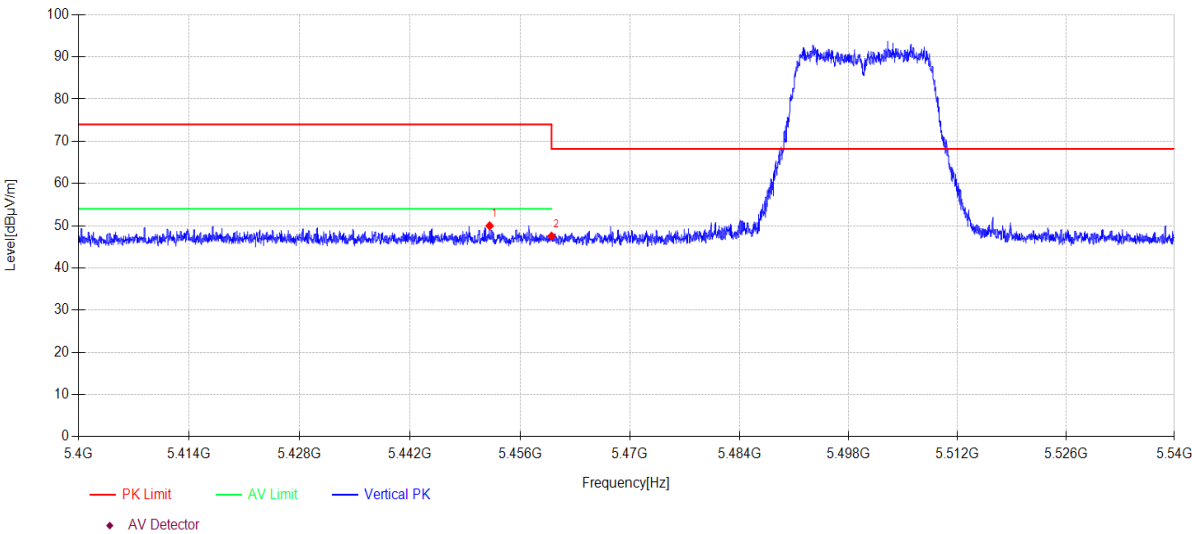

Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5452.122	11.23	33.00	5.74	0.00	49.97	74.00	24.03	PK	Vertical
2	5460.000	8.79	33.00	5.74	0.00	47.53	68.20	20.67	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-04-24

Tested By:

Juchang Du

EUT:

Senza Cloud Connector

Model Number:

SZC004

Test Mode:

11AC20 TX 5500MHz

Power Supply:

DC 5V

Condition:

Temp:23.5°C;Humi:59.7%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24021902-2E\FCC ABOVE 1G 5G\45

Memo:

Sample Number:S24021902-002 Power Setting:38

Test Graph

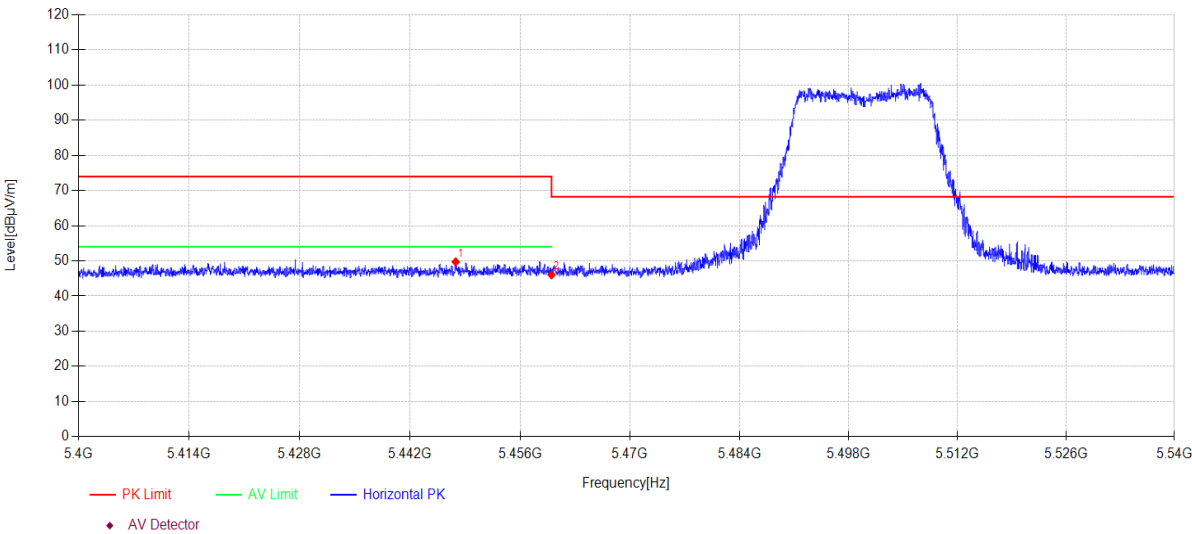

Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5447.796	11.02	33.00	5.73	0.00	49.75	74.00	24.25	PK	Horizontal
2	5460.000	7.31	33.00	5.74	0.00	46.05	68.20	22.15	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-04-24

Tested By:

Juchang Du

EUT:

Senza Cloud Connector

Model Number:

SZC004

Test Mode:

11AC20 TX 5500MHz

Power Supply:

DC 5V

Condition:

Temp:23.5°C;Humi:59.7%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24021902-2E\FCC ABOVE 1G 5G\46

Memo:

Sample Number:S24021902-002 Power Setting:38

Test Graph

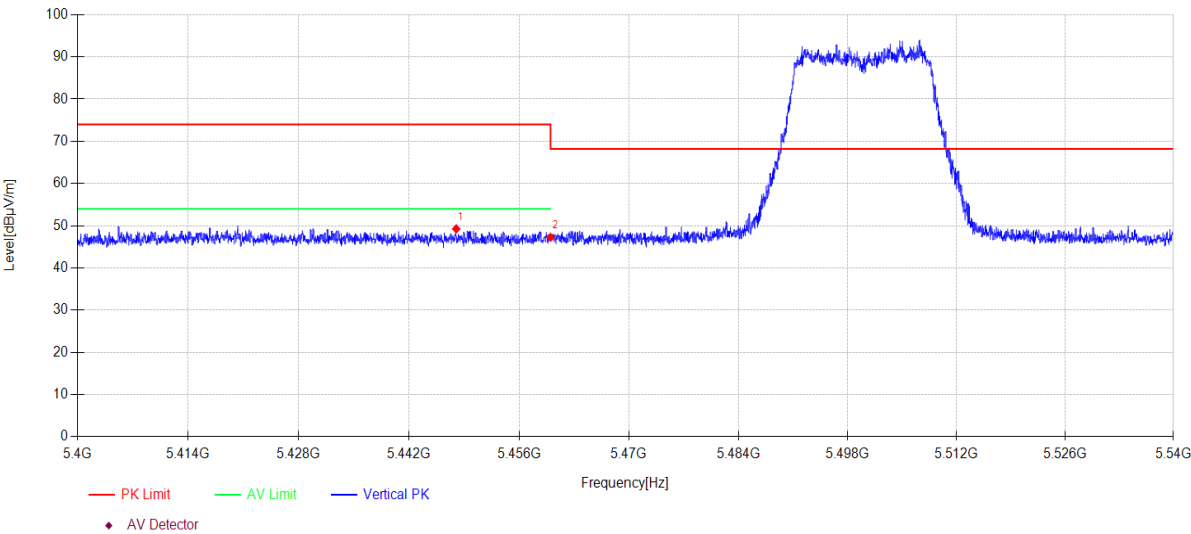

Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5447.992	10.54	33.00	5.73	0.00	49.27	74.00	24.73	PK	Vertical
2	5460.000	8.51	33.00	5.74	0.00	47.25	68.20	20.95	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:2024-04-24Tested By:Juchang Du

EUT:Senza Cloud ConnectorModel Number:SZC004


Test Mode:11AC40 TX 5510MHzPower Supply:DC 5V

Condition:Temp:23.5°C;Humi:59.7%Test Site:DDT 3# Chamber

File Path:d:\ts\2024 report data\Q24021902-2E\FCC ABOVE 1G 5G\47

Memo:Sample Number:S24021902-002 Power Setting:38

Test Graph

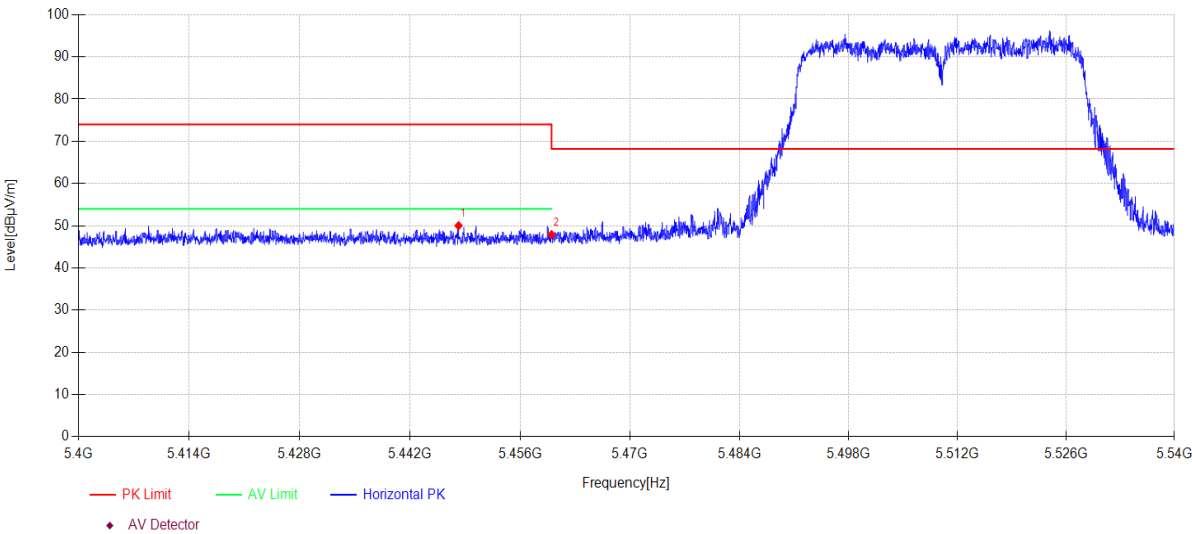

Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5448.160	11.28	33.00	5.73	0.00	50.01	74.00	23.99	PK	Horizontal
2	5460.000	9.16	33.00	5.74	0.00	47.90	68.20	20.30	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-04-24

Tested By:

Juchang Du

EUT:

Senza Cloud Connector

Model Number:

SZC004

Test Mode:

11AC40 TX 5510MHz

Power Supply:

DC 5V

Condition:

Temp:23.5°C;Humi:59.7%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24021902-2E\FCC ABOVE 1G 5G\48

Memo:

Sample Number:S24021902-002 Power Setting:38

Test Graph

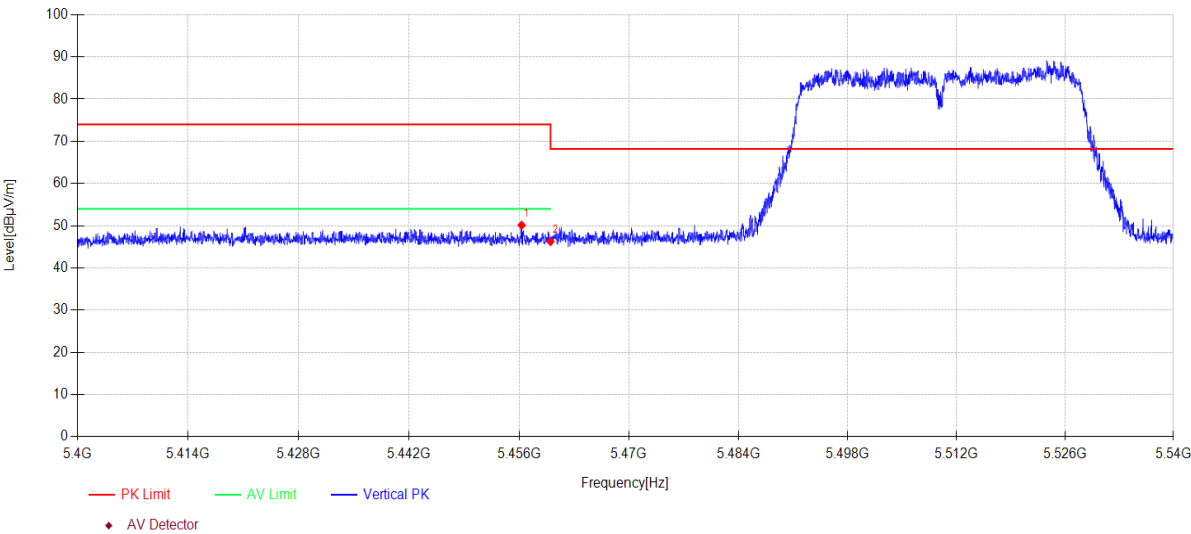

Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5456.322	11.37	33.00	5.74	0.00	50.11	74.00	23.89	PK	Vertical
2	5460.000	7.52	33.00	5.74	0.00	46.26	68.20	21.94	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-04-24

Tested By:

Juchang Du

EUT:

Senza Cloud Connector

Model Number:

SZC004

Test Mode:

11N40 TX 5510MHz

Power Supply:

DC 5V

Condition:

Temp:23.5°C;Humi:59.7%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24021902-2E\FCC ABOVE 1G 5G\49

Memo:

Sample Number:S24021902-002 Power Setting:38

Test Graph

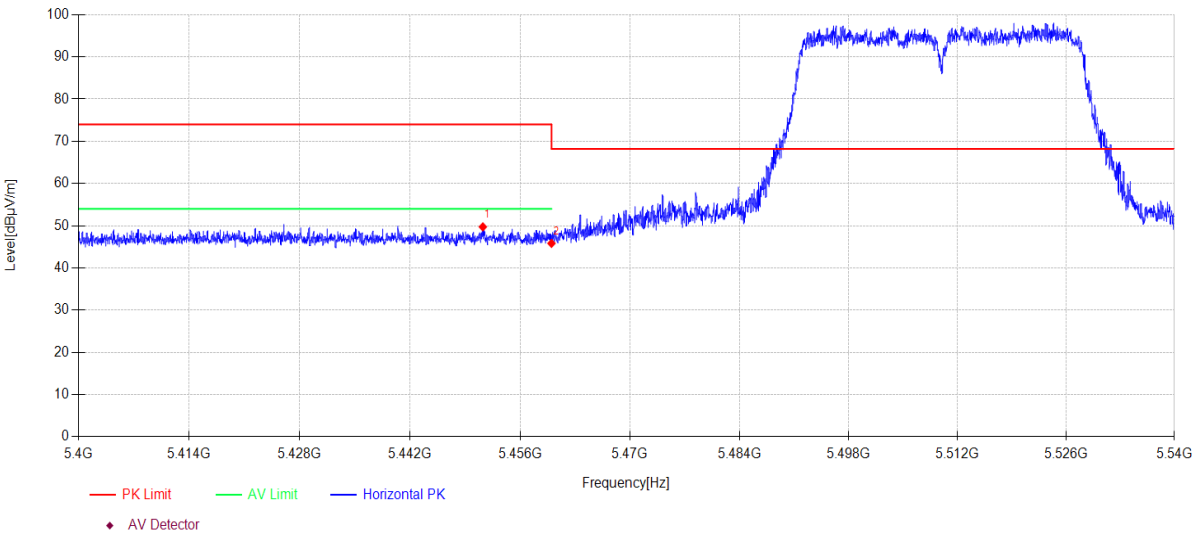

Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5451.254	10.99	33.00	5.74	0.00	49.73	74.00	24.27	PK	Horizontal
2	5460.000	7.08	33.00	5.74	0.00	45.82	68.20	22.38	PK	Horizontal

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-04-24

Tested By:

Juchang Du

EUT:

Senza Cloud Connector

Model Number:

SZC004

Test Mode:

11N40 TX 5510MHz

Power Supply:

DC 5V

Condition:

Temp:23.5°C;Humi:59.7%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24021902-2E\FCC ABOVE 1G 5G\50

Memo:

Sample Number:S24021902-002 Power Setting:38

Test Graph

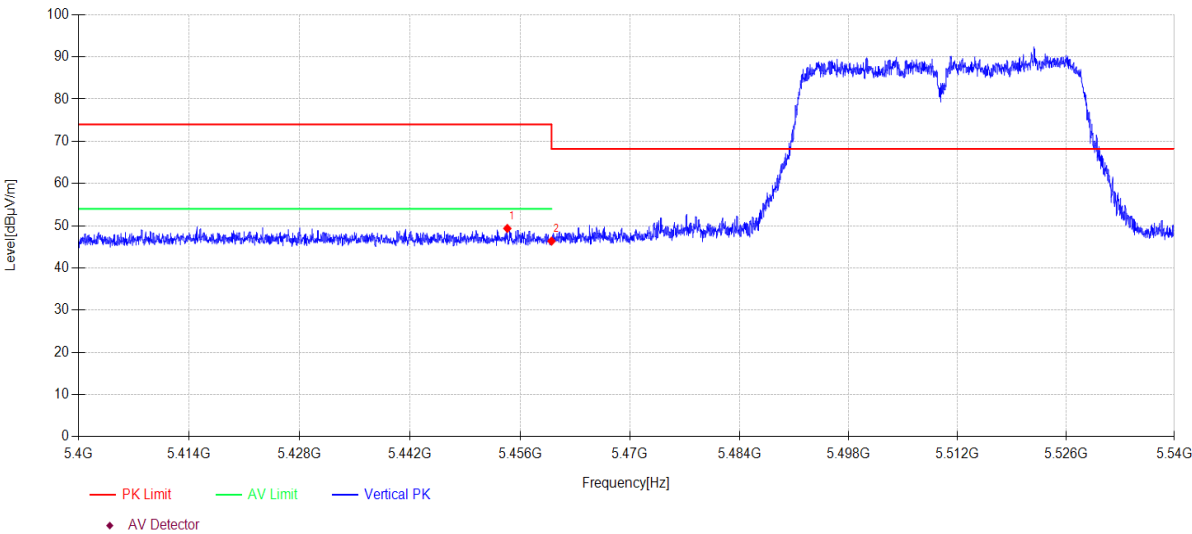

Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5454.376	10.61	33.00	5.74	0.00	49.35	74.00	24.65	PK	Vertical
2	5460.000	7.62	33.00	5.74	0.00	46.36	68.20	21.84	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-04-24

Tested By:

Juchang Du

EUT:

Senza Cloud Connector

Model Number:

SZC004

Test Mode:

11AC80 TX 5530MHz

Power Supply:

DC 5V

Condition:

Temp:23.5°C;Humi:59.7%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24021902-2E\FCC ABOVE 1G 5G\51

Memo:

Sample Number:S24021902-002 Power Setting:38

Test Graph

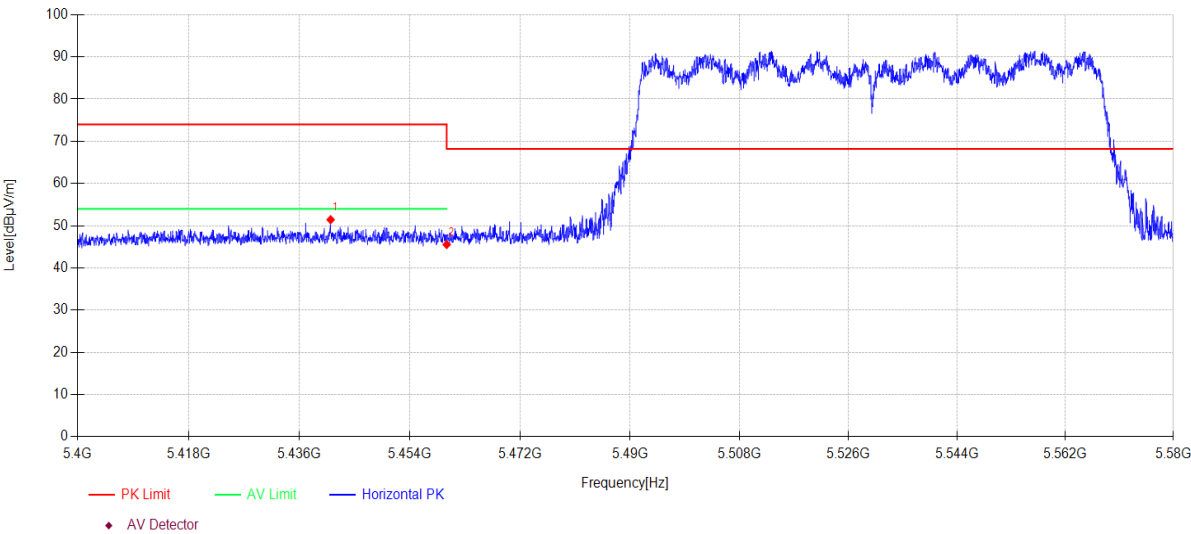

Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5441.076	12.68	33.02	5.73	0.00	51.43	74.00	22.57	PK	Horizontal
2	5460.000	6.80	33.00	5.74	0.00	45.54	68.20	22.66	PK	Horizontal

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-04-24

Tested By:

Juchang Du

EUT:

Senza Cloud Connector

Model Number:

SZC004

Test Mode:

11AC80 TX 5530MHz

Power Supply:

DC 5V

Condition:

Temp:23.5°C;Humi:59.7%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24021902-2E\FCC ABOVE 1G 5G\52

Memo:

Sample Number:S24021902-002 Power Setting:38

Test Graph

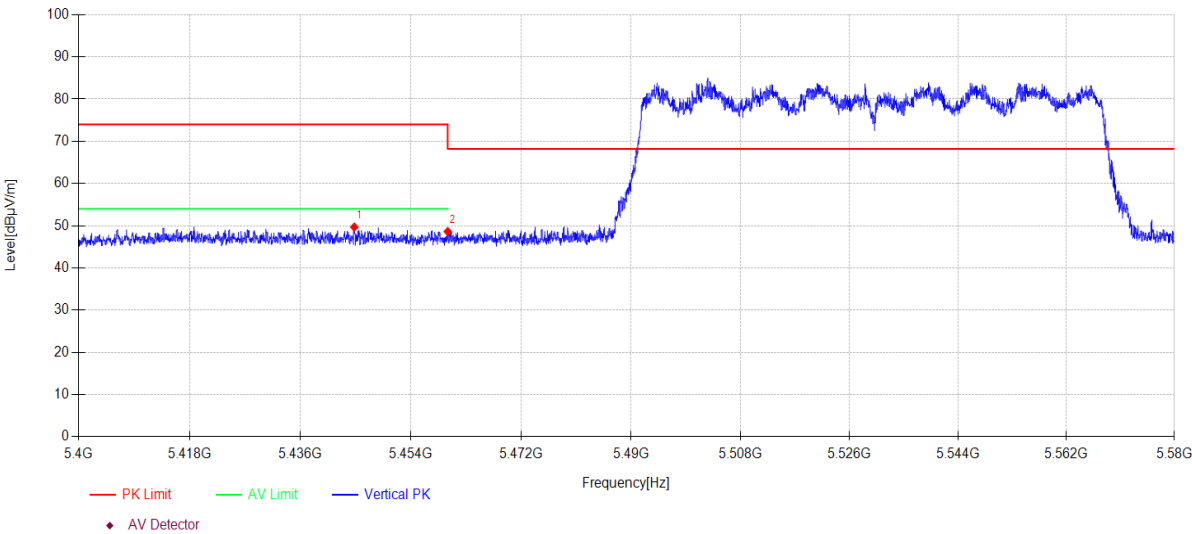

Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5444.766	10.95	33.01	5.73	0.00	49.69	74.00	24.31	PK	Vertical
2	5460.000	9.88	33.00	5.74	0.00	48.62	68.20	19.58	PK	Vertical

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-04-24

Tested By:

Juchang Du

EUT:

Senza Cloud Connector

Model Number:

SZC004

Test Mode:

11AC80 TX 5610MHz

Power Supply:

DC 5V

Condition:

Temp:23.5°C;Humi:59.7%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24021902-2E\FCC ABOVE 1G 5G\53

Memo:

Sample Number:S24021902-002 Power Setting:38

Test Graph

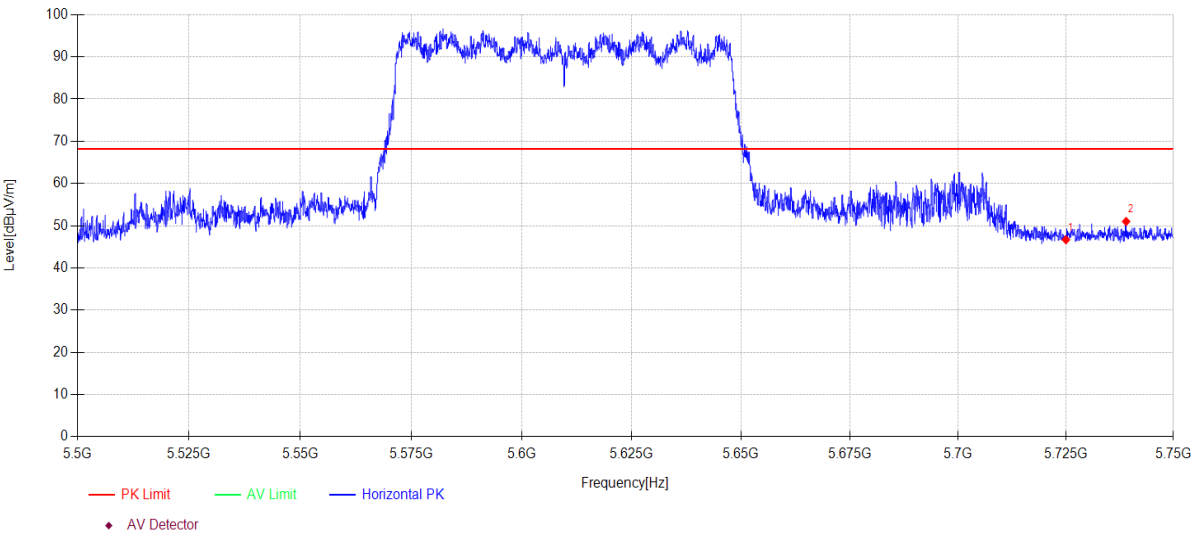

Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5725.000	7.06	33.75	5.87	0.00	46.68	68.20	21.52	PK	Horizontal
2	5739.000	11.29	33.83	5.88	0.00	51.00	68.20	17.20	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-04-24

Tested By:

Juchang Du

EUT:

Senza Cloud Connector

Model Number:

SZC004

Test Mode:

11AC80 TX 5610MHz

Power Supply:

DC 5V

Condition:

Temp:23.5°C;Humi:59.7%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24021902-2E\FCC ABOVE 1G 5G\54

Memo:

Sample Number:S24021902-002 Power Setting:38

Test Graph

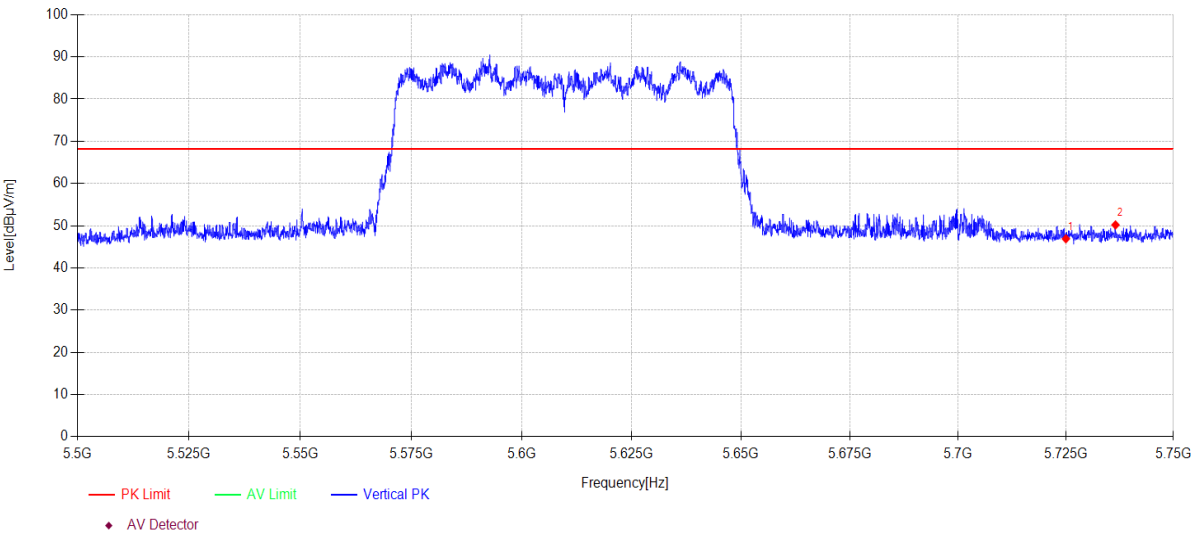

Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5725.000	7.28	33.75	5.87	0.00	46.90	68.20	21.30	PK	Vertical
2	5736.525	10.49	33.82	5.88	0.00	50.19	68.20	18.01	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-04-24

Tested By:

Juchang Du

EUT:

Senza Cloud Connector

Model Number:

SZC004

Test Mode:

11AC40 TX 5670MHz

Power Supply:

DC 5V

Condition:

Temp:23.5°C;Humi:59.7%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24021902-2E\FCC ABOVE 1G 5G\55

Memo:

Sample Number:S24021902-002 Power Setting:38

Test Graph

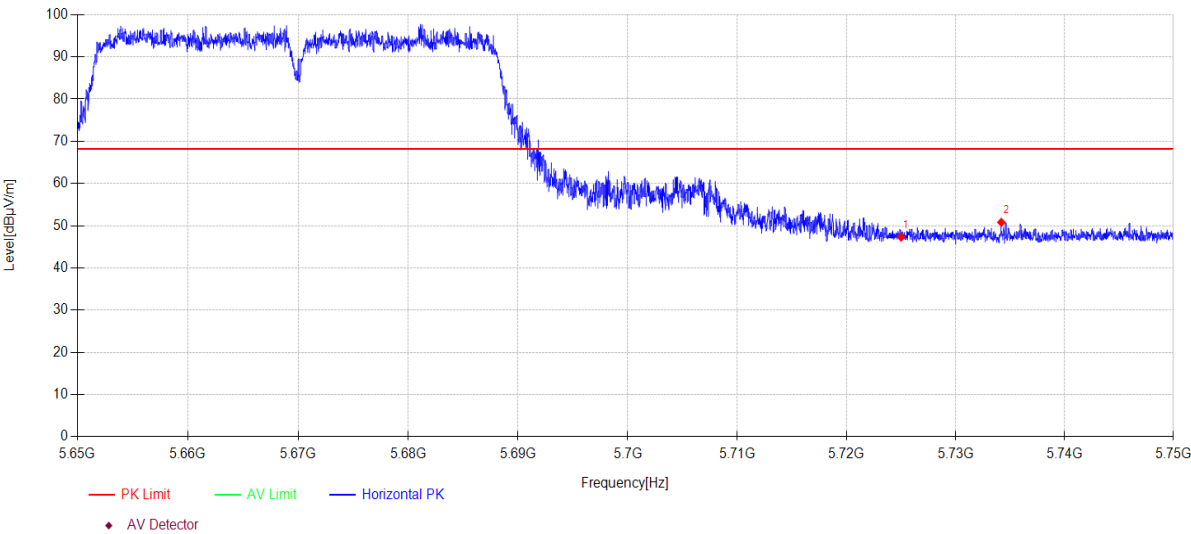

Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5725.000	7.66	33.75	5.87	0.00	47.28	68.20	20.92	PK	Horizontal
2	5734.190	11.11	33.81	5.88	0.00	50.80	68.20	17.40	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-04-24

Tested By:

Juchang Du

EUT:

Senza Cloud Connector

Model Number:

SZC004

Test Mode:

11AC40 TX 5670MHz

Power Supply:

DC 5V

Condition:

Temp:23.5°C;Humi:59.7%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24021902-2E\FCC ABOVE 1G 5G\56

Memo:

Sample Number:S24021902-002 Power Setting:38

Test Graph

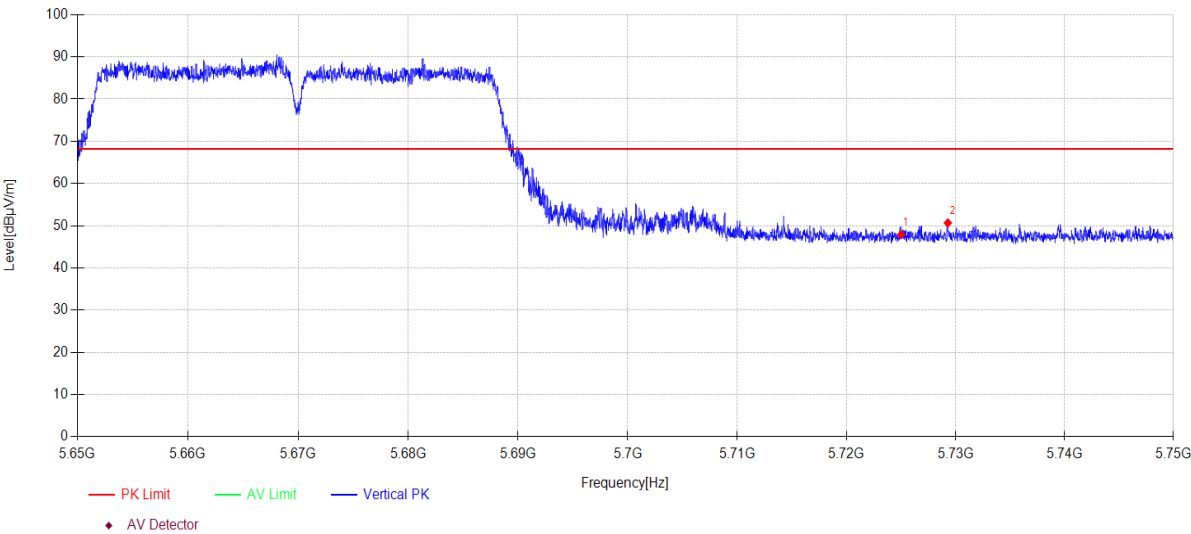

Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5725.000	8.28	33.75	5.87	0.00	47.90	68.20	20.30	PK	Vertical
2	5729.280	11.01	33.78	5.87	0.00	50.66	68.20	17.54	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-04-24

Tested By:

Juchang Du

EUT:

Senza Cloud Connector

Model Number:

SZC004

Test Mode:

11N40 TX 5670MHz

Power Supply:

DC 5V

Condition:

Temp:23.5°C;Humi:59.7%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24021902-2E\FCC ABOVE 1G 5G\57

Memo:

Sample Number:S24021902-002 Power Setting:38

Test Graph

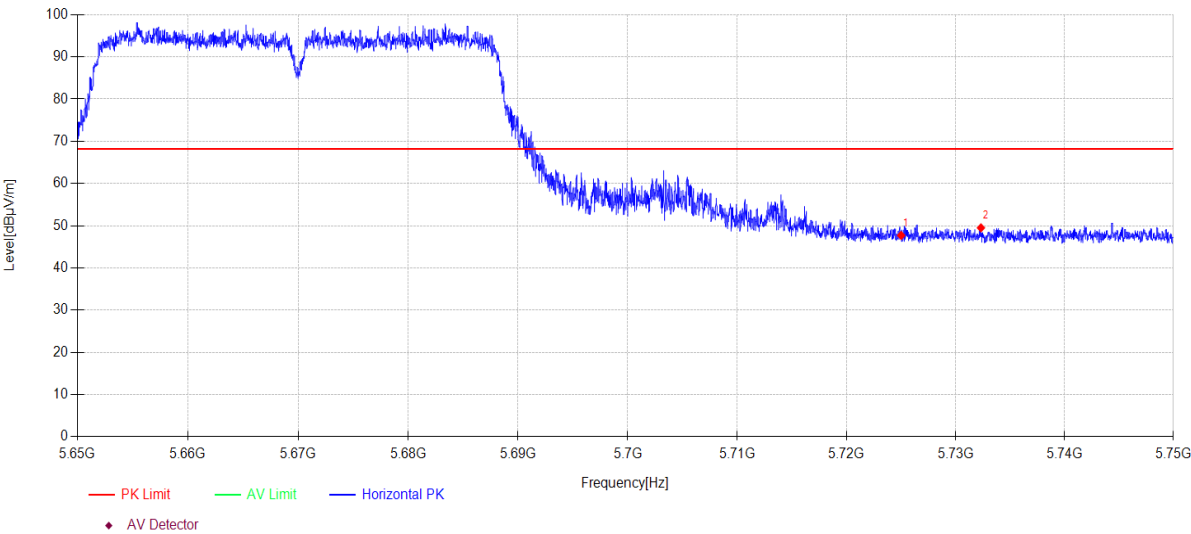

Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5725.000	8.09	33.75	5.87	0.00	47.71	68.20	20.49	PK	Horizontal
2	5732.320	9.83	33.79	5.88	0.00	49.50	68.20	18.70	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-04-24

Tested By:

Juchang Du

EUT:

Senza Cloud Connector

Model Number:

SZC004

Test Mode:

11N40 TX 5670MHz

Power Supply:

DC 5V

Condition:

Temp:23.5°C;Humi:59.7%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24021902-2E\FCC ABOVE 1G 5G\58

Memo:

Sample Number:S24021902-002 Power Setting:38

Test Graph

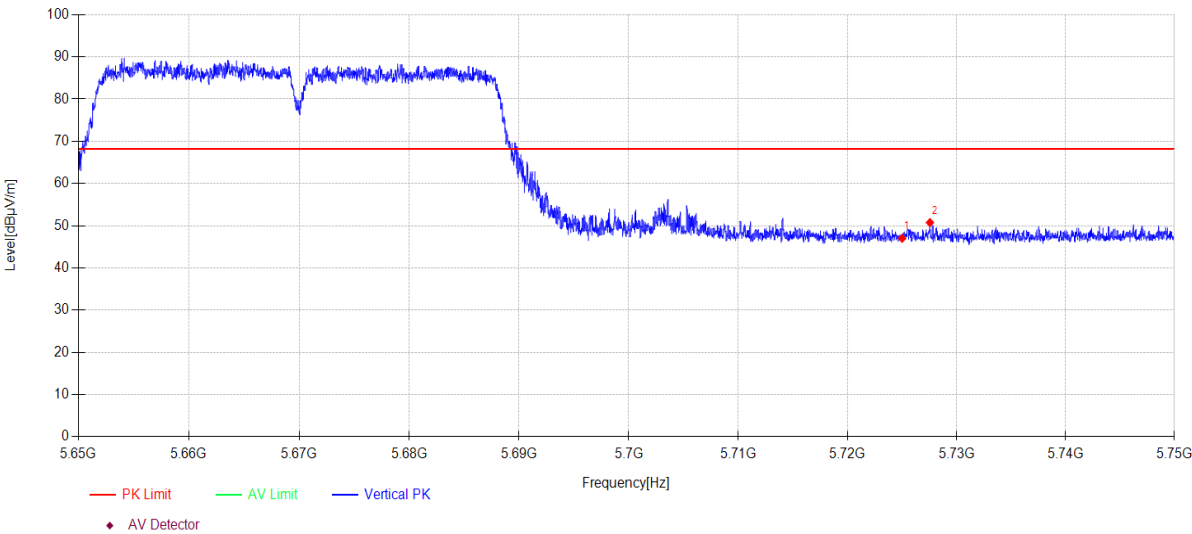

Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5725.000	7.39	33.75	5.87	0.00	47.01	68.20	21.19	PK	Vertical
2	5727.550	11.11	33.77	5.87	0.00	50.75	68.20	17.45	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-04-24

Tested By:

Juchang Du

EUT:

Senza Cloud Connector

Model Number:

SZC004

Test Mode:

11N20 TX 5700MHz

Power Supply:

DC 5V

Condition:

Temp:23.5°C;Humi:59.7%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24021902-2E\FCC ABOVE 1G 5G\59

Memo:

Sample Number:S24021902-002 Power Setting:38

Test Graph

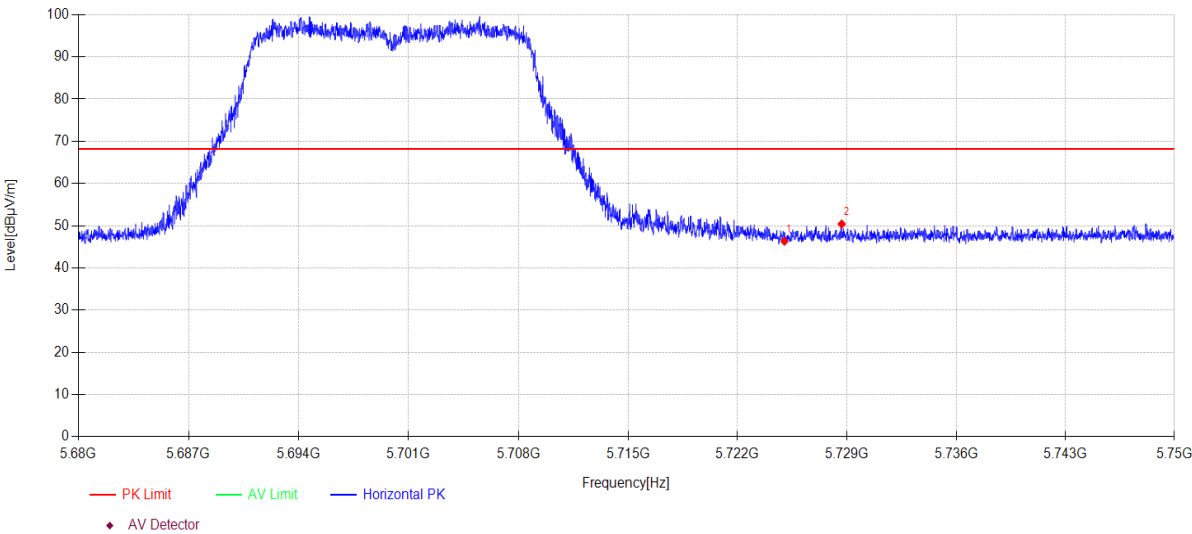

Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5725.000	6.70	33.75	5.87	0.00	46.32	68.20	21.88	PK	Horizontal
2	5728.664	10.76	33.77	5.87	0.00	50.40	68.20	17.80	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-04-24

Tested By:

Juchang Du

EUT:

Senza Cloud Connector

Model Number:

SZC004

Test Mode:

11N20 TX 5700MHz

Power Supply:

DC 5V

Condition:

Temp:23.5°C;Humi:59.7%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24021902-2E\FCC ABOVE 1G 5G\60

Memo:

Sample Number:S24021902-002 Power Setting:38

Test Graph

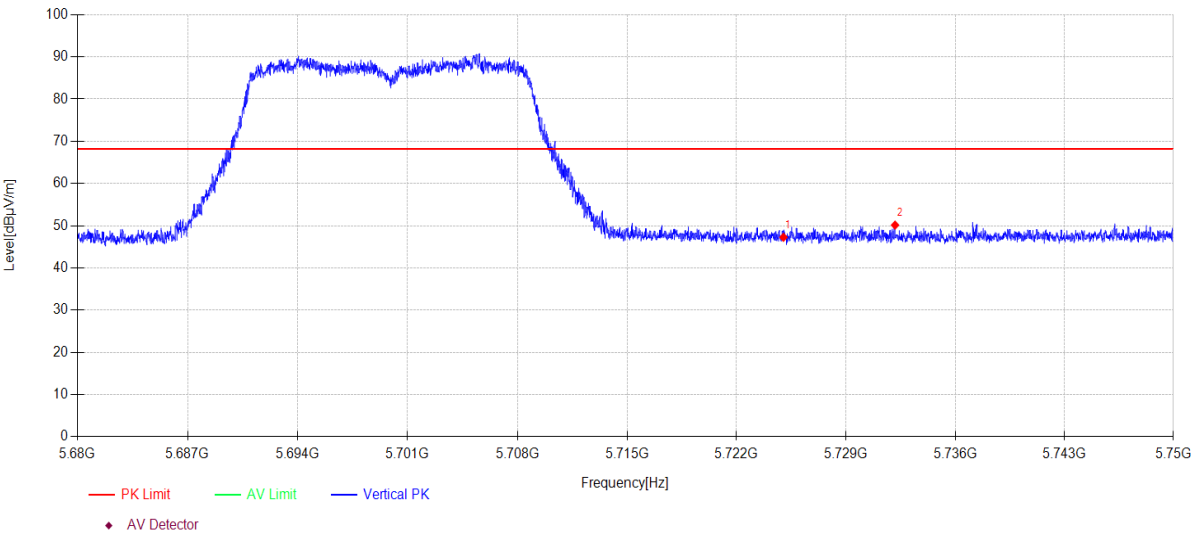

Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5725.000	7.64	33.75	5.87	0.00	47.26	68.20	20.94	PK	Vertical
2	5732.143	10.47	33.79	5.88	0.00	50.14	68.20	18.06	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-04-24

Tested By:

Juchang Du

EUT:

Senza Cloud Connector

Model Number:

SZC004

Test Mode:

11AC20 TX 5700MHz

Power Supply:

DC 5V

Condition:

Temp:23.5°C;Humi:59.7%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24021902-2E\FCC ABOVE 1G 5G\61

Memo:

Sample Number:S24021902-002 Power Setting:38

Test Graph

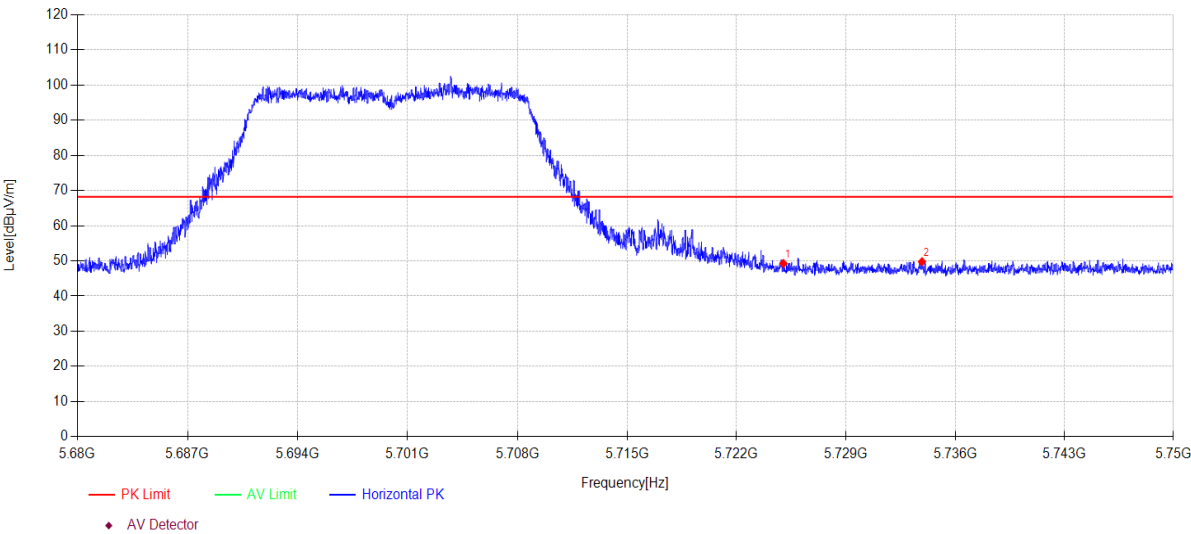

Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5725.000	9.65	33.75	5.87	0.00	49.27	68.20	18.93	PK	Horizontal
2	5733.872	10.09	33.80	5.88	0.00	49.77	68.20	18.43	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-04-24

Tested By:

Juchang Du

EUT:

Senza Cloud Connector

Model Number:

SZC004

Test Mode:

11AC20 TX 5700MHz

Power Supply:

DC 5V

Condition:

Temp:23.5°C;Humi:59.7%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24021902-2E\FCC ABOVE 1G 5G\62

Memo:

Sample Number:S24021902-002 Power Setting:38

Test Graph

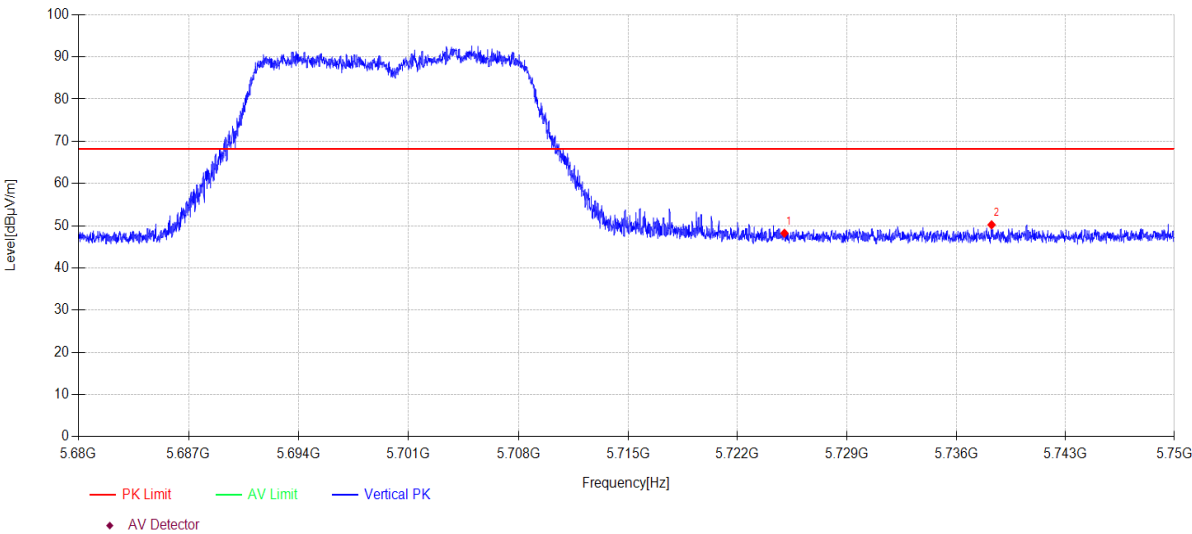

Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5725.000	8.61	33.75	5.87	0.00	48.23	68.20	19.97	PK	Vertical
2	5738.268	10.50	33.83	5.88	0.00	50.21	68.20	17.99	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:2024-04-29

Tested By:Juchang Du

EUT:Senza Cloud Connector

Model Number:SZC004

Test Mode:11AC20 TX 5720MHz

Power Supply:DC 5V


Condition:Temp:23.5°C;Humi:59.7%

Test Site:DDT 3# Chamber

File Path:d:\ts\2024 report data\Q24021902-2E\FCC ABOVE 1G 5G 5720\3

Memo:Sample Number:S24021902-002 Power Setting:38

Test Graph

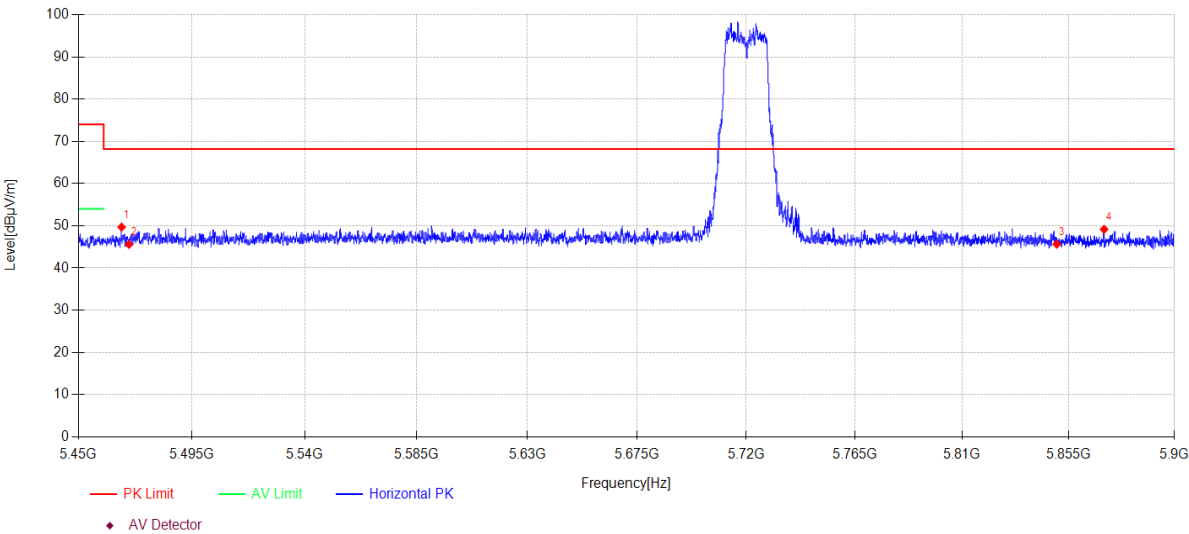

Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5467.100	10.93	33.00	5.74	0.00	49.67	68.20	18.53	PK	Horizontal
2	5470.000	6.83	33.00	5.75	0.00	45.58	68.20	22.62	PK	Horizontal
3	5850.000	5.68	34.00	5.94	0.00	45.62	68.20	22.58	PK	Horizontal
4	5870.075	9.16	34.04	5.95	0.00	49.15	68.20	19.05	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:2024-04-29

Tested By:Juchang Du

EUT:Senza Cloud Connector

Model Number:SZC004

Test Mode:11AC20 TX 5720MHz

Power Supply:DC 5V


Condition:Temp:23.5°C;Humi:59.7%

Test Site:DDT 3# Chamber

File Path:d:\ts\2024 report data\Q24021902-2E\FCC ABOVE 1G 5G 5720\4

Memo:Sample Number:S24021902-002 Power Setting:38

Test Graph

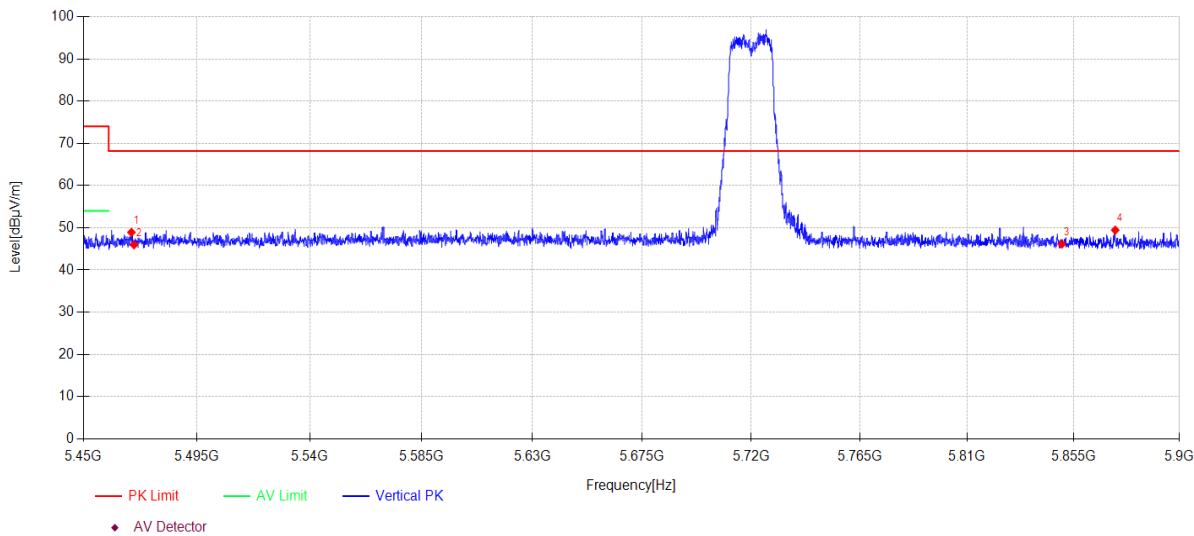

Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5468.990	10.16	33.00	5.74	0.00	48.90	68.20	19.30	PK	Vertical
2	5470.000	7.21	33.00	5.75	0.00	45.96	68.20	22.24	PK	Vertical
3	5850.000	6.18	34.00	5.94	0.00	46.12	68.20	22.08	PK	Vertical
4	5872.685	9.44	34.05	5.95	0.00	49.44	68.20	18.76	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-04-29

Tested By:

Juchang Du

EUT:

Senza Cloud Connector

Model Number:

SZC004

Test Mode:

11A TX 5720MHz

Power Supply:

DC 5V

Condition:

Temp:23.5°C;Humi:59.7%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24021902-2E\FCC ABOVE 1G 5G 5720\5

Memo:

Sample Number:S24021902-002 Power Setting:38

Test Graph

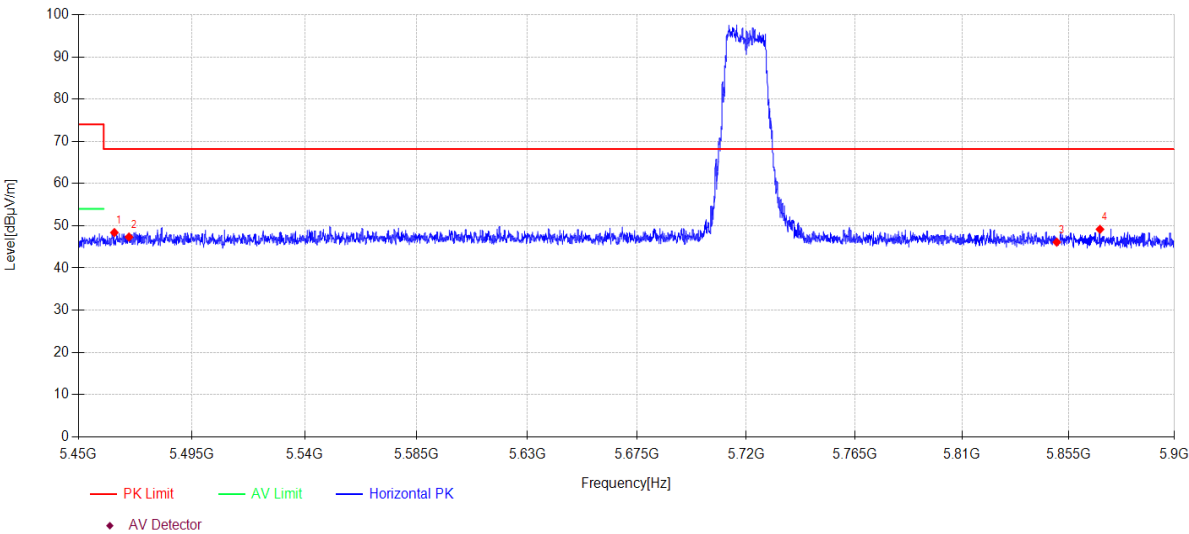

Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5464.220	9.64	33.00	5.74	0.00	48.38	68.20	19.82	PK	Horizontal
2	5470.000	8.58	33.00	5.75	0.00	47.33	68.20	20.87	PK	Horizontal
3	5850.000	6.17	34.00	5.94	0.00	46.11	68.20	22.09	PK	Horizontal
4	5868.320	9.17	34.04	5.94	0.00	49.15	68.20	19.05	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-04-29

Tested By:

Juchang Du

EUT:

Senza Cloud Connector

Model Number:

SZC004

Test Mode:

11A TX 5720MHz

Power Supply:

DC 5V

Condition:

Temp:23.5°C;Humi:59.7%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24021902-2E\FCC ABOVE 1G 5G 5720\6

Memo:

Sample Number:S24021902-002 Power Setting:38

Test Graph

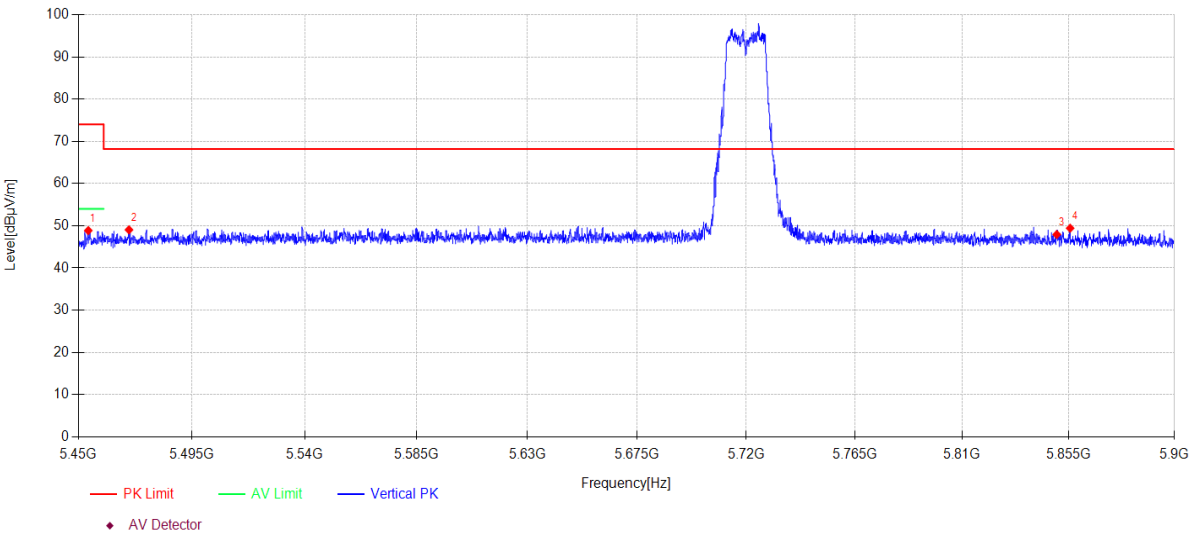

Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5453.915	10.11	33.00	5.74	0.00	48.85	74.00	25.15	PK	Vertical
2	5470.000	10.28	33.00	5.75	0.00	49.03	68.20	19.17	PK	Vertical
3	5850.000	7.98	34.00	5.94	0.00	47.92	68.20	20.28	PK	Vertical
4	5855.675	9.46	34.01	5.94	0.00	49.41	68.20	18.79	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-04-29

Tested By:

Juchang Du

EUT:

Senza Cloud Connector

Model Number:

SZC004

Test Mode:

11N20 TX 5720MHz

Power Supply:

DC 5V

Condition:

Temp:23.5°C;Humi:59.7%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24021902-2E\FCC ABOVE 1G 5G 5720\7

Memo:

Sample Number:S24021902-002 Power Setting:38

Test Graph

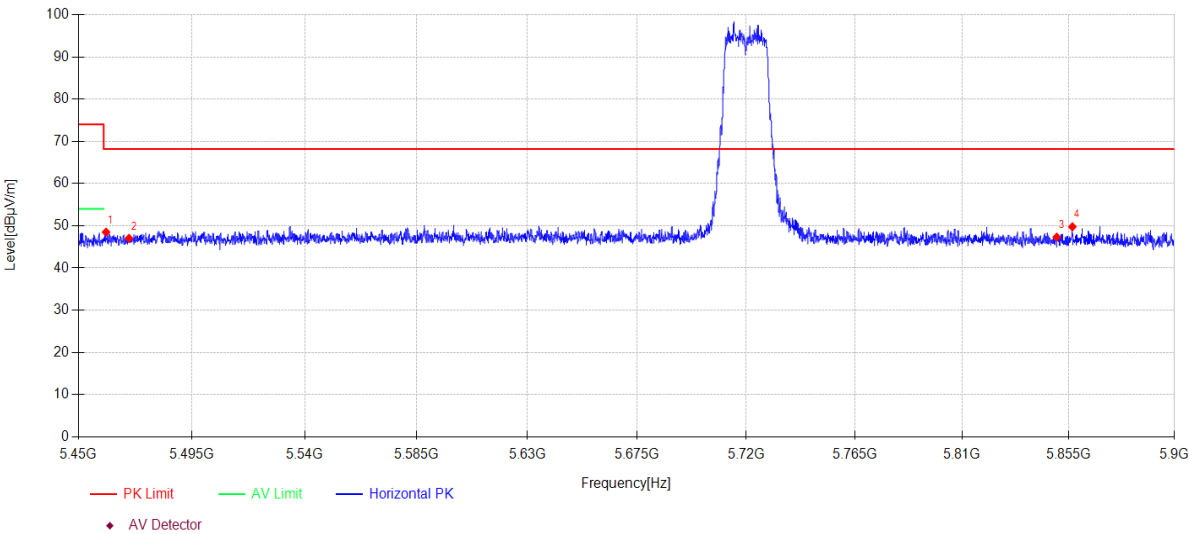

Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5460.935	9.74	33.00	5.74	0.00	48.48	68.20	19.72	PK	Horizontal
2	5470.000	8.26	33.00	5.75	0.00	47.01	68.20	21.19	PK	Horizontal
3	5850.000	7.36	34.00	5.94	0.00	47.30	68.20	20.90	PK	Horizontal
4	5856.620	9.81	34.01	5.94	0.00	49.76	68.20	18.44	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-04-29

Tested By:

Juchang Du

EUT:

Senza Cloud Connector

Model Number:

SZC004

Test Mode:

11N20 TX 5720MHz

Power Supply:

DC 5V

Condition:

Temp:23.5°C;Humi:59.7%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24021902-2E\FCC ABOVE 1G 5G 5720\8

Memo:

Sample Number:S24021902-002 Power Setting:38

Test Graph

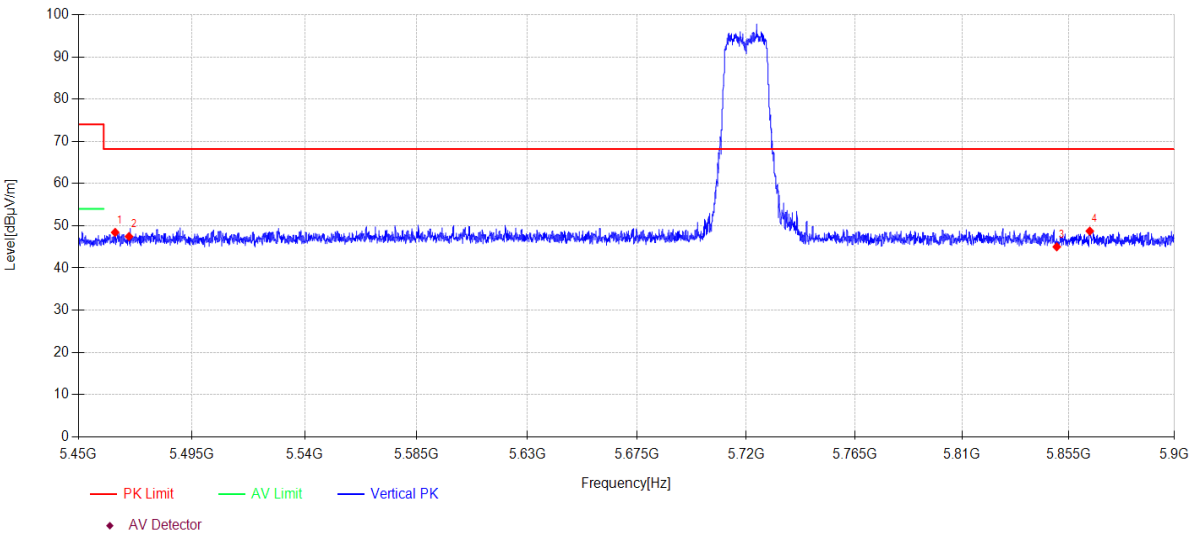

Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5464.535	9.68	33.00	5.74	0.00	48.42	68.20	19.78	PK	Vertical
2	5470.000	8.69	33.00	5.75	0.00	47.44	68.20	20.76	PK	Vertical
3	5850.000	5.07	34.00	5.94	0.00	45.01	68.20	23.19	PK	Vertical
4	5864.000	8.76	34.03	5.94	0.00	48.73	68.20	19.47	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-04-29

Tested By:

Juchang Du

EUT:

Senza Cloud Connector

Model Number:

SZC004

Test Mode:

11N40 TX 5710MHz

Power Supply:

DC 5V

Condition:

Temp:23.5°C;Humi:59.7%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24021902-2E\FCC ABOVE 1G 5G 5720\9

Memo:

Sample Number:S24021902-002 Power Setting:38

Test Graph

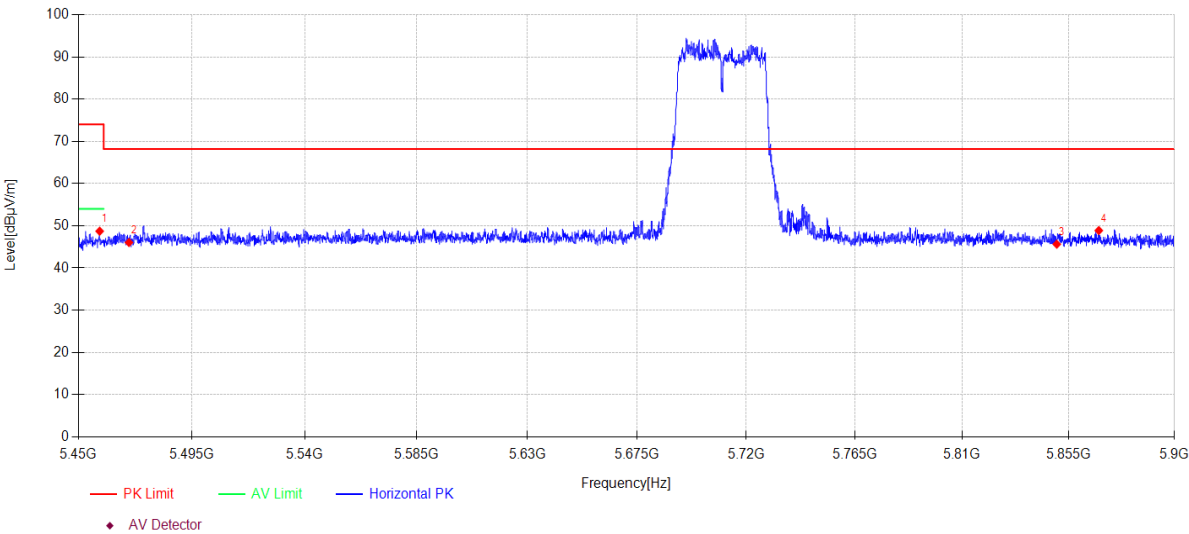

Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5458.415	9.96	33.00	5.74	0.00	48.70	74.00	25.30	PK	Horizontal
2	5470.000	7.27	33.00	5.75	0.00	46.02	68.20	22.18	PK	Horizontal
3	5850.000	5.68	34.00	5.94	0.00	45.62	68.20	22.58	PK	Horizontal
4	5867.825	8.88	34.04	5.94	0.00	48.86	68.20	19.34	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-04-29

Tested By:

Juchang Du

EUT:

Senza Cloud Connector

Model Number:

SZC004

Test Mode:

11N40 TX 5710MHz

Power Supply:

DC 5V

Condition:

Temp:23.5°C;Humi:59.7%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24021902-2E\FCC ABOVE 1G 5G 5720\10

Memo:

Sample Number:S24021902-002 Power Setting:38

Test Graph

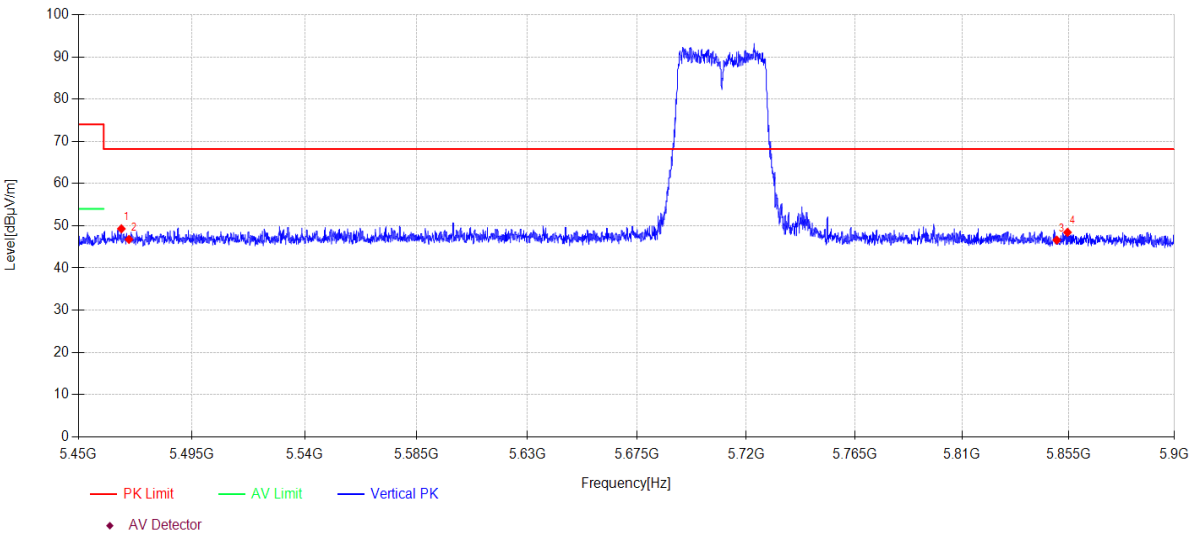

Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5467.010	10.53	33.00	5.74	0.00	49.27	68.20	18.93	PK	Vertical
2	5470.000	8.01	33.00	5.75	0.00	46.76	68.20	21.44	PK	Vertical
3	5850.000	6.65	34.00	5.94	0.00	46.59	68.20	21.61	PK	Vertical
4	5854.550	8.48	34.01	5.94	0.00	48.43	68.20	19.77	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-04-29

Tested By:

Juchang Du

EUT:

Senza Cloud Connector

Model Number:

SZC004

Test Mode:

11AC40 TX 5710MHz

Power Supply:

DC 5V

Condition:

Temp:23.5°C;Humi:59.7%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24021902-2E\FCC ABOVE 1G 5G 5720\11

Memo:

Sample Number:S24021902-002 Power Setting:38

Test Graph

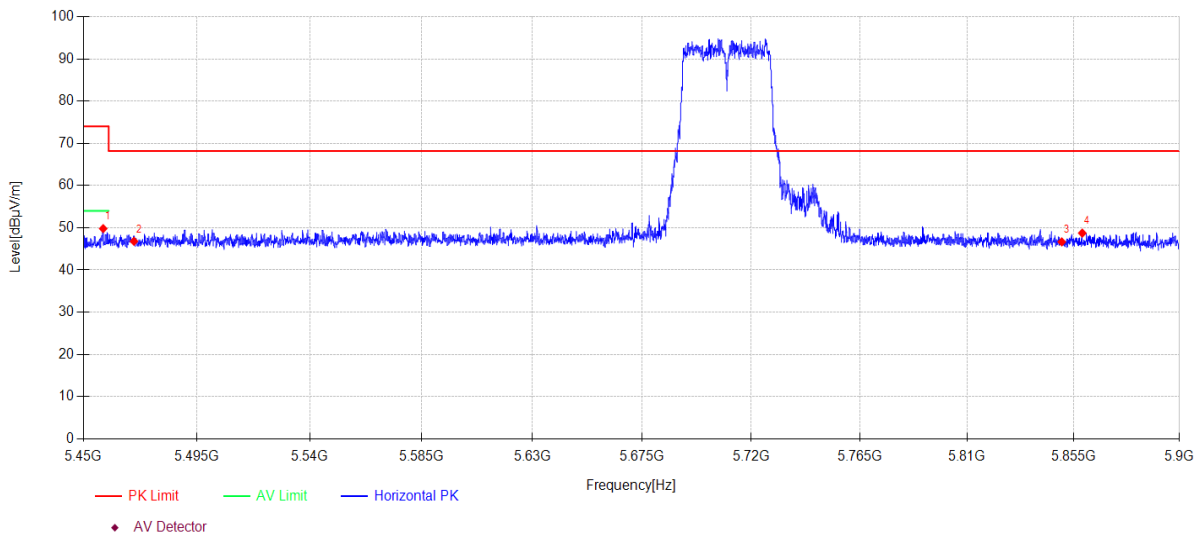

Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5457.830	11.05	33.00	5.74	0.00	49.79	74.00	24.21	PK	Horizontal
2	5470.000	8.04	33.00	5.75	0.00	46.79	68.20	21.41	PK	Horizontal
3	5850.000	6.71	34.00	5.94	0.00	46.65	68.20	21.55	PK	Horizontal
4	5858.690	8.77	34.02	5.94	0.00	48.73	68.20	19.47	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-04-29

Tested By:

Juchang Du

EUT:

Senza Cloud Connector

Model Number:

SZC004

Test Mode:

11AC40 TX 5710MHz

Power Supply:

DC 5V

Condition:

Temp:23.5°C;Humi:59.7%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24021902-2E\FCC ABOVE 1G 5G 5720\12

Memo:

Sample Number:S24021902-002 Power Setting:38

Test Graph

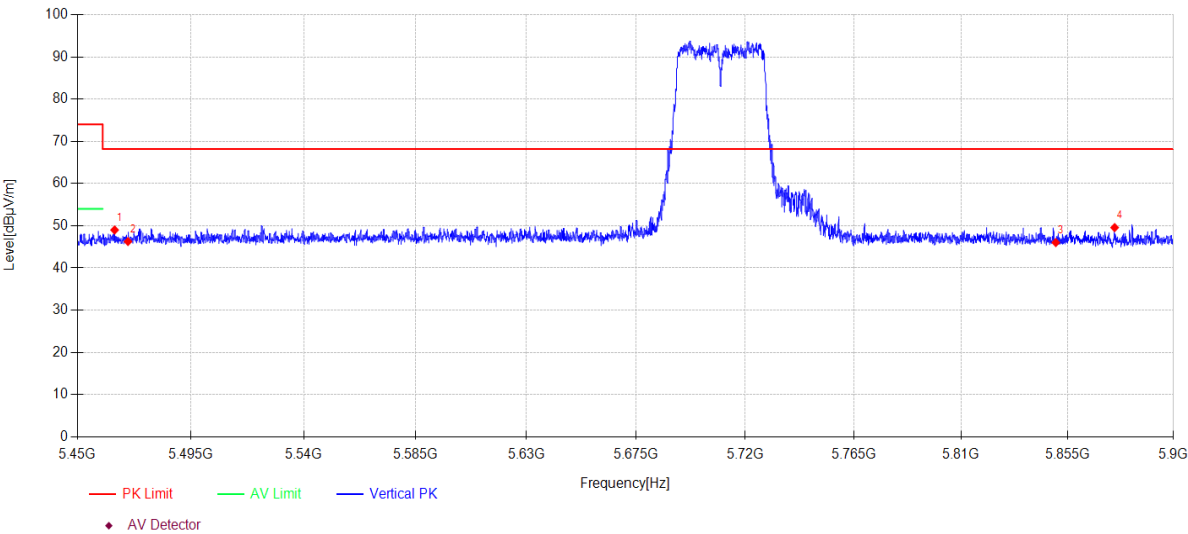

Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5464.715	10.25	33.00	5.74	0.00	48.99	68.20	19.21	PK	Vertical
2	5470.000	7.51	33.00	5.75	0.00	46.26	68.20	21.94	PK	Vertical
3	5850.000	6.08	34.00	5.94	0.00	46.02	68.20	22.18	PK	Vertical
4	5874.980	9.56	34.05	5.95	0.00	49.56	68.20	18.64	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-04-29

Tested By:

Juchang Du

EUT:

Senza Cloud Connector

Model Number:

SZC004

Test Mode:

11AC80 TX 5690MHz

Power Supply:

DC 5V

Condition:

Temp:23.5°C;Humi:59.7%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24021902-2E\FCC ABOVE 1G 5G 5720\13

Memo:

Sample Number:S24021902-002 Power Setting:38

Test Graph

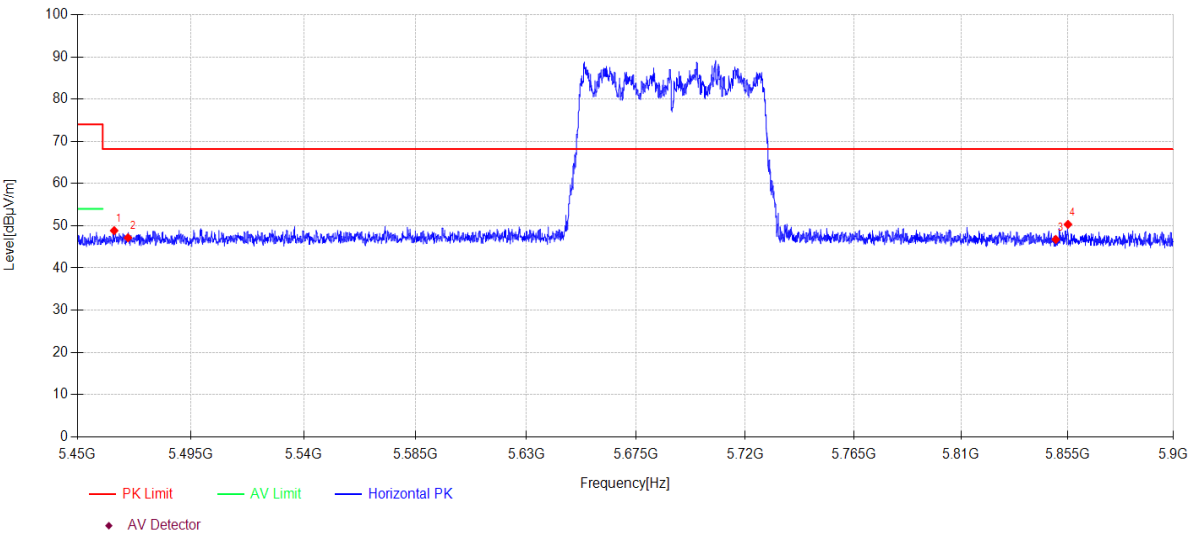

Data List										
N O.	Freq. [MHz]	Reading [dBµV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Detector	Polarity
1	5464.535	10.10	33.00	5.74	0.00	48.84	68.20	19.36	PK	Horizontal
2	5470.000	8.40	33.00	5.75	0.00	47.15	68.20	21.05	PK	Horizontal
3	5850.000	6.81	34.00	5.94	0.00	46.75	68.20	21.45	PK	Horizontal
4	5855.180	10.37	34.01	5.94	0.00	50.32	68.20	17.88	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-04-29

Tested By:

Juchang Du

EUT:

Senza Cloud Connector

Model Number:

SZC004

Test Mode:

11AC80 TX 5690MHz

Power Supply:

DC 5V

Condition:

Temp:23.5°C;Humi:59.7%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24021902-2E\FCC ABOVE 1G 5G 5720\14

Memo:

Sample Number:S24021902-002 Power Setting:38

Test Graph

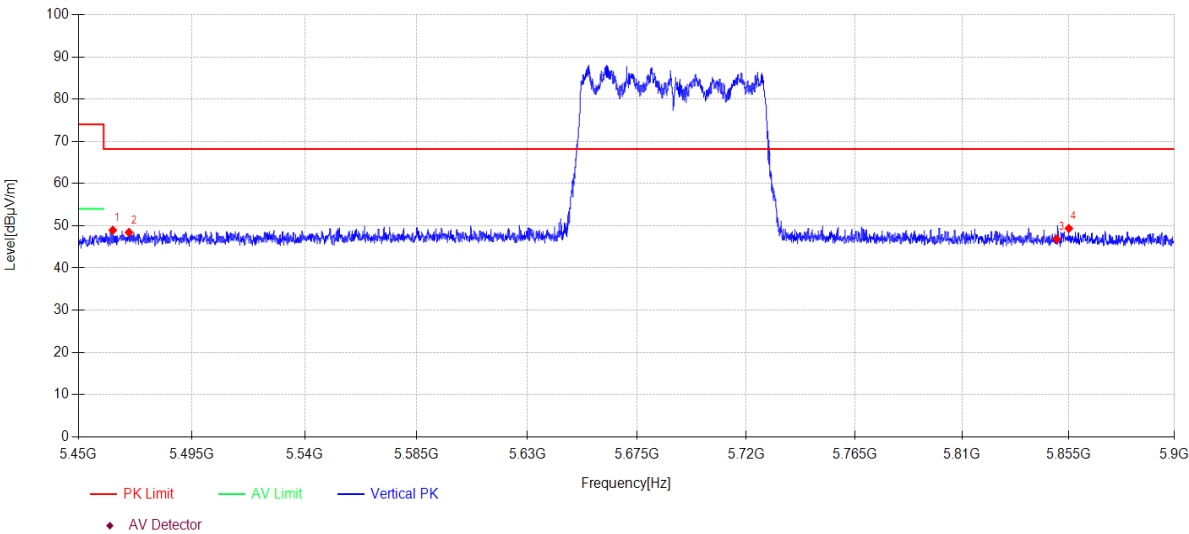

Data List										
N O.	Freq. [MHz]	Reading [dBµV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Detector	Polarity
1	5463.590	10.20	33.00	5.74	0.00	48.94	68.20	19.26	PK	Vertical
2	5470.000	9.68	33.00	5.75	0.00	48.43	68.20	19.77	PK	Vertical
3	5850.000	6.89	34.00	5.94	0.00	46.83	68.20	21.37	PK	Vertical
4	5855.135	9.39	34.01	5.94	0.00	49.34	68.20	18.86	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-04-24

Tested By:

Juchang Du

EUT:

Senza Cloud Connector

Model Number:

SZC004

Test Mode:

11AC20 TX 5745MHz

Power Supply:

DC 5V

Condition:

Temp:23.5°C;Humi:59.7%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24021902-2E\FCC ABOVE 1G 5.8G\7

Memo:

Sample Number:S24021902-002 Power Setting:38

Test Graph

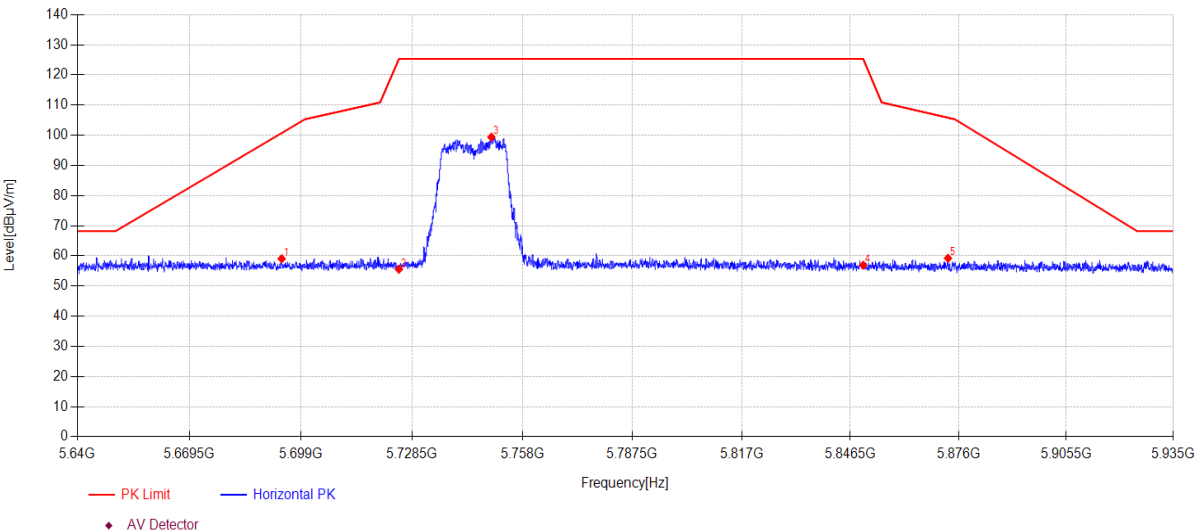

Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5693.867	19.61	33.58	5.86	0.00	59.05	100.75	41.70	PK	Horizontal
2	5725.000	15.95	33.75	5.87	0.00	55.57	125.30	69.73	PK	Horizontal
3	5749.681	59.61	33.90	5.88	0.00	99.39	125.30	25.91	PK	Horizontal
4	5850.000	16.96	34.00	5.94	0.00	56.90	125.27	68.37	PK	Horizontal
5	5873.109	19.21	34.05	5.95	0.00	59.21	105.83	46.62	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-04-24

Tested By:

Juchang Du

EUT:

Senza Cloud Connector

Model Number:

SZC004

Test Mode:

11AC20 TX 5745MHz

Power Supply:

DC 5V

Condition:

Temp:23.5°C;Humi:59.7%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24021902-2E\FCC ABOVE 1G 5.8G\8

Memo:

Sample Number:S24021902-002 Power Setting:38

Test Graph

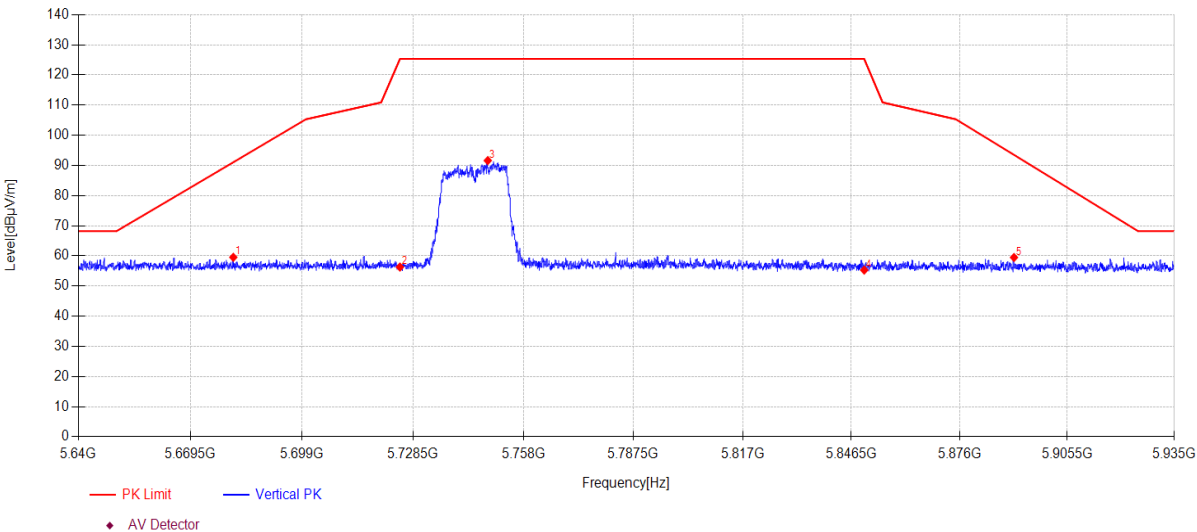

Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5680.799	20.17	33.52	5.85	0.00	59.54	91.05	31.51	PK	Vertical
2	5725.000	16.68	33.75	5.87	0.00	56.30	125.30	69.00	PK	Vertical
3	5748.442	51.85	33.89	5.88	0.00	91.62	125.30	33.68	PK	Vertical
4	5850.000	15.35	34.00	5.94	0.00	55.29	125.27	69.98	PK	Vertical
5	5890.898	19.43	34.08	5.96	0.00	59.47	93.50	34.03	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-04-24

Tested By:

Juchang Du

EUT:

Senza Cloud Connector

Model Number:

SZC004

Test Mode:

11AC20 TX 5785MHz

Power Supply:

DC 5V

Condition:

Temp:23.5°C;Humi:59.7%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24021902-2E\FCC ABOVE 1G 5.8G\9

Memo:

Sample Number:S24021902-002 Power Setting:38

Test Graph

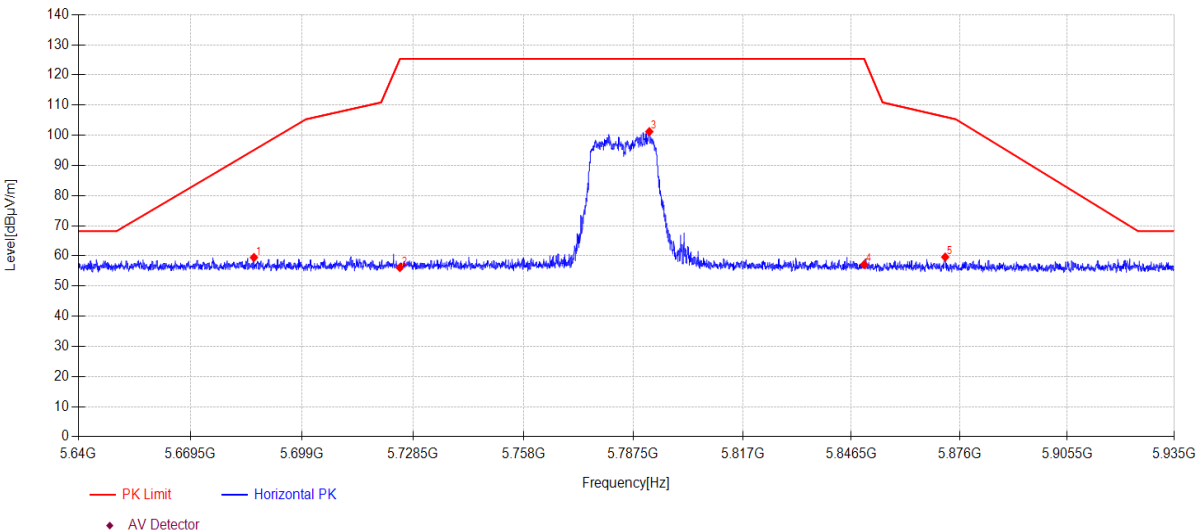

Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5686.256	20.06	33.55	5.85	0.00	59.46	95.10	35.64	PK	Horizontal
2	5725.000	16.50	33.75	5.87	0.00	56.12	125.30	69.18	PK	Horizontal
3	5791.807	61.15	34.15	5.91	0.00	101.21	125.30	24.09	PK	Horizontal
4	5850.000	17.18	34.00	5.94	0.00	57.12	125.27	68.15	PK	Horizontal
5	5872.077	19.61	34.04	5.95	0.00	59.60	106.12	46.52	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-04-24

Tested By:

Juchang Du

EUT:

Senza Cloud Connector

Model Number:

SZC004

Test Mode:

11AC20 TX 5785MHz

Power Supply:

DC 5V

Condition:

Temp:23.5°C;Humi:59.7%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24021902-2E\FCC ABOVE 1G 5.8G\10

Memo:

Sample Number:S24021902-002 Power Setting:38

Test Graph

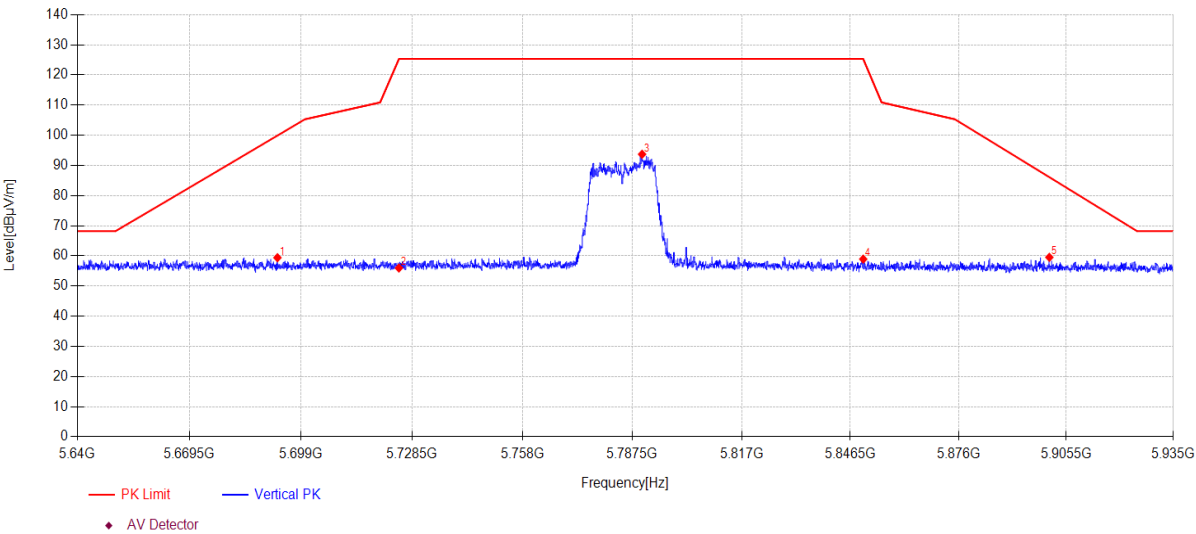

Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5692.746	19.97	33.57	5.86	0.00	59.40	99.92	40.52	PK	Vertical
2	5725.000	16.35	33.75	5.87	0.00	55.97	125.30	69.33	PK	Vertical
3	5790.126	53.66	34.14	5.91	0.00	93.71	125.30	31.59	PK	Vertical
4	5850.000	18.99	34.00	5.94	0.00	58.93	125.27	66.34	PK	Vertical
5	5900.869	19.46	34.10	5.96	0.00	59.52	86.11	26.59	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-04-24

Tested By:

Juchang Du

EUT:

Senza Cloud Connector

Model Number:

SZC004

Test Mode:

11AC20 TX 5825MHz

Power Supply:

DC 5V

Condition:

Temp:23.5°C;Humi:59.7%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24021902-2E\FCC ABOVE 1G 5.8G\11

Memo:

Sample Number:S24021902-002 Power Setting:38

Test Graph

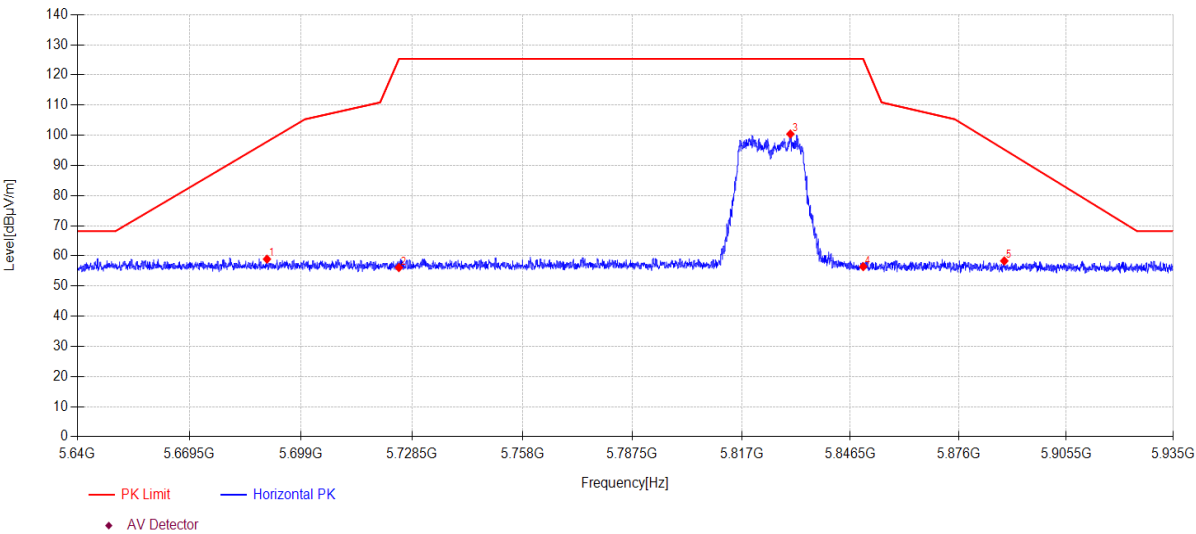

Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5689.973	19.51	33.56	5.85	0.00	58.92	97.86	38.94	PK	Horizontal
2	5725.000	16.50	33.75	5.87	0.00	56.12	125.30	69.18	PK	Horizontal
3	5830.216	60.40	34.08	5.93	0.00	100.41	125.30	24.89	PK	Horizontal
4	5850.000	16.49	34.00	5.94	0.00	56.43	125.27	68.84	PK	Horizontal
5	5888.508	18.30	34.08	5.95	0.00	58.33	95.28	36.95	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-04-24

Tested By:

Juchang Du

EUT:

Senza Cloud Connector

Model Number:

SZC004

Test Mode:

11AC20 TX 5825MHz

Power Supply:

DC 5V

Condition:

Temp:23.5°C;Humi:59.7%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24021902-2E\FCC ABOVE 1G 5.8G\12

Memo:

Sample Number:S24021902-002 Power Setting:38

Test Graph

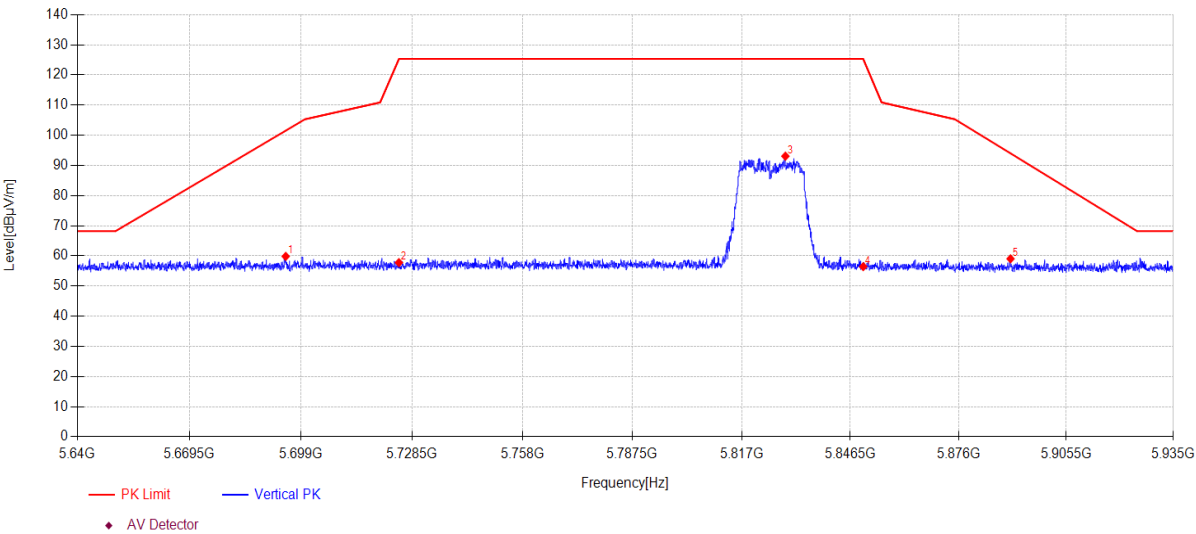

Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5694.929	20.40	33.58	5.86	0.00	59.84	101.54	41.70	PK	Vertical
2	5725.000	18.15	33.75	5.87	0.00	57.77	125.30	67.53	PK	Vertical
3	5828.859	53.07	34.08	5.92	0.00	93.07	125.30	32.23	PK	Vertical
4	5850.000	16.50	34.00	5.94	0.00	56.44	125.27	68.83	PK	Vertical
5	5890.219	19.00	34.08	5.96	0.00	59.04	94.01	34.97	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-04-24

Tested By:

Juchang Du

EUT:

Senza Cloud Connector

Model Number:

SZC004

Test Mode:

11A TX 5745MHz

Power Supply:

DC 5V

Condition:

Temp:23.5°C;Humi:59.7%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24021902-2E\FCC ABOVE 1G 5.8G\13

Memo:

Sample Number:S24021902-002 Power Setting:38

Test Graph

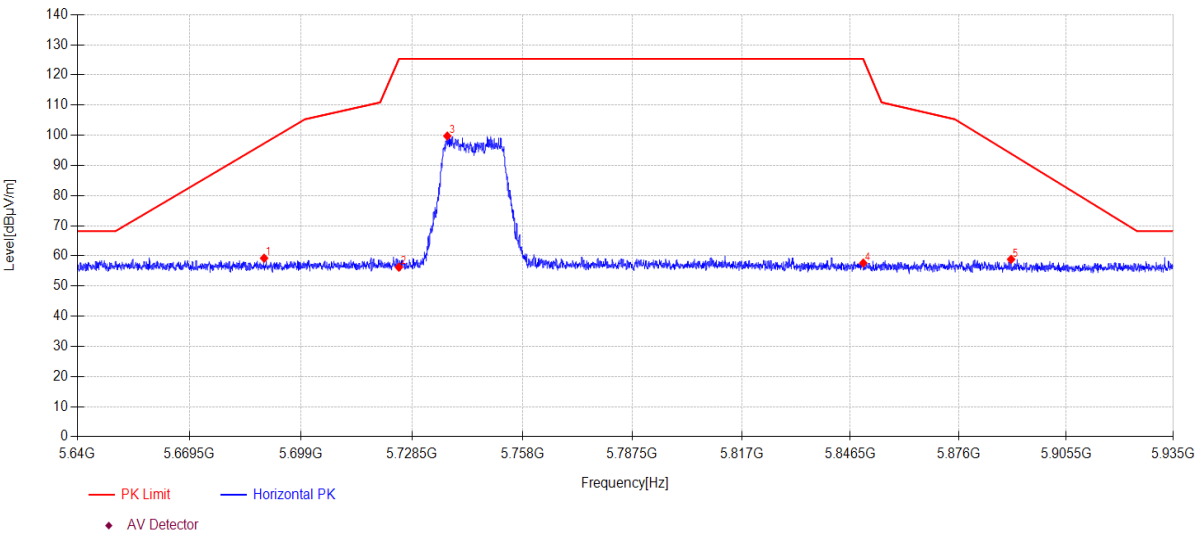

Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5689.206	19.83	33.56	5.85	0.00	59.24	97.29	38.05	PK	Horizontal
2	5725.000	16.62	33.75	5.87	0.00	56.24	125.30	69.06	PK	Horizontal
3	5737.911	60.04	33.83	5.88	0.00	99.75	125.30	25.55	PK	Horizontal
4	5850.000	17.68	34.00	5.94	0.00	57.62	125.27	67.65	PK	Horizontal
5	5890.367	18.81	34.08	5.96	0.00	58.85	93.90	35.05	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-04-24

Tested By:

Juchang Du

EUT:

Senza Cloud Connector

Model Number:

SZC004

Test Mode:

11A TX 5745MHz

Power Supply:

DC 5V

Condition:

Temp:23.5°C;Humi:59.7%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24021902-2E\FCC ABOVE 1G 5.8G\14

Memo:

Sample Number:S24021902-002 Power Setting:38

Test Graph

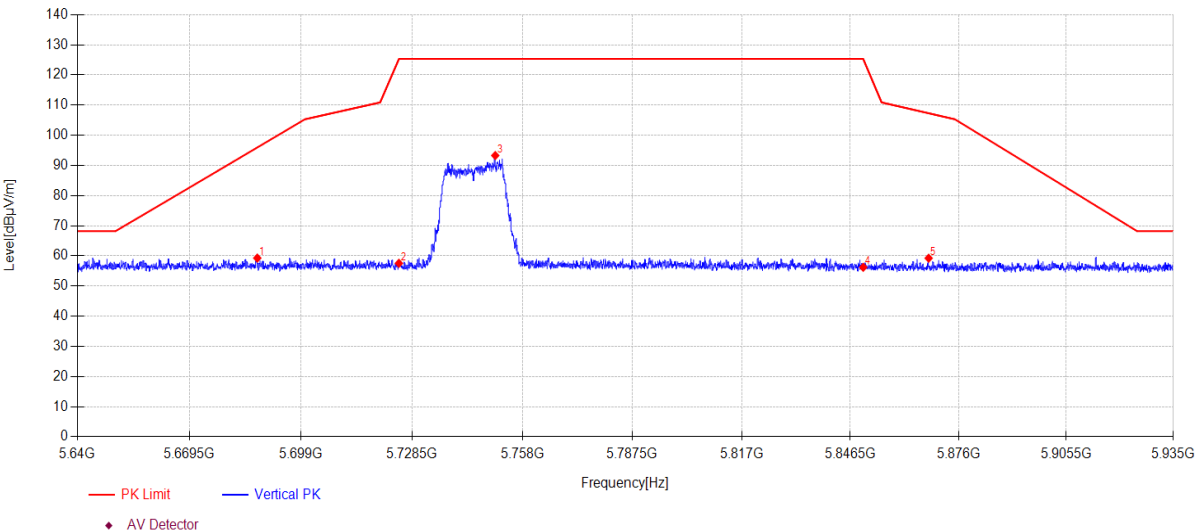

Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5687.407	19.88	33.55	5.85	0.00	59.28	95.96	36.68	PK	Vertical
2	5725.000	17.92	33.75	5.87	0.00	57.54	125.30	67.76	PK	Vertical
3	5750.714	53.49	33.90	5.89	0.00	93.28	125.30	32.02	PK	Vertical
4	5850.000	16.28	34.00	5.94	0.00	56.22	125.27	69.05	PK	Vertical
5	5867.829	19.26	34.04	5.94	0.00	59.24	107.31	48.07	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-04-24

Tested By:

Juchang Du

EUT:

Senza Cloud Connector

Model Number:

SZC004

Test Mode:

11A TX 5785MHz

Power Supply:

DC 5V

Condition:

Temp:23.5°C;Humi:59.7%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24021902-2E\FCC ABOVE 1G 5.8G\15

Memo:

Sample Number:S24021902-002 Power Setting:38

Test Graph

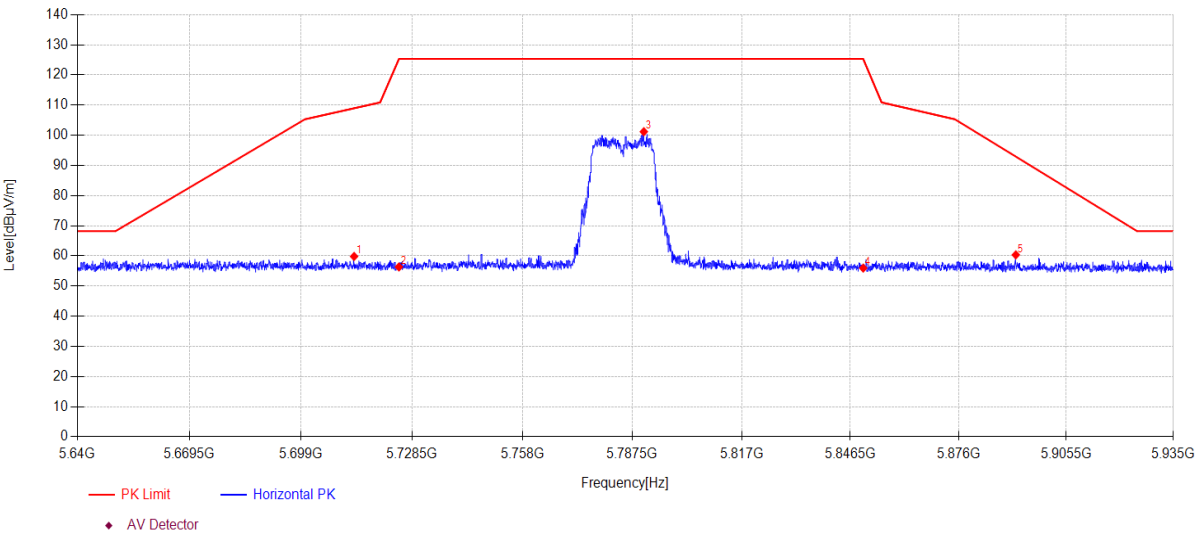

Data List										
N O.	Freq. [MHz]	Reading [dBµV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Detector	Polarity
1	5713.072	20.27	33.68	5.87	0.00	59.82	108.96	49.14	PK	Horizontal
2	5725.000	16.71	33.75	5.87	0.00	56.33	125.30	68.97	PK	Horizontal
3	5790.598	61.13	34.14	5.91	0.00	101.18	125.30	24.12	PK	Horizontal
4	5850.000	16.02	34.00	5.94	0.00	55.96	125.27	69.31	PK	Horizontal
5	5891.665	20.30	34.08	5.96	0.00	60.34	92.93	32.59	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:2024-04-24Tested By:Juchang Du

EUT:Senza Cloud ConnectorModel Number:SZC004


Test Mode:11A TX 5785MHzPower Supply:DC 5V

Condition:Temp:23.5°C;Humi:59.7%Test Site:DDT 3# Chamber

File Path:d:\ts\2024 report data\Q24021902-2E\FCC ABOVE 1G 5.8G\16

Memo:Sample Number:S24021902-002 Power Setting:38

Test Graph

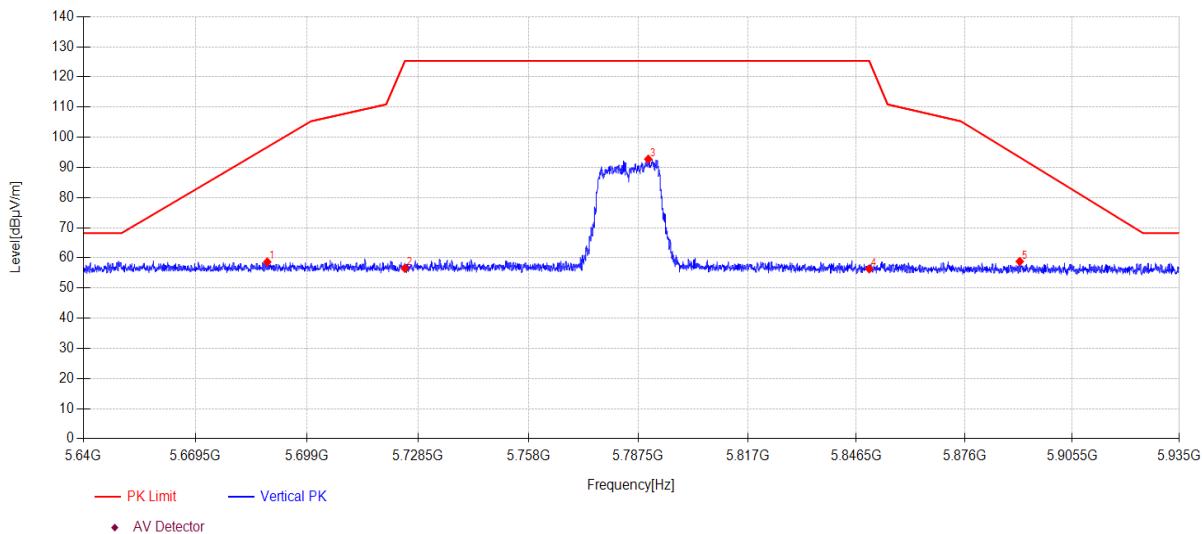

Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5688.469	19.23	33.55	5.85	0.00	58.63	96.74	38.11	PK	Vertical
2	5725.000	16.92	33.75	5.87	0.00	56.54	125.30	68.76	PK	Vertical
3	5790.185	52.69	34.14	5.91	0.00	92.74	125.30	32.56	PK	Vertical
4	5850.000	16.40	34.00	5.94	0.00	56.34	125.27	68.93	PK	Vertical
5	5891.104	18.77	34.08	5.96	0.00	58.81	93.35	34.54	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2024-04-24 Tested By: Juchang Du

EUT: Senza Cloud Connector Model Number: SZC004


Test Mode: 11A TX 5825MHz Power Supply: DC 5V

Condition: Temp:23.5°C;Humi:59.7% Test Site: DDT 3# Chamber

File Path: d:\ts\2024 report data\Q24021902-2E\FCC ABOVE 1G 5.8G\17

Memo: Sample Number:S24021902-002 Power Setting:38

Test Graph

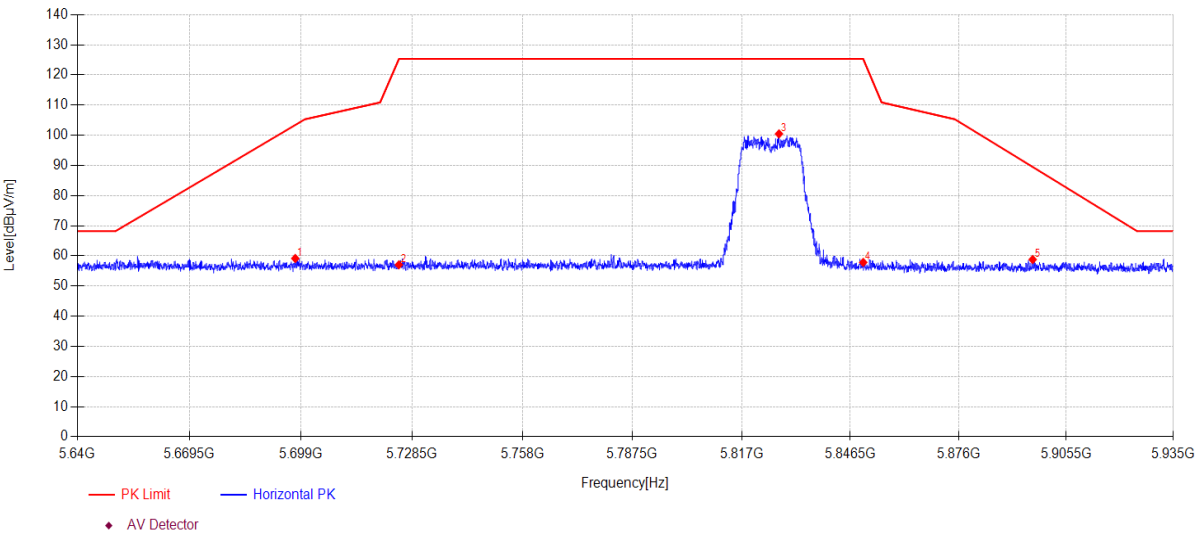

Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5697.466	19.70	33.59	5.86	0.00	59.15	103.42	44.27	PK	Horizontal
2	5725.000	17.43	33.75	5.87	0.00	57.05	125.30	68.25	PK	Horizontal
3	5827.119	60.45	34.09	5.92	0.00	100.46	125.30	24.84	PK	Horizontal
4	5850.000	17.90	34.00	5.94	0.00	57.84	125.27	67.43	PK	Horizontal
5	5896.296	18.74	34.09	5.96	0.00	58.79	89.50	30.71	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-04-24

Tested By:

Juchang Du

EUT:

Senza Cloud Connector

Model Number:

SZC004

Test Mode:

11A TX 5825MHz

Power Supply:

DC 5V

Condition:

Temp:23.5°C;Humi:59.7%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24021902-2E\FCC ABOVE 1G 5.8G\18

Memo:

Sample Number:S24021902-002 Power Setting:38

Test Graph

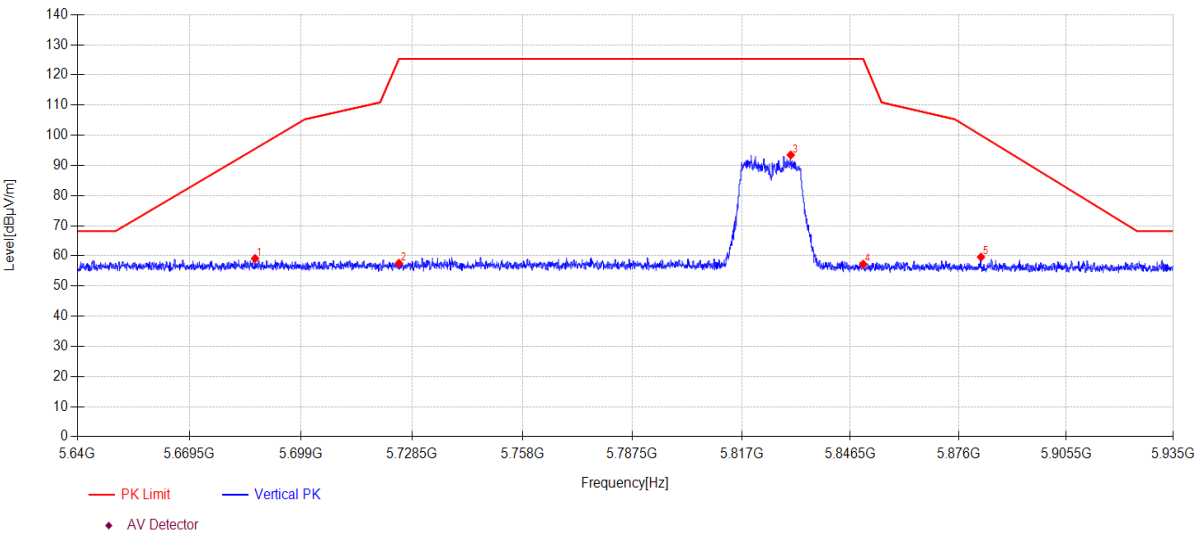

Data List										
N O.	Freq. [MHz]	Reading [dBµV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Detector	Polarity
1	5686.817	19.70	33.55	5.85	0.00	59.10	95.52	36.42	PK	Vertical
2	5725.000	17.93	33.75	5.87	0.00	57.55	125.30	67.75	PK	Vertical
3	5830.305	53.45	34.08	5.93	0.00	93.46	125.30	31.84	PK	Vertical
4	5850.000	17.29	34.00	5.94	0.00	57.23	125.27	68.04	PK	Vertical
5	5882.136	19.59	34.06	5.95	0.00	59.60	100.01	40.41	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-04-24

Tested By:

Juchang Du

EUT:

Senza Cloud Connector

Model Number:

SZC004

Test Mode:

11N20 TX 5745MHz

Power Supply:

DC 5V

Condition:

Temp:23.5°C;Humi:59.7%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24021902-2E\FCC ABOVE 1G 5.8G\19

Memo:

Sample Number:S24021902-002 Power Setting:38

Test Graph

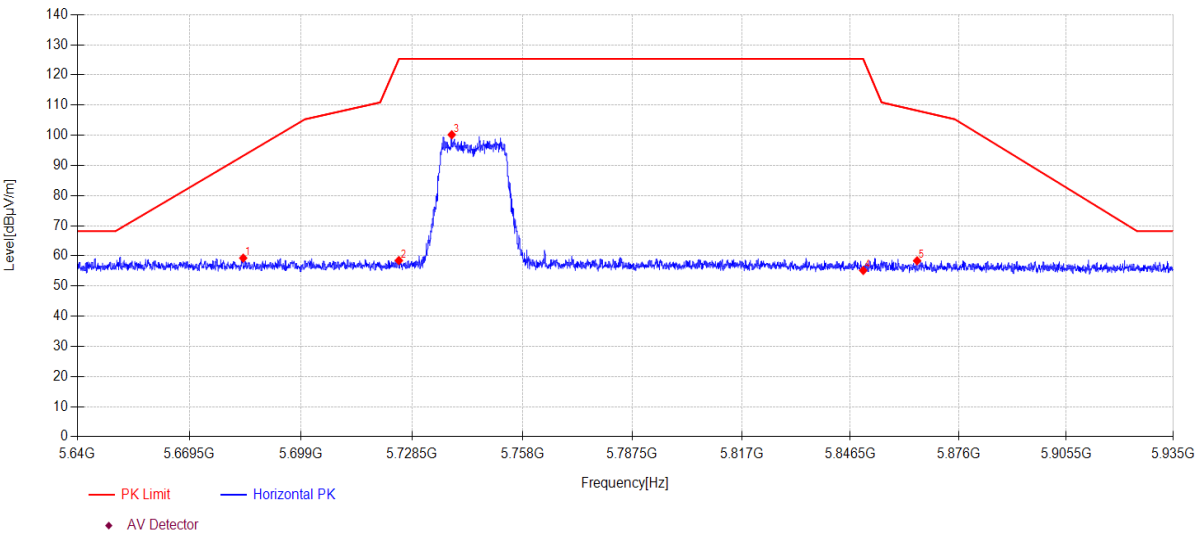

Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5683.690	19.90	33.53	5.85	0.00	59.28	93.20	33.92	PK	Horizontal
2	5725.000	18.84	33.75	5.87	0.00	58.46	125.30	66.84	PK	Horizontal
3	5739.091	60.47	33.83	5.88	0.00	100.18	125.30	25.12	PK	Horizontal
4	5850.000	15.23	34.00	5.94	0.00	55.17	125.27	70.10	PK	Horizontal
5	5864.672	18.40	34.03	5.94	0.00	58.37	108.19	49.82	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-04-24

Tested By:

Juchang Du

EUT:

Senza Cloud Connector

Model Number:

SZC004

Test Mode:

11N20 TX 5745MHz

Power Supply:

DC 5V

Condition:

Temp:23.5°C;Humi:59.7%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24021902-2E\FCC ABOVE 1G 5.8G\20

Memo:

Sample Number:S24021902-002 Power Setting:38

Test Graph

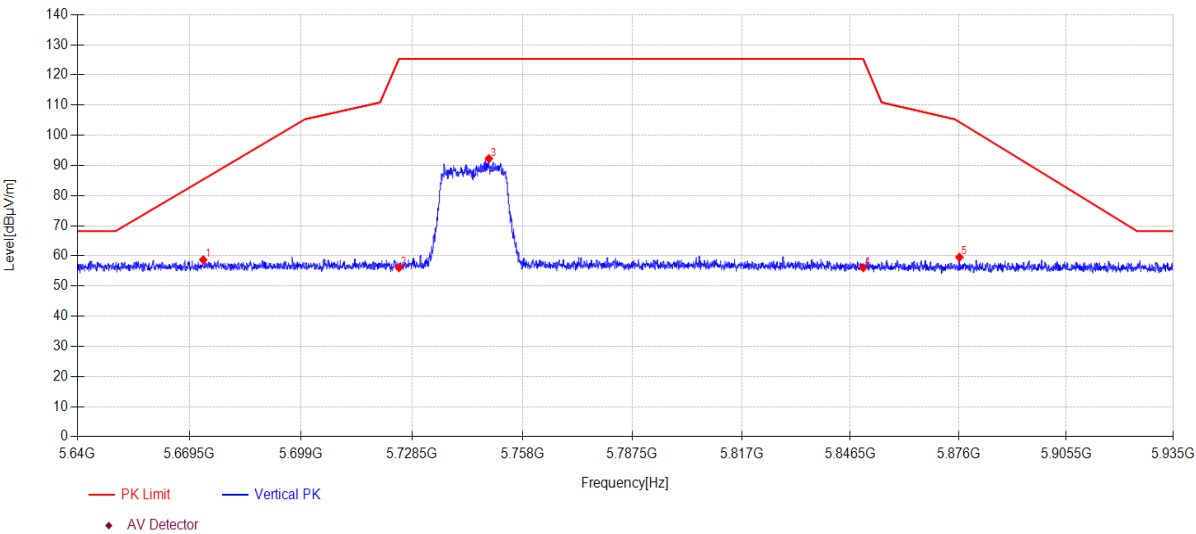

Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5673.129	19.36	33.49	5.85	0.00	58.70	85.36	26.66	PK	Vertical
2	5725.000	16.45	33.75	5.87	0.00	56.07	125.30	69.23	PK	Vertical
3	5749.003	52.46	33.89	5.88	0.00	92.23	125.30	33.07	PK	Vertical
4	5850.000	16.14	34.00	5.94	0.00	56.08	125.27	69.19	PK	Vertical
5	5876.236	19.55	34.05	5.95	0.00	59.55	104.38	44.83	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-04-24

Tested By:

Juchang Du

EUT:

Senza Cloud Connector

Model Number:

SZC004

Test Mode:

11N20 TX 5785MHz

Power Supply:

DC 5V

Condition:

Temp:23.5°C;Humi:59.7%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24021902-2E\FCC ABOVE 1G 5.8G\21

Memo:

Sample Number:S24021902-002 Power Setting:38

Test Graph

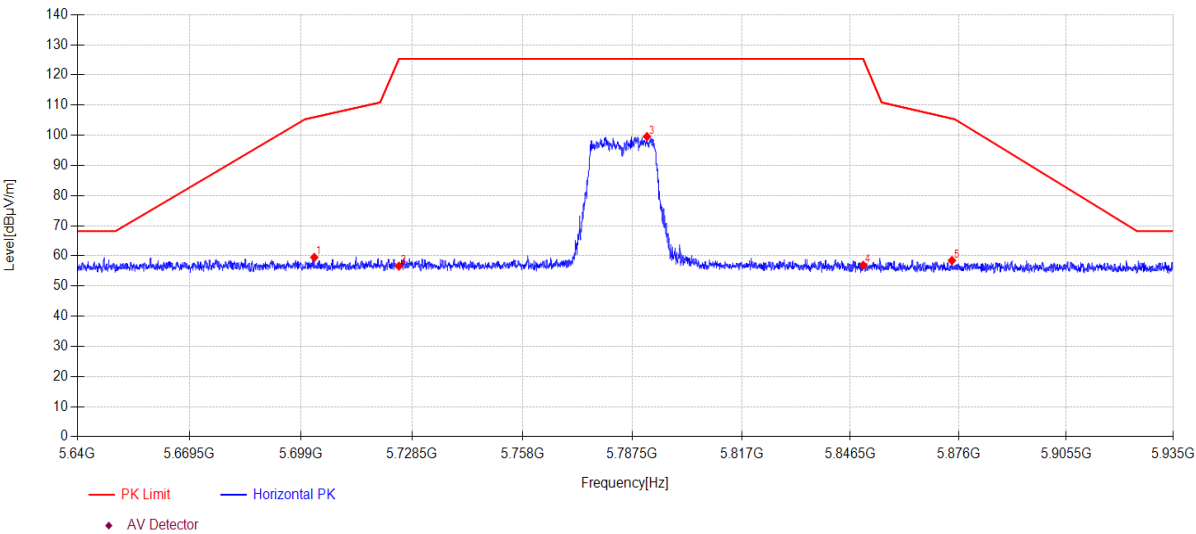

Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5702.511	20.03	33.62	5.86	0.00	59.51	106.00	46.49	PK	Horizontal
2	5725.000	16.98	33.75	5.87	0.00	56.60	125.30	68.70	PK	Horizontal
3	5791.453	59.51	34.15	5.91	0.00	99.57	125.30	25.73	PK	Horizontal
4	5850.000	16.96	34.00	5.94	0.00	56.90	125.27	68.37	PK	Horizontal
5	5874.201	18.48	34.05	5.95	0.00	58.48	105.52	47.04	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:2024-04-24Tested By:Juchang Du

EUT:Senza Cloud ConnectorModel Number:SZC004


Test Mode:11N20 TX 5785MHzPower Supply:DC 5V

Condition:Temp:23.5°C;Humi:59.7%Test Site:DDT 3# Chamber

File Path:d:\ts\2024 report data\Q24021902-2E\FCC ABOVE 1G 5.8G\22

Memo:Sample Number:S24021902-002 Power Setting:38

Test Graph

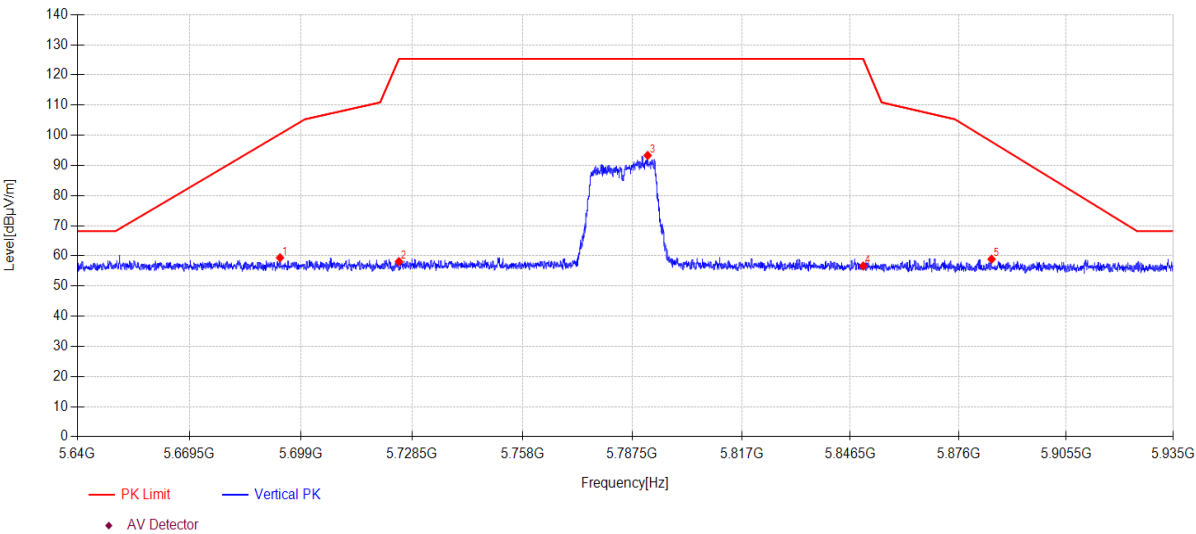

Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5693.425	19.95	33.57	5.86	0.00	59.38	100.42	41.04	PK	Vertical
2	5725.000	18.47	33.75	5.87	0.00	58.09	125.30	67.21	PK	Vertical
3	5791.630	53.24	34.15	5.91	0.00	93.30	125.30	32.00	PK	Vertical
4	5850.000	16.71	34.00	5.94	0.00	56.65	125.27	68.62	PK	Vertical
5	5885.027	18.89	34.07	5.95	0.00	58.91	97.86	38.95	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-04-24

Tested By:

Juchang Du

EUT:

Senza Cloud Connector

Model Number:

SZC004

Test Mode:

11N20 TX 5825MHz

Power Supply:

DC 5V

Condition:

Temp:23.5°C;Humi:59.7%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24021902-2E\FCC ABOVE 1G 5.8G\23

Memo:

Sample Number:S24021902-002 Power Setting:38

Test Graph

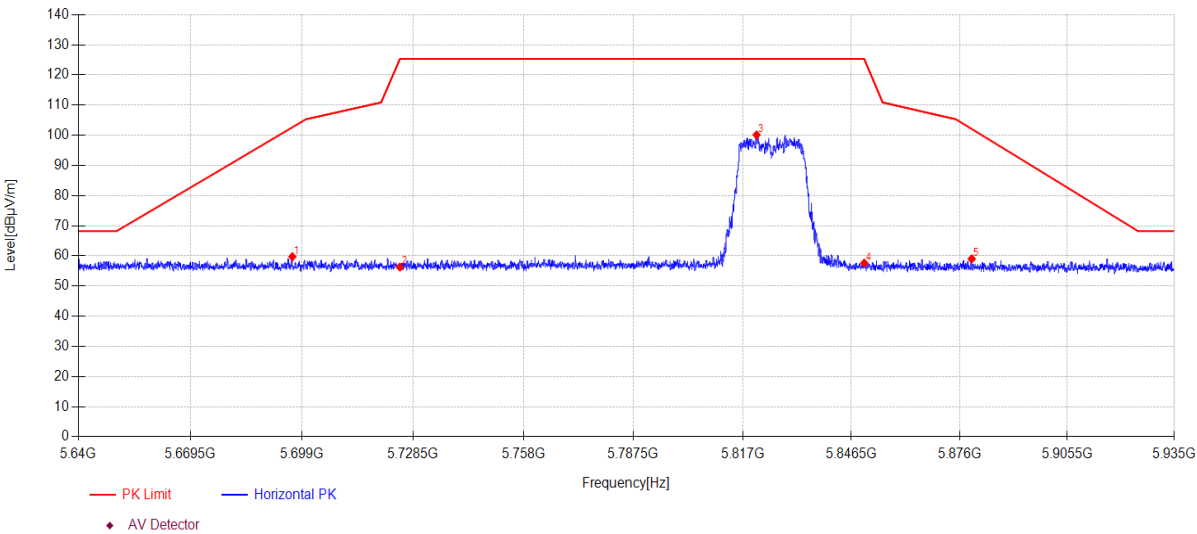

Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5696.434	20.30	33.59	5.86	0.00	59.75	102.65	42.90	PK	Horizontal
2	5725.000	16.67	33.75	5.87	0.00	56.29	125.30	69.01	PK	Horizontal
3	5820.776	60.08	34.12	5.92	0.00	100.12	125.30	25.18	PK	Horizontal
4	5850.000	17.66	34.00	5.94	0.00	57.60	125.27	67.67	PK	Horizontal
5	5879.334	19.00	34.06	5.95	0.00	59.01	102.08	43.07	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-04-24

Tested By:

Juchang Du

EUT:

Senza Cloud Connector

Model Number:

SZC004

Test Mode:

11N20 TX 5825MHz

Power Supply:

DC 5V

Condition:

Temp:23.5°C;Humi:59.7%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24021902-2E\FCC ABOVE 1G 5.8G\24

Memo:

Sample Number:S24021902-002 Power Setting:38

Test Graph

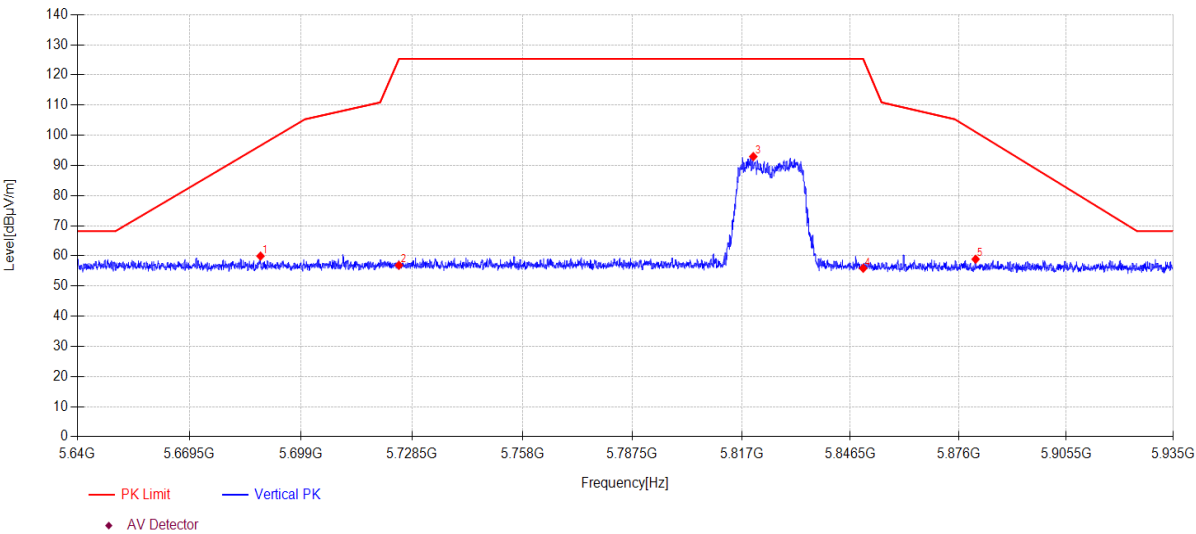

Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5688.262	20.53	33.55	5.85	0.00	59.93	96.59	36.66	PK	Vertical
2	5725.000	17.26	33.75	5.87	0.00	56.88	125.30	68.42	PK	Vertical
3	5820.157	52.89	34.12	5.92	0.00	92.93	125.30	32.37	PK	Vertical
4	5850.000	15.95	34.00	5.94	0.00	55.89	125.27	69.38	PK	Vertical
5	5880.661	18.89	34.06	5.95	0.00	58.90	101.10	42.20	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-04-24

Tested By:

Juchang Du

EUT:

Senza Cloud Connector

Model Number:

SZC004

Test Mode:

11N40 TX 5755MHz

Power Supply:

DC 5V

Condition:

Temp:23.5°C;Humi:59.7%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24021902-2E\FCC ABOVE 1G 5.8G\25

Memo:

Sample Number:S24021902-002 Power Setting:38

Test Graph

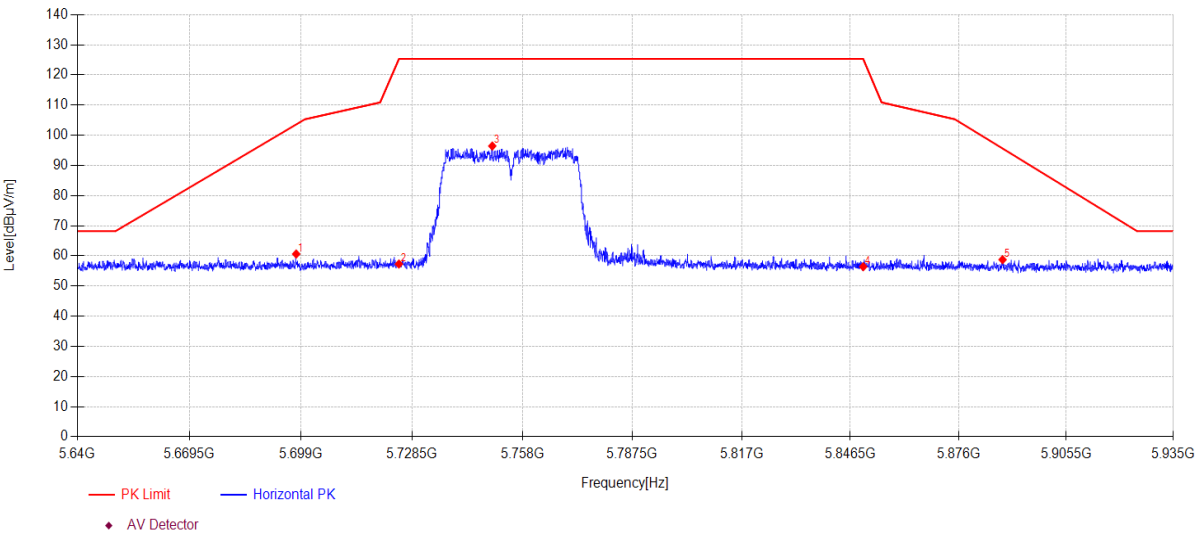

Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5697.702	21.17	33.59	5.86	0.00	60.62	103.59	42.97	PK	Horizontal
2	5725.000	17.69	33.75	5.87	0.00	57.31	125.30	67.99	PK	Horizontal
3	5749.917	56.65	33.90	5.88	0.00	96.43	125.30	28.87	PK	Horizontal
4	5850.000	16.47	34.00	5.94	0.00	56.41	125.27	68.86	PK	Horizontal
5	5888.036	18.72	34.08	5.95	0.00	58.75	95.63	36.88	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-04-24

Tested By:

Juchang Du

EUT:

Senza Cloud Connector

Model Number:

SZC004

Test Mode:

11N40 TX 5755MHz

Power Supply:

DC 5V

Condition:

Temp:23.5°C;Humi:59.7%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24021902-2E\FCC ABOVE 1G 5.8G\26

Memo:

Sample Number:S24021902-002 Power Setting:38

Test Graph

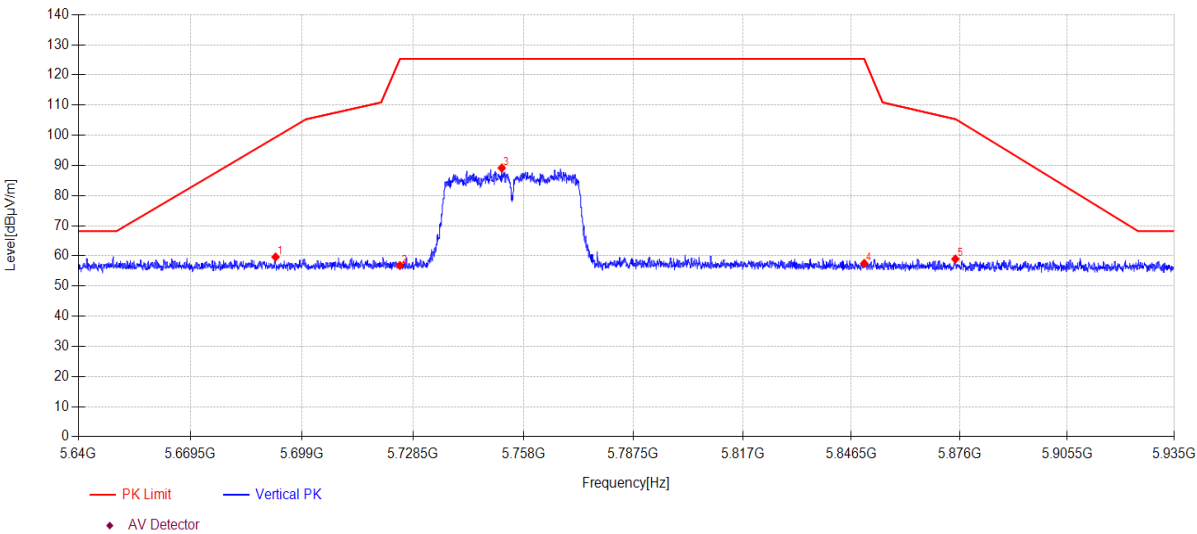

Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5691.979	20.20	33.57	5.86	0.00	59.63	99.35	39.72	PK	Vertical
2	5725.000	17.18	33.75	5.87	0.00	56.80	125.30	68.50	PK	Vertical
3	5752.189	49.35	33.91	5.89	0.00	89.15	125.30	36.15	PK	Vertical
4	5850.000	17.57	34.00	5.94	0.00	57.51	125.27	67.76	PK	Vertical
5	5874.850	18.95	34.05	5.95	0.00	58.95	105.34	46.39	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:2024-04-24Tested By:Juchang Du

EUT:Senza Cloud ConnectorModel Number:SZC004


Test Mode:11N40 TX 5795MHzPower Supply:DC 5V

Condition:Temp:23.5°C;Humi:59.7%Test Site:DDT 3# Chamber

File Path:d:\ts\2024 report data\Q24021902-2E\FCC ABOVE 1G 5.8G\27

Memo:Sample Number:S24021902-002 Power Setting:38

Test Graph

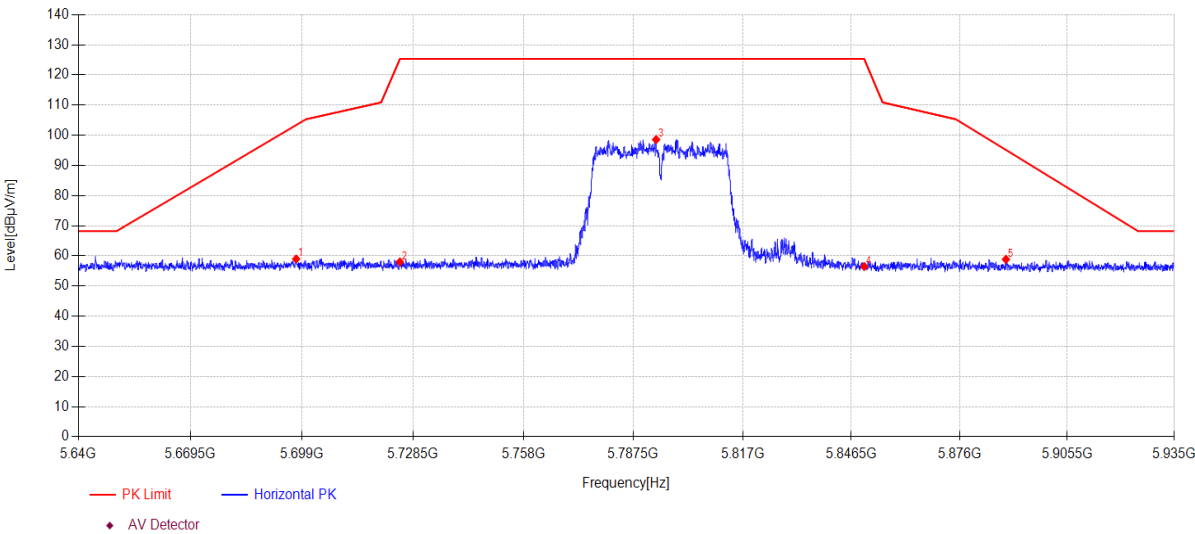

Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5697.437	19.52	33.59	5.86	0.00	58.97	103.40	44.43	PK	Horizontal
2	5725.000	18.37	33.75	5.87	0.00	57.99	125.30	67.31	PK	Horizontal
3	5793.636	58.51	34.16	5.91	0.00	98.58	125.30	26.72	PK	Horizontal
4	5850.000	16.54	34.00	5.94	0.00	56.48	125.27	68.79	PK	Horizontal
5	5888.685	18.81	34.08	5.95	0.00	58.84	95.15	36.31	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-04-24

Tested By:

Juchang Du

EUT:

Senza Cloud Connector

Model Number:

SZC004

Test Mode:

11N40 TX 5795MHz

Power Supply:

DC 5V

Condition:

Temp:23.5°C;Humi:59.7%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24021902-2E\FCC ABOVE 1G 5.8G\28

Memo:

Sample Number:S24021902-002 Power Setting:38

Test Graph

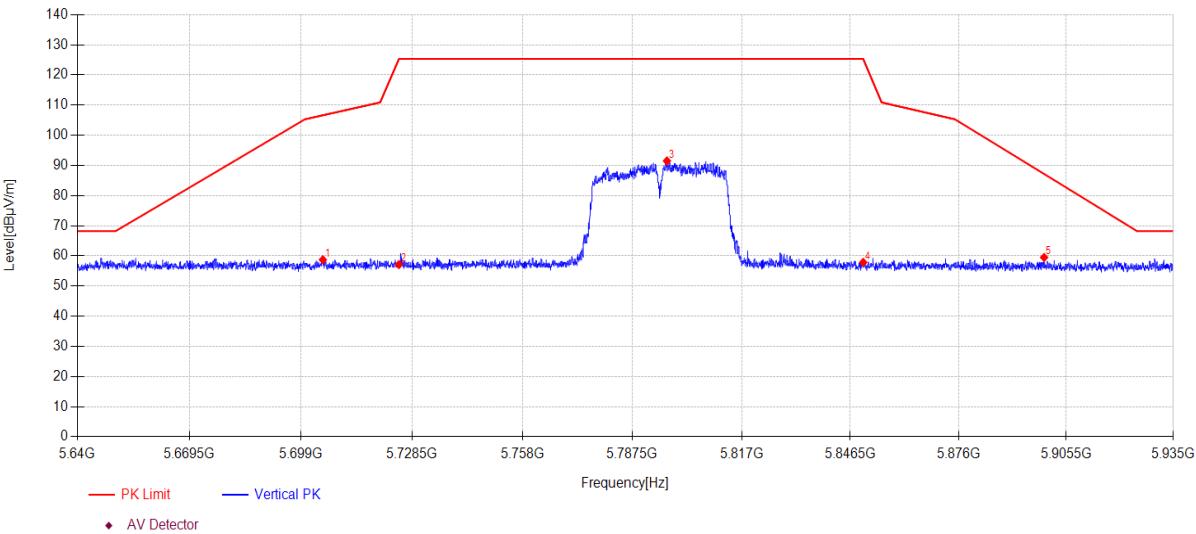

Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5704.782	19.24	33.63	5.86	0.00	58.73	106.64	47.91	PK	Vertical
2	5725.000	17.49	33.75	5.87	0.00	57.11	125.30	68.19	PK	Vertical
3	5796.822	51.41	34.18	5.91	0.00	91.50	125.30	33.80	PK	Vertical
4	5850.000	17.91	34.00	5.94	0.00	57.85	125.27	67.42	PK	Vertical
5	5899.423	19.43	34.10	5.96	0.00	59.49	87.18	27.69	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-04-24

Tested By:

Juchang Du

EUT:

Senza Cloud Connector

Model Number:

SZC004

Test Mode:

11AC40 TX 5755MHz

Power Supply:

DC 5V

Condition:

Temp:23.5°C;Humi:59.7%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24021902-2E\FCC ABOVE 1G 5.8G\29

Memo:

Sample Number:S24021902-002 Power Setting:38

Test Graph

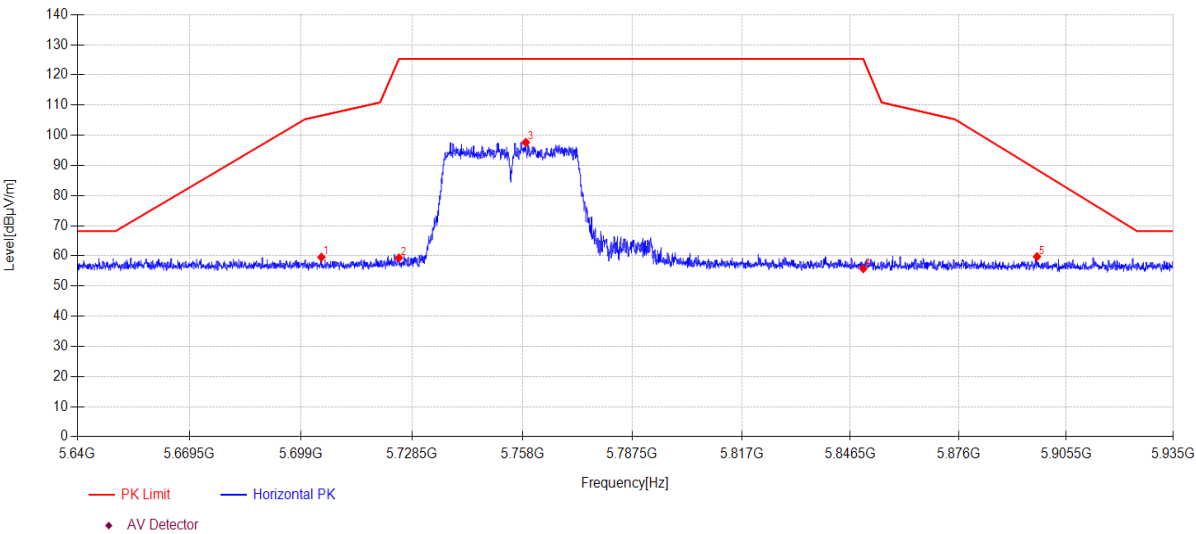

Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5704.399	20.07	33.63	5.86	0.00	59.56	106.53	46.97	PK	Horizontal
2	5725.000	19.70	33.75	5.87	0.00	59.32	125.30	65.98	PK	Horizontal
3	5758.915	57.79	33.95	5.89	0.00	97.63	125.30	27.67	PK	Horizontal
4	5850.000	15.81	34.00	5.94	0.00	55.75	125.27	69.52	PK	Horizontal
5	5897.476	19.69	34.09	5.96	0.00	59.74	88.62	28.88	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-04-24

Tested By:

Juchang Du

EUT:

Senza Cloud Connector

Model Number:

SZC004

Test Mode:

11AC40 TX 5755MHz

Power Supply:

DC 5V

Condition:

Temp:23.5°C;Humi:59.7%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24021902-2E\FCC ABOVE 1G 5.8G\30

Memo:

Sample Number:S24021902-002 Power Setting:38

Test Graph

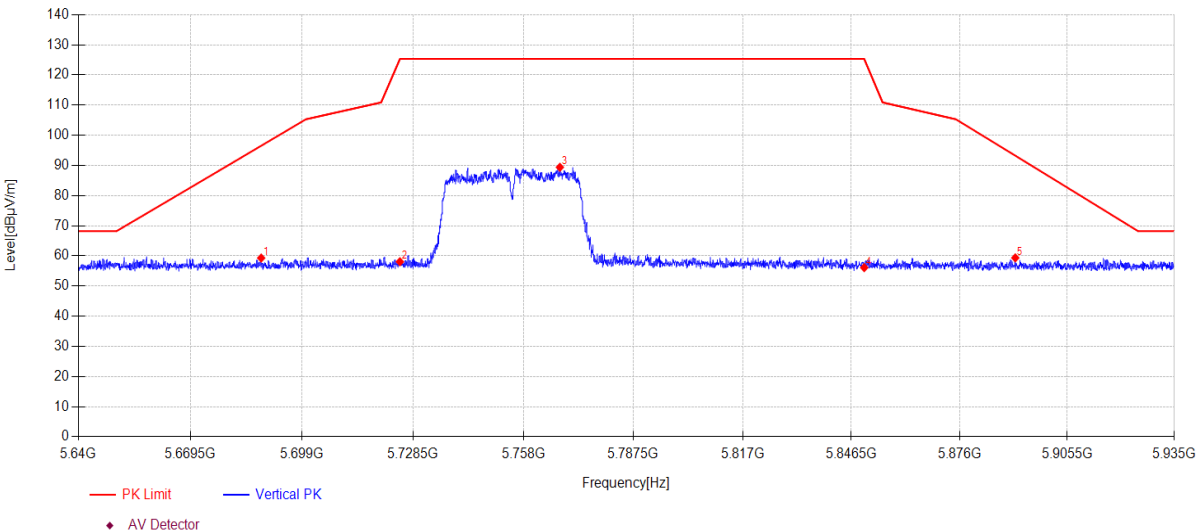

Data List										
N O.	Freq. [MHz]	Reading [dBµV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Detector	Polarity
1	5688.174	19.90	33.55	5.85	0.00	59.30	96.52	37.22	PK	Vertical
2	5725.000	18.44	33.75	5.87	0.00	58.06	125.30	67.24	PK	Vertical
3	5767.765	49.48	34.01	5.89	0.00	89.38	125.30	35.92	PK	Vertical
4	5850.000	16.16	34.00	5.94	0.00	56.10	125.27	69.17	PK	Vertical
5	5891.252	19.30	34.08	5.96	0.00	59.34	93.24	33.90	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-04-24

Tested By:

Juchang Du

EUT:

Senza Cloud Connector

Model Number:

SZC004

Test Mode:

11AC40 TX 5795MHz

Power Supply:

DC 5V

Condition:

Temp:23.5°C;Humi:59.7%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24021902-2E\FCC ABOVE 1G 5.8G\31

Memo:

Sample Number:S24021902-002 Power Setting:38

Test Graph

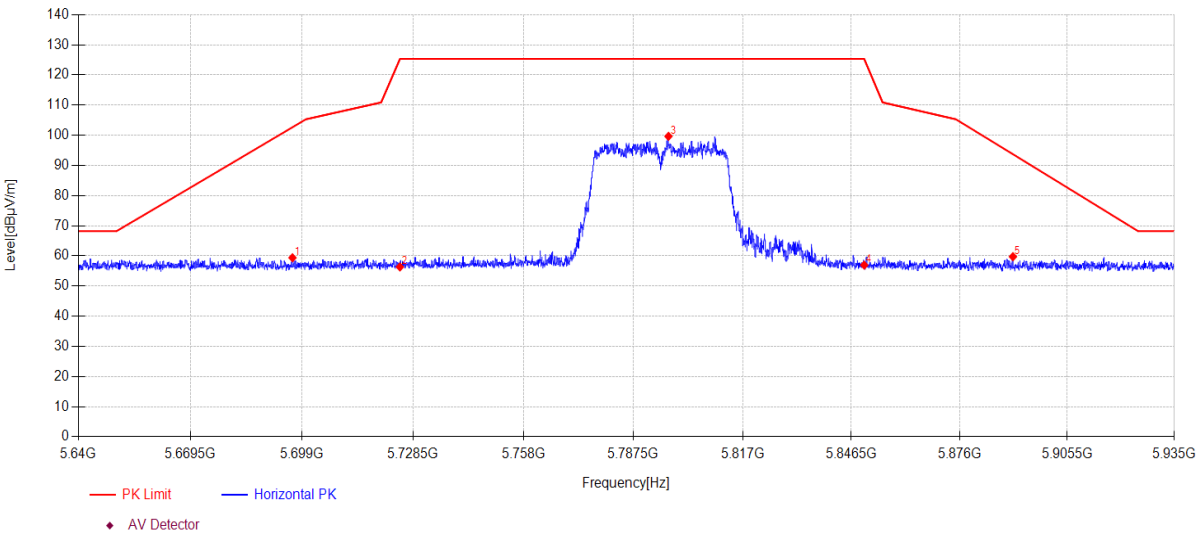

Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5696.463	19.92	33.59	5.86	0.00	59.37	102.68	43.31	PK	Horizontal
2	5725.000	16.71	33.75	5.87	0.00	56.33	125.30	68.97	PK	Horizontal
3	5796.970	59.56	34.18	5.91	0.00	99.65	125.30	25.65	PK	Horizontal
4	5850.000	17.00	34.00	5.94	0.00	56.94	125.27	68.33	PK	Horizontal
5	5890.603	19.69	34.08	5.96	0.00	59.73	93.72	33.99	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-04-24

Tested By:

Juchang Du

EUT:

Senza Cloud Connector

Model Number:

SZC004

Test Mode:

11AC40 TX 5795MHz

Power Supply:

DC 5V

Condition:

Temp:23.5°C;Humi:59.7%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24021902-2E\FCC ABOVE 1G 5.8G\32

Memo:

Sample Number:S24021902-002 Power Setting:38

Test Graph

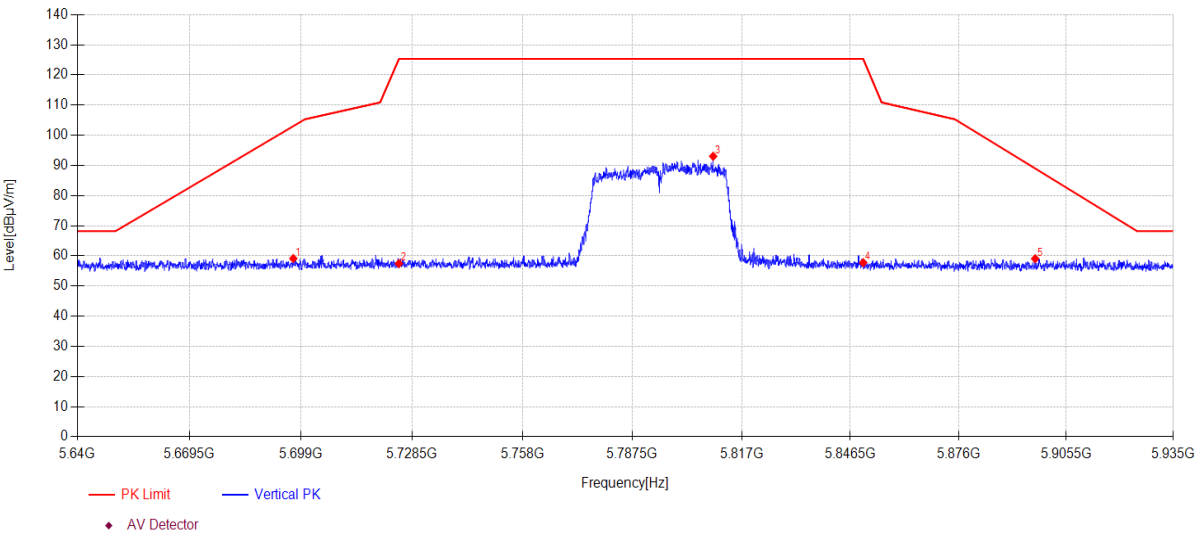

Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5696.935	19.66	33.59	5.86	0.00	59.11	103.03	43.92	PK	Vertical
2	5725.000	17.83	33.75	5.87	0.00	57.45	125.30	67.85	PK	Vertical
3	5809.301	52.95	34.16	5.91	0.00	93.02	125.30	32.28	PK	Vertical
4	5850.000	17.80	34.00	5.94	0.00	57.74	125.27	67.53	PK	Vertical
5	5896.975	19.01	34.09	5.96	0.00	59.06	88.99	29.93	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:2024-04-24

Tested By:Juchang Du

EUT:Senza Cloud Connector

Model Number:SZC004

Test Mode:11AC80 TX 5775MHz

Power Supply:DC 5V


Condition:Temp:23.5°C;Humi:59.7%

Test Site:DDT 3# Chamber

File Path:d:\ts\2024 report data\Q24021902-2E\FCC ABOVE 1G 5.8G\33

Memo:Sample Number:S24021902-002 Power Setting:38

Test Graph

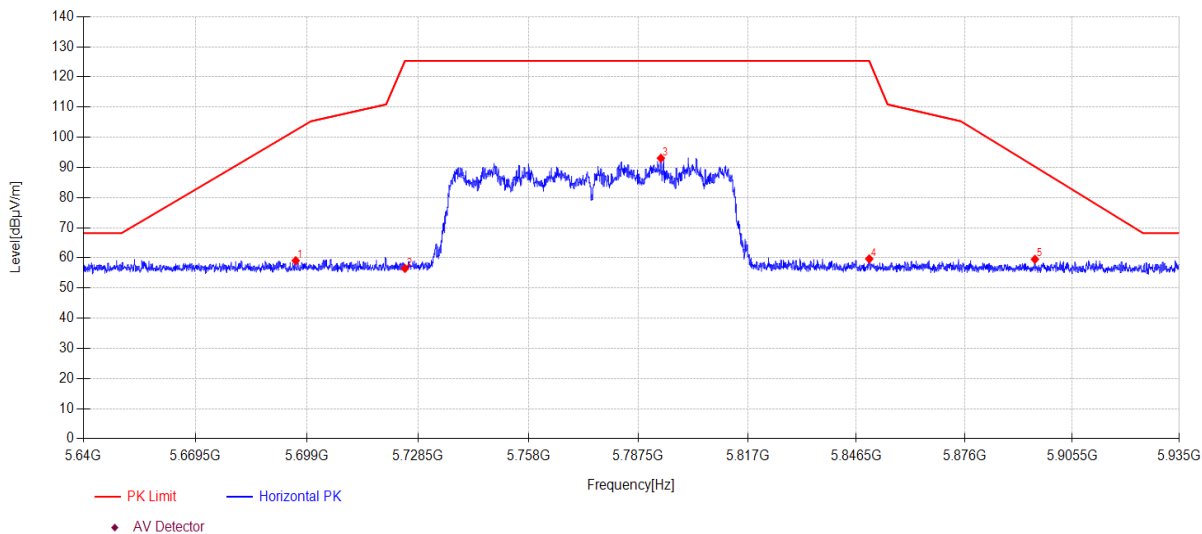

Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5695.991	19.64	33.58	5.86	0.00	59.08	102.33	43.25	PK	Horizontal
2	5725.000	16.89	33.75	5.87	0.00	56.51	125.30	68.79	PK	Horizontal
3	5793.577	53.00	34.16	5.91	0.00	93.07	125.30	32.23	PK	Horizontal
4	5850.000	19.74	34.00	5.94	0.00	59.68	125.27	65.59	PK	Horizontal
5	5895.264	19.48	34.09	5.96	0.00	59.53	90.26	30.73	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-04-24

Tested By:

Juchang Du

EUT:

Senza Cloud Connector

Model Number:

SZC004

Test Mode:

11AC80 TX 5775MHz

Power Supply:

DC 5V

Condition:

Temp:23.5°C;Humi:59.7%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24021902-2E\FCC ABOVE 1G 5.8G\34

Memo:

Sample Number:S24021902-002 Power Setting:38

Test Graph

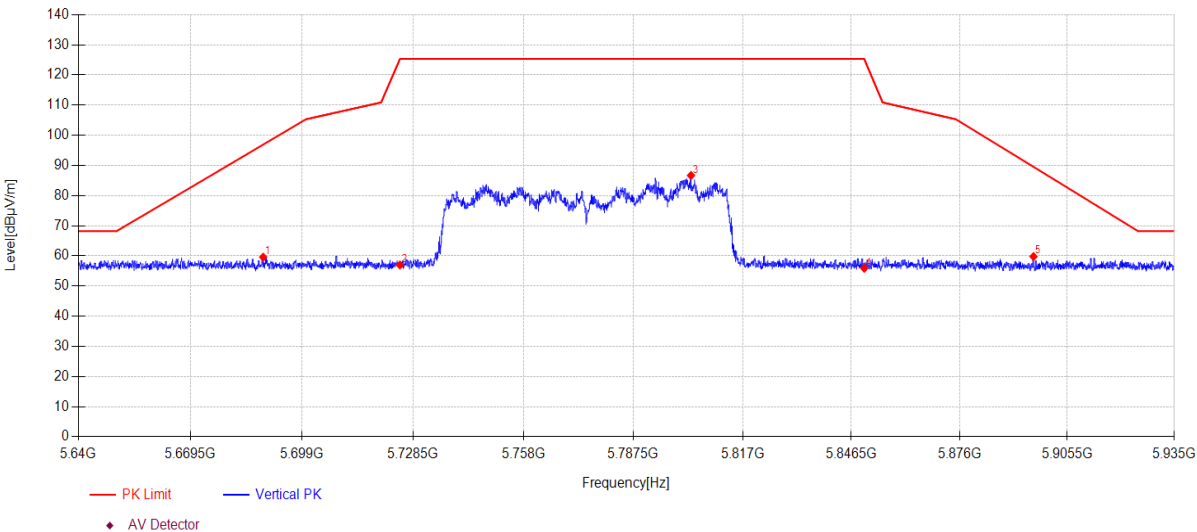

Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5688.705	20.17	33.55	5.85	0.00	59.57	96.92	37.35	PK	Vertical
2	5725.000	17.37	33.75	5.87	0.00	56.99	125.30	68.31	PK	Vertical
3	5803.047	46.56	34.19	5.91	0.00	86.66	125.30	38.64	PK	Vertical
4	5850.000	15.97	34.00	5.94	0.00	55.91	125.27	69.36	PK	Vertical
5	5896.237	19.73	34.09	5.96	0.00	59.78	89.54	29.76	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.


3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

15.Power Line Conducted Emissions

15.1. Test equipment

Equipment	Manufacturer	Model No.	Serial No.	Cal Due To
Two Line V-Network	R&S	ENV216	DDT-ZC02056	2024/07/11
Conducted Radiated Software	Audix	E3	DDT-ZC00562	/
Δ -shaped artificial power network	SCHWARZBEC K	PVDC 8301	DDT-ZC03939	2025/04/01
RF Cable	Yuhu Technology	Z806-NJ-NJ-6M	DDT-ZC02004	2024/07/14
Two Line V-Network	R&S	ENV216	DDT-ZC02059	2024/07/11
Three-phase artificial power network	SCHWARZBEC K	NSLK 8163	DDT-ZC01572	2024/07/11
Pulse Limiter	SCHWARZBEC K	VTSD 9561	DDT-ZC02128	2024/07/14
EMI Test Receiver	R&S	ESCI/E3	DDT-ZC01297	2024/07/11

15.2. Block diagram of test setup

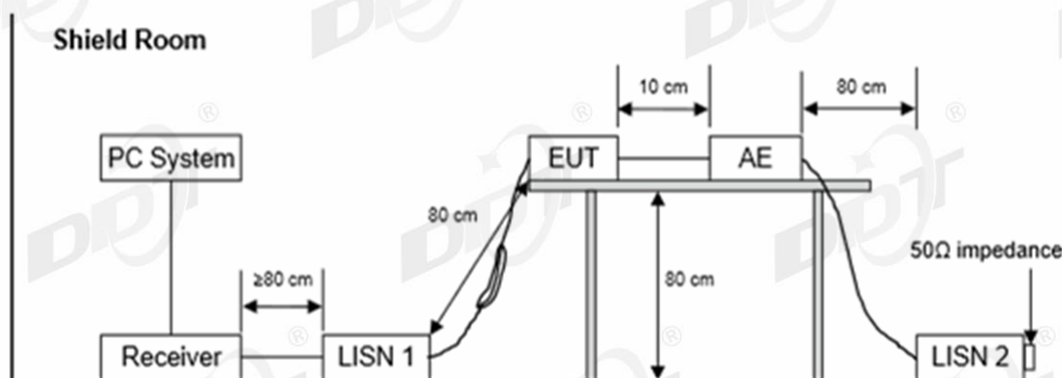

15.3. Limits

Frequency	Quasi-Peak Level dB(mV)	Average Level dB(mV)
150 kHz~500 kHz	66 ~ 56*	56 ~ 46*
500 kHz~5 MHz	56	46
5 MHz~30 MHz	60	50

Note 1: * Decreasing linearly with logarithm of frequency.

Note 2: The lower limit shall apply at the transition frequencies.

15.4. Assistant equipment used for test

Assistant equipment	Manufacturer	Model number	Description	other
AC Adapter	HUAWEI	HW-050450C00	Input: 100-240V~50/60Hz, Output: 5V/2A or 4.5V/5A or 5V/4.5A	N/A

15.5. Test procedure

The EUT and Support equipment, if needed, were put placed on a non-metallic table, 80cm above the ground plane.

All support equipment power received from a second LISN.

Emissions were measured on each current carrying line of the EUT using an EMI Test Receiver connected to the LISN powering the EUT.

The Receiver scanned from 150 kHz to 30 MHz for emissions in each of the test modes.

During the above scans, the emissions were maximized by cable manipulation.

The test mode(s) described in clause 2.4 were scanned during the preliminary test.

After the preliminary scan, we found the test mode producing the highest emission level.

The EUT configuration and worse cable configuration of the above highest emission levels were recorded for reference of the final test.

EUT and support equipment were set up on the test bench as per the configuration with highest emission level in the preliminary test.

A scan was taken on both power lines, Neutral and Line, recording at least the six highest emissions.

Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit.

The test data of the worst-case condition(s) was recorded.

The bandwidth of test receiver is set at 9 kHz.

15.6. Test result

PASS. (See below detailed test result)

Note1: All emissions not reported below are too low against the prescribed limits.

Note2: "----" means Peak detection; "----" means Average detection.

Note3: Pre-test AC conducted emission at both voltage AC 120V/60Hz and AC 240V/50Hz, recorded the worst case.

15.7. Test data

TR-4-E-010 Conducted Emission Test Result

Test Site

: DDT 6# Shield Room

Test Date

: 2024-04-19

EUT

: Senza Cloud Connector

Power Supply

: AC 120V/60Hz

Condition

: Temp:21.8°C,Humi:51.5%

Tested By

: Antony Zeng

Model Number

: SZC004

Test Mode


: 5G mode

LISN

: 2023 ENV 216 3#/LINE

Memo :

Data: 18

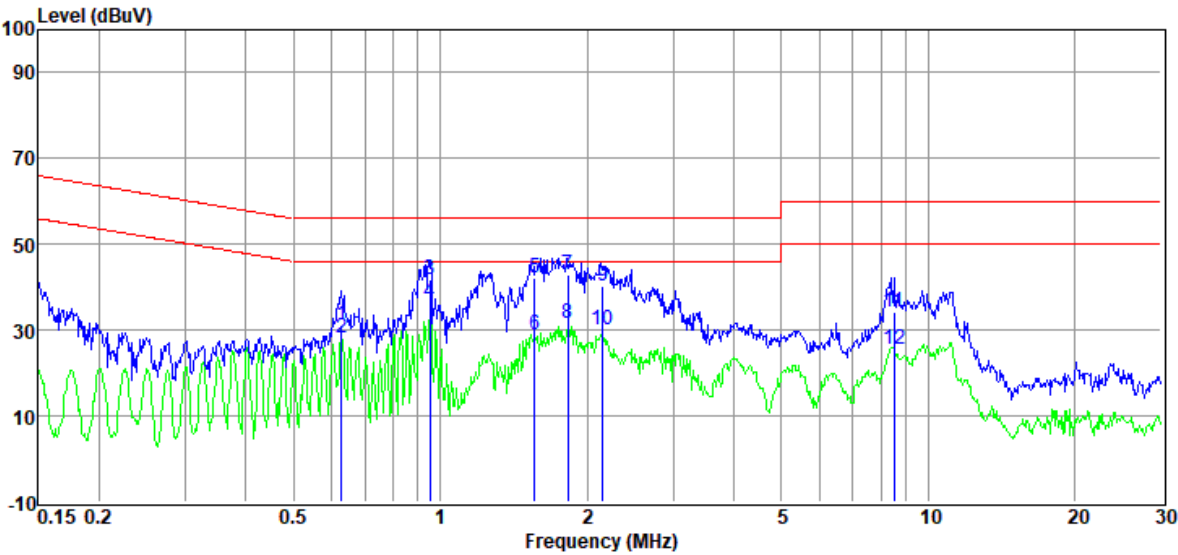

Item	Freq.	Read Level	LISN Factor	Cable Loss	Pulse Limiter Factor	Result Level	Limit Line	Over Limit	Detector	Phase
(Mark)	(MHz)	(dBμV)	(dB)	(dB)	(dB)	(dBμV)	(dBμV)	(dB)		
1	0.63	11.36	9.68	0.14	9.96	31.14	56.00	-24.86	QP	LINE
2	0.63	8.30	9.68	0.14	9.96	28.08	46.00	-17.92	Average	LINE
3	0.95	21.83	9.69	0.24	9.97	41.73	56.00	-14.27	QP	LINE
4	0.95	16.41	9.69	0.24	9.97	36.31	46.00	-9.69	Average	LINE
5	1.56	22.42	9.52	0.26	9.98	42.18	56.00	-13.82	QP	LINE
6	1.56	9.05	9.52	0.26	9.98	28.81	46.00	-17.19	Average	LINE
7	1.83	22.90	9.74	0.26	9.99	42.89	56.00	-13.11	QP	LINE
8	1.83	11.60	9.74	0.26	9.99	31.59	46.00	-14.41	Average	LINE
9	2.16	20.26	9.82	0.26	9.99	40.33	56.00	-15.67	QP	LINE
10	2.16	9.85	9.82	0.26	9.99	29.92	46.00	-16.08	Average	LINE
11	8.50	14.23	9.64	0.28	10.04	34.19	60.00	-25.81	QP	LINE
12	8.50	5.73	9.64	0.28	10.04	25.69	50.00	-24.31	Average	LINE

Note: 1. Result Level = Read Level +LISN Factor + Pulse Limiter Factor + Cable loss.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

TR-4-E-010 Conducted Emission Test Result

Test Site

: DDT 6# Shield Room

Test Date

: 2024-04-19

EUT

: Senza Cloud Connector

Power Supply

: AC 120V/60Hz

Condition

: Temp:21.8°C,Humi:51.5%

D:\2024 Report Date\Q24021902-2E\0419 CE.EM6

Tested By

: Antony Zeng

Model Number

: SZC004

Test Mode


: 5G mode

LISN

: 2023 ENV 216 3#/NEUTRAL

Memo :

Data: 20

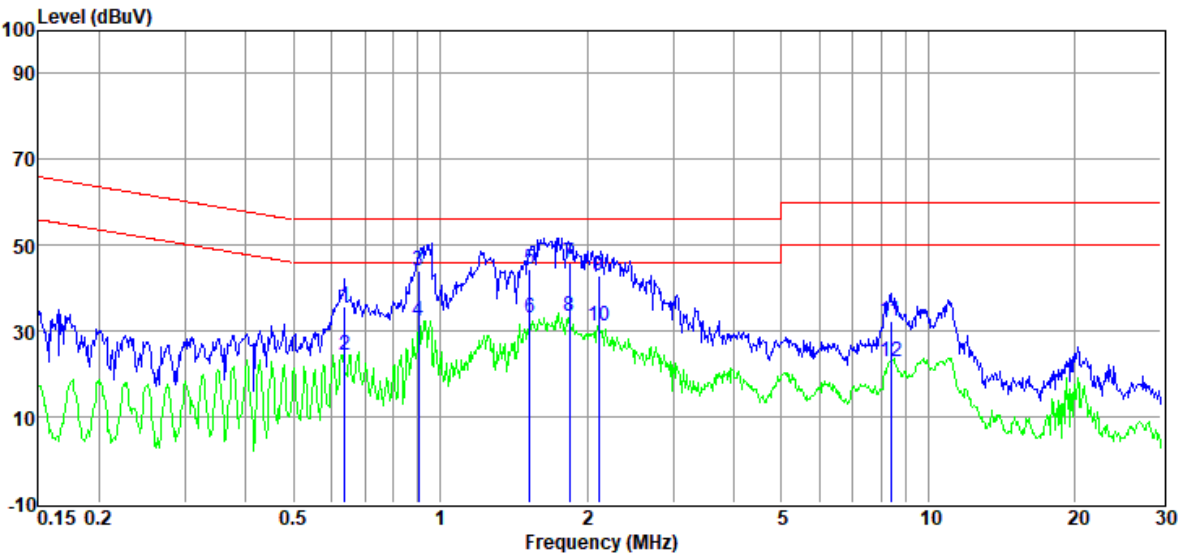

Item	Freq.	Read Level	LISN Factor	Cable Loss	Pulse Limiter Factor	Result Level	Limit Line	Over Limit	Detector	Phase
(Mark)	(MHz)	(dBμV)	(dB)	(dB)	(dB)	(dBμV)	(dBμV)	(dB)		
1	0.64	15.75	9.76	0.14	9.96	35.61	56.00	-20.39	QP	NEUTRAL
2	0.64	4.56	9.76	0.14	9.96	24.42	46.00	-21.58	Average	NEUTRAL
3	0.90	23.99	10.05	0.22	9.97	44.23	56.00	-11.77	QP	NEUTRAL
4	0.90	12.06	10.05	0.22	9.97	32.30	46.00	-13.70	Average	NEUTRAL
5	1.53	24.29	10.03	0.26	9.98	44.56	56.00	-11.44	QP	NEUTRAL
6	1.53	12.80	10.03	0.26	9.98	33.07	46.00	-12.93	Average	NEUTRAL
7	1.84	25.60	10.00	0.26	9.99	45.85	56.00	-10.15	QP	NEUTRAL
8	1.84	13.08	10.00	0.26	9.99	33.33	46.00	-12.67	Average	NEUTRAL
9	2.11	22.74	9.90	0.26	9.99	42.89	56.00	-13.11	QP	NEUTRAL
10	2.11	11.14	9.90	0.26	9.99	31.29	46.00	-14.71	Average	NEUTRAL
11	8.37	12.33	9.71	0.28	10.03	32.35	60.00	-27.65	QP	NEUTRAL
12	8.37	2.97	9.71	0.28	10.03	22.99	50.00	-27.01	Average	NEUTRAL

Note: 1. Result Level = Read Level +LISN Factor + Pulse Limiter Factor + Cable loss.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

17. Photos of the EUT

Please refer to DDT-Q24021902-1E appendix I

-----End Report-----