


FCC ID Label Information

Label location:

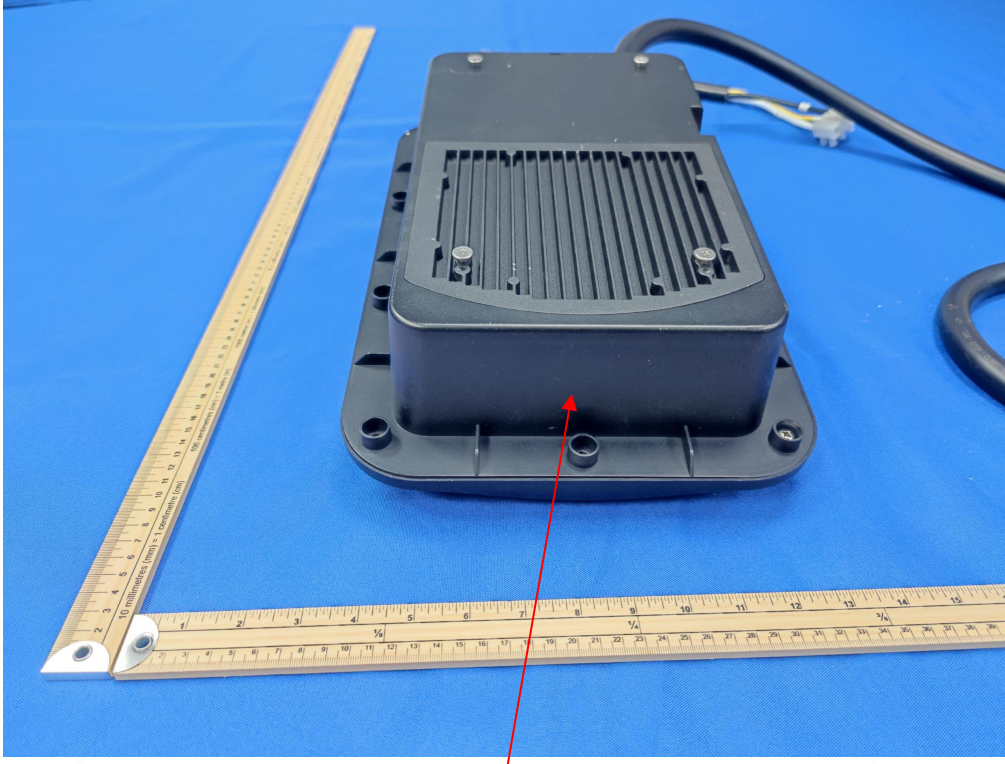

Product Name: EV AC Charger

Model: HBE-AC48A01HW-U-BHSED

FCC ID: 2BF82-HBE01HW

Contains FCC ID: 2AC7Z-ESP32WROOM32E

Contains FCC ID: XMR202008EC25AFXD

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) this device must accept any interference received, including interference that may cause undesired operation.

Label Size: L: 220mm x W: 50mm

HBE

Name: EV AC Charger
Model: HBE-AC48A01HW-U-BHSED
Input: 240VAC, Max.48A,50/60Hz
Output: 240VAC, Max.48A,50/60Hz
Protection Level: TYPE 4
Operating Temperature: -30~55 C
Operating Environment: Outdoor & Indoor
For Use With Electric Vehicles
Ventilation Not Required
Use Copper Conductors: 8AWG
Maximum Torque: 1.3N.m
THE SUITABILITY OF THE USE OF FLEXIBLE CORD IN ACCORDANCE WITH CE CODE, PART I.
Manufacture: HBE
Order number:
Production Date: 08-2024
Made in China

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:
1) This device may not cause harmful interference, and, 2) This device must accept any interference received including interference that may cause undesired operation.




Intertek CONFORMS TO UL STD.2594
5024669 CERTIFIED TO CSA STD.C22.2#280

FC Contains FCC ID 1: 2AC7Z-ESP32WROOM32E
Contains FCC ID 2: XMR202008EC25AFXD
FCC ID: 2BF82-HBE01HW

CAN ICES-002(A)/NMB-002(A) FOR USE WITH ELECTRIC VEHICLES. TYPE 4 ENCLOSURE. conforms to UL Std. 2594/Certified to CSA Std.C22.2#280 INDOOR/OUTDOOR USE. VENTILATION NOT REQUIRED. OPERATING TEMP: -30 C TO 55 C

CAUTION: Risk of electric shock. Do not remove cover or attempt to open the enclosure. No user serviceable parts inside. Refer servicing to qualified service personnel. Do not use this product if there is any damage to the unit. To reduce the risk of electric shock, connect only to properly grounded outlets.

WARNING: Only for use with vehicles that do not require ventilation. To avoid a risk of fire or electric shock, do not use this device with an extension cord. Risk of explosion. This equipment has arcing or sparking parts that should not be exposed to flammable vapors. This equipment should be located at least 460 mm (18 inches) above the floor.

ATTENTION: Risque de choc électrique. Ne pas retirer le couvercle ni essayer d'ouvrir le boîtier. Aucune pièce interne réparable par l'utilisateur. Confier tout travail d'entretien ou de réparation à un technicien qualifié. Ne pas utiliser ce produit si l'appareil est endommagé. Pour réduire le risque de choc électrique, brancher sur une prise correctement mise à la terre.

AVERTISSEMENT: Ce dispositif est destiné au chargement des véhicules ne nécessitant pas de ventilation au cours du chargement. Pour réduire le risque de choc électrique ou d'incendie, ne pas utiliser de rallonge avec cet appareil. Risque d'explosion. L'appareil comporte des pièces pouvant produire des arcs électriques ou des étincelles qui ne devraient pas être exposées aux vapeurs inflammables. Cet appareil devrait être installé à au moins 460 mm (18 pouces) au-dessus du plancher.

220 mm

50 mm

尺寸公差		厚度公差	
≤200	±0.1	≤0.8	±0.05
200-400	±0.2	0.8-1.2	±0.10
400-800	±0.3	≥1.5	±0.15
≥800	±0.5		

技术要求:

- 1.材质:0.2mmPET,黑底带背胶, 表面磨砂
- 2.表面不可有污渍等不良缺陷.
- 3.产品须符合ROHS和REACH环保要求

材质为0.2MM厚PET 黑底背敷不干胶, 表面磨砂效果

5					设计	周磊磊	日期		单位	MM	视角	编号	
4					校对		日期		比例	1:1			铭牌
3					审核		日期		材质	PET	T=*		
2					表面处理黑色			重量/克	A4				
1					用量 件/套			HBE 深圳市海搏电子有限公司 SHENZHEN HB ELECTRONIC CO.,LTD					
序号	日期	更改内容	ECN编号	签名	外形:250.7*381*60.4								共1页 第1页