






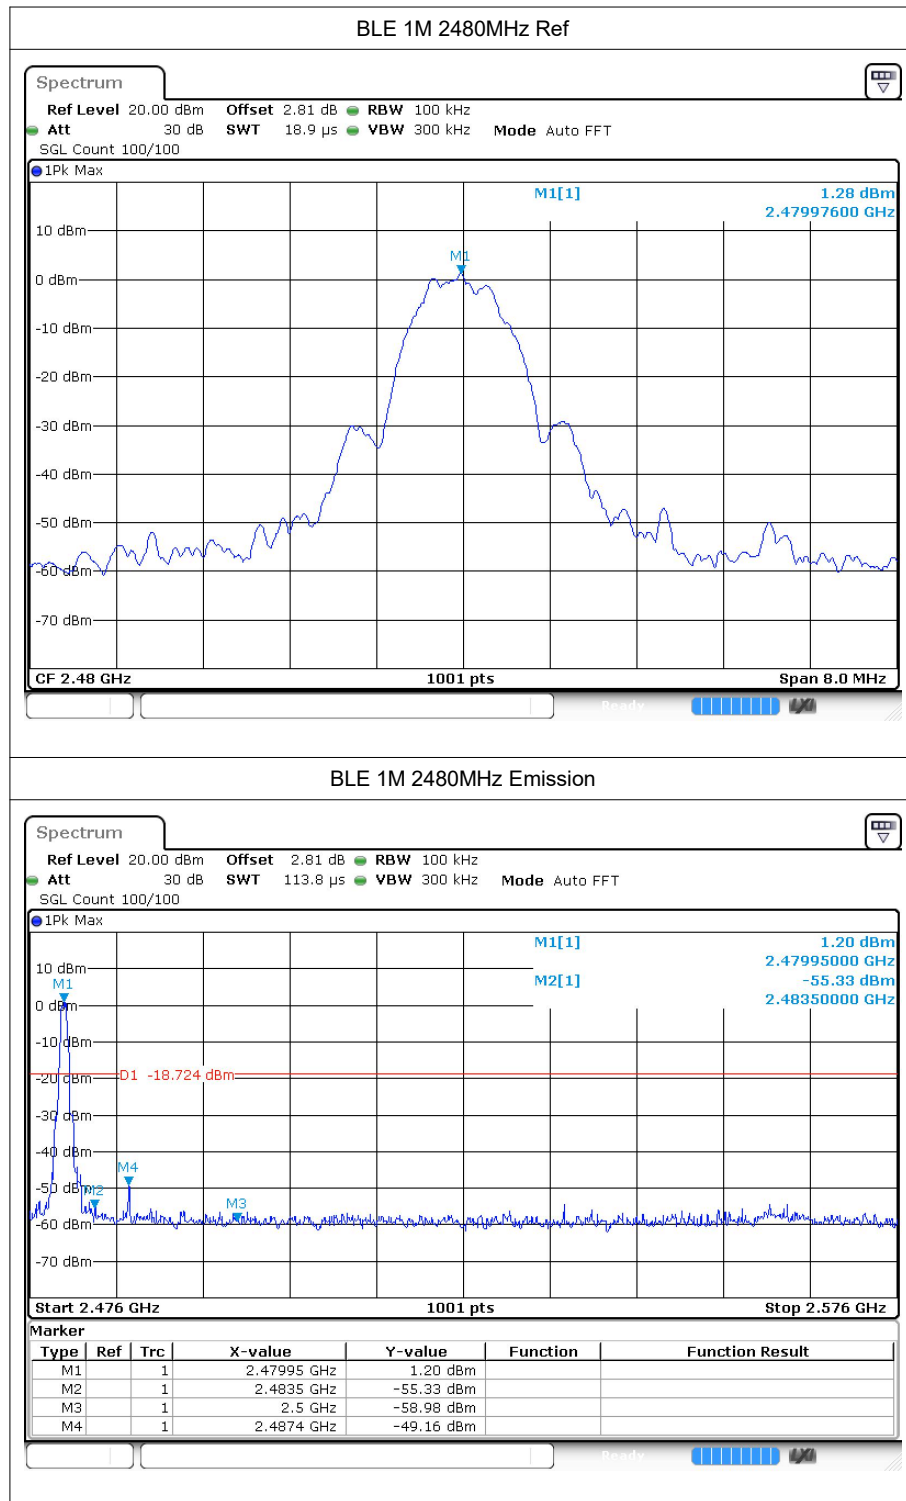

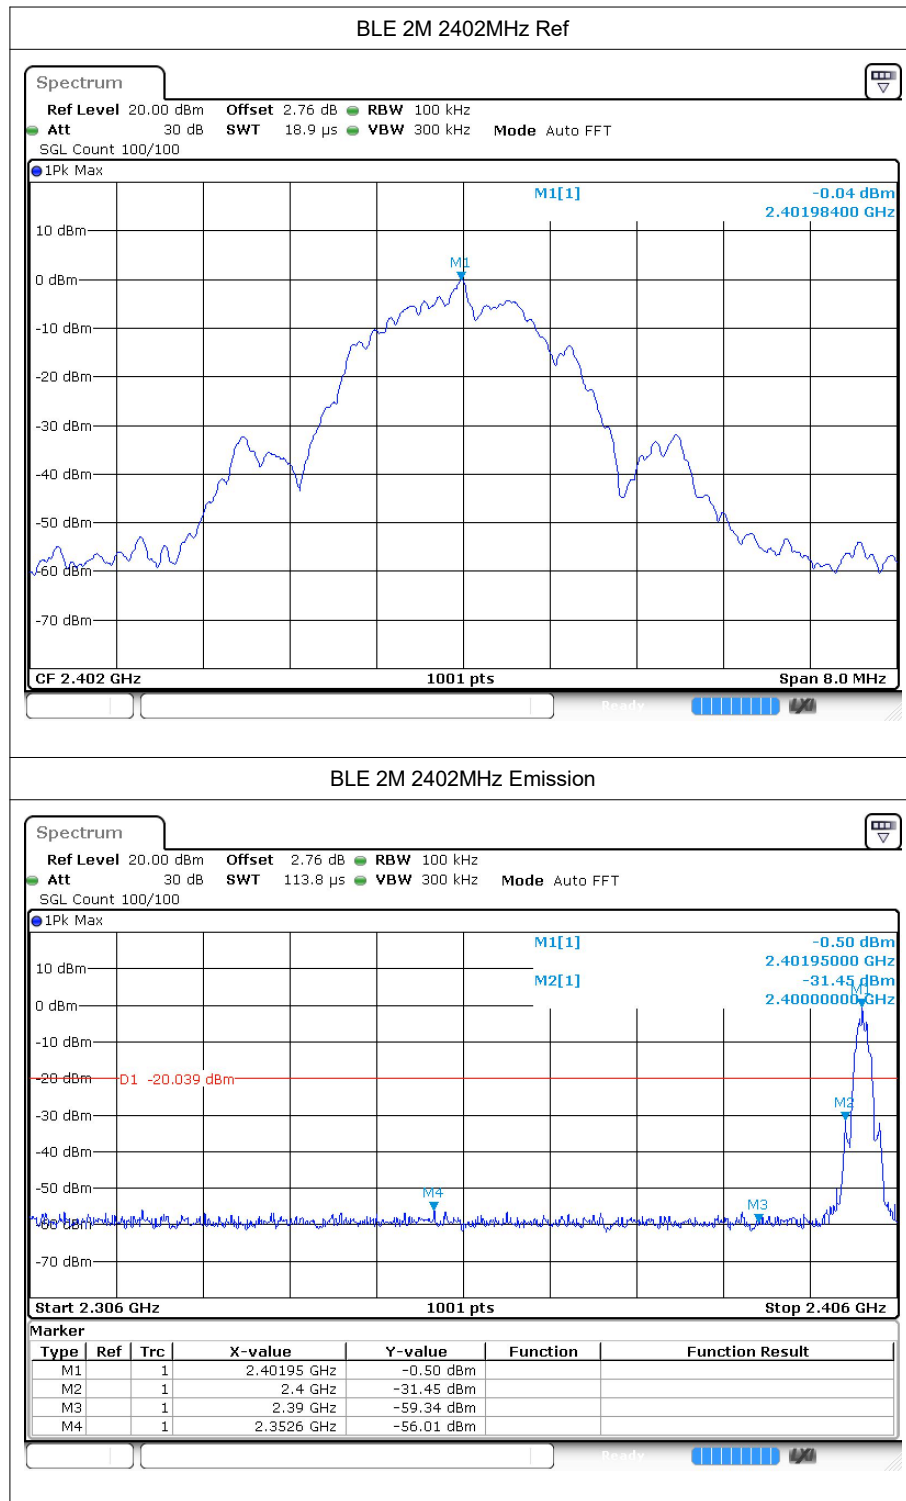

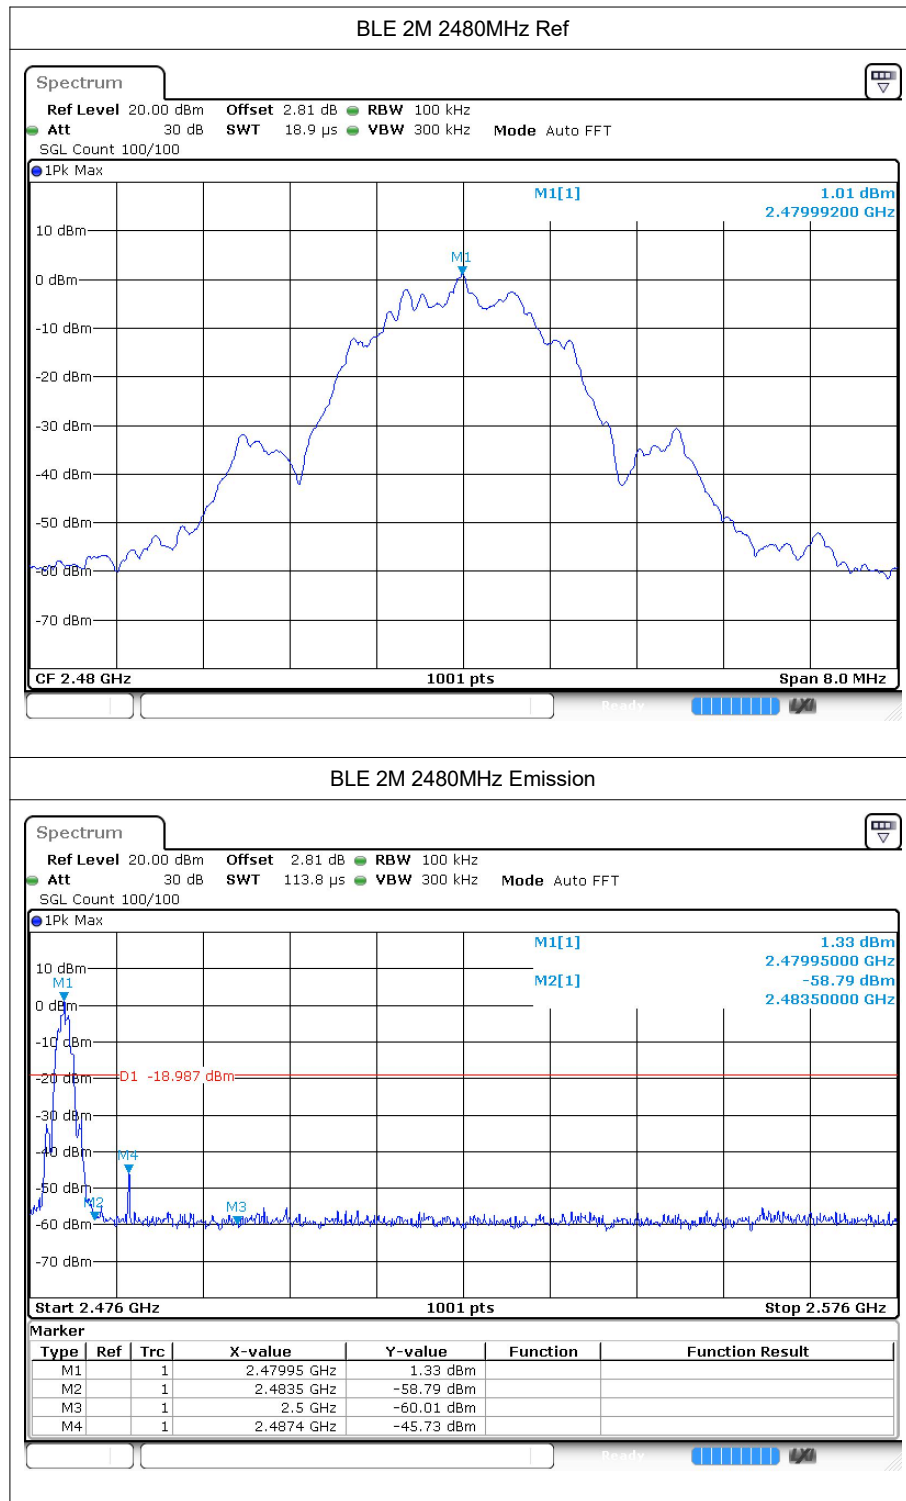



6 Conducted RF Spurious Emission


6.1 Test Result


Mode	Frequency (MHz)	Max Value (dBc)	Limit (dBc)	Verdict
BLE 1M	2402	-44.08	-20	Pass
BLE 1M	2440	-45.04	-20	Pass
BLE 1M	2480	-44.62	-20	Pass
BLE 2M	2402	-43.24	-20	Pass
BLE 2M	2440	-44.82	-20	Pass
BLE 2M	2480	-43.88	-20	Pass


6.2 Test Graphs

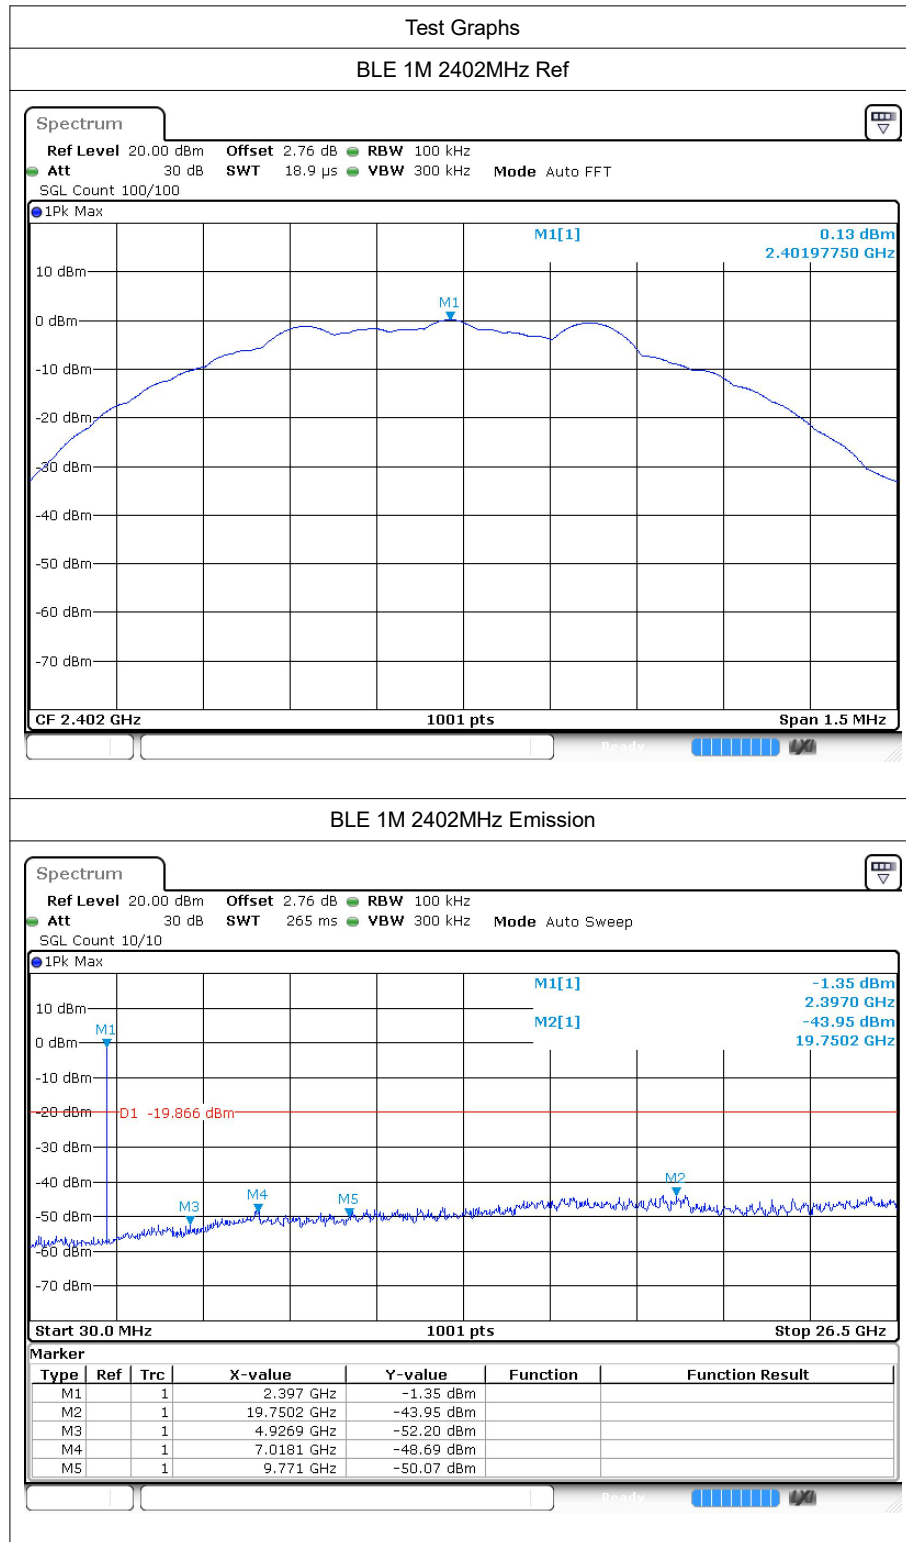


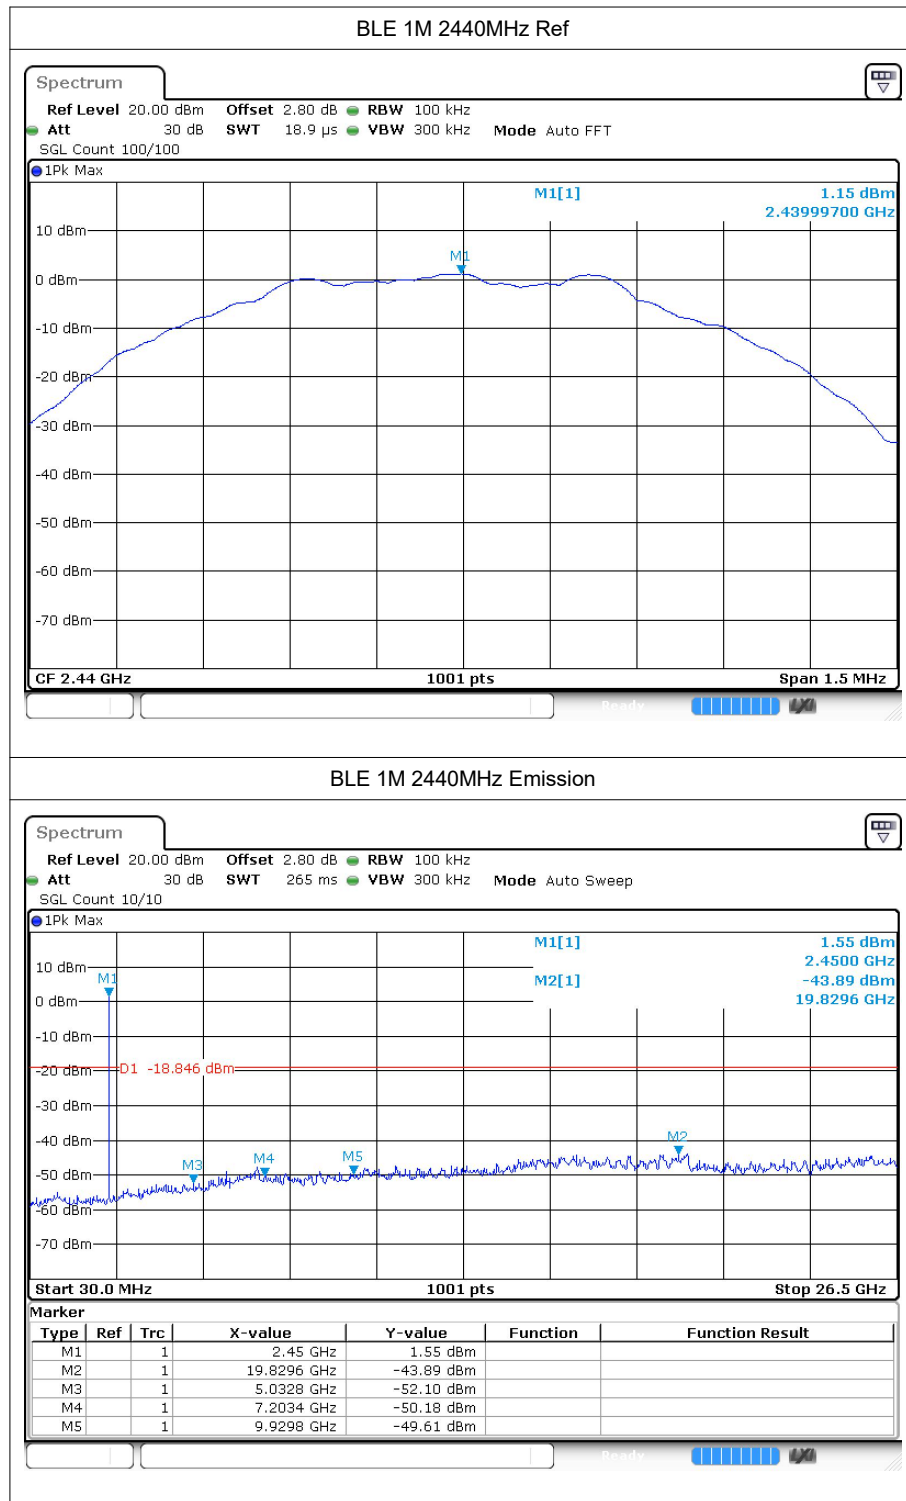

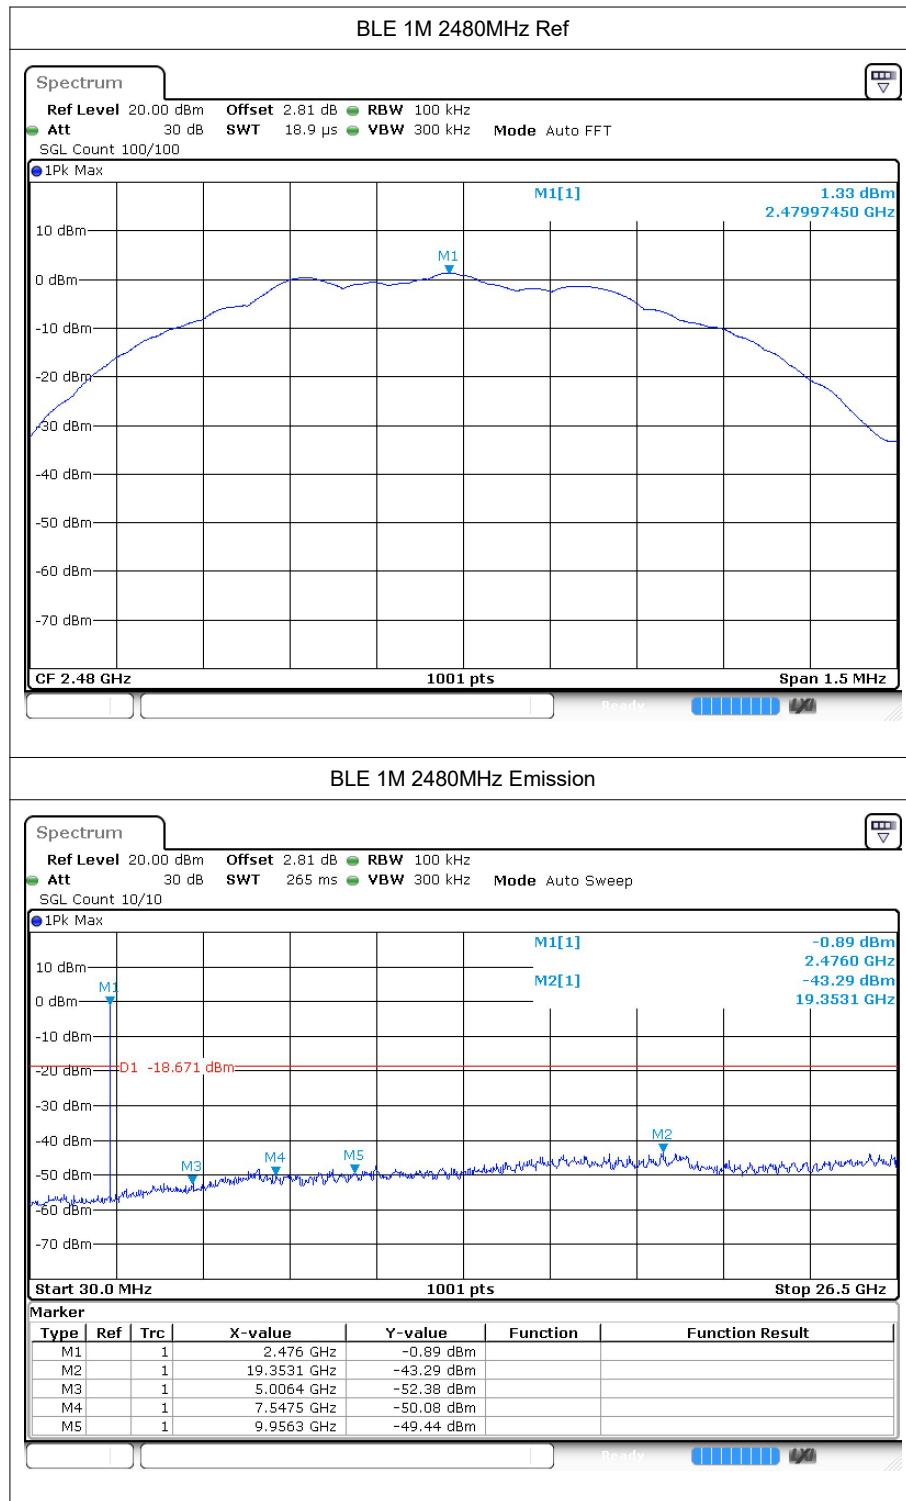

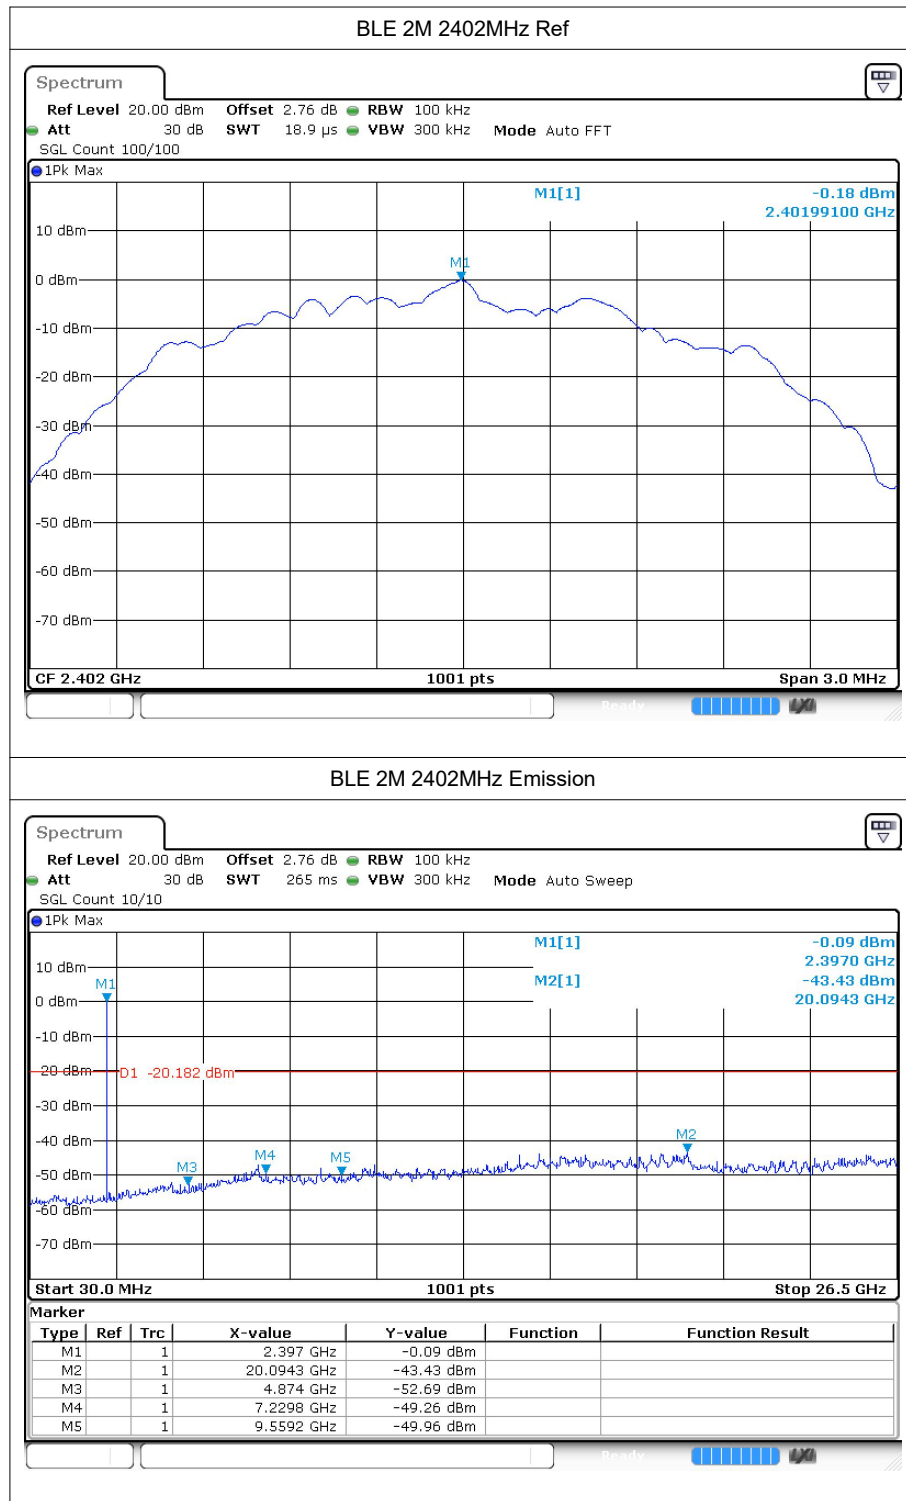

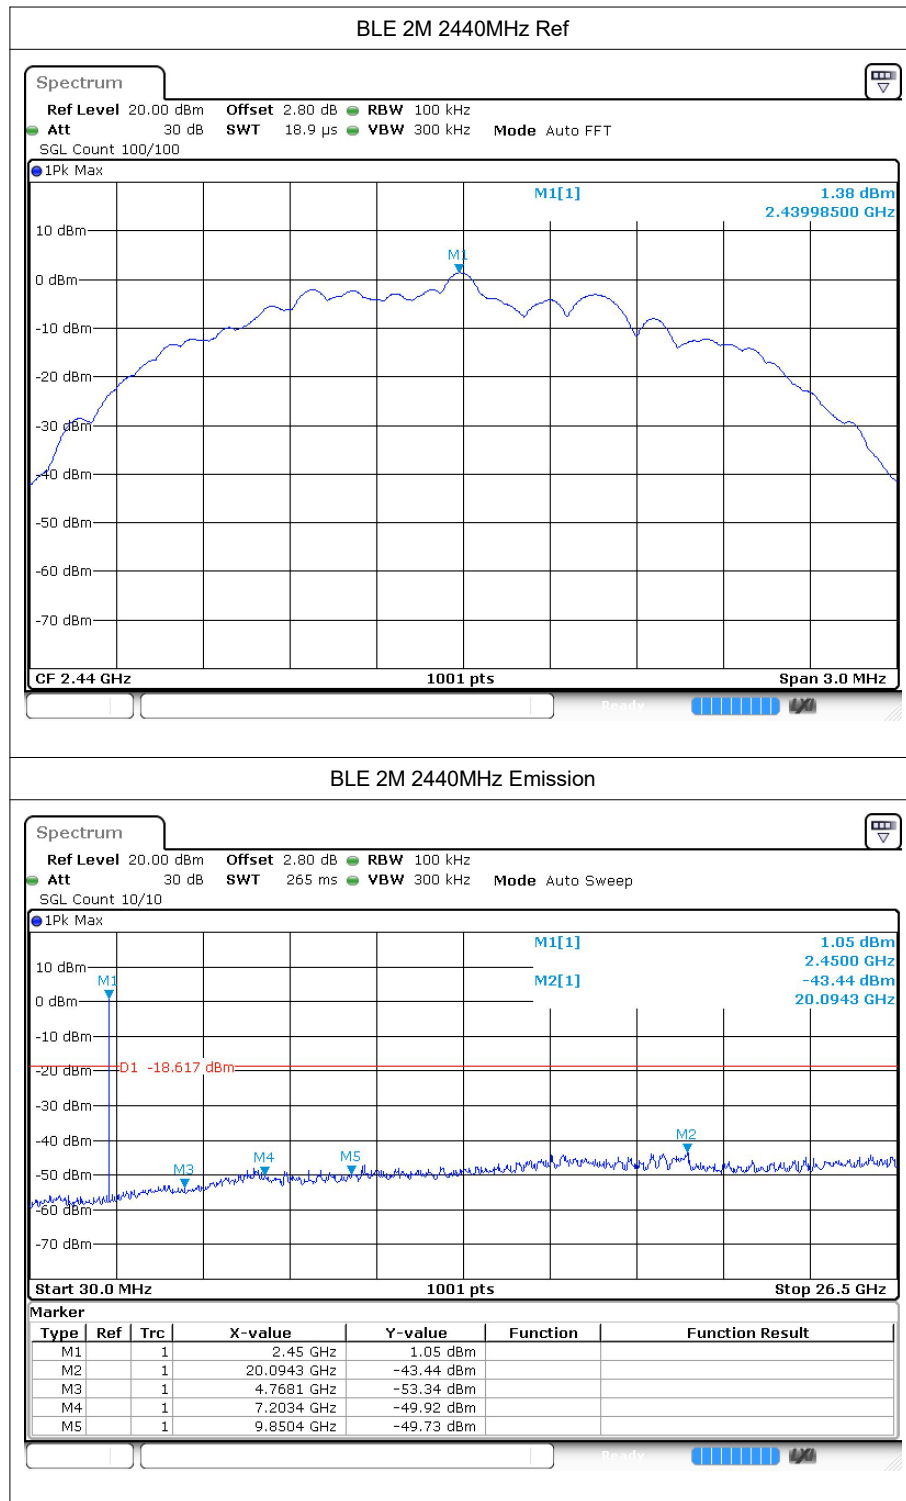

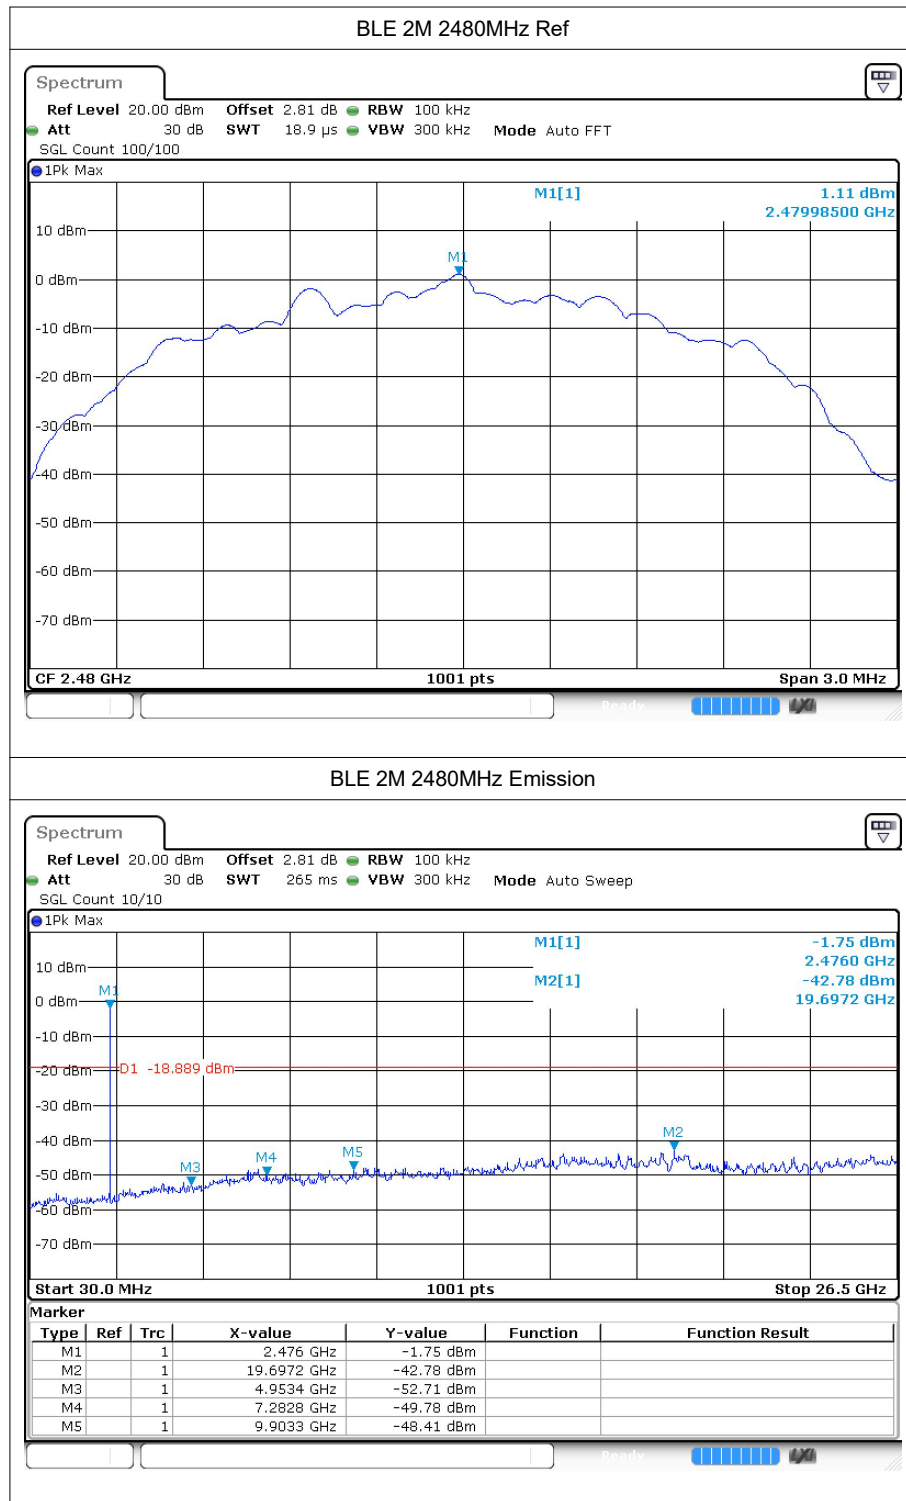





7 Restrict Band


7.1 Test Result


Mode	Frequency (MHz)	Spur Freq (MHz)	Power (dBm)	Gain (dBi)	Duty Factor	E (dBuV/m)	Detector	Limit (dBuV/m)	Verdict
BLE 1M	2402	2310	-50.55	2	-	46.71	Peak	74	Pass
BLE 1M	2402	2310	-56.34	2	1.94	42.86	Average	54	Pass
BLE 1M	2402	2386.224	-46.31	2	-	50.95	Peak	74	Pass
BLE 1M	2402	2343.216	-54.59	2	1.94	44.61	Average	54	Pass
BLE 1M	2402	2390	-50.45	2	-	46.81	Peak	74	Pass
BLE 1M	2402	2390	-57.34	2	1.94	41.86	Average	54	Pass
BLE 1M	2480	2483.5	-48.67	2	-	48.59	Peak	74	Pass
BLE 1M	2480	2483.5	-56.07	2	1.94	43.13	Average	54	Pass
BLE 1M	2480	2485.504	-45.16	2	-	52.1	Peak	74	Pass
BLE 1M	2480	2487.448	-54.88	2	1.94	44.32	Average	54	Pass
BLE 1M	2480	2500	-47.77	2	-	49.49	Peak	74	Pass
BLE 1M	2480	2500	-56.05	2	1.94	43.15	Average	54	Pass
BLE 2M	2402	2310	-50.01	2	-	47.25	Peak	74	Pass
BLE 2M	2402	2310	-57.27	2	4.63	44.62	Average	54	Pass
BLE 2M	2402	2341.008	-46.98	2	-	50.28	Peak	74	Pass
BLE 2M	2402	2338.128	-54.43	2	4.63	47.46	Average	54	Pass
BLE 2M	2402	2390	-51.31	2	-	45.95	Peak	74	Pass
BLE 2M	2402	2390	-56.62	2	4.63	45.27	Average	54	Pass
BLE 2M	2480	2483.5	-47.37	2	-	49.89	Peak	74	Pass
BLE 2M	2480	2483.5	-55.47	2	4.54	46.33	Average	54	Pass
BLE 2M	2480	2487.4	-44.28	2	-	52.98	Peak	74	Pass
BLE 2M	2480	2487.472	-54.7	2	4.54	47.1	Average	54	Pass
BLE 2M	2480	2500	-48.69	2	-	48.57	Peak	74	Pass
BLE 2M	2480	2500	-56.67	2	4.54	45.13	Average	54	Pass

7.2 Test Graphs

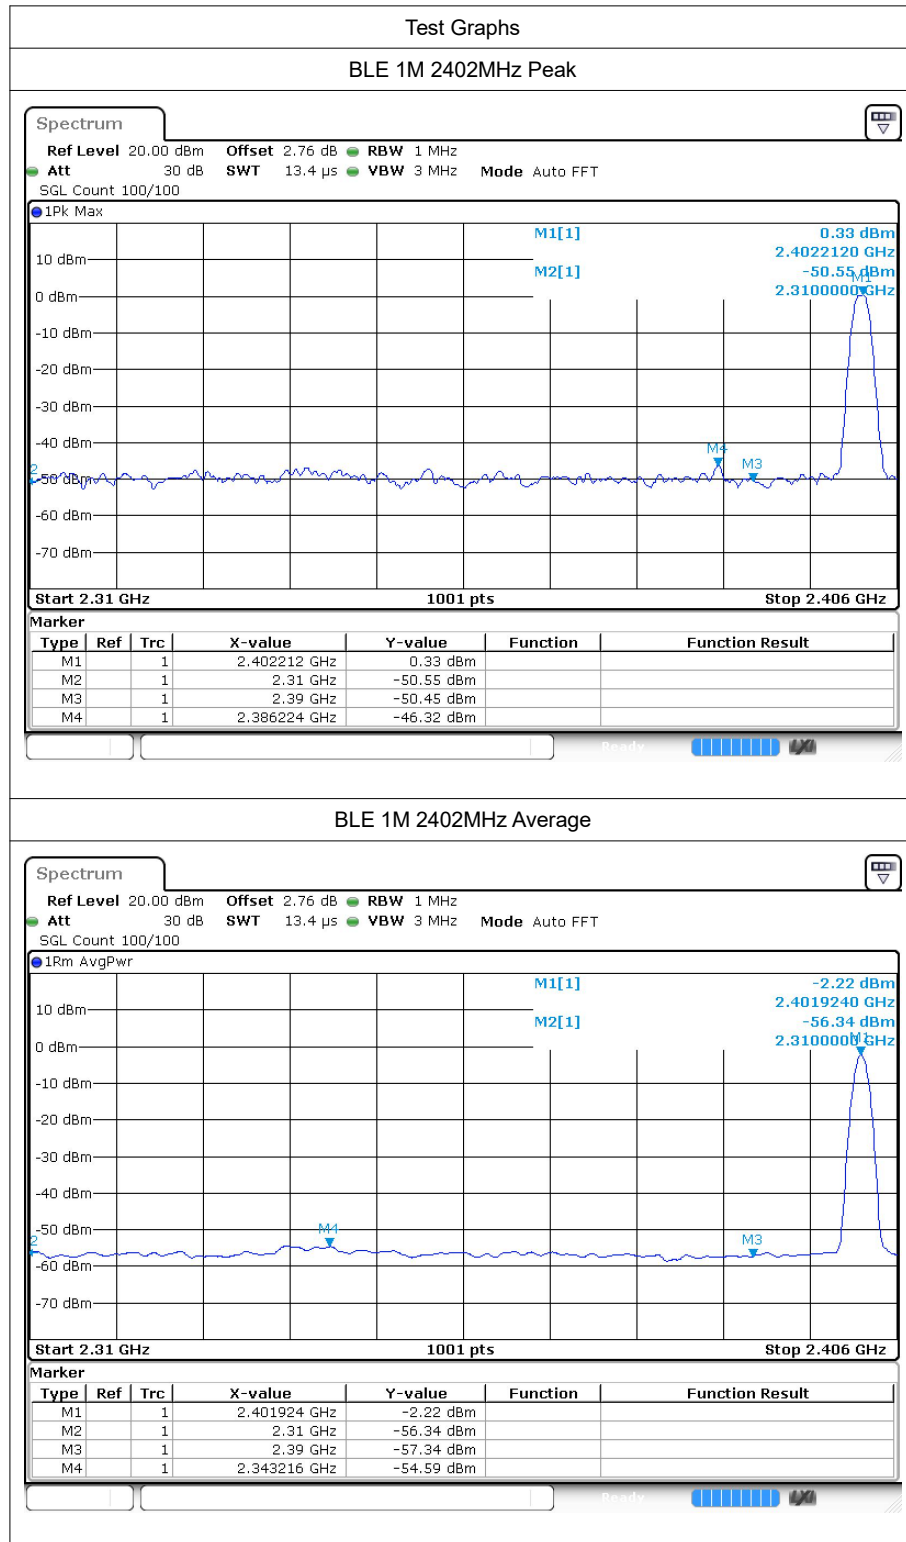

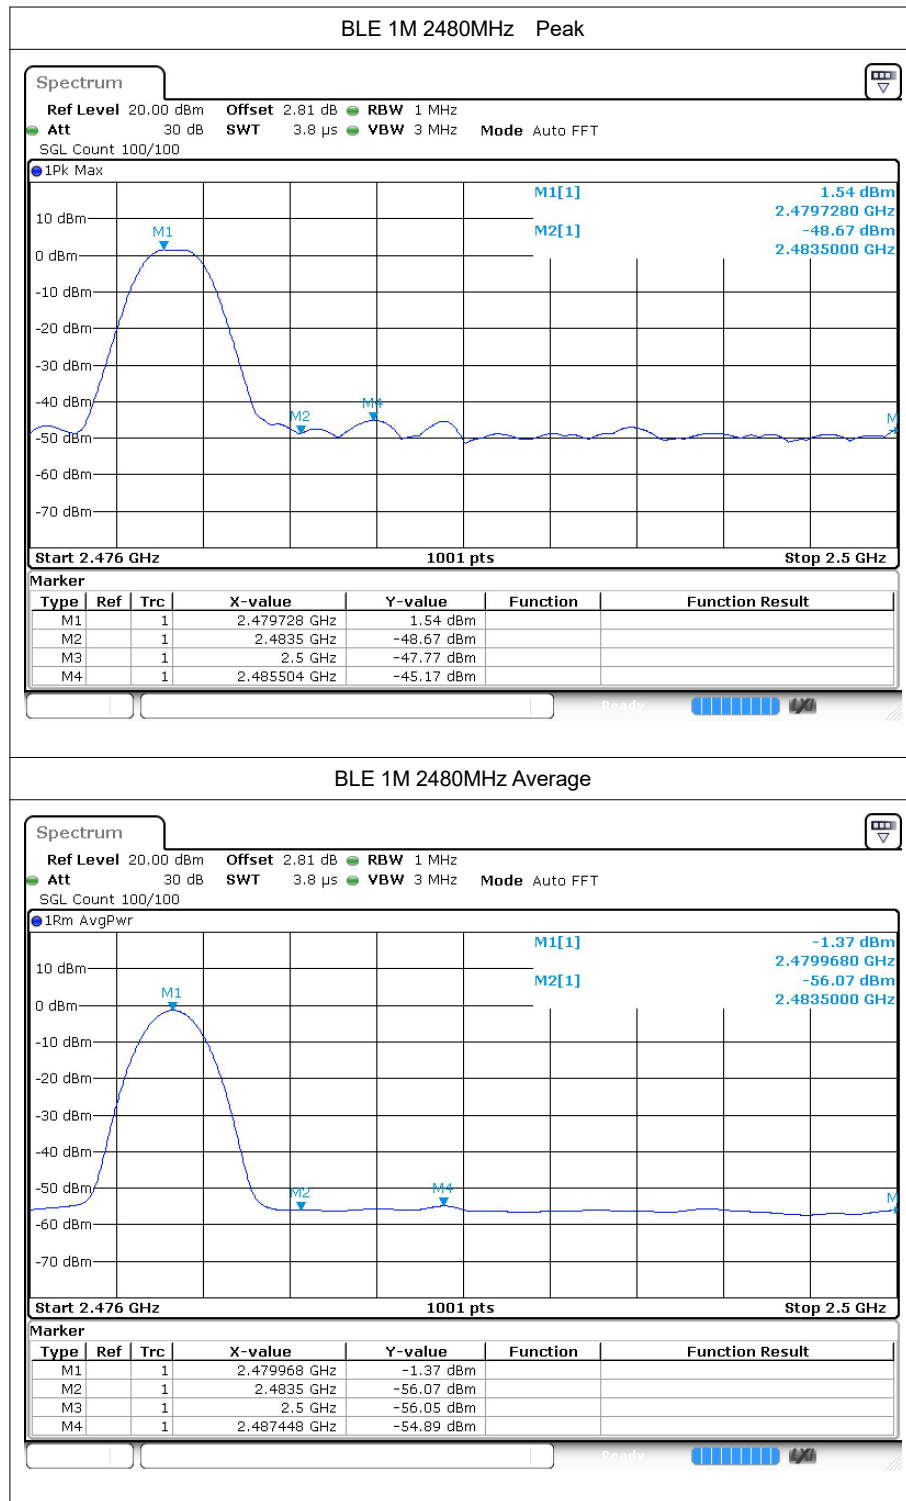

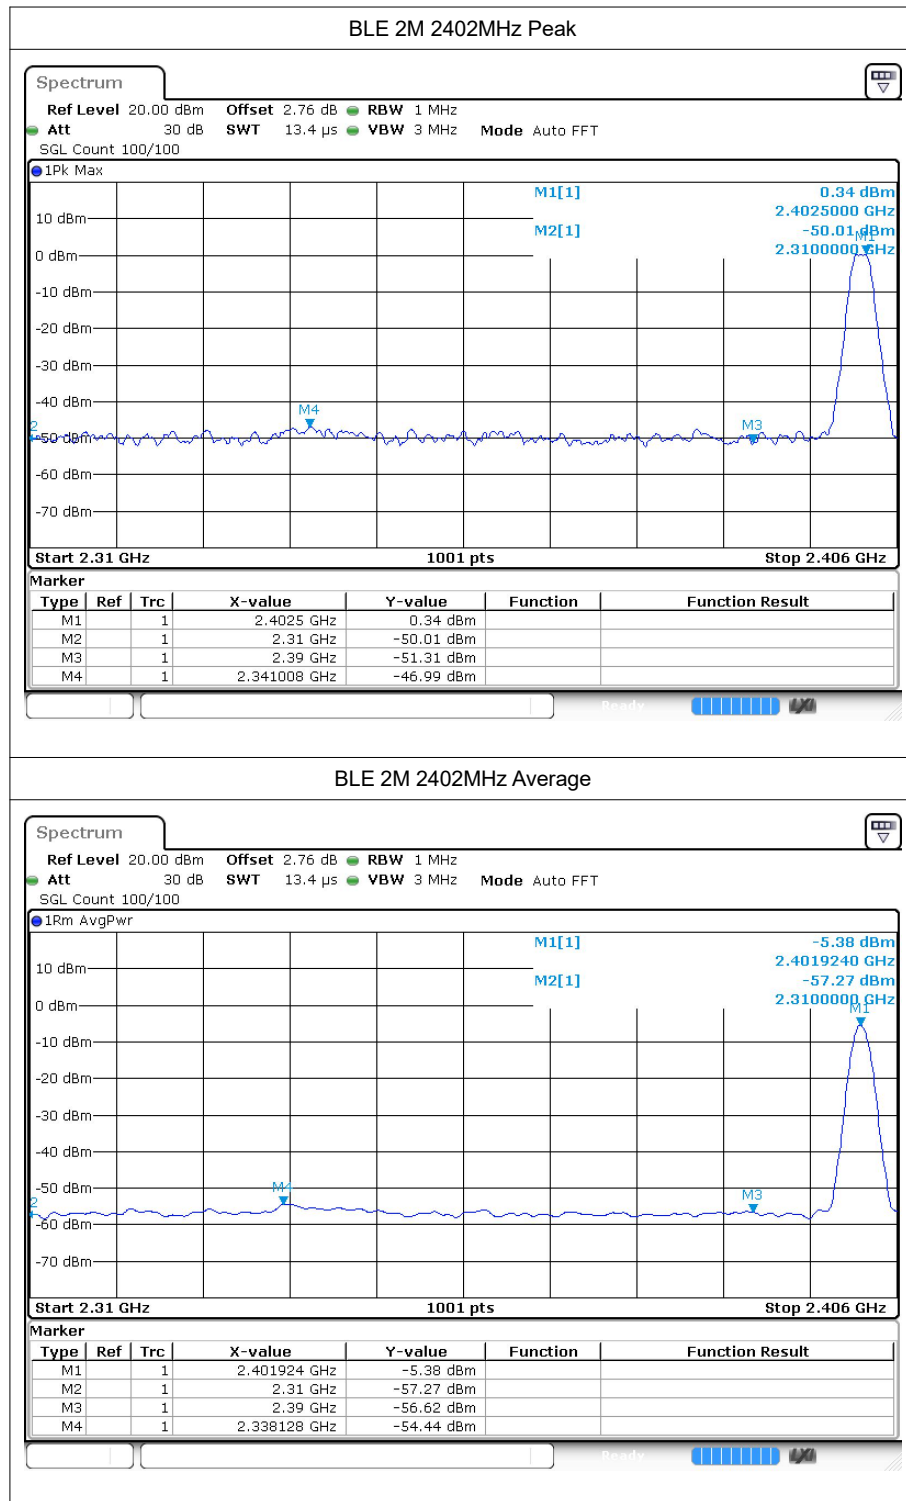

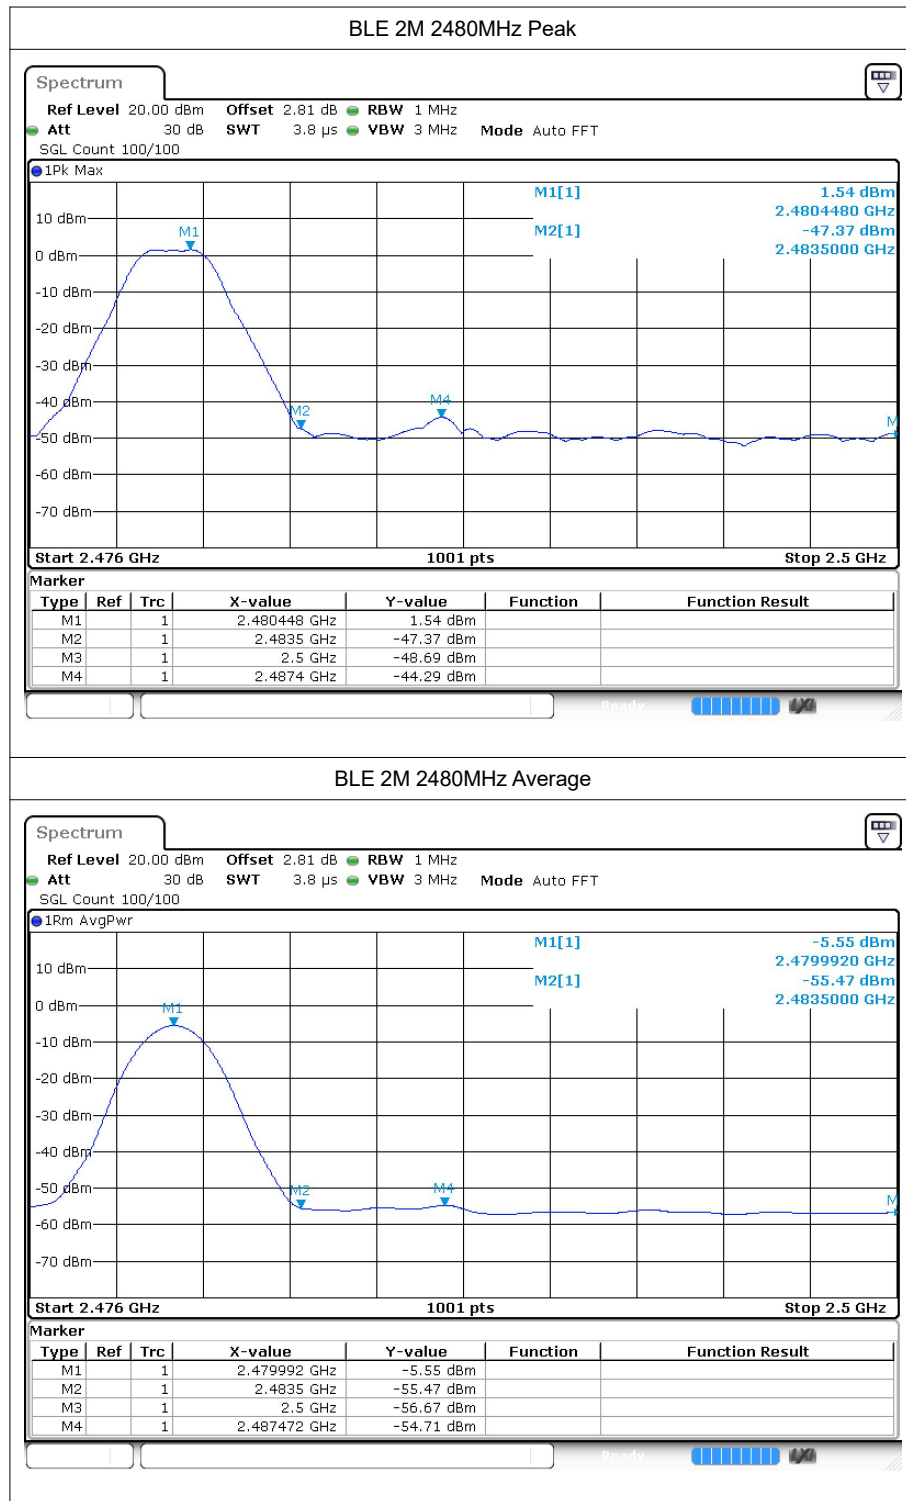

---The End---