

# Maximum Permissible Exposure Report

FCC Part 1(1.1310) and Part 2(2.1091)

Portable Power Station

Model No.: PPS730

FCC ID: 2BFAX-PPS730

Report No.: NCT24003247E-2

Issue Date: Jan. 30, 2024

*Prepared for*

American Power Conversion Holdings Inc., Taiwan Branch

5F., No.189, Sec. 2, Jiuzong Rd., Neihu District, Taipei City 11494, Taiwan

*Prepared by*

Shenzhen NCT Testing Technology Co., Ltd.

A101&2F B2, Fuqiao 6th Area, Xintian Community, Fuhai Street, Baoan District,  
Shenzhen, People's Republic of China

TEL: 400-8868-419

FAX: 86-755-27790922

**TABLE OF CONTENT**

Test Report Description	Page
<b>1. SUMMARY OF TEST RESULT .....</b>	<b>4</b>
<b>2. GENERAL INFORMATION .....</b>	<b>5</b>
2.1. DESCRIPTION OF DEVICE (EUT).....	5
2.2. DESCRIPTION OF SUPPORT UNITS.....	6
2.3. TEST SETUP .....	6
2.4. DESCRIPTION OF TEST FACILITY.....	7
2.5. MEASUREMENT UNCERTAINTY.....	7
<b>3. MEASURING DEVICE AND TEST EQUIPMENT .....</b>	<b>8</b>
3.1. FOR MPE MEASUREMENT .....	8
<b>4. RF EXPOSURE .....</b>	<b>9</b>
4.1. MEASURING STANDARD .....	9
4.2. REQUIREMENTS .....	9
4.3. TEST CONFIGURATION.....	10
4.4. LIMITS .....	11
4.5. MEASURING RESULTS .....	13
<b>5. PHOTOGRAPHS OF TEST SETUP .....</b>	<b>15</b>

**TEST REPORT DESCRIPTION**

Applicant : American Power Conversion Holdings Inc., Taiwan Branch  
Address : 5F., No.189, Sec. 2, Jiuzong Rd., Neihu District, Taipei City 11494, Taiwan  
Manufacturer : Guangdong Greenway Technology Co., Ltd.  
Address : No. 6 Tongsha Tonghuan Road, Dongcheng Street, Dongguan, Guangdong, China  
EUT : Portable Power Station  
Model Name : PPS730  
Trademark : Schneider Electric


**Measurement Procedure Used:**

FCC Part 1(1.1310) and Part 2(2.1091)  
KDB680106 D01 Wireless Power Transfer v04

The device described above is tested by Shenzhen NCT Testing Technology Co., Ltd. to determine the maximum emission levels emanating from the device and the severe levels of the device can endure and its performance criterion. The measurement results are contained in this test report and Shenzhen NCT Testing Technology Co., Ltd. is assumed full of responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT (Equipment Under Test) is technically compliant with the FCC (Federal Communications Commission) requirements.

This report applies to above tested sample only and shall not be reproduced in part without written approval of Shenzhen NCT Testing Technology Co., Ltd.

Test Engineer:



Keven Wu / Engineer

Technical Manager:



Henry Wang / Manager



## 1. SUMMARY OF TEST RESULT

EMISSION		
Description of Test Item	Standard & Limits	Results
MPE	FCC Part 1(1.1310) and Part 2(2.1091) KDB680106 D01 Wireless Power Transfer v04	Pass
Note: N/A is an abbreviation for Not Applicable.		

## 2. GENERAL INFORMATION

### 2.1. Description of Device (EUT)

EUT : Portable Power Station  
Model Number : PPS730  
Serise Number : /  
Mode difference : /  
Power Rating : Input:  
DC IN: 12-30V/10A  
AC IN: AC 120V/60Hz 80W max  
AC Output: AC 120V/60Hz 700W max  
DC Output: Total 295W max  
USB-A x2: DC 5V/2.4A  
USB-A QC: 18W (DC 5V/3A, 9V/2A, 12V/1.5A)  
USB-C PD: 100W (DC 5V/3A, 9V/3A, 12V/3A, 15V/3A, 20V/5A)  
USB-C QC: 18W (DC 5V/3A, 9V/2A, 12V/1.5A)  
DC OUT:  
Car Port: 12V/10A  
DC 5521 Port x2: 12V/5A  
Car Port & DC 5521 Port Total: 120W Max  
Wireless Output: 15W max  
Capacity: 738Wh/14.76V

#### Operation

Frequency for WPT : 110.5-205 kHz  
(Wireless Power  
Transmission)

Modulation : ASK (Amplitude Shift Keying)

Antenna Type: : Coil Antenna

Date of Received : Jan. 19, 2024

Date of Test : Jan. 19, 2024 to Jan. 30, 2024


## 2.2. Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
E-1	Portable Power Station	N/A	PPS730	N/A	EUT
E-2	Phone	Xiaomi	Mi14ultra	N/A	Auxiliary

Note: (1)The support equipment was authorized by Declaration of Confirmation.  
(2)For detachable type I/O cable should be specified the length in cm in 『Length』 column.

## 2.3. Test Setup

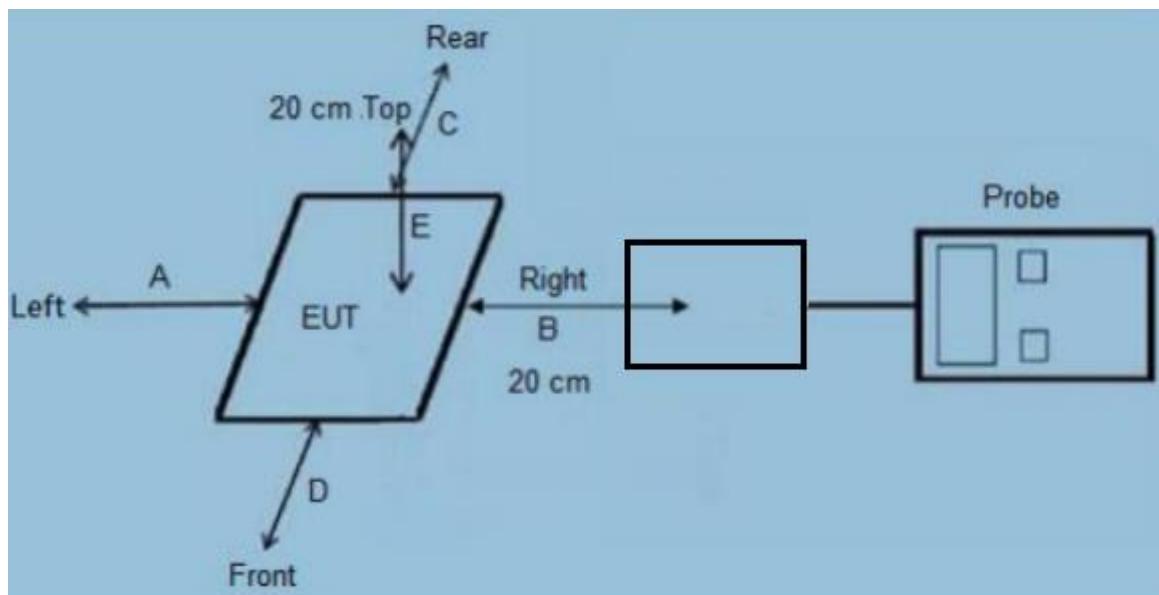

## 2.4. Description of Test Facility

### Site Description

EMC Lab. : Accredited by CNAS, 2022-09-27  
The certificate is valid until 2028.01.07  
The Laboratory has been assessed and proved to be in compliance with  
CNAS-CL01:2006 (identical to ISO/IEC 17025:2017)  
The Certificate Registration Number is L8251

Designation Number: CN1347  
Test Firm Registration Number: 894804  
Accredited by A2LA, June 14, 2023  
The Certificate Registration Number is 6837.01

Accredited by Industry Canada, November 09, 2018  
The Conformity Assessment Body Identifier is CN0150  
Company Number: 30806

Name of Firm : Shenzhen NCT Testing Technology Co., Ltd.  
Site Location : A101&2F B2, Fuqiao 6th Area, Xintian Community, Fuhai Street, Baoan  
District, Shenzhen, People's Republic of China

## 2.5. Measurement Uncertainty

Parameter	Uncertainty
RF output power, conducted	±1.0dB
Power Spectral Density, conducted	±2.2dB
Radio Frequency	± 1 x 10 <sup>-6</sup>
Bandwidth	± 1.5 x 10 <sup>-6</sup>
Time	±2%
Duty Cycle	±2%
Temperature	±1°C
Humidity	±5%
DC and low frequency voltages	±3%
Conducted Emissions (150kHz~30MHz)	±3.24dB
Radiated Emission(30MHz~1GHz)	±5.03dB
Radiated Emission(1GHz~25GHz)	±4.74dB
Electric Field Emissions	±0.08V/m
Magnetic Field Emissions	±0.02A/m
uT	±0.01

### 3. MEASURING DEVICE AND TEST EQUIPMENT

#### 3.1. For MPE Measurement

Used	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
<input checked="" type="checkbox"/>	Exposure Level Tester(9kHz-400kHz)	Narda	EHP-200A	180ZX00634	2023.06.21	2024.06.20

## 4. RF EXPOSURE

### 4.1. Measuring Standard

FCC Part 1(1.1310) and Part 2(2.1091)

### 4.2. Requirements

Three different categories of transmitters are defined by the FCC in OET Bulletin 65. These categories are fixed installation, mobile, and portable and are defined as follows:

- o Fixed Installations: fixed location means that the device, including its antenna, is physically secured at a permanent location and is not able to be easily moved to another location. Additionally, distance to humans from the antenna is maintained to at least 2 meters.
- o Mobile Devices: a mobile device is defined as a transmitting device designed to be used in other than fixed locations and to be generally used in such a way that a separation distance of at least 20 centimeters is normally maintained between the transmitter's radiating structures and the body of the user or nearby persons. Transmitters designed to be used by consumers or workers that can be easily re-located, such as a wireless modem operating in a laptop computer, are considered mobile devices if they meet the 20 centimeter separation requirement. The FCC rules for evaluating mobile devices for RF compliance are found in 47 CFR §2.1091.
- o Portable Devices: a portable device is defined as a transmitting device designed to be used so that the radiating structure(s) of the device is/are within 20 centimeters of the body of the user. Portable device requirements are found in Section 2.1093 of the FCC's Rules (47 CFR§2.1093). The FCC also categorizes the use of the device as based upon the user's awareness and ability to exercise control over his or her exposure. The two categories defined are Occupational/ Controlled Exposure and General Population/Uncontrolled Exposure. These two categories are defined as follows:  
Occupational/Controlled Exposure: In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. This exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means. Awareness of the potential for RF exposure in a workplace or similar environment can be provided through specific training as part of a RF safety program. If appropriate, warning signs and labels can also be used to establish such awareness by providing prominent information on the risk of potential exposure and instructions on methods to minimize such exposure risks.  
General Population/Uncontrolled Exposure: The general population / uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity. Warning labels placed on low-power consumer devices such as cellular telephones are not considered sufficient to allow the device to be considered under the occupational/controlled category, and the general population/uncontrolled exposure limits apply to these devices.

#### 4.3. Test configuration

1. The field strength of both E-field and H-field was measured at 20cm(the 20 cm measured from thecenter of the probe(s) to the edge of the device) using the equipment list above for determiningcompliance with the MPE requirements of FCC Part 1.1310.
2. The RF power density was measured at 3 ifferent charge conditions: min load, mid load, max load.
3. Maximum E-field and H-field measurements were made 20cm from each side of the EUT. Alongthe side of the EUT and stil 20cm away from the edge of the EUT, the field probes were positioned atthe location where there is maximum field strength. The maximum E-field and H-field is reportedbelow.
4. This device uses a wireless phone for power transfer operating at thefrequency of 110-205kHz. Thus, the 300kHz limits were used: E-field Limit = 614 (V/m); H-field limit= 1.63 (A/m).
5. The EUT were measured according to the dictates of KDB680106 D01 Wireless Power Transferv04

## 4.4. Limits

(A) Limits for Occupational / Controlled Exposure

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/ cm <sup>2</sup> )	Averaging Time  E  <sup>2</sup> , H  <sup>2</sup> or S (minutes)
0.3-3.0	614	1.63	(100)*	6
3.0-30	1842 / f	4.89 / f	(900 / f)*	6
30-300	61.4	0.163	1.0	6
300-1500			F/300	6
1500-100,000			5	6

(B) Limits for General Population / Uncontrolled Exposure

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/ cm <sup>2</sup> )	Averaging Time  E  <sup>2</sup> , H  <sup>2</sup> or S (minutes)
0.3-1.34	614	1.63	(100)*	30
1.34-30	824/f	2.19/f	(180/f)*	30
30-300	27.5	0.073	0.2	30
300-1500			F/1500	30
1500-100,000			1.0	30

Note: f = frequency in MHz ; \*Plane-wave equivalent power density

**Test Mode:**

Test Mode	Description	Remark
Mode 1	EUT + Phone	5%
Mode 2		50%
Mode 3		95%
Remark: All the modes have tested and recorded the worst mode 1 & mode 2 & mode 3 in the report		

#### 4.5. Measuring Results

##### *Test Mode: Mode 1*

Electric Field Emissions		
Test Position	Measure Value (V/m)	Limit(V/m)
Top	3.47	614
Left	2.51	614
Right	3.44	614
Rear	3.36	614
Front	2.68	614

Magnetic Field Emissions		
Test Position	Measure Value (A/m)	Limit(A/m)
Top	0.0298	1.63
Left	0.0363	1.63
Right	0.0145	1.63
Rear	0.0196	1.63
Front	0.0185	1.63

##### *Test Mode: Mode 2*

Electric Field Emissions		
Test Position	Measure Value (V/m)	Limit(V/m)
Top	2.61	614
Left	2.57	614
Right	2.58	614
Rear	2.73	614
Front	2.62	614

Magnetic Field Emissions		
Test Position	Measure Value (A/m)	Limit(A/m)
Top	0.0211	1.63
Left	0.0217	1.63
Right	0.0149	1.63
Rear	0.0223	1.63
Front	0.0102	1.63

**Test Mode: Mode 3****Electric Field Emissions**

Test Position	Measure Value (V/m)	Limit(V/m)
Top	1.45	614
Left	1.36	614
Right	1.24	614
Rear	1.28	614
Front	1.35	614

**Magnetic Field Emissions**

Test Position	Measure Value (A/m)	Limit(A/m)
Top	0.0103	1.63
Left	0.0111	1.63
Right	0.0101	1.63
Rear	0.0085	1.63
Front	0.0122	1.63

## 5. PHOTOGRAPHS OF TEST SETUP

