

Radio Test Report

Report No.: STS2404070W01

Issued for

Shenzhen AOTO Electronics Co., Ltd.

Room 1805, Tower 2, Shum Yip Jinyuan Building, Qingshuihe Street, Luohu District, shenzhen, China.

Product Name: Remote control

Brand Name: AOTO

Model Name: RC-Q5

Series Model(s): N/A

FCC ID: 2BFB9-SID-AT2K210A

Test Standards: FCC Part 15.249

The test results presented in this report relate only to the object tested. This report shall not be reproduced, except in full, without the written approval of the Shenzhen STS Test Services Co., Ltd.



TEST REPORT

Applicant's Name: Shenzhen AOTO Electronics Co., Ltd.
Address: Room 1805, Tower 2, Shum Yip Jinyuan Building, Qingshuihe Street, Luohu District, shenzhen, China.
Manufacturer's Name: Shenzhen AOTO Electronics Co., Ltd.
Address: Room 1805, Tower 2, Shum Yip Jinyuan Building, Qingshuihe Street, Luohu District, shenzhen, China.

Product Description

Product Name: Remote control
Brand Name: AOTO
Model Name: RC-Q5
Series Model(s): N/A

Test Standards.....: FCC Part 15.249
Test Procedure: ANSI C63.10-2020

This device described above has been tested by STS, the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.
 The test results presented in this report relate only to the object tested. This report shall not be reproduced, except in full, without the written approval of the Shenzhen STS Test Services Co., Ltd.

Date of Test:
Date of receipt of test item: 15 Apr. 2024
Date of performance of tests ..: 15 Apr. 2024 ~ 18 Apr. 2024
Date of Issue: 18 Apr. 2024
Test Result.....: **Pass**

Testing Engineer :

Aaron Bu

(Aaron Bu)

Technical Manager :

Chris Chen

(Chris Chen)

Authorized Signatory :

Bovey Yang

(Bovey Yang)



Table of Contents	Page
1. SUMMARY OF TEST RESULTS	5
1.1 TEST FACTORY	6
1.2 MEASUREMENT UNCERTAINTY	6
2. GENERAL INFORMATION	7
2.1 GENERAL DESCRIPTION OF THE EUT	7
2.2 DESCRIPTION OF THE TEST MODES	8
2.3 TEST SOFTWARE AND POWER LEVEL	8
2.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	8
2.5 DESCRIPTION OF NECESSARY ACCESSORIES AND SUPPORT UNITS	9
2.6 EQUIPMENTS LIST FOR ALL TEST ITEMS	10
3. EMC EMISSION TEST	11
3.1 CONDUCTED EMISSION MEASUREMENT	11
3.2 RADIATED EMISSION MEASUREMENT	14
4.1 TEST PROCEDURE	34
4.2 TEST SETUP	34
4.3 EUT OPERATION CONDITIONS	34
4.4 TEST RESULTS	35
5. ANTENNA REQUIREMENT	37
5.1 STANDARD REQUIREMENT	37
5.2 EUT ANTENNA	37
APPENDIX- PHOTOS OF TEST SETUP	38



Revision History

Rev.	Issue Date	Report No.	Effect Page	Contents
00	18 Apr. 2024	STS2404070W01	ALL	Initial Issue



1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

FCC Part 15.249 , Subpart C			
Standard Section	Test Item	Judgment	Remark
15.207	Conducted Emission	N/A	
15.203	Antenna Requirement	Pass	
15.249	Radiated Spurious Emission	Pass	
15.249	Radiated Band Edge Emission	Pass	
15.249	Field Strength of fundamental	Pass	
15.215(c)	20dB Bandwidth	Pass	

NOTE:

- (1) 'N/A' denotes test is not applicable in this Test Report.
- (2) All tests are according to ANSI C63.10-2020.



1.1 TEST FACTORY

SHENZHEN STS TEST SERVICES CO., LTD

Add. :101, Building B, Zhuoke Science Park, No.190 Chongqing Road, ZhanChengShequ, Fuhai Sub-District, Bao'an District, Shenzhen, Guang Dong, China

FCC test Firm Registration Number: 625569

IC test Firm Registration Number: 12108A

A2LA Certificate No.: 4338.01

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately **95 %**.

No.	Item	Uncertainty
1	RF output power, conducted	$\pm 0.755\text{dB}$
2	Unwanted Emissions, conducted	$\pm 2.874\text{dB}$
3	All emissions, radiated 9K-30MHz	$\pm 3.80\text{dB}$
4	All emissions, radiated 30M-1GHz	$\pm 4.18\text{dB}$
5	All emissions, radiated 1G-6GHz	$\pm 4.90\text{dB}$
6	All emissions, radiated >6G	$\pm 5.24\text{dB}$
7	Conducted Emission (9KHz-150KHz)	$\pm 2.19\text{dB}$
8	Conducted Emission (150KHz-30MHz)	$\pm 2.53\text{dB}$
9	Occupied Channel Bandwidth	$\pm 3.5\%$
10	Power Spectral Density, conducted	$\pm 1.245\text{dB}$
11	Duty Cycle	$\pm 3.2\%$

2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF THE EUT

Product Name	Remote control
Brand Name	AOTO
Model Name	RC-Q5
Series Model(s)	N/A
Model Difference	N/A
Product Description	The EUT is a Remote control
	Operation Frequency: 2402 - 2480Mhz
	Modulation Type: GFSK
	Antenna Designation: PCB
	Antenna Gain(Peak): 2.63 dBi
Based on the application, features, or specification exhibited in User Manual, the EUT is considered as an ITE/Computing Device. More details of EUT technical specification, please refer to the User Manual.	
Rating	Input: 3V by 2 x 1.5V batteries
Connecting I/O Port(s)	Please refer to the Note 1.
Hardware version number	V1.0
Software version number	HT588_XJDZ_Q5_330

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User Manual.
- 2.

Channel List							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
01	2402	11	2422	21	2442	31	2462
02	2404	12	2424	22	2444	32	2464
03	2406	13	2426	23	2446	33	2466
04	2408	14	2428	24	2448	34	2468
05	2410	15	2430	25	2450	35	2470
06	2412	16	2432	26	2452	36	2472
07	2414	17	2434	27	2454	37	2474
08	2416	18	2436	28	2456	38	2476
09	2418	19	2438	29	2458	39	2478
10	2420	20	2440	30	2460	40	2480

3.

Test channel List		
Test Channel	EUT Channel	Test Frequency (MHz)
lowest	CH01	2402
middle	CH02	2440
highest	CH03	2480

Note: The antenna information refer the manufacturer provide report, applicable only to the tested sample identified in the report.

2.2 DESCRIPTION OF THE TEST MODES

For conducted test items and radiated spurious emissions
 Each of these EUT operation mode(s) or test configuration mode(s) mentioned below was evaluated respectively.

Pretest Mode	Description	Data/Modulation
Mode 1	TX/CH01	GFSK
Mode 2	TX/CH02	GFSK
Mode 3	TX/CH03	GFSK

Note:

(1) All above mode have been measurement, only worst data was reported.

2.3 TEST SOFTWARE AND POWER LEVEL


During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level.

RF Function	Type	Mode Or Modulation type	ANT Gain(dBi)	Power Class	Software For Testing
SRD	2.4G	GFSK	2.63	Default	sscom5.13.1

2.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product power parameters.

Radiated Spurious Emission Test

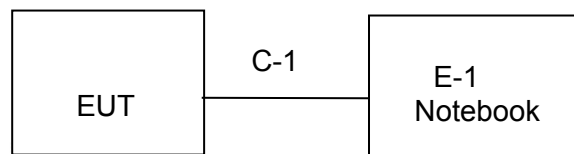

2.5 DESCRIPTION OF NECESSARY ACCESSORIES AND SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Necessary accessories

Item	Equipment	Mfr/Brand	Model/Type No.	Length	Note
	N/A	N/A	N/A	N/A	N/A

Support units

Item	Equipment	Mfr/Brand	Model/Type No.	Length	Note
E-1	Notebook	DELL	VOSTRO.3800	N/A	N/A
C-1	USB Cable	N/A	100cm	N/A	N/A

Note:

- (1) For detachable type I/O cable should be specified the length in cm in 『Length』 column.

2.6 EQUIPMENTS LIST FOR ALL TEST ITEMS

Radiation Test equipment

RF Radiation Test Equipment					
Kind of Equipment	Manufacturer	Type No.	Serial No.	Last Calibration	Calibrated Until
Temperature & Humidity	SW-108	SuWei	N/A	2024.03.15	2025.03.14
Pre-Amplifier(0.1M-3GHz)	EM	EM330	060665	2024.02.23	2025.02.22
Pre-Amplifier(1G-18GHz)	SKET	LNPA-01018G-45	SK2018080901	2023.09.26	2024.09.25
Pre-Amplifier(18G-40GHz)	SKET	LNPA_1840-50	SK2018101801	2024.02.23	2025.02.22
Active loop Antenna	ZHINAN	ZN30900C	16035	2023.02.28	2025.02.27
Bilog Antenna	TESEQ	CBL6111D	34678	2022.09.30	2024.09.29
Horn Antenna	SCHWARZBECK	BBHA 9120D	02014	2023.09.24	2025.09.23
Horn Antenna	A-INFOMW	LB-180400-KF	J211020657	2023.10.10	2025.10.09
Positioning Controller	MF	MF-7802	MF-780208587	N/A	N/A
Signal Analyzer	R&S	FSV 40-N	101823	2023.09.26	2024.09.25
Switch Control Box	N/A	N/A	N/A	N/A	N/A
Filter Box	BALUN Technology	SU319E	BL-SZ1530051	N/A	N/A
Antenna Mast	MF	MFA-440H	N/A	N/A	N/A
Turn Table	MF	SC100_1	60531	N/A	N/A
AC Power Source	APC	KDF-11010G	F214050035	N/A	N/A
DC power supply	HONGSHENG FENG	DPS-305AF	17064939	2023.09.26	2024.09.25
Temperature & Humidity	SW-108	SuWei	N/A	2024.03.15	2025.03.14
Test SW	EZ-EMC	Ver.STSLAB-03A1 RE			
RF Connected Test					
Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
Signal Analyzer	Agilent	N9020A	MY51510623	2024.02.23	2025.02.22
Temperature & Humidity	SW-108	SuWei	N/A	2024.03.15	2025.03.14

3. EMC EMISSION TEST

3.1 CONDUCTED EMISSION MEASUREMENT

3.1.1 POWER LINE CONDUCTED EMISSION LIMITS

The radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table.

FREQUENCY (MHz)	Quasi-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of “ * ” marked band means the limitation decreases linearly with the logarithm of the frequency in the range.


The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

3.1.2 TEST PROCEDURE

- a. The EUT is 0.8 m from the horizontal ground plane and 0.4 m from the vertical ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments are powered from additional LISN(s). The LISN provides 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN is at least 80 cm from the nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

3.1.3 TEST SETUP

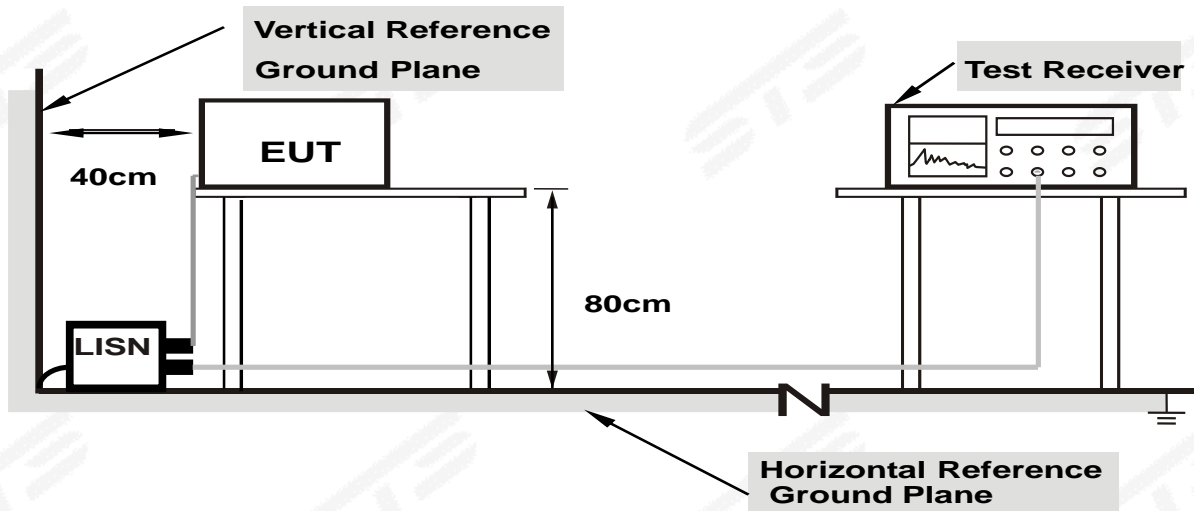

- Note: 1.Support units were connected to second LISN.**
2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes support.

3.1.4 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.



3.1.5 TEST RESULT

Temperature:	--(C)	Relative Humidity:	--%RH
Test Voltage:	N/A	Phase:	L/N
Test Mode:	N/A		

Note: product is battery operated and conducted emission test is not applicable.

3.2 RADIATED EMISSION MEASUREMENT

3.2.1 RADIATED EMISSION LIMITS

In any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on Part 15.249 and the Part 15.209(a) limit in the table below has to be followed.

Standard FCC 15.209

Frequencies (MHz)	Field Strength (microrvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
960~1000	500	3
Above 1000	Other:74.0 dB(μV)/m (Peak) 54.0 dB(μV)/m (Average)	3

Standard FCC 15.249

Frequency of Emission (MHz)	Field Strength of fundamental (millivolts /meter)	Field Strength of Harmonics (microvolts/meter)
900~928	50	500
2400~2483.5	50	500
5725~5875	50	500
24000~242500	250	2500

Notes:

- (1) Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation.
- (2) Emission level (dBuV/m) =20log Emission level (uV/m).

LIMITS OF RESTRICTED FREQUENCY BANDS

FREQUENCY (MHz)	FREQUENCY (MHz)	FREQUENCY (MHz)	FREQUENCY (GHz)
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7



6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	Above 38.6
13.36-13.41			

Spectrum Parameter	Setting
Detector	Peak/AV
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB (emission in restricted band)	>20BW
VB (emission in restricted band)	=3xRB

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~90kHz / RB 200Hz for PK & AV
	90kHz~110kHz / RB 200Hz for QP
	110kHz~490kHz / RB 200Hz for PK & AV
	490kHz~30MHz / RB 9kHz for QP
	30MHz~1000MHz / RB 120kHz for QP

3.2.2 TEST PROCEDURE


- a. The measuring distance of 3m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation (Below 1GHz)
- b. The measuring distance of 3m shall be used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation (Above 1GHz)
- c. The height of the test antenna shall vary between 1m to 4m. Both horizontal and vertical polarization of the antenna are set to make the measurement.
- d. The initial step in collecting radiated emission data is a receive peak detector mode. Pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- e. All readings are peak unless otherwise stated QP in column of Note. Peak denoted that the Peak reading complies with the QP limits and then QP Mode measurement didn't perform (Below 1GHz)
- f. All readings are Peak mode value unless otherwise stated AVG in column of Note. If the Peak mode measured value complies with the Peak limits and lower than AVG Limits, the EUT shall be deemed to meet Peak & AVG limits and then only Peak mode was measured, but AVG mode didn't perform. (Above 1GHz)
- g. For the actual test configuration, please refer to the related Item –EUT Test Photos.
Note: Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axes. The worst case emissions were reported.

3.2.3 DEVIATION FROM TEST STANDARD


No deviation

3.2.4 TEST SETUP


(A) Radiated Emission Test-Up Frequency Below 30MHz

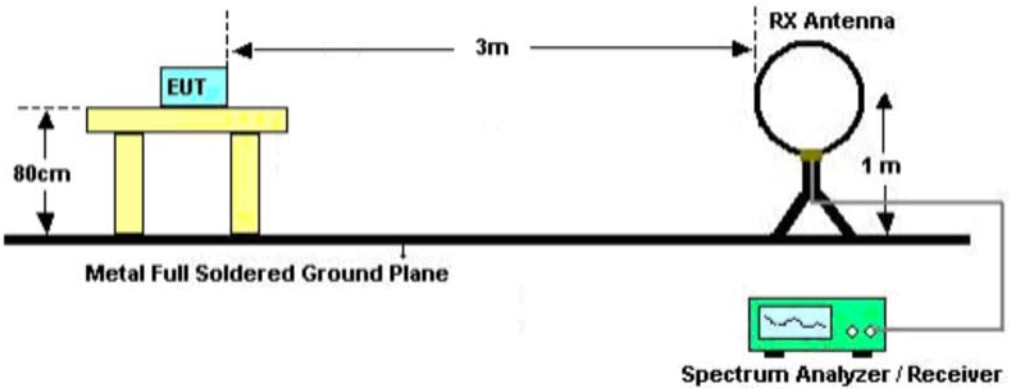

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

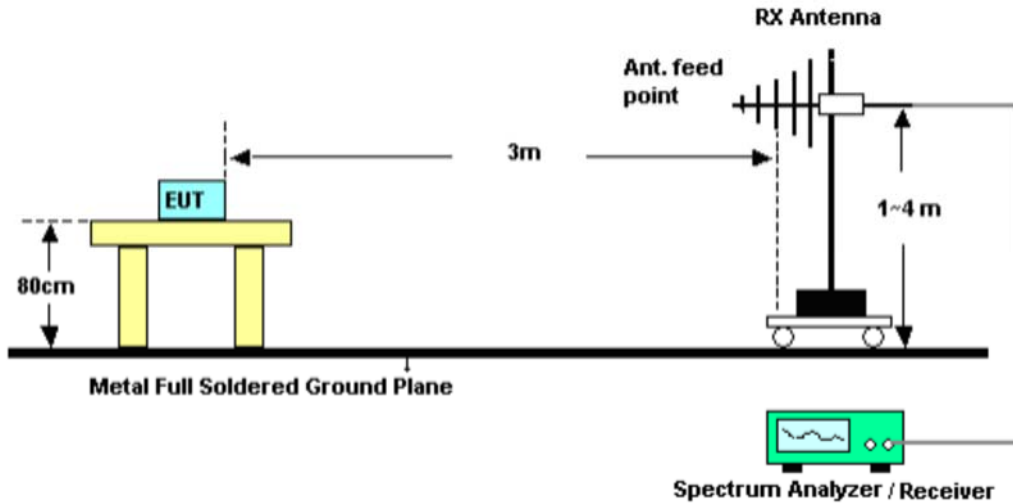

(C) Radiated Emission Test-Up Frequency Above 1GHz

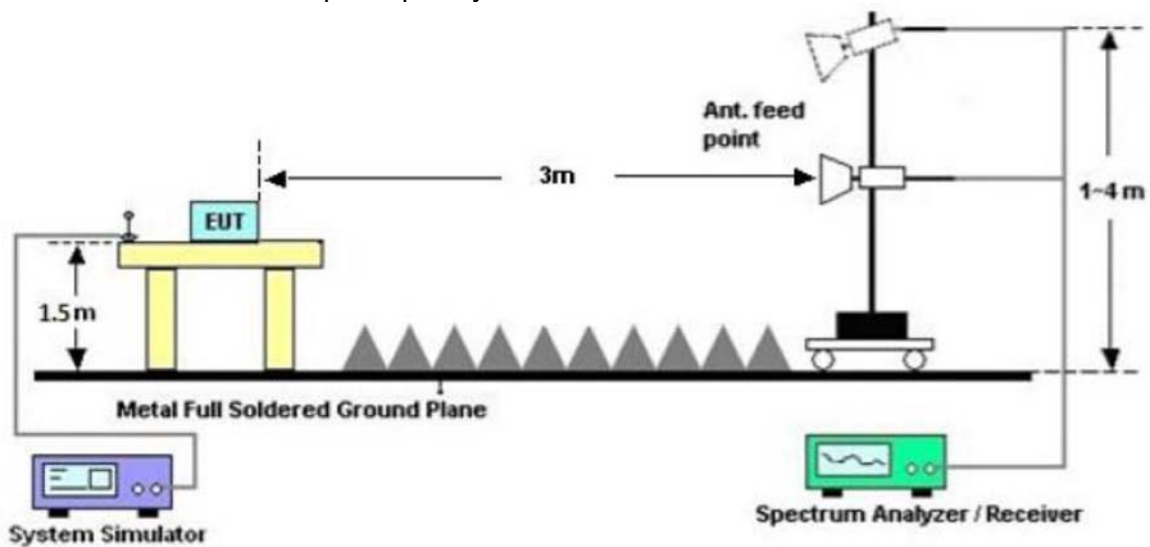



3.2.5 FIELD STRENGTH CALCULATION

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

Margin=PL-PK L or AL- AV L; Margin only shown the worst case.

Where

PR = Peak Reading

AR = Average Reading

PL = Peak Level

AL = Average Level

AF = Antenna Factor

PK L = Peak Limit

AV L = AV Limit

For example

Frequency (MHz)	PR (dBμV/m)	AR (dBμV/m)	AF (dB)	PL (dBμV/m)	AL (dBμV/m)	PK L (dBμV/m)	AV L (dBμV/m)	Margin (dB)
2178	40.23	30.31	9.83	50.06	40.14	74.00	54.00	-13.86

3.2.6 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

Below 30 MHz

Temperature:	23.1(C)	Relative Humidity:	60%RH
Test Voltage:	DC 3V	Polarization:	---
Test Mode:	TX Mode		

Freq.	Reading	Limit	Margin	State
(MHz)	(dBuV/m)	(dBuV/m)	(dB)	P/F
--	--	--	--	PASS
--	--	--	--	PASS

NOTE:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor = $40 \log(\text{specific distance}/\text{test distance})$ (dB);

Limit line = specific limits(dBuv) + distance extrapolation factor.

Between 30MHz – 1000 MHz Radiation Spurious


Temperature:	23.1(C)	Relative Humidity:	60%RH
Test Voltage:	DC 3V	Phase:	Horizontal
Test Mode:	Mode 1 /2/3(Mode 3 Worst mode)		

No.	Frequency (MHz)	Reading (dBUV)	Correct Factor(dB/m)	Result (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Remark
1	143.4900	54.82	-18.23	36.59	43.50	-6.91	peak
2	191.9900	55.20	-21.04	34.16	43.50	-9.34	peak
3	299.6600	54.06	-14.82	39.24	46.00	-6.76	peak
4	394.7200	48.64	-11.38	37.26	46.00	-8.74	peak
5	612.0000	41.34	-5.50	35.84	46.00	-10.16	peak
6	828.3100	37.92	-0.95	36.97	46.00	-9.03	peak

Remark:

1. Margin = Result (Result =Reading + Factor)–Limit
2. Factor= Antenna factor+Cable attenuation factor(cable loss)-Amplifier gain

80.0 dBUV/m

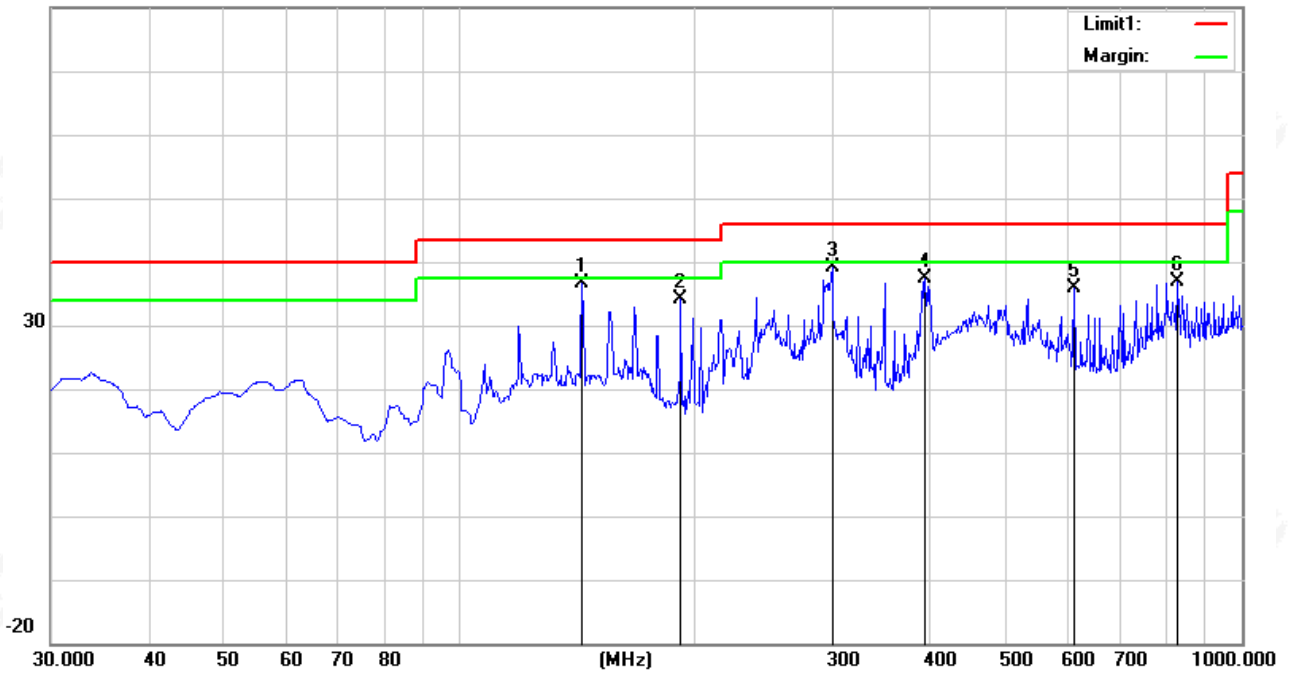


Temperature:	23.1(C)	Relative Humidity:	60%RH
Test Voltage:	DC 3V	Phase:	Vertical
Test Mode:	Mode 1/2/3 (Mode 3 Worst mode)		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	35.8200	49.21	-15.91	33.30	40.00	-6.70	peak
2	62.0100	59.70	-25.76	33.94	40.00	-6.06	peak
3	167.7400	56.16	-19.58	36.58	43.50	-6.92	peak
4	299.6600	54.06	-14.82	39.24	46.00	-6.76	peak
5	350.1000	49.46	-13.06	36.40	46.00	-9.60	peak
6	799.2100	37.84	-2.04	35.80	46.00	-10.20	peak

Remark:

- Margin = Result (Result =Reading + Factor) –Limit
- Factor= Antenna factor+Cable attenuation factor(cable loss)-Amplifier gain

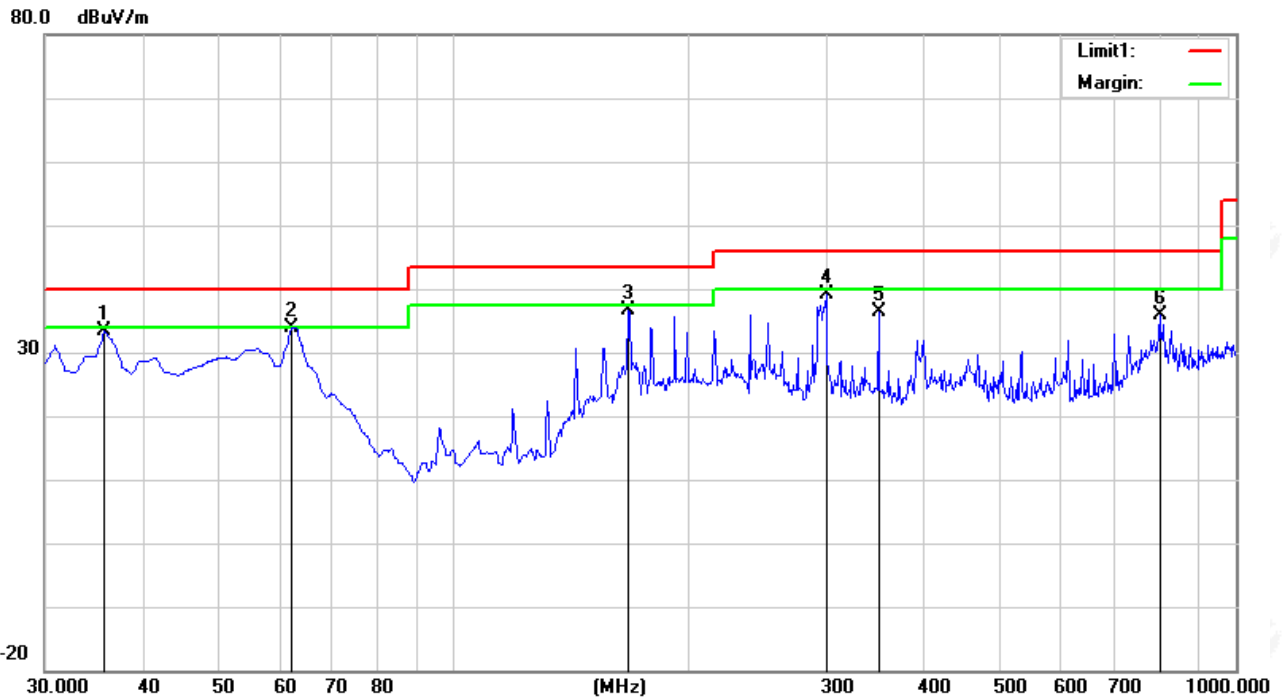




Above 1G Radiation Spurious

2402MHz
Horizontal


RE_FCC Test Case_FCC 15C 1GHz-18GHz

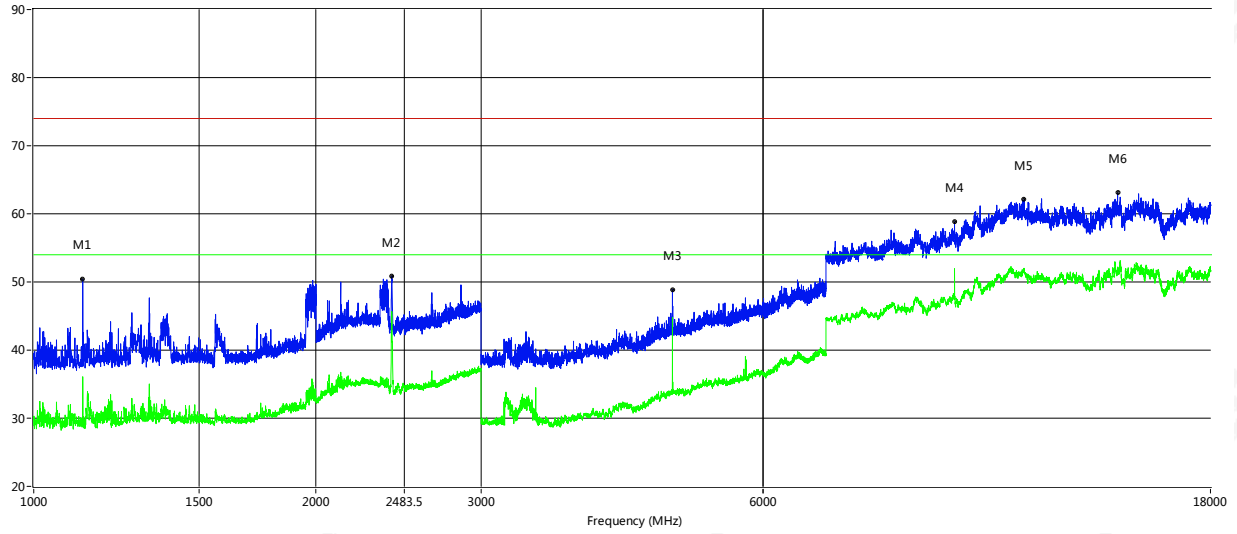

Frequency (MHz)	Peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	AV Limit (dBuV/m)	Over Limit (dB)	Table (o)	Height (cm)	Verdict
1128.000	50.44	36.10	-1.43	74.0	54.0	-17.90	138.30	100	Pass
2409.500	50.84	45.69	3.98	74.0	54.0	-8.31	1.60	100	Pass
4801.000	48.89	44.82	-6.97	74.0	54.0	-9.18	51.10	100	Pass
9601.500	58.84	51.94	5.77	74.0	54.0	-2.06	284.90	100	Pass
11389.000	62.11	51.50	9.72	74.0	54.0	-2.50	276.30	100	Pass
14328.750	63.08	51.72	11.00	74.0	54.0	-2.28	228.40	100	Pass

Vertical

RE_FCC Test Case_FCC 15C 1GHz-18GHz

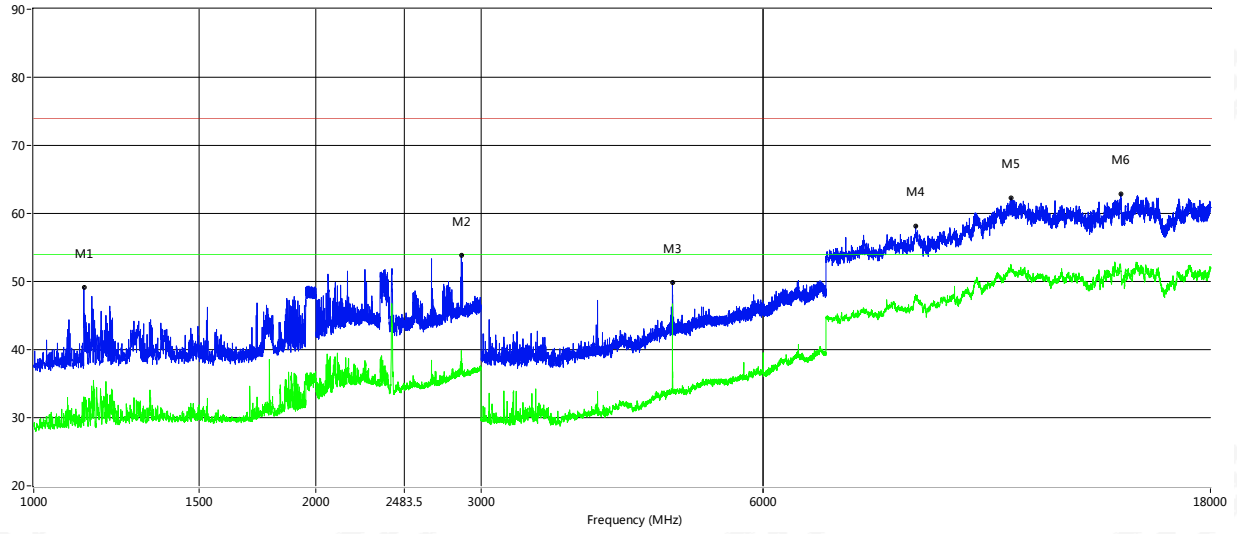


Frequency (MHz)	Peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	AV Limit (dBuV/m)	Over Limit (dB)	Table (o)	Height (cm)	Verdict
1131.000	49.09	33.06	-1.42	74.0	54.0	-20.94	214.50	100	Pass
2858.500	53.82	39.86	5.61	74.0	54.0	-14.14	193.10	100	Pass
4801.000	49.87	46.69	-6.97	74.0	54.0	-7.31	359.60	100	Pass
8727.000	58.12	48.08	5.08	74.0	54.0	-5.92	321.00	100	Pass
11037.000	62.32	52.33	10.02	74.0	54.0	-1.67	193.10	100	Pass
14444.250	62.89	51.96	10.90	74.0	54.0	-2.04	160.40	100	Pass



2440MHz
Horizontal


RE_FCC Test Case_FCC 15C 1GHz-18GHz

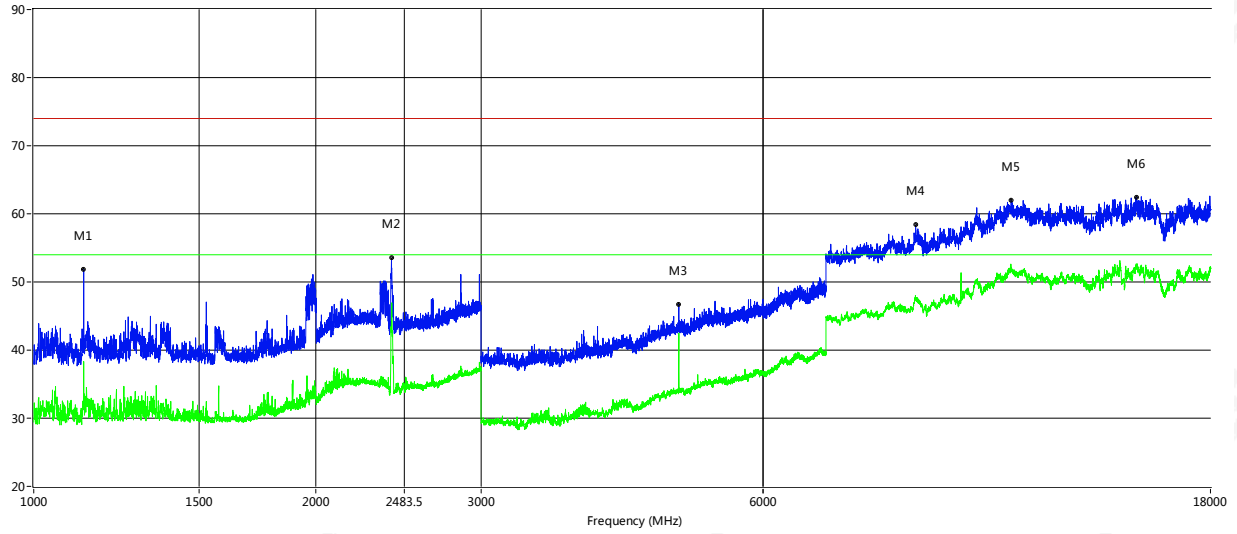

Frequency (MHz)	Peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	AV Limit (dBuV/m)	Over Limit (dB)	Table (o)	Height (cm)	Verdict
1130.500	51.80	38.31	-1.42	74.0	54.0	-15.69	296.20	100	Pass
2407.500	53.51	45.14	3.98	74.0	54.0	-8.86	207.30	100	Pass
4877.000	46.77	42.52	-6.53	74.0	54.0	-11.48	6.10	100	Pass
8727.000	58.37	47.41	5.08	74.0	54.0	-6.59	127.40	100	Pass
11034.250	61.95	52.15	10.04	74.0	54.0	-1.85	220.00	100	Pass
15008.000	62.39	52.17	10.39	74.0	54.0	-1.83	324.10	100	Pass

Vertical

RE_FCC Test Case_FCC 15C 1GHz-18GHz

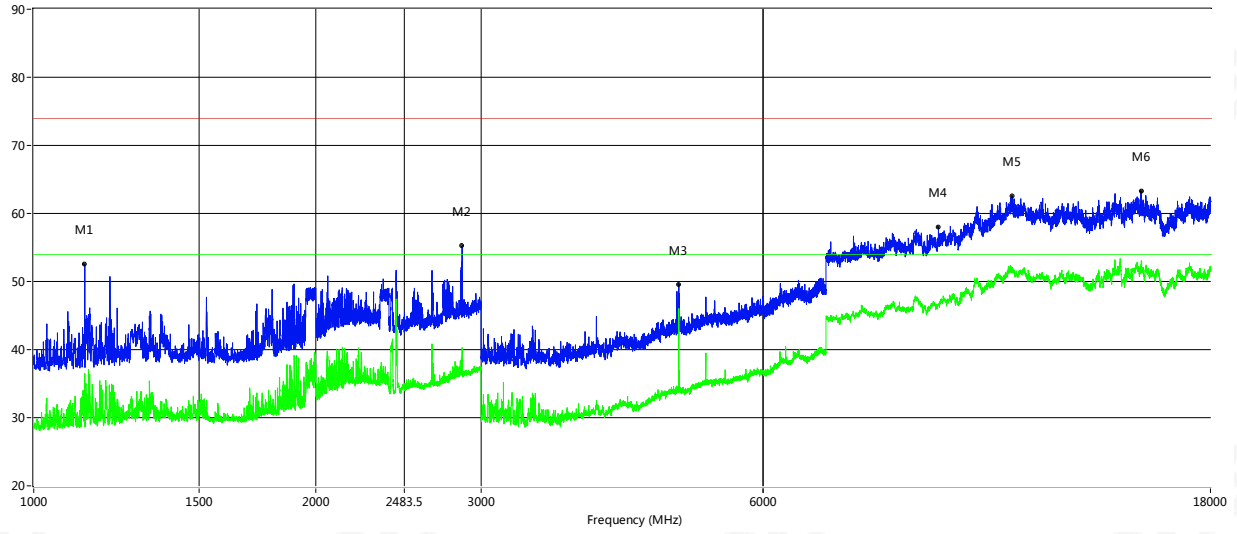


Frequency (MHz)	Peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	AV Limit (dBuV/m)	Over Limit (dB)	Table (o)	Height (cm)	Verdict
1133.500	52.55	36.48	-1.42	74.0	54.0	-17.52	213.10	100	Pass
2863.500	55.26	39.54	5.61	74.0	54.0	-14.46	215.90	100	Pass
4877.000	49.61	46.03	-6.53	74.0	54.0	-7.97	360.00	100	Pass
9227.500	57.97	46.72	4.62	74.0	54.0	-7.28	33.10	100	Pass
11059.000	62.58	51.77	9.90	74.0	54.0	-2.23	319.20	100	Pass
15175.750	63.32	52.13	10.86	74.0	54.0	-1.87	34.70	100	Pass



2480MHz
Horizontal


RE_FCC Test Case_FCC 15C 1GHz-18GHz

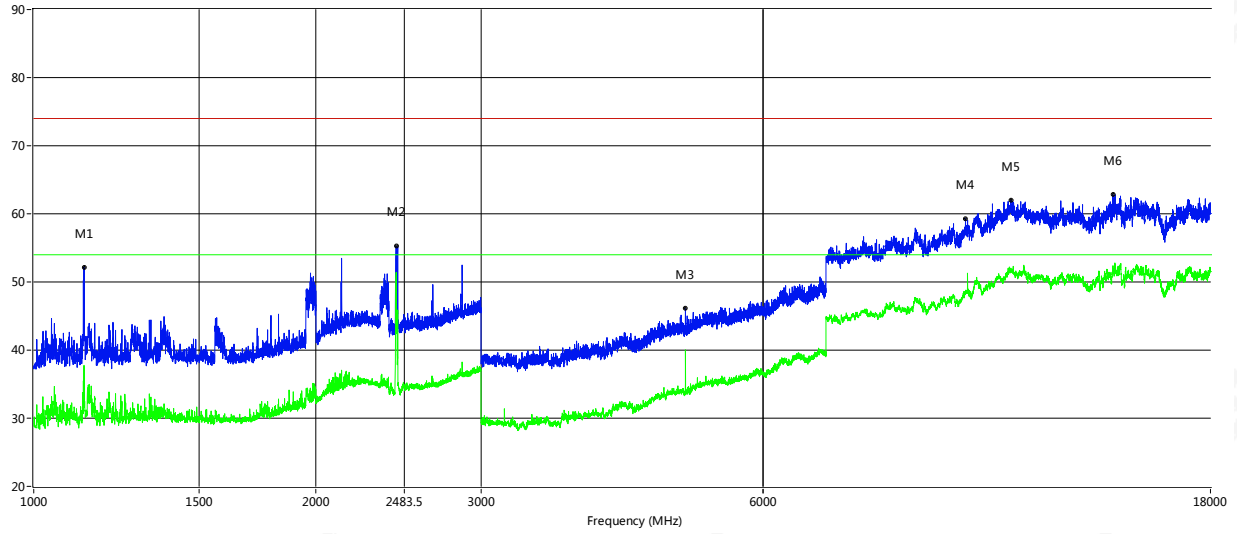

Frequency (MHz)	Peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	AV Limit (dBuV/m)	Over Limit (dB)	Table (o)	Height (cm)	Verdict
1131.500	52.21	37.76	-1.42	74.0	54.0	-16.24	114.90	100	Pass
2435.000	55.25	51.40	4.04	74.0	54.0	-2.60	323.80	100	Pass
4957.000	46.07	40.04	-6.38	74.0	54.0	-13.96	36.90	100	Pass
9862.750	59.33	48.59	6.34	74.0	54.0	-5.41	144.20	100	Pass
11031.500	62.00	51.90	10.05	74.0	54.0	-2.10	239.20	100	Pass
14169.250	62.84	52.38	11.09	74.0	54.0	-1.62	214.50	100	Pass

Vertical

RE_FCC Test Case_FCC 15C 1GHz-18GHz

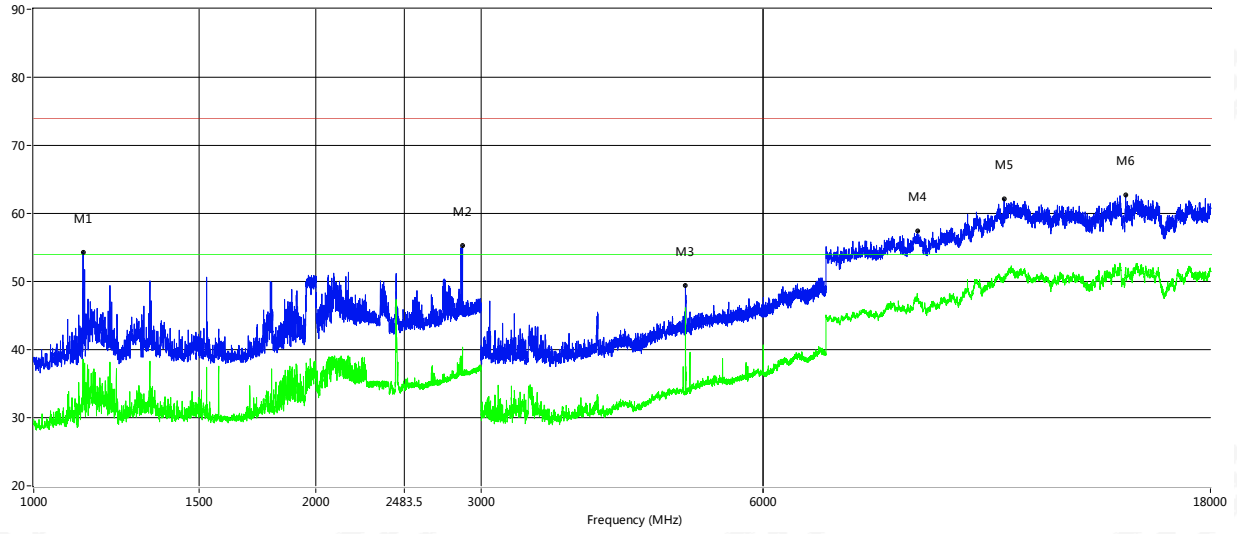

Frequency (MHz)	Peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	AV Limit (dBuV/m)	Over Limit (dB)	Table (o)	Height (cm)	Verdict
1128.500	54.34	38.61	-1.43	74.0	54.0	-15.39	251.20	100	Pass
2866.500	55.25	40.38	5.61	74.0	54.0	-13.62	213.50	100	Pass
4957.000	49.38	46.16	-6.38	74.0	54.0	-7.84	343.50	100	Pass
8765.500	57.42	47.54	4.96	74.0	54.0	-6.46	109.20	100	Pass
10841.750	62.12	50.45	8.76	74.0	54.0	-3.55	76.40	100	Pass
14614.750	62.68	51.77	11.16	74.0	54.0	-2.23	171.00	100	Pass



Duty cycle




Ton (ms)	Tp (ms)	Duty cycle(%)	Duty Factor
2.176	2.503	86.94%	1.22

Note: Duty Factor=20*LOG10(1/(Ton/Tp))

(Radiation Band edge)

2402MHz
Horizontal

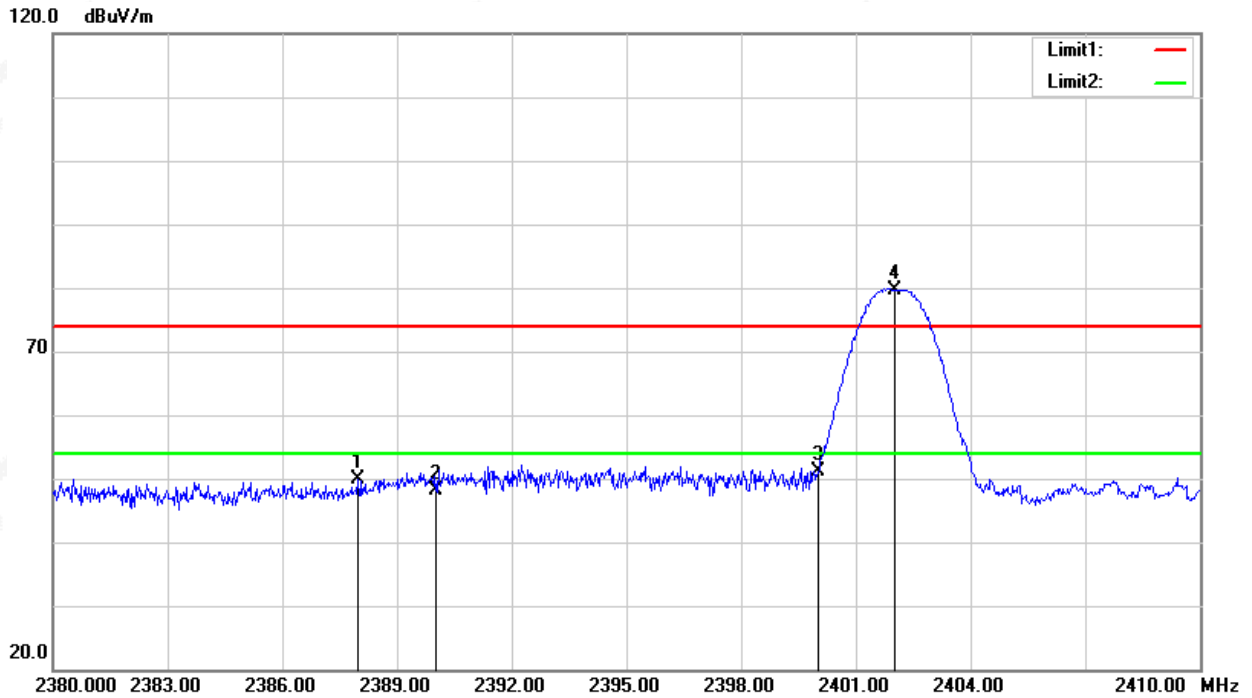


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2387.980	45.54	4.31	49.85	74.00	-24.15	peak
2	2390.000	43.71	4.34	48.05	74.00	-25.95	peak
3	2400.000	46.58	4.49	51.07	74.00	-22.93	peak

Fundamental Frequency

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Duty cycle Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4	2402.000	75.19	4.49	-	79.68	114.00	-34.32	peak
4	2402.000	75.19	4.49	1.22	78.46	94.00	-15.54	AVG

Vertical

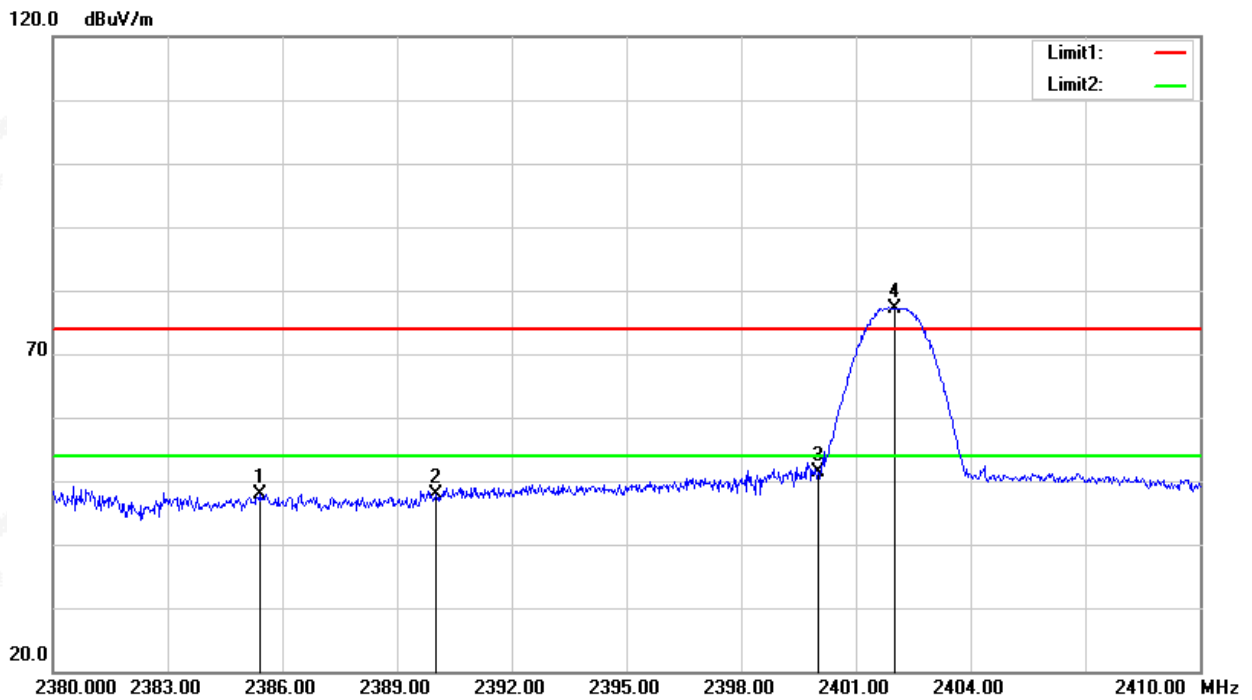


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2385.430	43.62	4.27	47.89	74.00	-26.11	peak
2	2390.000	43.52	4.34	47.86	74.00	-26.14	peak
3	2400.000	46.91	4.49	51.40	74.00	-22.60	peak

Fundamental Frequency

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Duty cycle Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4	2402.000	72.69	4.49	-	77.18	114.00	-36.82	peak
4	2402.000	72.69	4.49	1.22	75.96	94.00	-18.04	AVG


2440MHz
Horizontal

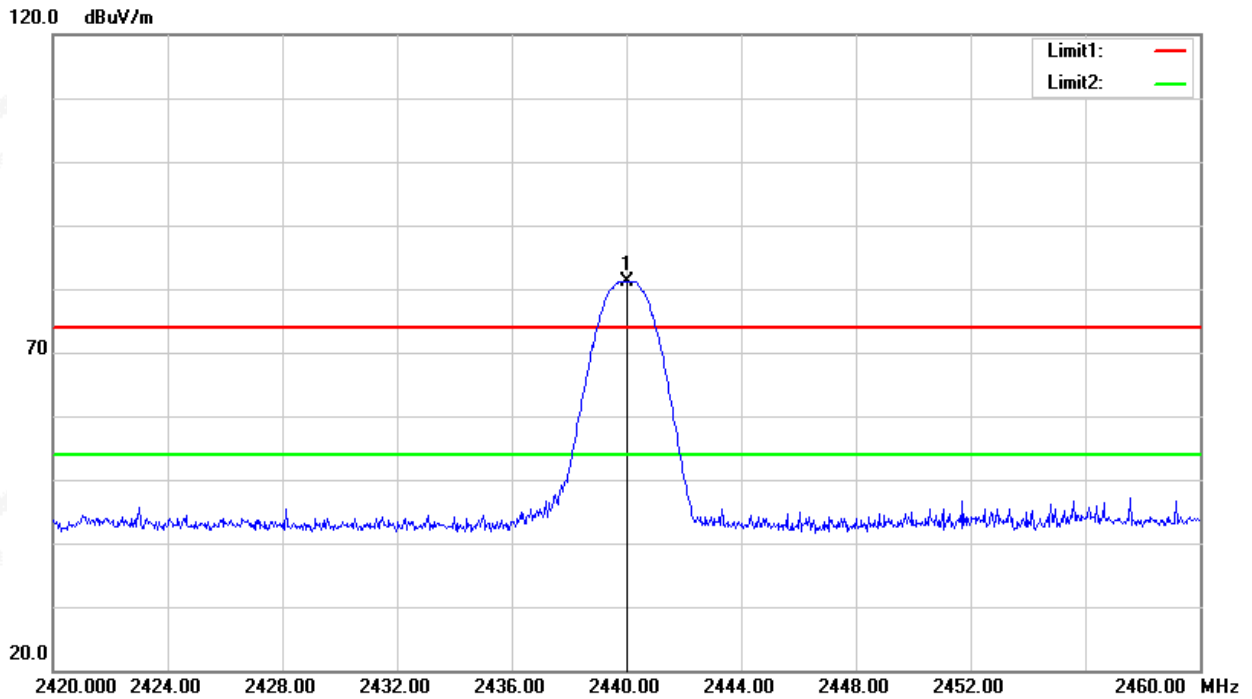

Fundamental Frequency

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Duty cycle Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2440.000	76.59	4.52	-	81.11	114.00	-32.89	peak
1	2440.000	76.59	4.52	1.22	79.89	94.00	-14.11	AVG


Vertical

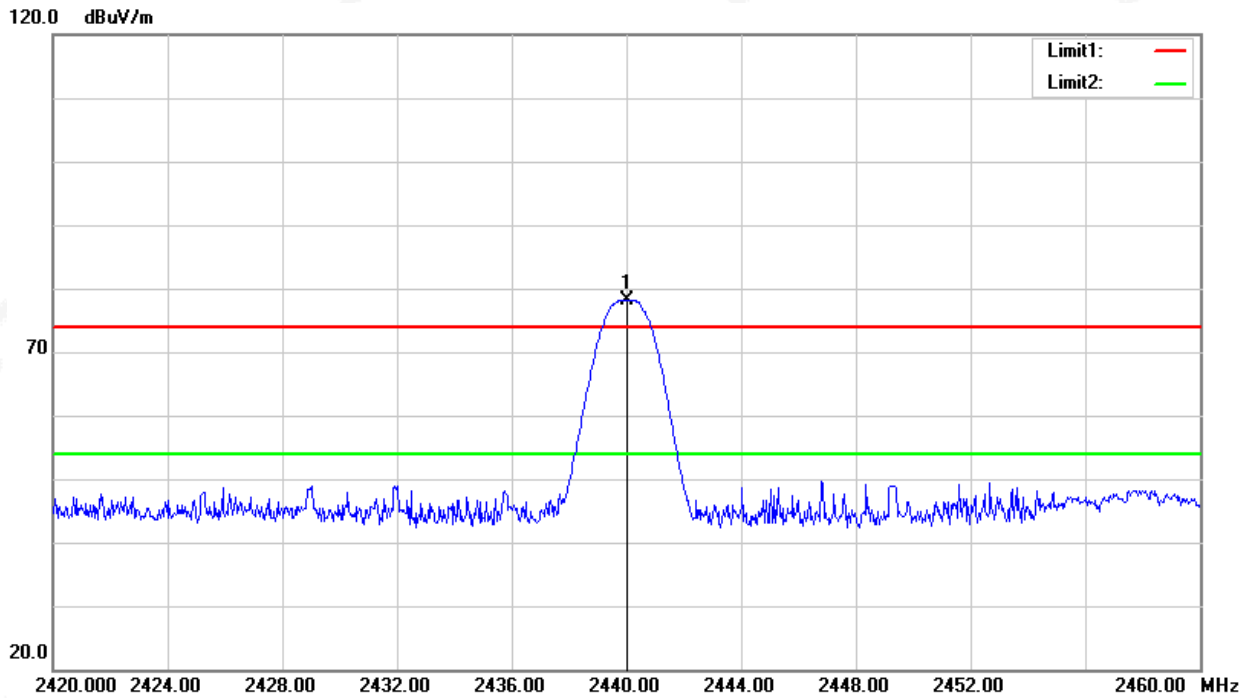

Fundamental Frequency

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Duty cycle Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2440.000	73.56	4.52	-	78.08	114.00	-35.92	peak
1	2440.000	73.56	4.52	1.22	76.86	94.00	-17.14	AVG

2480MHz
Horizontal

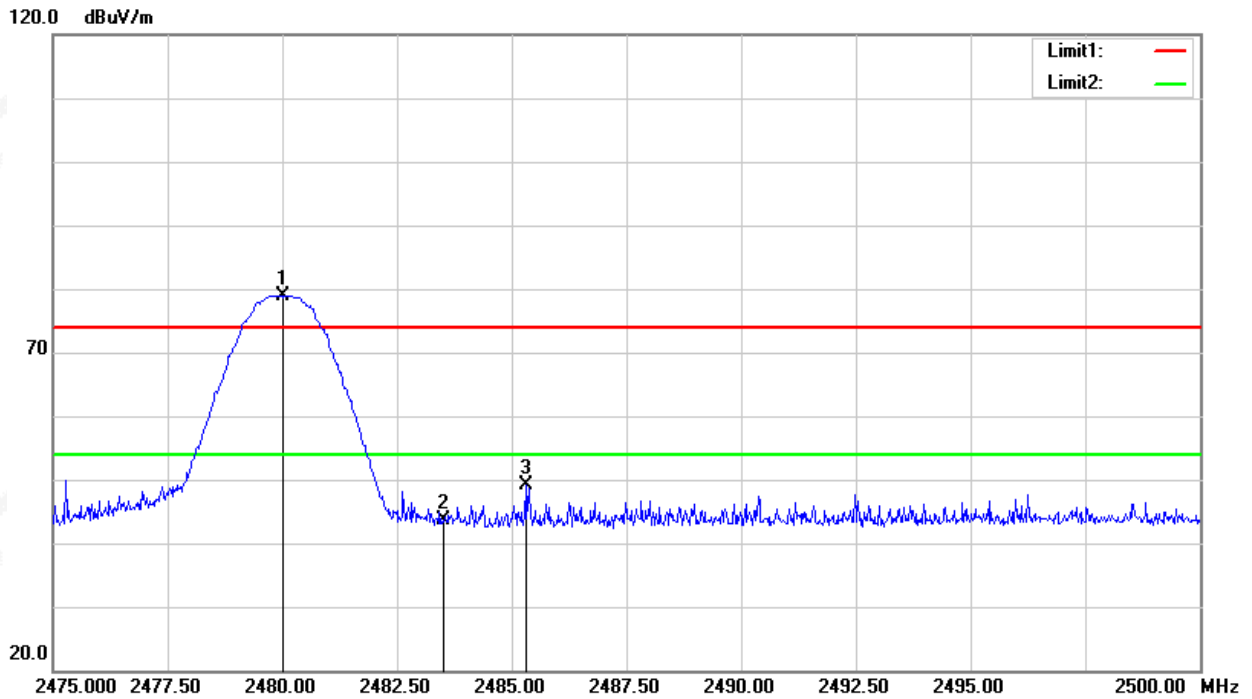


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
2	2483.500	39.01	4.60	43.61	74.00	-30.39	peak
3	2485.300	44.59	4.61	49.20	74.00	-24.80	peak

Fundamental Frequency

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Duty cycle Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2480.000	74.21	4.60	-	78.81	114.00	-35.19	peak
1	2480.000	74.21	4.60	1.22	77.59	94.00	-16.41	AVG

Vertical

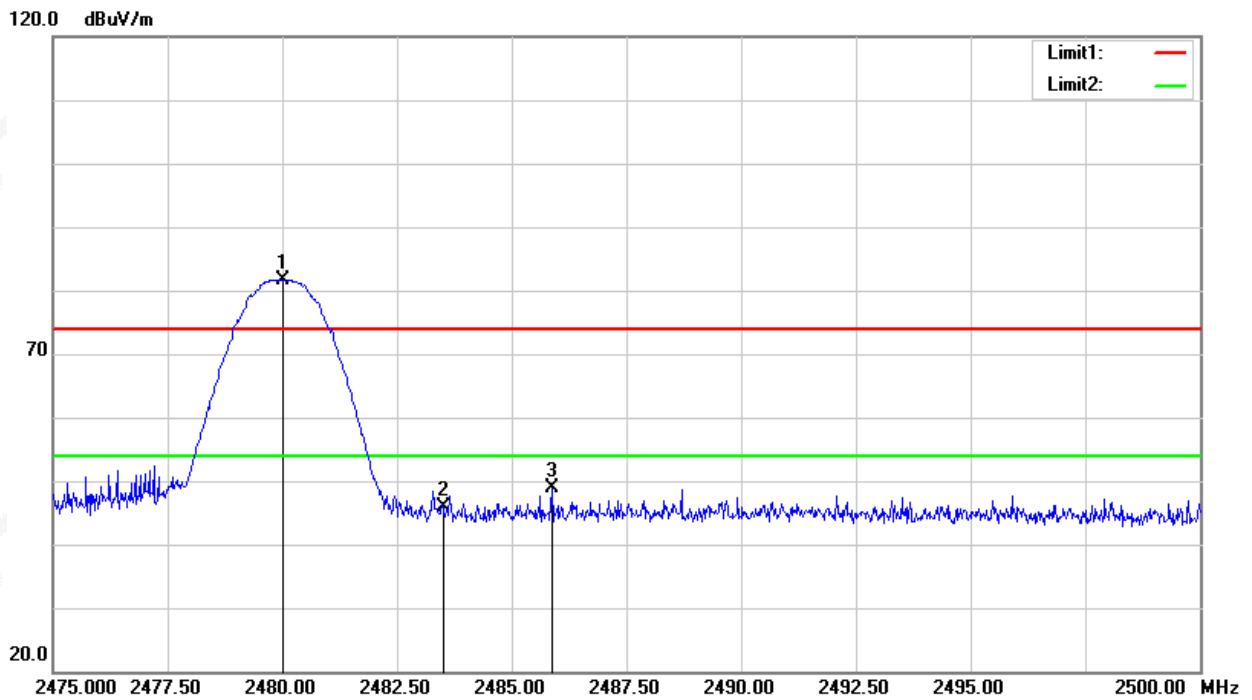

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
2	2483.500	41.40	4.60	46.00	74.00	-28.00	peak
3	2485.875	44.16	4.61	48.77	74.00	-25.23	peak

Fundamental Frequency

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Duty cycle Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2480.000	76.91	4.60	-	81.51	114.00	-32.49	peak
1	2480.000	76.91	4.60	1.22	80.29	94.00	-13.71	AVG

4. BANDWIDTH TEST

4.1 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- b. Spectrum Setting : RBW= 1% to 5% OBW, VBW \geq RBW, Sweep time = Auto.

4.2 TEST SETUP



4.3 EUT OPERATION CONDITIONS

TX mode.




4.4 TEST RESULTS

Temperature:	25°C	Relative Humidity:	50%
Test Voltage:	DC 3V		


Test Channel	Frequency(MHz)	20 dB Bandwidth(KHz)
CH01	2402	1174
CH02	2440	1177
CH03	2480	1176

CH01

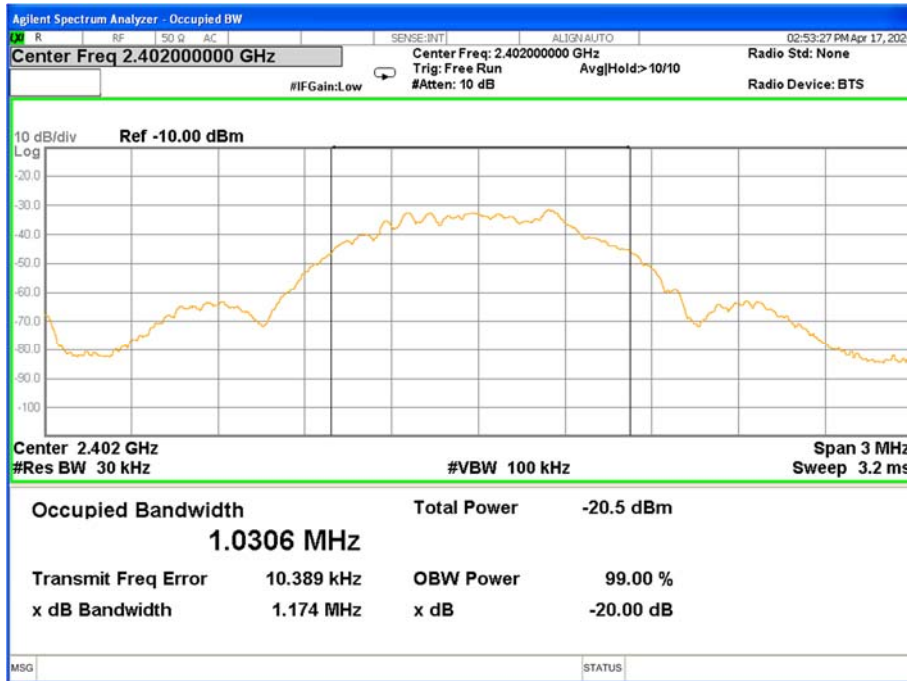




CH02

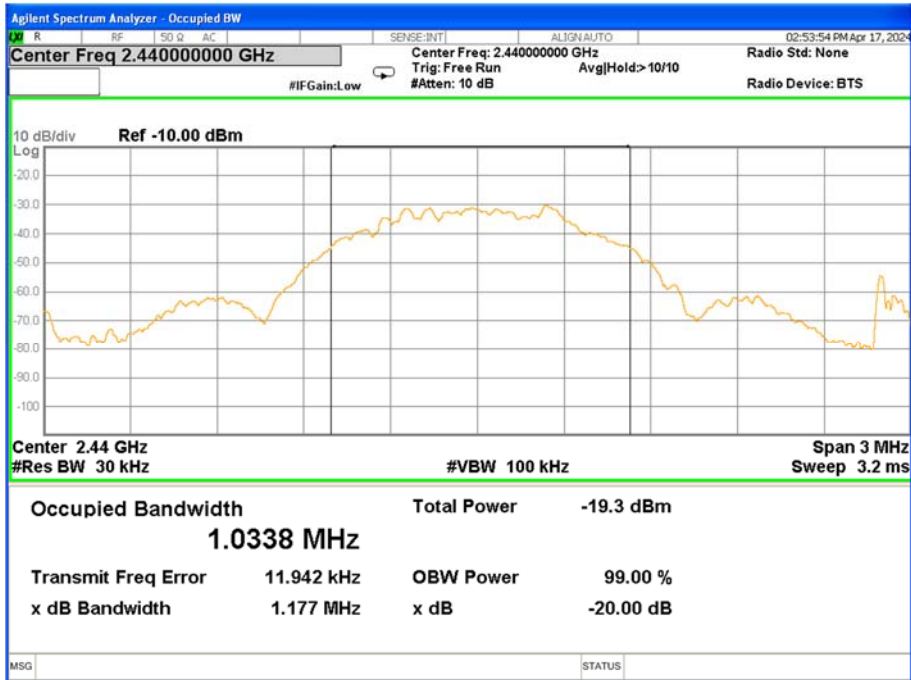

CH03

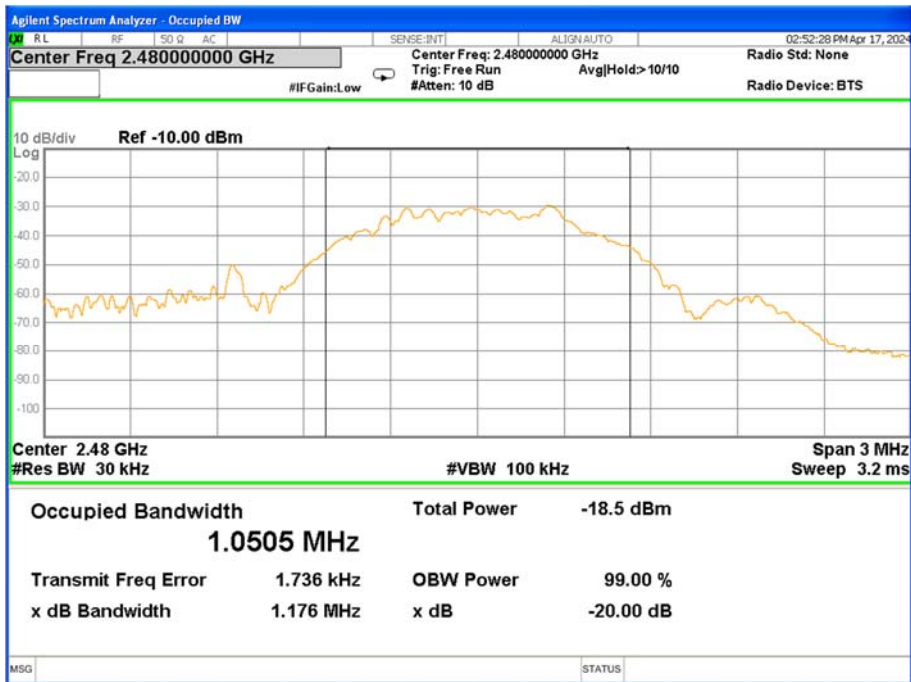



5. ANTENNA REQUIREMENT

5.1 STANDARD REQUIREMENT

According to the FCC Part 15 Paragraph 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

5.2 EUT ANTENNA

The EUT antenna is PCB Antenna. It conforms to the standard requirements.



APPENDIX- PHOTOS OF TEST SETUP

Note: See test photos in setup photo document for the actual connections between Product and support equipment.

*****END OF THE REPORT*****