



FCC PART 15.247 TEST REPORT

For

Zhejiang Sunseeker Industrial Co., Ltd.

Jinde Road 988, Jiangdong Industrial Park, Jinhua, Zhejiang, China

FCC ID: 2BFD7-AP6212

Report Type:	Product Name:
Original Report	2.4G Wi-Fi&Bluetooth module
Report Number:	RKSA240816002-00B
Report Date:	2024-11-14
Reviewed By:	<u>Bard Liu</u> 
Approved By:	<u>Kyle Xu</u> 
Prepared By:	Bay Area Compliance Laboratories Corp. (Kunshan) No.248 Chenghu Road, Kunshan, Jiangsu Province, China Tel: +86-512-86175000 Fax: +86-512-88934268 www.baclcorp.com.cn

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Kunshan). This report must not be used by the customer to claim product certification, approval, or endorsement by NVLAP, or any agency of the U.S.Government.

TABLE OF CONTENTS

REPORT REVISION HISTORY.....	4
GENERAL INFORMATION.....	5
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	5
OBJECTIVE	5
TEST METHODOLOGY	5
MEASUREMENT UNCERTAINTY.....	6
TEST FACILITY	6
SYSTEM TEST CONFIGURATION.....	7
DESCRIPTION OF TEST CONFIGURATION	7
EUT EXERCISE SOFTWARE	7
SPECIAL ACCESSORIES	7
EQUIPMENT MODIFICATIONS	7
SUPPORT EQUIPMENT LIST AND DETAILS	8
EXTERNAL I/O CABLE.....	8
BLOCK DIAGRAM OF TEST SETUP	9
TEST EQUIPMENT LIST	12
SUMMARY OF TEST RESULTS	13
FCC §1.1310 & §2.1091 - MAXIMUM PERMISSIBLE EXPOSURE (MPE)	14
FCC §15.203 – ANTENNA REQUIREMENT	15
APPLICABLE STANDARD	15
ANTENNA CONNECTOR CONSTRUCTION	15
FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS	16
APPLICABLE STANDARD	16
TEST SYSTEM SETUP	16
EMI TEST RECEIVER SETUP	16
TEST PROCEDURE	17
TEST RESULTS SUMMARY	17
TEST DATA: SEE APPENDIX	17
FCC §15.205, §15.209 & §15.247(d) – RADIATED EMISSIONS.....	18
APPLICABLE STANDARD	18
TEST SYSTEM SETUP	18
EMI TEST RECEIVER SETUP.....	19
TEST PROCEDURE	19
TEST RESULTS SUMMARY	20
TEST DATA: SEE APPENDIX	20
FCC §15.247(a) (1)-CHANNEL SEPARATION TEST	21
APPLICABLE STANDARD	21
TEST PROCEDURE	21
TEST DATD: SEE APPENDIX	21
FCC §15.247(a) (1) – 20 dB EMISSION BANDWIDTH.....	22
APPLICABLE STANDARD	22
TEST PROCEDURE	22
TEST DATD: SEE APPENDIX	22
FCC §15.247(a) (1) (iii)-QUANTITY OF HOPPING CHANNEL TEST	23
APPLICABLE STANDARD	23

TEST PROCEDURE	23
TEST DATD: SEE APPENDIX	23
FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME).....	24
APPLICABLE STANDARD	24
TEST PROCEDURE	24
TEST DATD: SEE APPENDIX	24
FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT	25
APPLICABLE STANDARD	25
TEST PROCEDURE	25
TEST DATD: SEE APPENDIX	25
FCC §15.247(d) - BAND EDGES TESTING	26
APPLICABLE STANDARD	26
TEST PROCEDURE	26
TEST DATD: SEE APPENDIX	26
APPENDIX - TEST DATA.....	27
ENVIRONMENTAL CONDITIONS & TEST INFORMATION.....	27
AC LINE CONDUCTED EMISSIONS	28
RADIATED EMISSIONS & RESTRICTED BANDS EMISSIONS	30
CHANNEL SEPARATION TEST	50
20 dB BANDWIDTH TEST	52
QUANTITY OF HOPPING CHANNEL TEST	55
TIME OF OCCUPANCY (DWELL TIME).....	56
PEAK OUTPUT POWER MEASUREMENT.....	59
BAND EDGES.....	62
EUT PHOTOGRAPHS	65
TEST SETUP PHOTOGRAPHS	66

REPORT REVISION HISTORY

Number of Revisions	Report No.	Version	Issue Date	Description
0	RKSA240816002-00B	R1V1	2024-11-14	Initial Release

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

Applicant:	Zhejiang Sunseeker Industrial Co., Ltd.
Product Name:	2.4G Wi-Fi&Bluetooth module
Tested Model	AP6212
Series Model:	AP6212A
Model Difference:	Model name
Power Supply:	DC 3.0~3.8V(Typical: DC 3.3 V)
Maximum Output Power:	GFSK: 4.52 dBm $\pi/4$ -DQPSK: 6.83 dBm 8DPSK: 7.16 dBm
RF Function:	Classic BT
Operating Band/Frequency:	2402-2480 MHz
Channel Number:	79
Channel Separation:	1 MHz
Modulation Type:	GFSK, $\pi/4$ -DQPSK, 8DPSK
Antenna Type:	Dipole Antenna
★Maximum Antenna Gain:	2.37 dBi

Note: The maximum antenna gain was declared by the manufacturer.

All measurement and test data in this report was gathered from production sample serial number: RKSA240816002-1 (Assigned by the BACL (Kunshan). The EUT supplied by the applicant was received on 2024-08-16.)

Objective

This test report is prepared for *Zhejiang Sunseeker Industrial Co., Ltd.* in accordance with Part 2-Subpart J, Part 15-Subparts A and C of the Federal Communication Commissions rules.

The tests were performed in order to determine Compliance with FCC Part 15, Subpart C, section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices and 558074 D01 15.247 Meas Guidance v05r02.

Measurement Uncertainty

Item	Uncertainty	
AC Power Lines Conducted Emissions	3.19dB	
RF conducted test with spectrum	0.9dB	
RF Output Power with Power meter	0.5dB	
Radiated emission	9 kHz~150 kHz	3.8dB
	150 kHz~30 MHz	3.4dB
	30MHz~1GHz	6.11dB
	1GHz~6GHz	4.45dB
	6GHz~18GHz	5.23dB
	18GHz~40GHz	5.65dB
Occupied Bandwidth	0.5kHz	
Temperature	1.0°C	
Humidity	6%	

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Kunshan) to collect test data is located on the No.248 Chenghu Road, Kunshan, Jiangsu Province, China.

Bay Area Compliance Laboratories Corp. (Kunshan) is accredited in accordance with ISO/IEC 17025:2017 by NVLAP (Lab code: 600338-0), and the lab has been recognized as the FCC accredited lab under the KDB 974614 D01, the FCC Designation No.: CN5055.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

Channel list:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	40	2442
1	2403
...
...	...	78	2480
39	2441	/	/

EUT was tested with Channel 0, 39 and 78.

EUT Exercise Software

RF Test Tool: Xshell

★Power level: Default

Note: The power level was declared by the applicant.

Special Accessories

No special accessory.

Equipment Modifications

No modification was made to the EUT tested.

Support Equipment List and Details

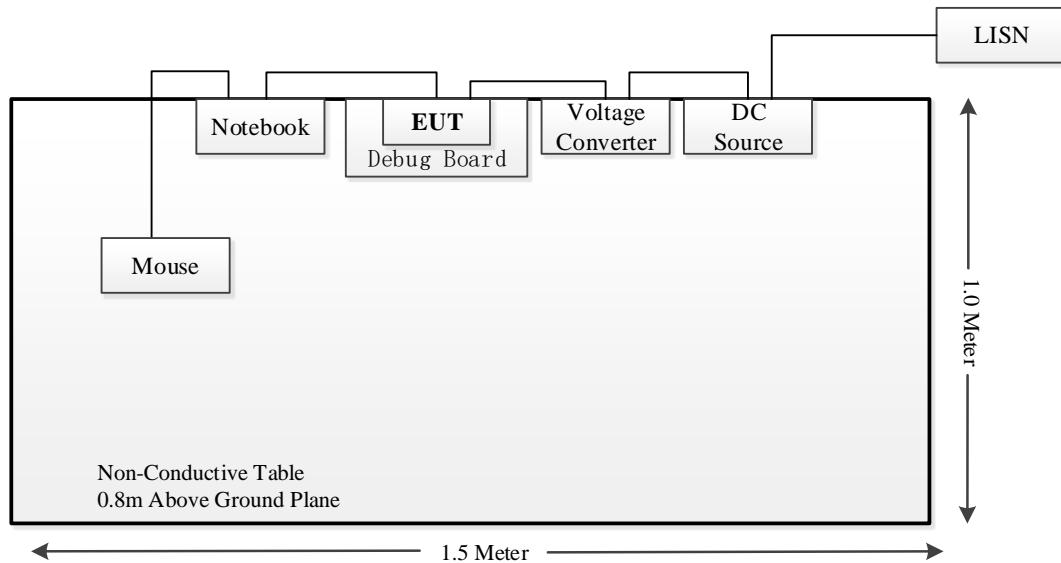
Manufacturer	Description	Model	Serial Number
Lenovo	Notebook	Y700P	PF2B7PL5
/	Debug board	/	/
Shenzhen Zhaoxin Electronic Instrument Equipment Co., Ltd.	DC Source	PS-6005D	18P6005D10724
Logitech	Mouse	M-U0026	HS529HB
/	Voltage converter	/	/

External I/O Cable

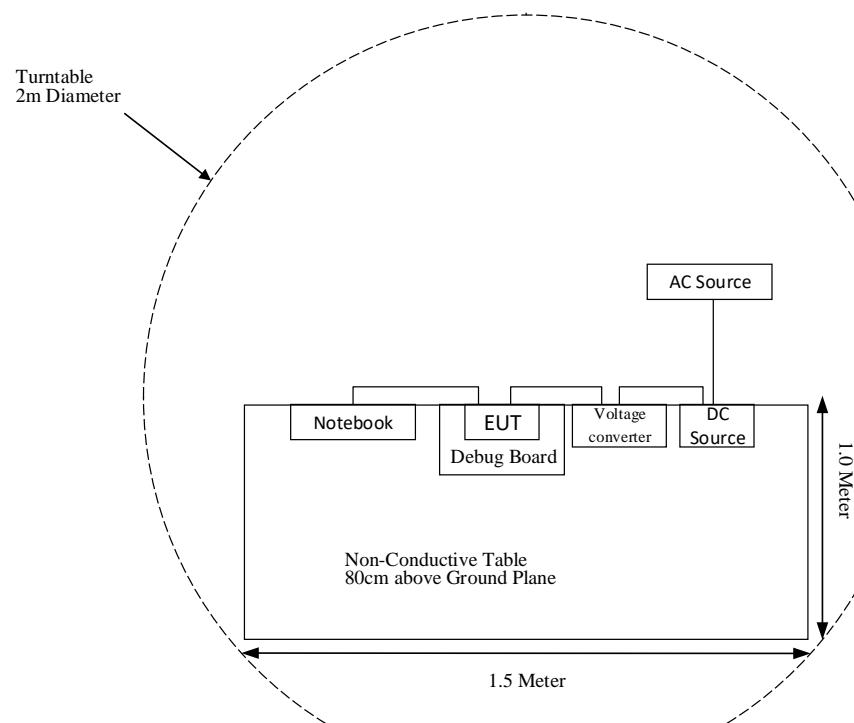
Cable Description	Length (m)	From Port	To Port
Data Cable	1.0	Debug board	Notebook
Power Cable 1	1.0	Voltage converter	DC Source/Adapter
Power Cable 2	1.0	DC Source	AC Source/LISN
Power Cable 3	0.5	Debug board	Voltage converter

Block Diagram of Test Setup

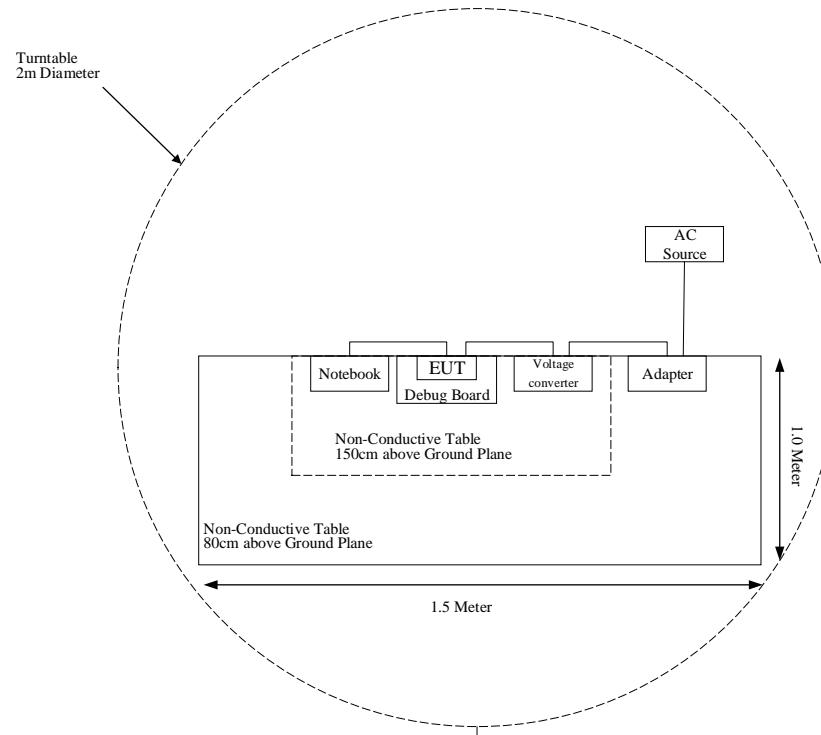
For Conducted Emissions:



For Radiated Emissions(Below 1GHz):



For Radiated Emissions (Above 1 GHz):



TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Radiated Emission Test (Chamber #1)					
Rohde & Schwarz	EMI Test Receiver	ESCI	100195	2024-04-23	2025-04-22
Sunol Sciences	Broadband Antenna	JB3	A090314-1	2023-11-11	2024-11-10
Narda	6dB Attenuator	773-6	10690812-2-1	2023-11-11	2024-11-10
ETS-LINDGREN	Loop Antenna	6512	108100	2023-11-09	2024-11-08
Sonoma Instrument	Pre-amplifier	310N	171205	2024-04-23	2025-04-22
Rohde & Schwarz	Auto Test Software	EMC32	100361	N/A	N/A
MICRO-COAX	Coaxial Cable	Cable-8	008	2024-04-23	2025-04-22
MICRO-COAX	Coaxial Cable	Cable-9	009	2024-04-23	2025-04-22
Radiated Emission Test (Chamber #2)					
Rohde & Schwarz	EMI Test Receiver	ESU40	100207/040	2024-04-25	2025-04-24
ETS-LINDGREN	Horn Antenna	3115	9311-4159	2023-12-02	2024-12-01
ETS-LINDGREN	Horn Antenna	3116	2516	2023-12-08	2024-12-07
A.H.Systems, inc	Amplifier	PAM-0118P	512	2024-04-25	2025-04-24
SELECTOR	Amplifier	EM18G40G	060726	2024-04-25	2025-04-24
MICRO-TRONICS	Band Reject Filter	BRM50702	G024	2024-04-25	2025-04-24
Narda	Attenuator	20dB	020	2024-04-23	2025-04-22
Rohde & Schwarz	Auto test Software	EMC32	100361	N/A	N/A
MICRO-COAX	Coaxial Cable	Cable-6	006	2024-04-25	2025-04-24
MICRO-COAX	Coaxial Cable	Cable-11	011	2024-04-25	2025-04-24
MICRO-COAX	Coaxial Cable	Cable-12	012	2024-04-25	2025-04-24
MICRO-COAX	Coaxial Cable	Cable-13	013	2024-04-25	2025-04-24
RF Conducted Test					
Rohde & Schwarz	Signal Analyzer	FSV40	101116	2024-04-24	2025-04-23
Rohde & Schwarz	Spectrum Analyzer	FSU26	200103	2024-04-24	2025-04-23
Narda	Attenuator	10dB	010	2024-04-25	2025-04-24
Conducted Emission Test					
Rohde & Schwarz	EMI Test Receiver	ESR3	101746	2024-04-23	2025-04-22
Narda	Attenuator	10 dB	N/A	2024-04-23	2025-04-22
MICRO-COAX	Coaxial Cable	Cable-15	015	2024-04-23	2025-04-22
Audix	Test Software	e3	V9	N/A	N/A
Rohde & Schwarz	LISN	ENV216	101130	2024-04-23	2025-04-22

Statement of Traceability: Bay Area Compliance Laboratories Corp. (Kunshan) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§1.1310 & §2.1091	MAXIMUM PERMISSIBLE EXPOSURE (MPE)	Compliant
§15.203	Antenna Requirement	Compliant
§15.207(a)	AC Line Conducted Emissions	Compliant
§15.205, §15.209 & §15.247(d)	Radiated Emissions & Restricted Bands Emissions	Compliant
§15.247(a)(1)	20 dB Emission Bandwidth	Compliant
§15.247(a)(1)	Channel Separation Test	Compliant
§15.247(a)(1)(iii)	Time of Occupancy (Dwell Time)	Compliant
§15.247(a)(1)(iii)	Quantity of hopping channel Test	Compliant
§15.247(b)(1)	Peak Output Power Measurement	Compliant
§15.247(d)	Band edges	Compliant

FCC §1.1310 & §2.1091 - MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Applicable Standard

According to subpart §2.1091 and subpart §1.1310, systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines.

Limits for Maximum Permissible Exposure (MPE) (§1.1310, §2.1091)

(B) Limits for General Population/Uncontrolled Exposure				
Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm ²)	Averaging Time (minutes)
0.3-1.34	614	1.63	*(100)	30
1.34-30	824/f	2.19/f	*(180/f ²)	30
30-300	27.5	0.073	0.2	30
300-1500	/	/	f/1500	30
1500-100,000	/	/	1.0	30

f = frequency in MHz; * = Plane-wave equivalent power density;

According to §1.1310 and §2.1091 RF exposure is calculated.

Calculated Formulary

Predication of MPE limit at a given distance

S = PG/4πR² = power density (in appropriate units, e.g. mW/cm²);

P = power input to the antenna (in appropriate units, e.g., mW);

G = power gain of the antenna in the direction of interest relative to an isotropic radiator, the power gain factor, is normally numeric gain;

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm);

Calculated Data:

Mode	Frequency Range (MHz)	Antenna Gain		★Tune-up Output Power		Evaluation Distance (cm)	Power Density (mW/cm ²)	MPE Limit (mW/cm ²)
		(dBi)	(numeric)	(dBm)	(mW)			
2.4G Wi-Fi	2412-2462	2.37	1.73	24.5	281.84	20	0.0970	1.0
BLE	2402-2480	2.37	1.73	6.5	4.47	20	0.0015	1.0
Classic BT	2402-2480	2.37	1.73	7.5	5.62	20	0.0019	1.0

Note:

- For the above tune up power were declared by the manufacturer.
- WiFi and BT/BLE cannot transmit simultaneously.

Result: The device meet FCC MPE at 20 cm distance.

FCC §15.203 – ANTENNA REQUIREMENT

Applicable Standard

According to FCC § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Antenna Connector Construction

The EUT has a dipole antenna for Bluetooth, and the antenna gain is 2.37 dBi, fulfill the requirement of this section. Please refer to the EUT photos.

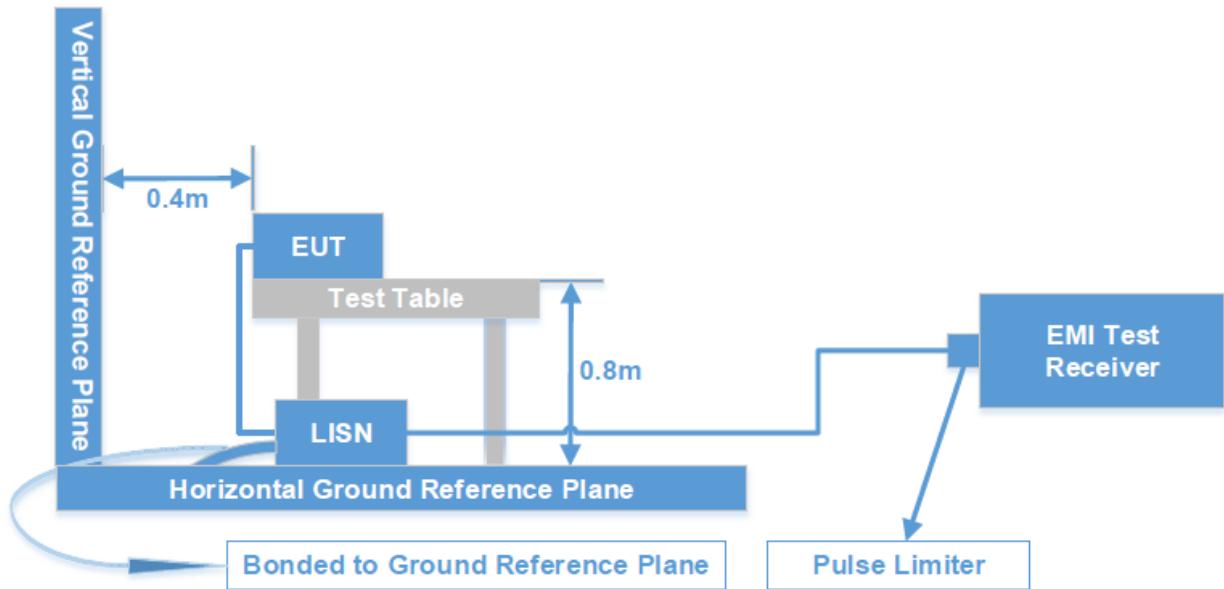
Result: Compliant.

FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC §15.207(a)

Test System Setup



The measurement procedure of EUT setup is according with ANSI C63.10-2013. The related limit was specified in FCC Part 15.207.

EMI Test Receiver Setup

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	RBW	VBW
150 kHz - 30 MHz	9 kHz	30 kHz

Test Procedure

ANSI C63.10-2013 clause 6.2

During the conducted emission test, the EUT or adapter was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

If the maximum peak value of the emissions is below the average limit, the QP value and average value measurement will not need to be performed and only record the maximum peak measured value to meet the requirements.

Level & Over Limit Calculation

The Level is calculated by adding LISN VDF (Voltage Division Factor), Cable Loss and Transient Limiter Attenuation from the Meter Reading. The basic equation is as follows:

$$\begin{aligned} \text{Factor (dB)} &= \text{LISN VDF (dB)} + \text{Cable Loss (dB)} + \text{Transient Limiter Attenuation (dB)} \\ \text{Level (dB}\mu\text{V)} &= \text{Read level (dB}\mu\text{V)} + \text{Factor (dB)} \end{aligned}$$

The “**Over Limit**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an Over Limit of 7 dB means the emission is 7 dB above the limit. The equation for Over Limit calculation is as follows:

$$\text{Over Limit (dB)} = \text{Level (dB}\mu\text{V)} - \text{Limit (dB}\mu\text{V)}$$

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Part 15.207.

Test Data: See Appendix

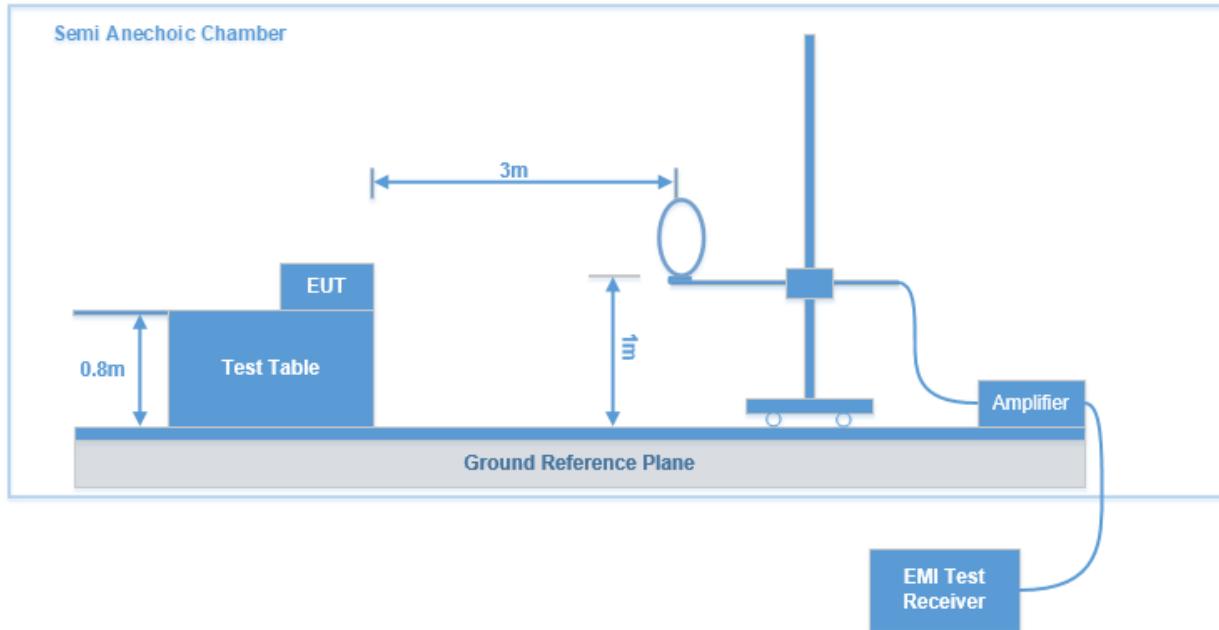
FCC §15.205, §15.209 & §15.247(d) – RADIATED EMISSIONS

Applicable Standard

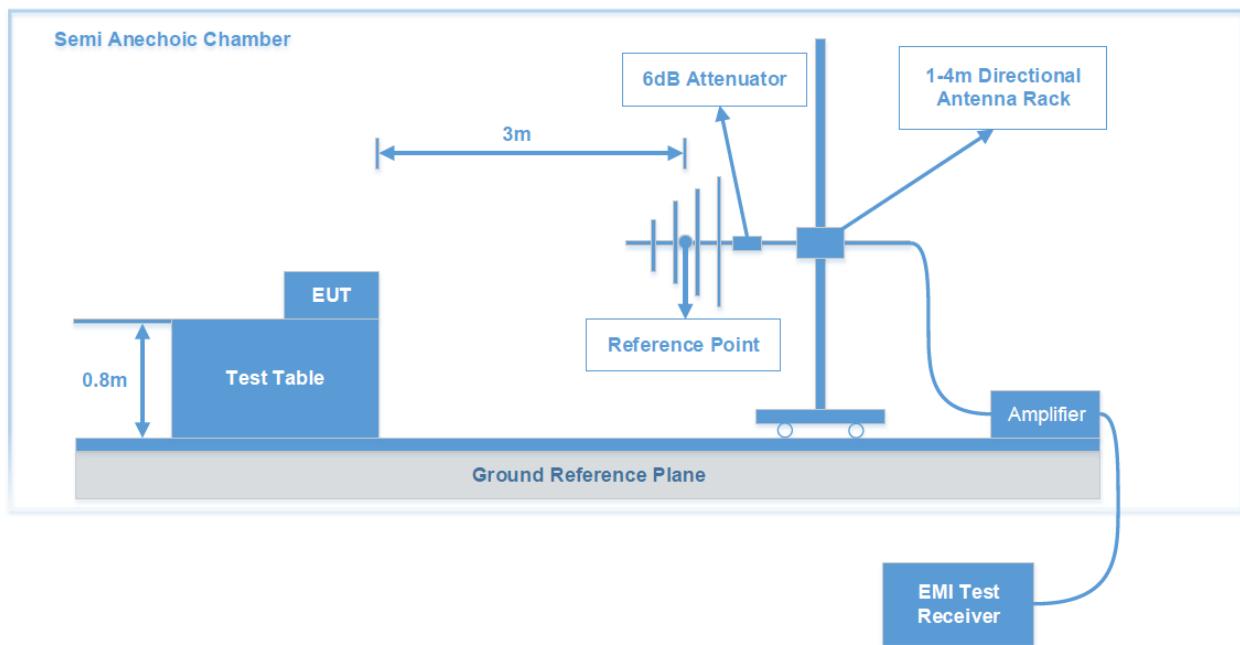
FCC §15.205; §15.209; §15.247(d)

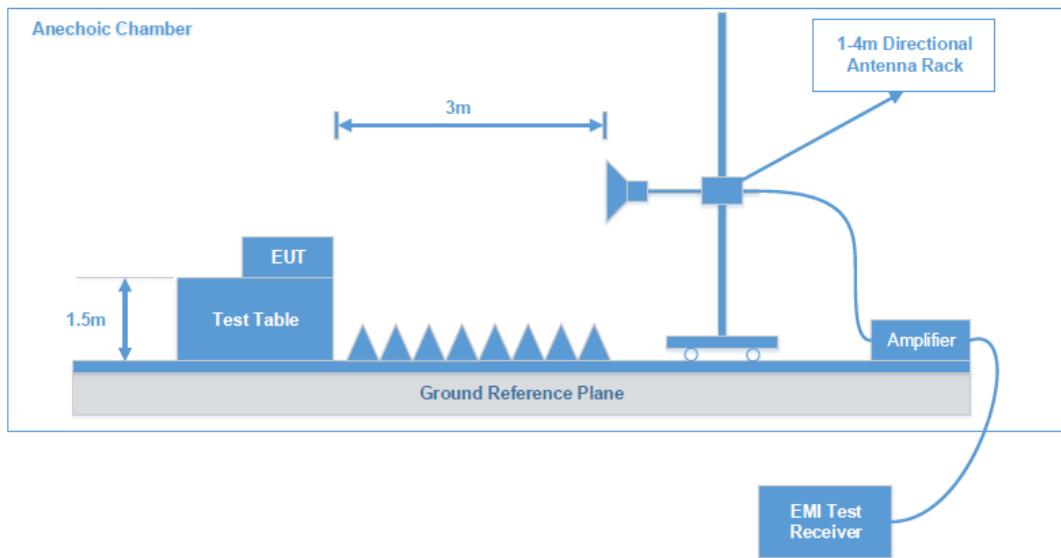
Test System Setup

9 kHz – 30 MHz:



30 MHz - 1 GHz:



Above 1GHz:

The radiated emission tests were performed in the 3 meters, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209 and FCC 15.247 limits.

EMI Test Receiver Setup

During the radiated emission test, the EMI test receiver Setup was set with the following configurations:

Frequency Range	RBW	VBW	IF B/W	Measurement
9 kHz - 150 kHz	200 Hz	1 kHz	200 Hz	QP/Average
150 kHz - 30 MHz	9 kHz	30 kHz	9 kHz	QP/ Average
30 MHz - 1000 MHz	100 kHz	300 kHz	/	Peak
	/	/	120 kHz	QP
Above 1GHz	1MHz	3 MHz	/	Peak
	1MHz	3 MHz	/	Average

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

If the measured peak level of the emissions that the measuring receiver reading level plus corrected factor is at least 6 dB below the QP emission limit, there's no need to record the measured QP level of the emissions in the report.

For 9 kHz-30MHz test, the lowest height of the magnetic antenna shall be 1 m above the ground and three antenna orientations (parallel, perpendicular, and ground-parallel) shall be measured.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

Corrected Amplitude (dB μ V/m) = Meter Reading (dB μ V) + Antenna Factor (dB/m) + Cable Loss (dB) - Amplifier Gain (dB)

The “Margin” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

Margin (dB) = Limit (dB μ V/m) – Corrected Amplitude (dB μ V/m)

Note: The QuasiPeak (dB μ V/m), MaxPeak (dB μ V/m), Average (dB μ V/m) which shown in the data table are all Corrected Amplitude.

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Title 47, Part 15, Subpart C, section 15.205, 15.209 and 15.247.

Test Data: See Appendix

FCC §15.247(a) (1)-CHANNEL SEPARATION TEST

Applicable Standard


Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater provided the systems operate with an output power no greater than 125 mW.

Test Procedure

The EUT shall have its hopping function enabled. Use the following spectrum analyzer settings:

- a. Span: Wide enough to capture the peaks of two adjacent channels.
- b. RBW: Start with the RBW set to approximately 30% of the channel spacing; adjust as necessary to best identify the center of each individual channel.
- c. Video (or average) bandwidth (VBW) \geq RBW.
- d. Sweep: Auto.
- e. Detector function: Peak.
- f. Trace: Max hold.
- g. Allow the trace to stabilize.

Use the marker-delta function to determine the separation between the peaks of the adjacent channels.



Test Data: See Appendix


FCC §15.247(a) (1) – 20 dB EMISSION BANDWIDTH

Applicable Standard

Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.



Test Data: See Appendix

FCC §15.247(a) (1) (iii)-QUANTITY OF HOPPING CHANNEL TEST

Applicable Standard


Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Procedure

The EUT shall have its hopping function enabled. Use the following spectrum analyzer settings:

- a. Span: The frequency band of operation. Depending on the number of channels the device supports, it may be necessary to divide the frequency range of operation across multiple spans, to allow the individual channels to be clearly seen.
- b. RBW: To identify clearly the individual channels, set the RBW to less than 30% of the channel spacing or the 20 dB bandwidth, whichever is smaller.
- c. VBW \geq RBW.
- d. Sweep: Auto.
- e. Detector function: Peak.
- f. Trace: Max hold.
- g. Allow the trace to stabilize.

It might prove necessary to break the span up into subranges to show clearly all of the hopping frequencies.



Test Data: See Appendix


FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME)**Applicable Standard**

Frequency hopping systems in the 2400-2483.5 MHz shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Procedure

The EUT shall have its hopping function enabled. Use the following spectrum analyzer settings:

- a. Span: Zero span, centered on a hopping channel.
- b. RBW shall be \leq channel spacing and where possible RBW should be set $\geq 1 / T$, where T is the expected dwell time per channel.
- c. Sweep: As necessary to capture the entire dwell time per hopping channel; where possible use a video trigger and trigger delay so that the transmitted signal starts a little to the right of the start of the plot. The trigger level might need slight adjustment to prevent triggering when the system hops on an adjacent channel; a second plot might be needed with a longer sweep time to show two successive hops on a channel.
- d. Detector function: Peak.
- e. Trace: Max hold.



Test Data: See Appendix


FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT

Applicable Standard

According to §15.247(b) (1), for frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 watt. And for all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts.

Test Procedure

- a. Use the following spectrum analyzer settings:
 - 1) Span: Approximately five times the 20 dB bandwidth, centered on a hopping channel.
 - 2) RBW > 20 dB bandwidth of the emission being measured.
 - 3) VBW \geq RBW.
 - 4) Sweep: Auto.
 - 5) Detector function: Peak.
 - 6) Trace: Max hold.
- b. Allow trace to stabilize.
- c. Use the marker-to-peak function to set the marker to the peak of the emission.
- d. The indicated level is the peak output power, after any corrections for external attenuators and cables.
- e. A plot of the test results and setup description shall be included in the test report.



Test Data: See Appendix


FCC §15.247(d) - BAND EDGES TESTING

Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates Compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Remove the antenna from the EUT and then connect to a low loss RF cable from the antenna port to a EMI test receiver, then turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.



Test Data: See Appendix

APPENDIX - TEST DATA

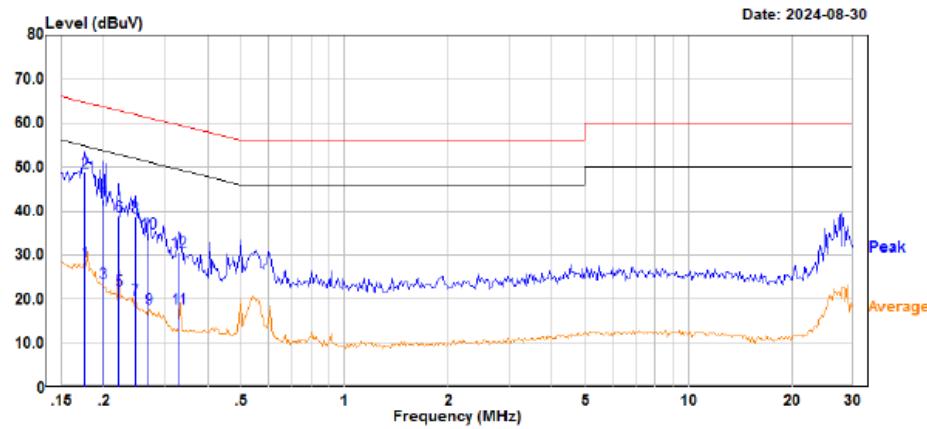
Environmental Conditions & Test Information

Test Item:	AC LINE CONDUCTED EMISSIONS	RADIATED EMISSIONS				CHANNEL SEPARATION TEST	20 DB BANDWIDTH TEST
		9 kHz-30 MHz	30MHz-1GHz	1 GHz - 18 GHz	18 GHz - 25 GHz		
Test Date:	2024-08-30	2024-09-06	2024-09-05~2024-09-06	2024-09-07 to 2024-09-10	2024-09-13	2024-11-12	2024-09-04
Temperature:	24.4 °C	25.4 °C	25.2 °C~25.4 °C	24.3-25.7 °C	24.5°C	24.7 °C	24.7 °C
Relative Humidity:	46 %	44 %	44 %~46%	47-51 %	52 %	51 %	51 %
ATM Pressure:	100. kPa	101.2 kPa	100.8 kPa ~101.2 kPa	101.0-101.2kPa	101.0kPa	102.1 kPa	100.7 kPa
Test Result:	Pass	Pass	Pass	Pass	Pass	Pass	Pass
Test Engineer:	Richard Wen	Grace Luo	Grace Luo	Destine Hu	Hugh Wu	Neil Zhou	Neil Zhou

Test Item:	Quantity Of Hopping Channel Test	Time Of Occupancy (Dwell Time)	PEAK OUTPUT POWER MEASUREMENT	BAND EDGES TESTING
Test Date:	2024-09-04	2024-09-04	2024-09-04	2024-09-04
Temperature:	24.7 °C	24.7 °C	24.7 °C	24.7 °C
Relative Humidity:	51 %	51 %	51 %	51 %
ATM Pressure:	100.7 kPa	100.7 kPa	100.7 kPa	100.7 kPa
Test Result:	Pass	Pass	Pass	Pass
Test Engineer:	Neil Zhou	Neil Zhou	Neil Zhou	Neil Zhou

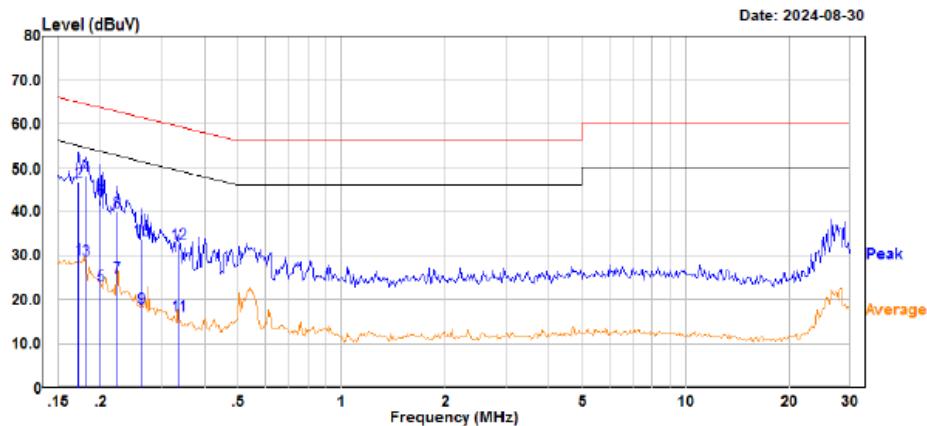
AC LINE CONDUCTED EMISSIONS

EUT operation mode: Transmitting in 8DPSK Mode high channel (maximum output power mode)



Site : CE
 Condition : limit\CE limit\FCC Part 15.207
 : DET:Peak
 Project No. : RKSA240816002
 Model : AP6212
 Phase : L
 Voltage : 120V/60Hz
 Mode : BT
 Test Equipment : ENV216, ESR
 Temperature : 24.4°C
 Humidity : 44%
 Atmospheric pressure: 100.8kPa
 Test Engineer : Richard Wen

Freq	Read		Limit		Over	Remark
	MHz	Level	Factor	Level		
				dBuV	dBuV	
1	0.176	8.48	20.12	28.60	54.68	-26.08 Average
2	0.176	28.59	20.12	48.71	64.68	-15.97 QP
3	0.198	3.64	20.11	23.75	53.69	-29.94 Average
4	0.198	22.42	20.11	42.53	63.69	-21.16 QP
5	0.221	1.84	20.13	21.97	52.78	-30.81 Average
6	0.221	18.83	20.13	38.96	62.78	-23.82 QP
7	0.247	-0.33	20.13	19.80	51.87	-32.07 Average
8	0.247	18.46	20.13	38.59	61.87	-23.28 QP
9	0.270	-2.25	20.15	17.90	51.13	-33.23 Average
10	0.270	14.87	20.15	35.02	61.13	-26.11 QP
11	0.329	-2.30	20.18	17.88	49.48	-31.60 Average
12	0.329	10.47	20.18	30.65	59.48	-28.83 QP



Site : CE
Condition : limit\CE limit\FCC Part 15.207
: DET:Peak
Project No. : RKSA240816002
Model : AP6212
Phase : N
Voltage : 120V/60Hz
Mode : BT
Test Equipment : ENV216,ESR
Temperature : 24.4°C
Humidity : 44%
Atmospheric pressure: 100.8kPa
Test Engineer : Richard Wen

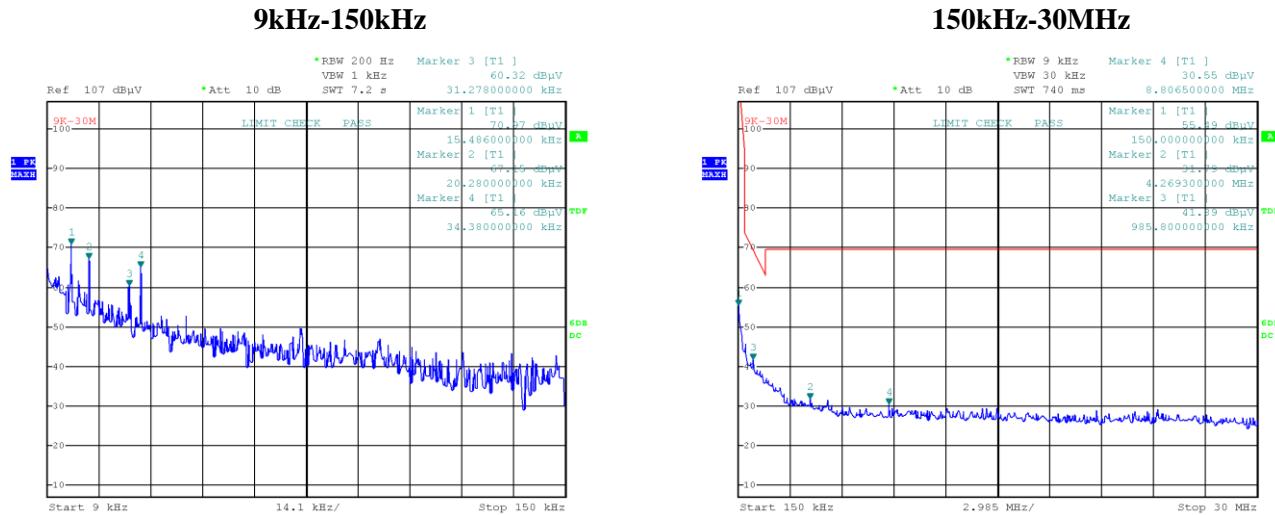
Freq	Read			Limit		Over	Remark
	MHz	dBuV	dB	dBuV	dBuV		
1	0.172	9.15	20.11	29.26	54.84	-25.58	Average
2	0.172	26.64	20.11	46.75	64.84	-18.09	QP
3	0.181	8.91	20.12	29.03	54.43	-25.40	Average
4	0.181	27.92	20.12	48.04	64.43	-16.39	QP
5	0.200	3.08	20.11	23.19	53.61	-30.42	Average
6	0.200	22.53	20.11	42.64	63.61	-20.97	QP
7	0.223	5.06	20.13	25.19	52.70	-27.51	Average
8	0.223	19.83	20.13	39.96	62.70	-22.74	QP
9	0.262	-1.97	20.14	18.17	51.38	-33.21	Average
10	0.262	13.46	20.14	33.60	61.38	-27.78	QP
11	0.336	-3.63	20.18	16.55	49.31	-32.76	Average
12	0.336	12.39	20.18	32.57	59.31	-26.74	QP

RADIATED EMISSIONS & RESTRICTED BANDS EMISSIONS

EUT operation mode: Transmitting

After pre-scan in the X, Y and Z axes of orientation, the worst case is below:

9 kHz-30 MHz: (Transmitting maximum output power 8DPSK mode high channel)
Parallel(worst case)



Project No.RKSA240816002
Date: 6.SEP.2024 18:06:59

Tester:Grace Luo

Project No.RKSA240816002
Date: 6.SEP.2024 17:51:51

Tester:Grace Luo

9kHz-150kHz

Frequency (MHz)	Corrected Amplitude (dBµV/m) @3m	Detector PK/QP/Ave.	Corrected Factor (dB/m)	Limit (dBµV/m) @3m	Margin (dB)
0.015486	70.97	PK	52.87	123.81	52.84
0.02028	67.15	PK	49.92	121.46	54.31
0.031278	60.32	PK	46.87	117.70	57.38
0.03438	65.16	PK	46.06	116.88	51.72

150kHz-30MHz

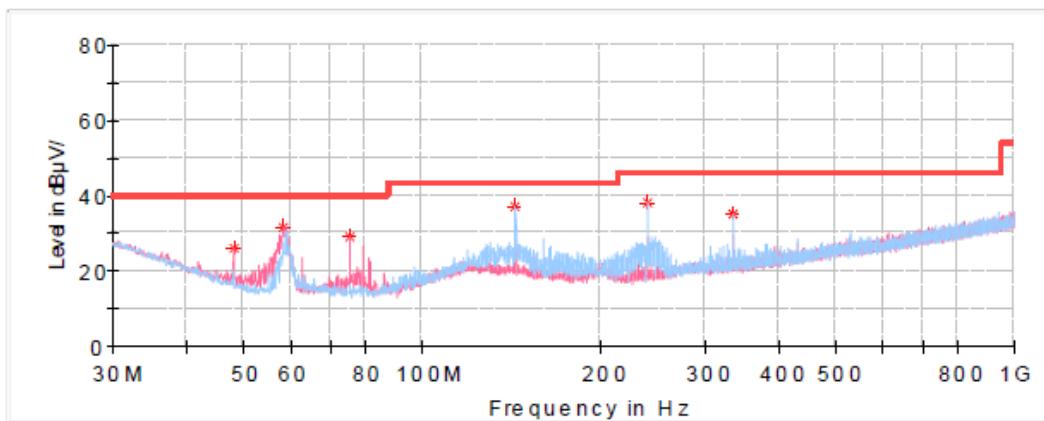
Frequency (MHz)	Corrected Amplitude (dBµV/m) @3m	Detector PK/QP/Ave.	Corrected Factor (dB/m)	Limit (dBµV/m) @3m	Margin (dB)
0.15000	55.49	PK	50.90	104.08	48.59
4.26930	31.79	PK	16.12	69.54	37.75
0.98580	41.89	PK	17.65	67.73	25.84
8.80650	30.55	PK	6.40	69.54	38.99

30 MHz - 1 GHz (Transmitting in maximum output power 8DPSK mode):

Low Channel: 2402 MHz

Common Information

Project No: RKSA240816002
EUT Model: AP6212
Test Mode: Transmitting in BT-3DH5 mode high channel
Standard: FCC Part 15.205 & FCC Part 15.209&FCC Part 15.247
Test Equipment: ESCI, JB3, 310N
Temperature: 25.4°C
Humidity: 44%
Barometric Pressure: 101.2kPa
Test Engineer: Grace Luo
Test Date: 2024/9/6

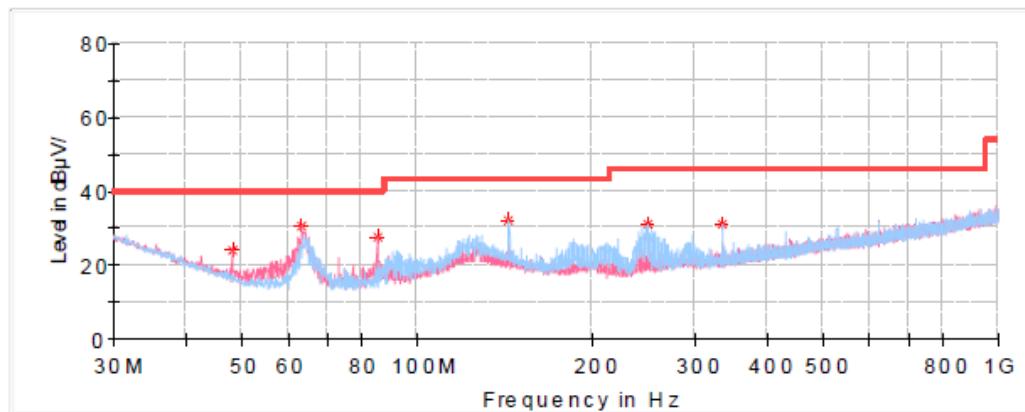


Critical_Freqs

Frequency (MHz)	MaxPeak (dBu V/m)	Limit (dBu V/m)	Margin (dB)	Pol	Corr. (dB/m)
47.945000	26.35	40.00	13.65	V	-15.7
58.372500	31.93	40.00	8.07	V	-17.4
75.590000	28.98	40.00	11.02	V	-17.2
143.975000	37.05	43.50	6.45	H	-11.6
240.005000	38.49	46.00	7.51	H	-12.6
336.035000	35.00	46.00	11.00	H	-9.6

Middle Channel: 2441 MHz**Common Information**

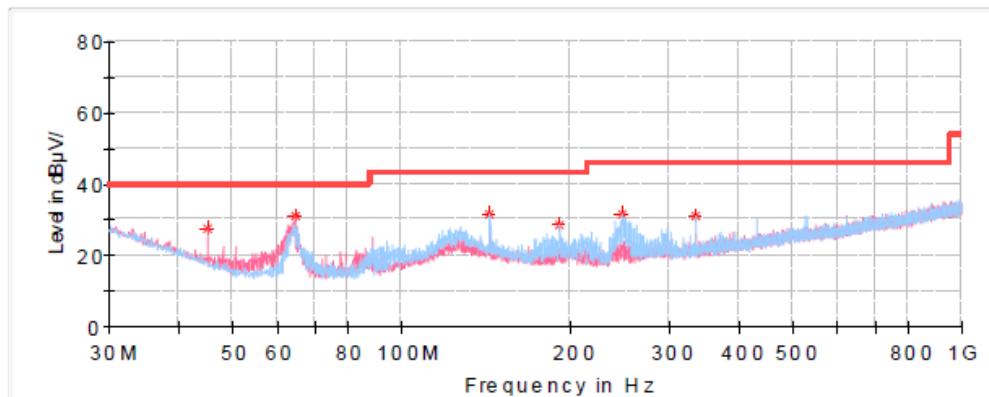
Project No: RKSA240816002
EUT Model: AP6212
Test Mode: Transmitting in BT-3DH5 mode middle channel
Standard: FCC Part 15.205 & FCC Part 15.209&FCC Part 15.247
Test Equipment: ESCI, JB3, 310N
Temperature: 25.2°C
Humidity: 46%
Barometric Pressure: 100.8kPa
Test Engineer: Grace Luo
Test Date: 2024/9/5

**Critical_Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
47.945000	24.23	40.00	15.77	V	-15.7
63.222500	30.92	40.00	9.08	V	-17.4
85.290000	27.75	40.00	12.25	V	-17.1
143.975000	32.23	43.50	11.27	H	-11.6
249.705000	31.02	46.00	14.98	H	-12.3
336.035000	31.19	46.00	14.81	H	-9.6

High Channel:2480 MHz**Common Information**

Project No: RKSA240816002
EUT Model: AP6212
Test Mode: Transmitting in BT-3DH5 mode high channel
Standard: FCC Part 15.205 &FCC Part 15.209&FCC Part 15.247
Test Equipment: ESCI, JB3, 310N
Temperature: 25.2°C
Humidity: 46%
Barometric Pressure: 100.8kPa
Test Engineer: Grace Luo
Test Date: 2024/9/5

**Critical_Freqs**

Frequency (MHz)	MaxPeak (dBu V/m)	Limit (dBu V/m)	Margin (dB)	Pol	Corr. (dB/m)
45.035000	27.88	40.00	12.12	V	-14.1
64.556250	31.35	40.00	8.65	V	-17.3
143.975000	31.80	43.50	11.70	H	-11.6
191.990000	28.74	43.50	14.76	H	-12.5
248.250000	31.59	46.00	14.41	H	-12.3
336.035000	31.43	46.00	14.57	H	-9.6

1 GHz - 18 GHz:**GFSK:****Low Channel: 2402 MHz****Common Information**

Project No.:

RKSA240816002

Test Mode:

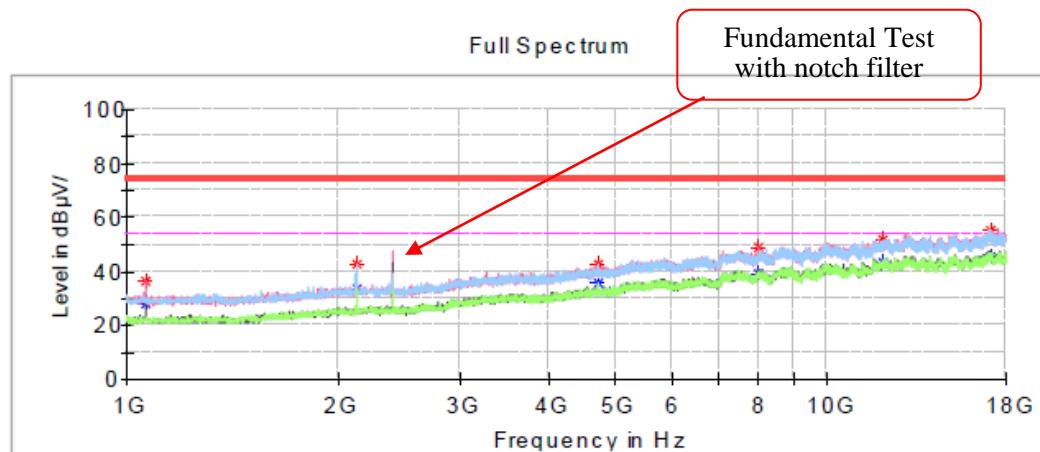
BT

Standard:

FCC Part 15.247&FCC Part 15.205&FCC Part 15.209

Test Engineer:

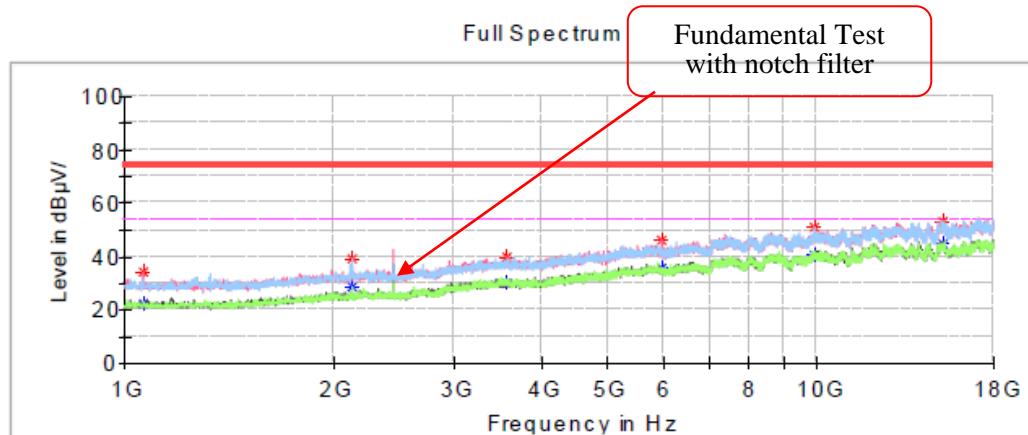
Destine Hu

**Critical_Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1064.600000	36.44	---	74.00	37.56	V	-15.4
1064.600000	---	28.10	54.00	25.90	V	-15.4
2127.100000	---	33.27	54.00	20.73	H	-11.3
2127.100000	42.58	---	74.00	31.42	H	-11.3
4700.900000	---	35.55	54.00	18.45	H	-3.5
4700.900000	42.50	---	74.00	31.50	H	-3.5
7976.800000	---	38.96	54.00	15.04	V	3.9
7976.800000	48.94	---	74.00	25.06	V	3.9
12055.100000	---	43.60	54.00	10.40	V	9.0
12055.100000	51.71	---	74.00	22.29	V	9.0
17107.500000	---	45.23	54.00	8.77	H	12.1
17107.500000	55.18	---	74.00	18.82	H	12.1

Middle Channel: 2441 MHz**Common Information**

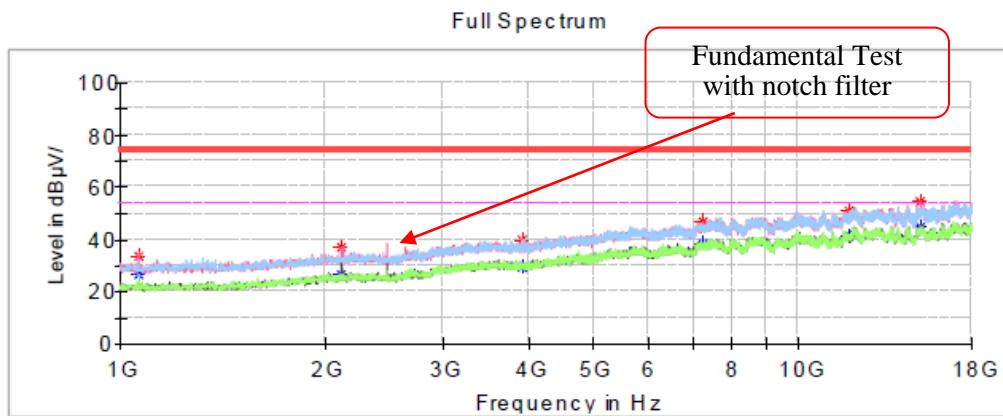
Project No.: RKSA240816002
 Test Mode: BT
 Standard: FCC Part 15.247&FCC Part 15.205&FCC Part 15.209
 Test Engineer: Destine Hu

**Critical Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1061.200000	---	22.55	54.00	31.45	V	-15.4
1061.200000	34.08	---	74.00	39.92	V	-15.4
2127.100000	---	28.92	54.00	25.08	H	-11.3
2127.100000	38.96	---	74.00	35.04	H	-11.3
3563.600000	---	30.30	54.00	23.70	H	-6.3
3563.600000	39.77	---	74.00	34.23	H	-6.3
5979.300000	---	35.41	54.00	18.59	V	0.0
5979.300000	46.39	---	74.00	27.61	V	0.0
9913.100000	---	40.84	54.00	13.16	H	6.9
9913.100000	50.75	---	74.00	23.25	H	6.9
15213.700000	---	44.73	54.00	9.27	V	9.5
15213.700000	53.50	---	74.00	20.50	V	9.5

High Channel: 2480 MHz**Common Information**

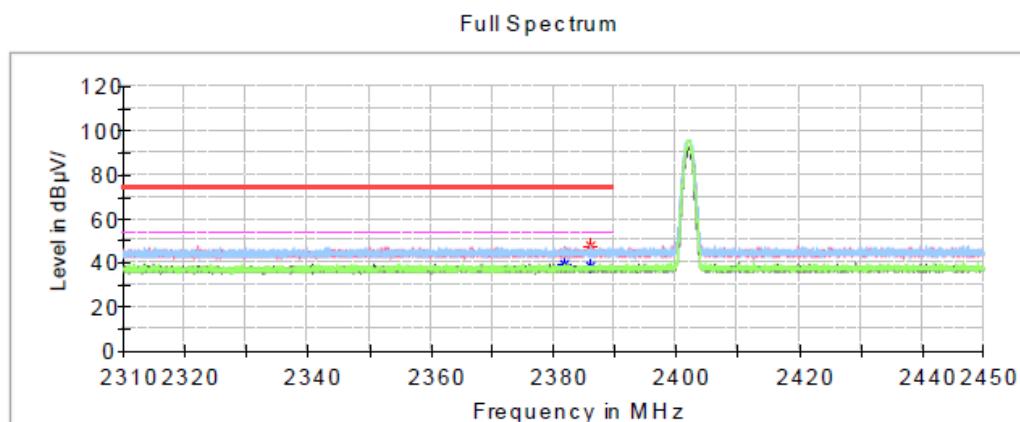
Project No.: RKSA240816002
 Test Mode: BT
 Standard: FCC Part 15.247&FCC Part 15.205&FCC Part 15.209
 Test Engineer: Destine Hu

**Critical_Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1062.900000	---	26.69	54.00	27.31	H	-15.4
1062.900000	33.48	---	74.00	40.52	H	-15.4
2118.600000	---	26.82	54.00	27.18	V	-11.4
2118.600000	37.26	---	74.00	36.74	V	-11.4
3915.500000	---	29.65	54.00	24.35	H	-6.0
3915.500000	40.17	---	74.00	33.83	H	-6.0
7240.700000	---	38.54	54.00	15.46	V	3.2
7240.700000	47.01	---	74.00	26.99	V	3.2
11851.100000	---	41.50	54.00	12.50	V	8.9
11851.100000	51.04	---	74.00	22.96	V	8.9
15161.000000	---	44.64	54.00	9.36	V	9.5
15161.000000	54.21	---	74.00	19.79	V	9.5

Band Edge:**Left Side****Common Information**

Project No.: RKSA240816002
Test Mode: BT
Standard: FCC Part 15.247&FCC Part 15.205&FCC Part 15.209
Test Engineer: Destine Hu

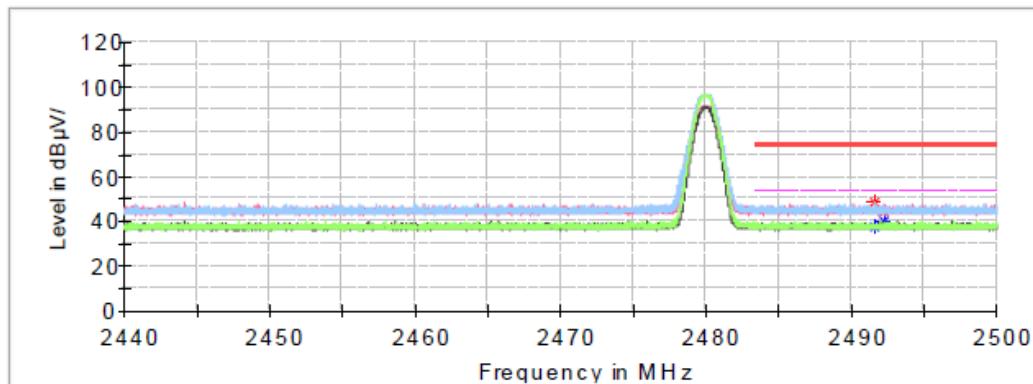
**Critical_Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
2381.848000	44.51	---	74.00	29.49	V	-0.6
2381.848000	---	39.68	54.00	14.32	V	-0.6
2386.006000	47.64	---	74.00	26.36	H	-0.6
2386.006000	---	38.38	54.00	15.62	H	-0.6

Right Side**Common Information**

Project No.: RKSA240816002
Test Mode: BT
Standard: FCC Part 15.247&FCC Part 15.205&FCC Part 15.209
Test Engineer: Destine Hu

Full Spectrum

**Critical_Freqs**

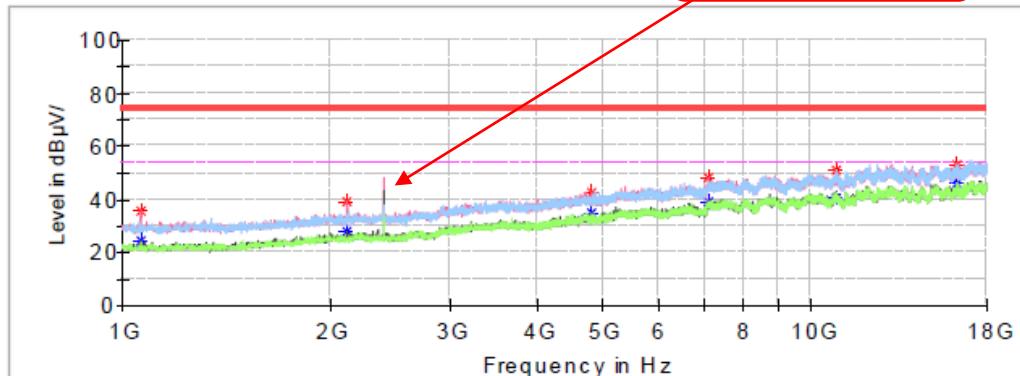
Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
2491.654000	48.58	---	74.00	25.42	H	-0.2
2491.654000	---	37.99	54.00	16.01	H	-0.2
2492.188000	44.50	---	74.00	29.50	V	-0.2
2492.188000	---	40.32	54.00	13.68	V	-0.2

$\pi/4$ -DQPSK:**Low Channel: 2402 MHz****Common Information**

Project No.: RKSA240816002
 Test Mode: BT
 Standard: FCC Part 15.247&FCC Part 15.205&FCC Part 15.209
 Test Engineer: Destine Hu

Full Spectrum

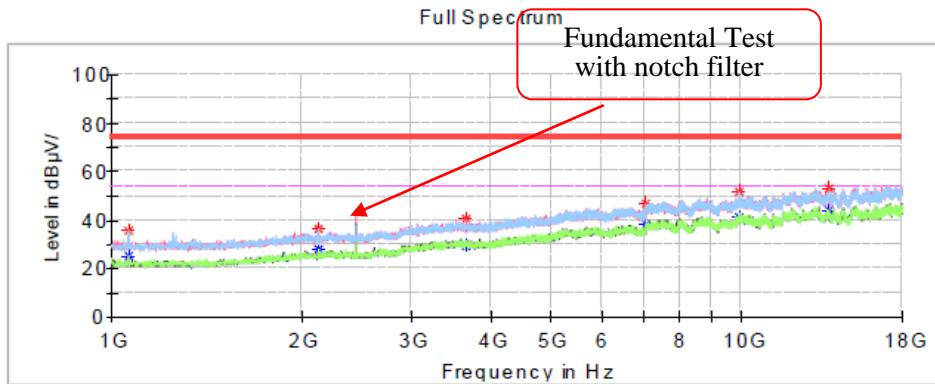
Fundamental Test with notch filter

**Critical_Freqs**

Frequency (MHz)	MaxPeak (dB µV/m)	Average (dB µV/m)	Limit (dB µV/m)	Margin (dB)	Pol	Corr. (dB/m)
1061.200000	---	24.50	54.00	29.50	V	-15.4
1061.200000	35.56	---	74.00	38.44	V	-15.4
2122.000000	---	28.14	54.00	25.86	V	-11.4
2122.000000	38.85	---	74.00	35.15	V	-11.4
4802.900000	---	35.03	54.00	18.97	V	-3.2
4802.900000	42.64	---	74.00	31.36	V	-3.2
7092.800000	---	38.91	54.00	15.09	H	2.9
7092.800000	48.00	---	74.00	26.00	H	2.9
10897.400000	---	40.86	54.00	13.14	H	7.3
10897.400000	50.85	---	74.00	23.15	H	7.3
16313.600000	---	46.01	54.00	7.99	H	10.3
16313.600000	53.39	---	74.00	20.61	H	10.3

Middle Channel: 2441 MHz**Common Information**

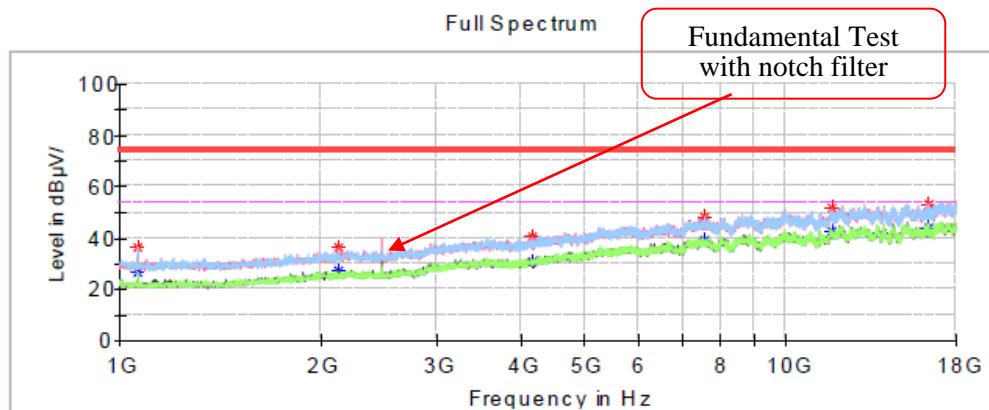
Project No.: RKSA240816002
 Test Mode: BT
 Standard: FCC Part 15.247&FCC Part 15.205&FCC Part 15.209
 Test Engineer: Destine Hu

**Critical_Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1061.200000	---	25.40	54.00	28.60	H	-15.4
1061.200000	35.78	---	74.00	38.22	H	-15.4
2128.800000	---	27.73	54.00	26.27	H	-11.3
2128.800000	36.41	---	74.00	37.59	H	-11.3
3660.500000	---	29.30	54.00	24.70	V	-6.2
3660.500000	40.31	---	74.00	33.69	V	-6.2
7070.700000	---	38.38	54.00	15.62	H	2.8
7070.700000	46.75	---	74.00	27.25	H	2.8
9930.100000	---	40.95	54.00	13.05	H	6.9
9930.100000	51.42	---	74.00	22.58	H	6.9
13756.800000	---	44.09	54.00	9.91	V	9.7
13756.800000	53.22	---	74.00	20.78	V	9.7

High Channel: 2480 MHz**Common Information**

Project No.: RKSA240816002
 Test Mode: BT
 Standard: FCC Part 15.247&FCC Part 15.205&FCC Part 15.209
 Test Engineer: Destine Hu

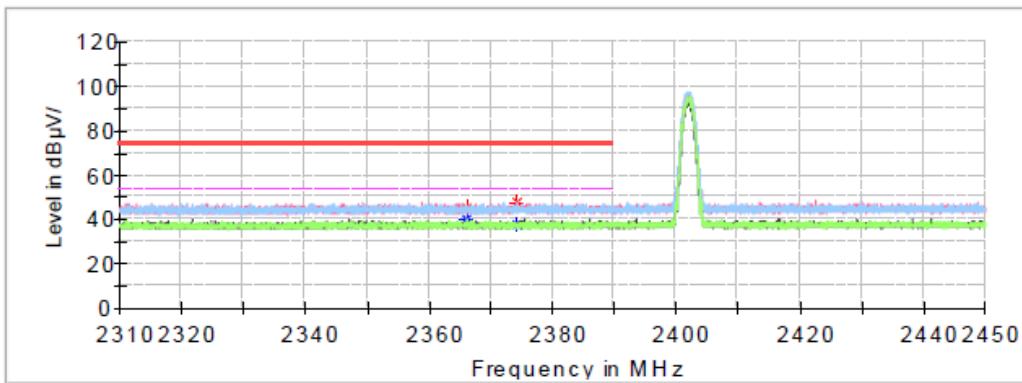
**Critical_Freqs**

Frequency (MHz)	MaxPeak (dB µ V/m)	Average (dB µ V/m)	Limit (dB µ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1064.600000	---	26.65	54.00	27.35	H	-15.4
1064.600000	36.65	---	74.00	37.35	H	-15.4
2132.200000	---	27.07	54.00	26.93	V	-11.3
2132.200000	36.18	---	74.00	37.82	V	-11.3
4172.200000	---	31.04	54.00	22.96	V	-5.3
4172.200000	40.46	---	74.00	33.54	V	-5.3
7533.100000	---	38.84	54.00	15.16	V	3.9
7533.100000	47.91	---	74.00	26.09	V	3.9
11744.000000	---	42.61	54.00	11.39	V	8.9
11744.000000	51.41	---	74.00	22.59	V	8.9
16379.900000	---	44.12	54.00	9.88	H	10.5
16379.900000	53.30	---	74.00	20.70	H	10.5

Band Edge:**Left Side****Common Information**

Project No.: RKSA240816002
Test Mode: BT
Standard: FCC Part 15.247&FCC Part 15.205&FCC Part 15.209
Test Engineer: Destine Hu

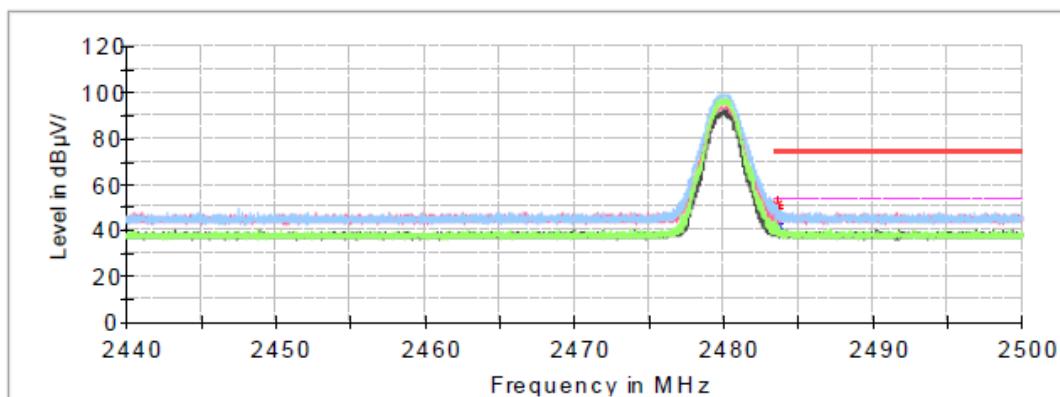
Full Spectrum

**Critical_Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
2366.154000	---	40.07	54.00	13.93	H	-0.7
2366.154000	45.01	---	74.00	28.99	H	-0.7
2374.204000	---	37.39	54.00	16.61	V	-0.6
2374.204000	48.01	---	74.00	25.99	V	-0.6

Right Side**Common Information**

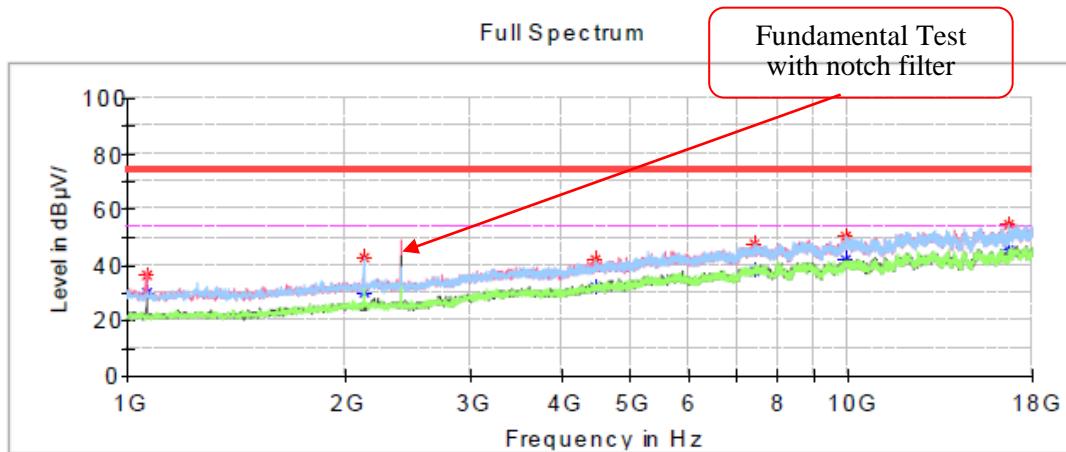
Project No.: RKSA240816002
Test Mode: BT
Standard: FCC Part 15.247&FCC Part 15.205&FCC Part 15.209
Test Engineer: Destine Hu

Full Spectrum**Critical Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
2483.548000	51.27	---	74.00	22.73	H	-0.3
2483.548000	---	41.42	54.00	12.58	H	-0.3
2483.620000	49.31	---	74.00	24.69	V	-0.3
2483.620000	---	42.45	54.00	11.55	V	-0.3

8DPSK:**Low Channel: 2402 MHz****Common Information**

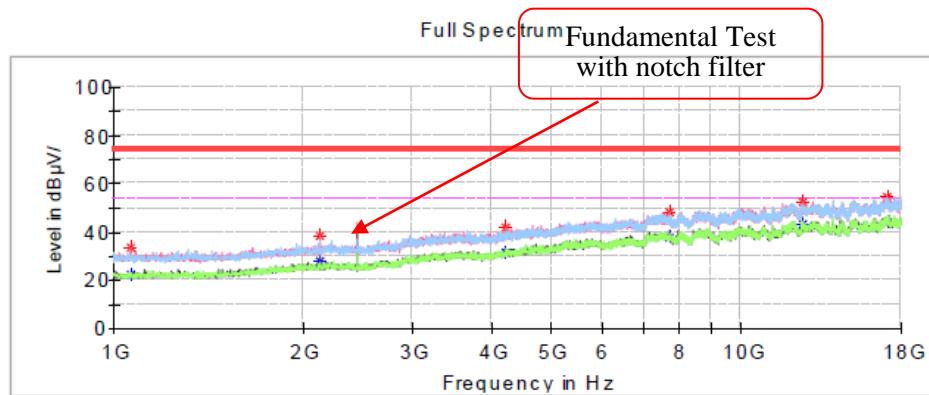
Project No.: RKSA240816002
 Test Mode: BT
 Standard: FCC Part 15.247&FCC Part 15.205&FCC Part 15.209
 Test Engineer: Destine Hu

**Critical_Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1062.900000	---	29.91	54.00	24.09	V	-15.4
1062.900000	36.64	---	74.00	37.36	V	-15.4
2125.400000	---	29.95	54.00	24.05	H	-11.3
2125.400000	42.40	---	74.00	31.60	H	-11.3
4451.000000	---	32.38	54.00	21.62	H	-4.4
4451.000000	41.62	---	74.00	32.38	H	-4.4
7403.900000	---	38.05	54.00	15.95	H	3.6
7403.900000	47.30	---	74.00	26.70	H	3.6
9943.700000	---	41.71	54.00	12.29	V	7.0
9943.700000	50.64	---	74.00	23.36	V	7.0
16745.400000	---	45.70	54.00	8.30	H	11.5
16745.400000	54.69	---	74.00	19.31	H	11.5

Middle Channel: 2441 MHz**Common Information**

Project No.: RKSA240816002
 Test Mode: BT
 Standard: FCC Part 15.247&FCC Part 15.205&FCC Part 15.209
 Test Engineer: Destine Hu

**Critical Freqs**

Frequency (MHz)	MaxPeak (dB µ V/m)	Average (dB µ V/m)	Limit (dB µ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1064.600000	---	22.69	54.00	31.31	V	-15.4
1064.600000	33.33	---	74.00	40.67	V	-15.4
2128.800000	---	28.30	54.00	25.70	V	-11.3
2128.800000	38.78	---	74.00	35.22	V	-11.3
4228.300000	---	31.39	54.00	22.61	H	-5.2
4228.300000	41.61	---	74.00	32.39	H	-5.2
7703.100000	---	38.01	54.00	15.99	V	3.9
7703.100000	48.39	---	74.00	25.61	V	3.9
12541.300000	---	43.36	54.00	10.64	H	9.7
12541.300000	52.37	---	74.00	21.63	H	9.7
17121.100000	---	44.36	54.00	9.64	V	12.1
17121.100000	54.75	---	74.00	19.25	V	12.1

High Channel: 2480 MHz**Common Information**

Project No.:

RKSA240816002

Test Mode:

BT

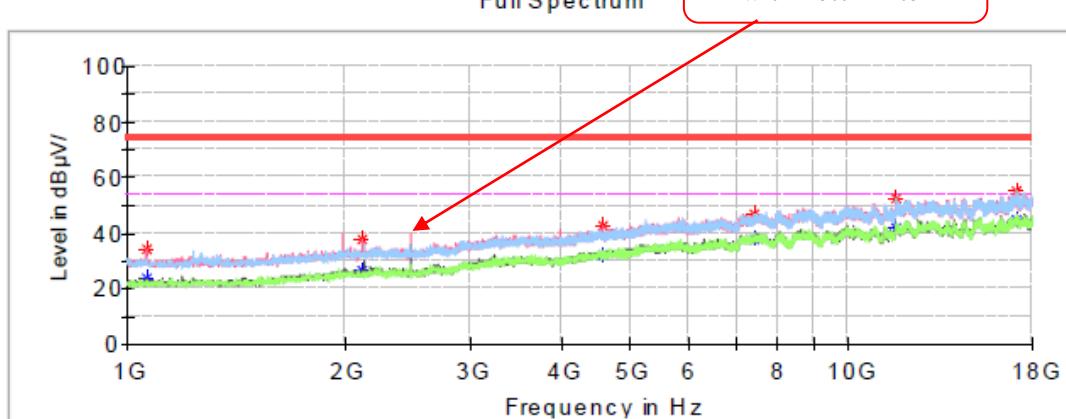
Standard:

FCC Part 15.247&FCC Part 15.205&FCC Part 15.209

Test Engineer:

Destine Hu

Fundamental Test
with notch filter

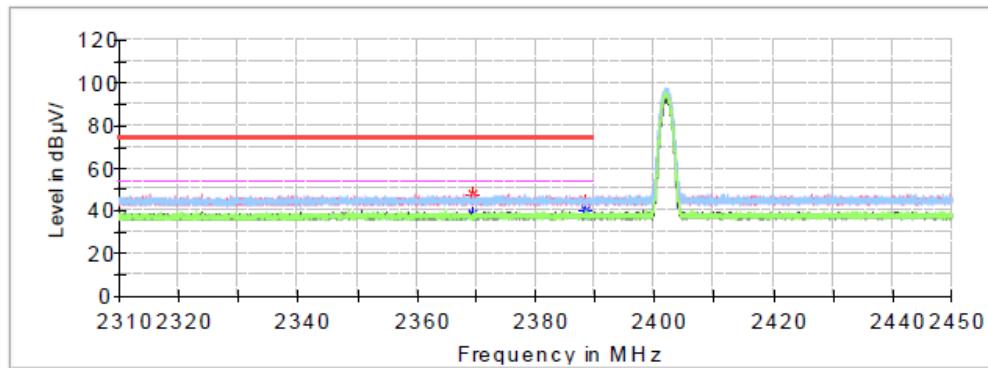
**Critical Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1061.200000	---	23.95	54.00	30.05	V	-15.4
1061.200000	34.41	---	74.00	39.59	V	-15.4
2122.000000	---	26.43	54.00	27.57	V	-11.4
2122.000000	37.71	---	74.00	36.29	V	-11.4
4576.800000	---	32.22	54.00	21.78	V	-4.0
4576.800000	42.44	---	74.00	31.56	V	-4.0
7417.500000	---	38.10	54.00	15.90	V	3.7
7417.500000	47.07	---	74.00	26.93	V	3.7
11662.400000	---	41.76	54.00	12.24	H	8.9
11662.400000	52.73	---	74.00	21.27	H	8.9
17160.200000	---	44.48	54.00	9.52	H	12.0
17160.200000	54.95	---	74.00	19.05	H	12.0

Band Edge:**Left Side****Common Information**

Project No.: RKSA240816002
Test Mode: BT
Standard: FCC Part 15.247&FCC Part 15.205&FCC Part 15.209
Test Engineer: Destine Hu

Full Spectrum

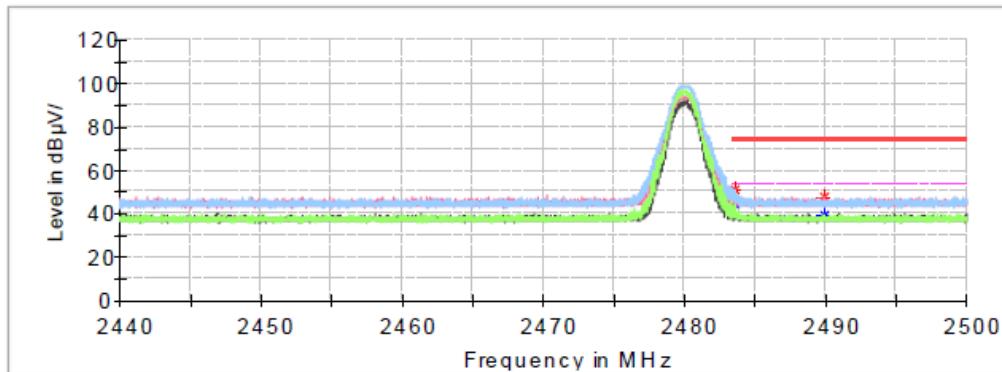
**Critical_Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
2369.346000	47.62	---	74.00	26.38	V	-0.6
2369.346000	---	38.24	54.00	15.76	V	-0.6
2388.540000	44.82	---	74.00	29.18	H	-0.6
2388.540000	---	40.28	54.00	13.72	H	-0.6

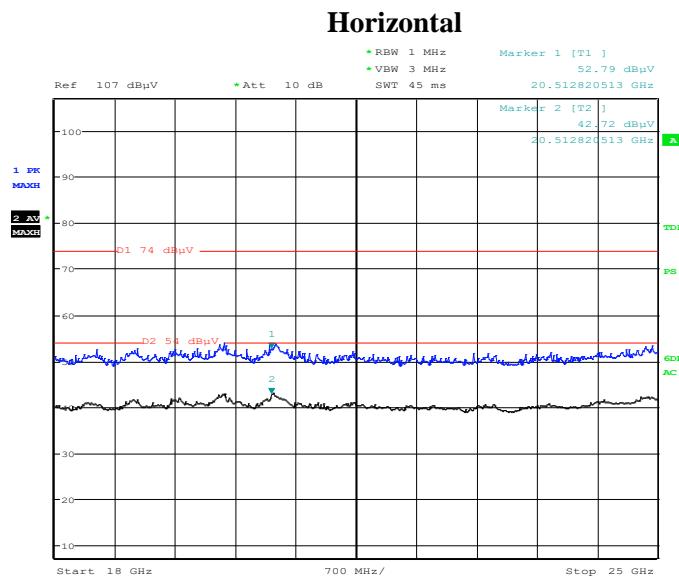
Right Side**Common Information**

Project No.: RKSA240816002
Test Mode: BT
Standard: FCC Part 15.247&FCC Part 15.205&FCC Part 15.209
Test Engineer: Destine Hu

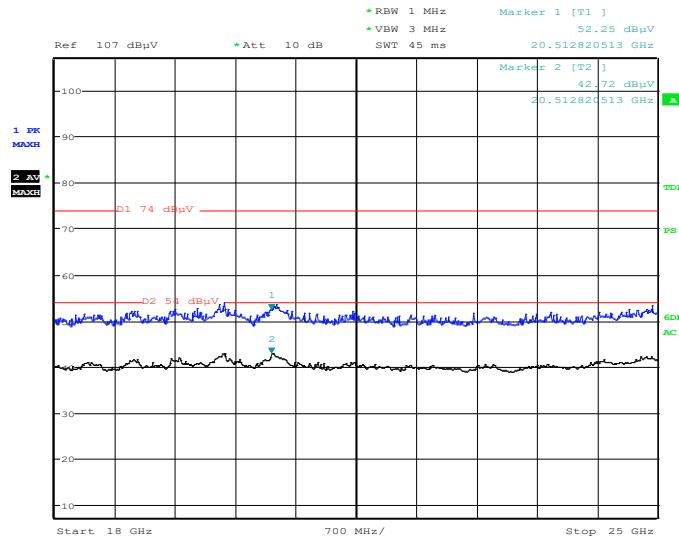
Full Spectrum

**Critical Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
2483.554000	---	44.62	54.00	9.38	H	-0.3
2483.554000	50.87	---	74.00	23.13	H	-0.3
2489.890000	---	39.16	54.00	14.84	V	-0.2
2489.890000	47.55	---	74.00	26.45	V	-0.2

18 GHz - 25 GHz (8DPSK Mode high channel):

Project No :RKSA240816002 Tester :Hugh Wu
Date: 13.SEP.2024 00:27:21

Vertical

Project No :RKSA240816002 Tester :Hugh Wu
Date: 13.SEP.2024 00:26:52

Note: The test distance is 3m. The limit is 74dB μ V/m(Peak) and 54dB μ V/m(Average).

CHANNEL SEPARATION TEST*EUT operation mode: Transmitting*

Mode	Channel	Channel frequency (MHz)	Result (MHz)	Limit (MHz)
GFSK	Low	2402-2403	1.005	0.902
	Middle	2441-2442	1.000	0.902
	High	2480-2479	1.005	0.902

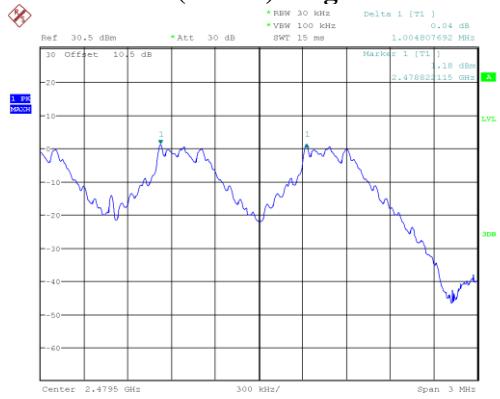
Note: only GFSK mode result is report since EDR ($\pi/4$ -DQPSK, 8DPSK) has the exact same channel plan and the Limit is maximum 20 dB bandwidth*2/3

BDR (GFSK): Low Channel

ProjectNo.:RKSA240816002 Tester:Neil Zhou
Date: 12.NOV.2024 14:17:55

BDR (GFSK): Middle Channel

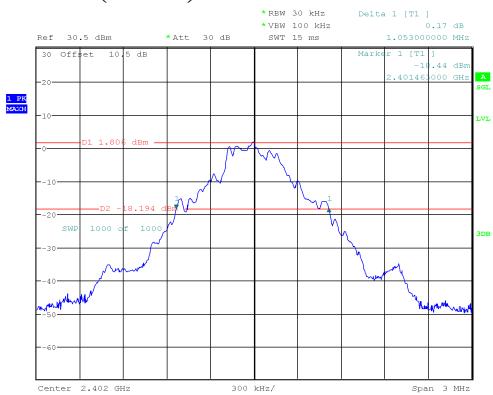
ProjectNo.:RKSA240816002 Tester:Neil Zhou
Date: 12.NOV.2024 14:33:59

BDR (GFSK): High Channel

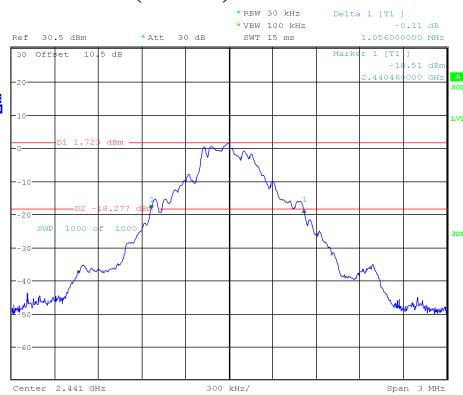
ProjectNo.:RKSA240816002 Tester:Neil Zhou
Date: 12.NOV.2024 15:16:22

20 dB BANDWIDTH TEST*EUT operation mode: Transmitting*

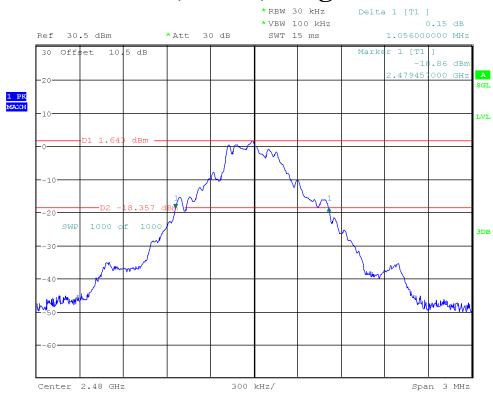
Mode	Channel	Frequency (MHz)	20 dB Emission Bandwidth (MHz)
BDR (GFSK)	Low	2402	1.053
	Middle	2441	1.056
	High	2480	1.056
EDR ($\pi/4$-DQPSK)	Low	2402	1.350
	Middle	2441	1.350
	High	2480	1.353
EDR (8DPSK)	Low	2402	1.302
	Middle	2441	1.317
	High	2480	1.308

BDR (GFSK): Low Channel

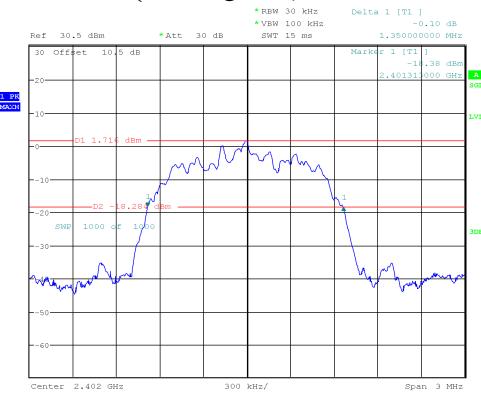
ProjectNo.:RKSA240816002 Tester:Neil Zhou
Date: 4.SEP.2024 09:26:48

BDR (GFSK): Middle Channel

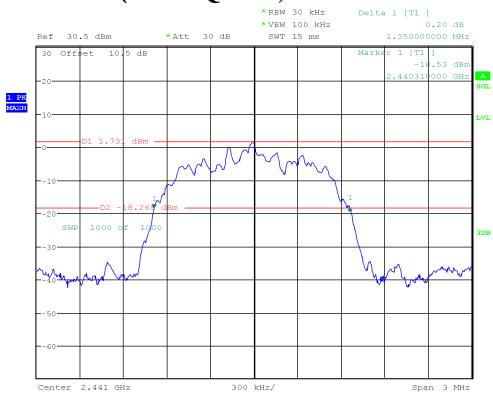
ProjectNo.:RKSA240816002 Tester:Neil Zhou
Date: 4.SEP.2024 09:40:50

BDR (GFSK): High Channel

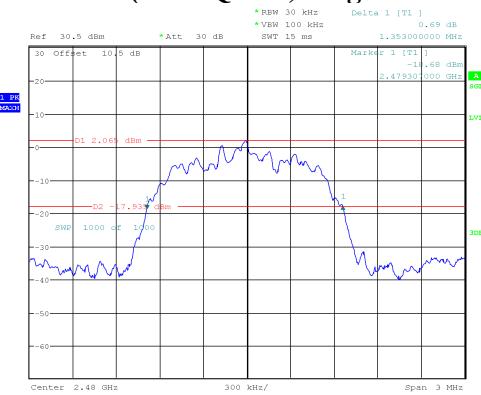
ProjectNo.:RKSA240816002 Tester:Neil Zhou
Date: 4.SEP.2024 09:47:37

EDR ($\pi/4$ -DQPSK): Low Channel

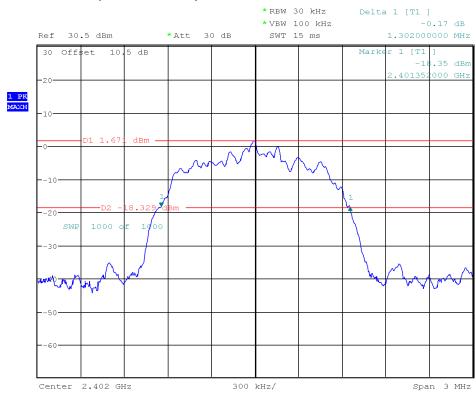
ProjectNo.:RKSA240816002 Tester:Neil Zhou
Date: 4.SEP.2024 10:35:45

EDR($\pi/4$ -DQPSK): Middle Channel

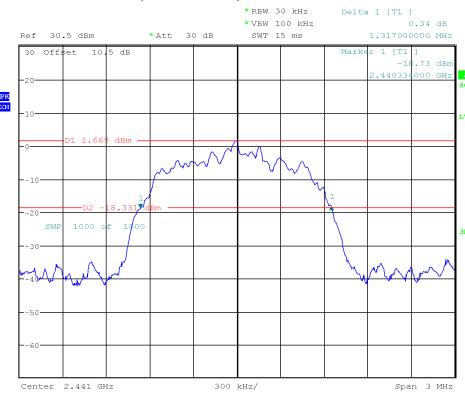
ProjectNo.:RKSA240816002 Tester:Neil Zhou
Date: 4.SEP.2024 10:44:53

EDR ($\pi/4$ -DQPSK): High Channel

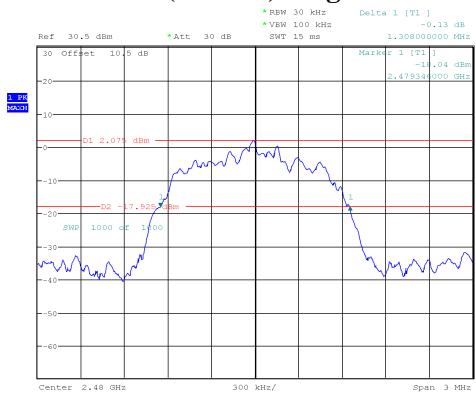
ProjectNo.:RKSA240816002 Tester:Neil Zhou
Date: 4.SEP.2024 10:50:43

EDR (8DPSK): Low Channel

ProjectNo.:RKSA240816002 Tester:Neil Zhou
Date: 4.SEP.2024 11:19:57

EDR (8DPSK): Middle Channel

ProjectNo.:RKSA240816002 Tester:Neil Zhou
Date: 4.SEP.2024 11:27:34

EDR (8DPSK): High Channel

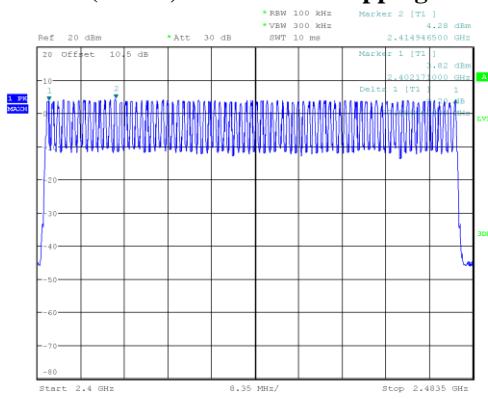
ProjectNo.:RKSA240816002 Tester:Neil Zhou
Date: 4.SEP.2024 11:33:42

QUANTITY OF HOPPING CHANNEL TEST

EUT operation mode: Hopping

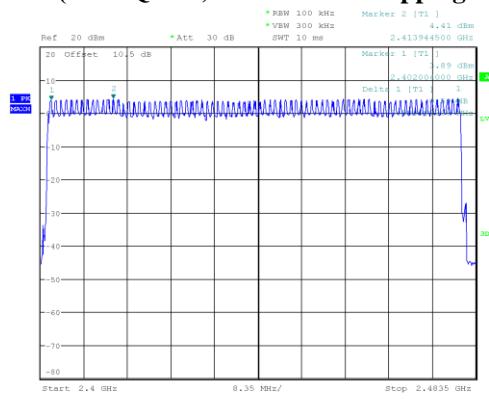
Mode	Frequency Range (MHz)	Number of Hopping Channel (CH)	Limit (CH)
BDR (GFSK)	2400-2483.5	79	≥15
EDR ($\pi/4$ -DQPSK)	2400-2483.5	79	≥15
EDR (8DPSK)	2400-2483.5	79	≥15

BDR (GFSK):Number of Hopping Channels



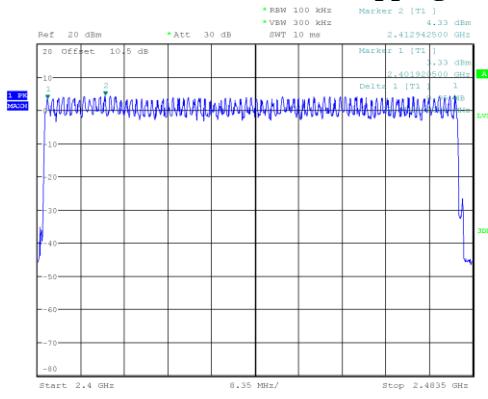
ProjectNo.:RKSA240816002 Tester:Neil Zhou
Date: 4.SEP.2024 10:17:09

EDR ($\pi/4$ -DQPSK): Number of Hopping Channels



ProjectNo.:RKSA240816002 Tester:Neil Zhou
Date: 4.SEP.2024 11:14:07

EDR (8DPSK): Number of Hopping Channels



ProjectNo.:RKSA240816002 Tester:Neil Zhou
Date: 4.SEP.2024 11:53:35

TIME OF OCCUPANCY (DWELL TIME)*EUT operation mode: Hopping*

Mode		Channel	Pulse Width (ms)	Dwell Time (s)	Limit (s)	Result
BDR (GFSK)	DH1	Middle	0.449	0.144	0.4	Pass
	DH3	Middle	1.697	0.272	0.4	Pass
	DH5	Middle	2.963	0.316	0.4	Pass
EDR ($\pi/4$ -DQPSK)	2DH1	Middle	0.469	0.150	0.4	Pass
	2DH3	Middle	1.705	0.273	0.4	Pass
	2DH5	Middle	2.960	0.316	0.4	Pass
EDR (8DPSK)	3DH1	Middle	0.445	0.142	0.4	Pass
	3DH3	Middle	1.716	0.275	0.4	Pass
	3DH5	Middle	2.976	0.317	0.4	Pass

Note:

DH1: Dwell time = Pulse time*(1600/2/79)*31.6S

DH3: Dwell time = Pulse time*(1600/4/79)*31.6S

DH5: Dwell time = Pulse time*(1600/6/79)*31.6S

2DH1: Dwell time = Pulse time*(1600/2/79)*31.6S

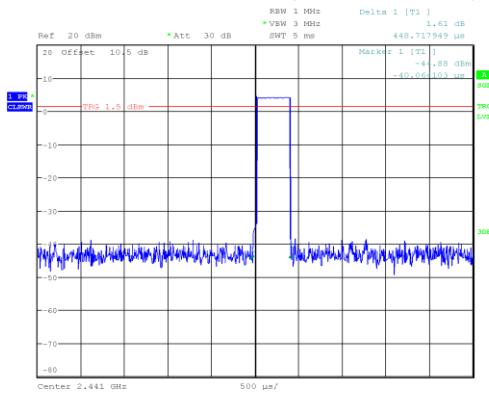
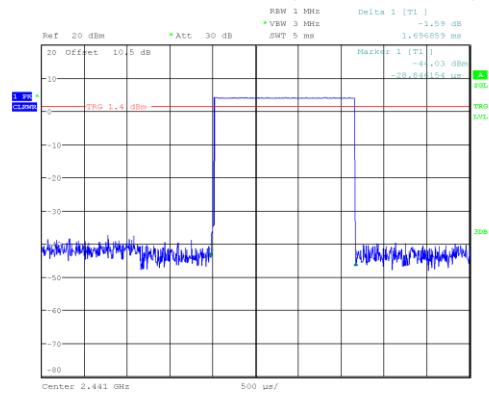
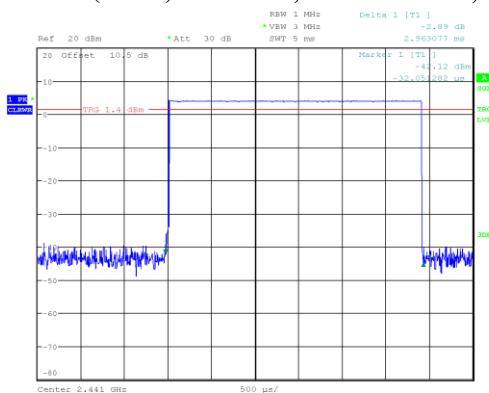
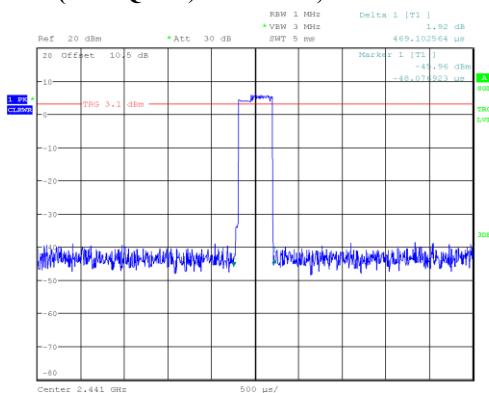
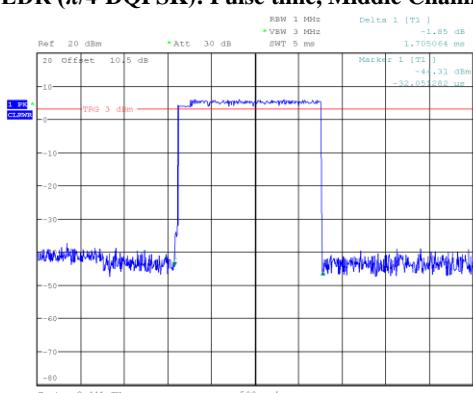
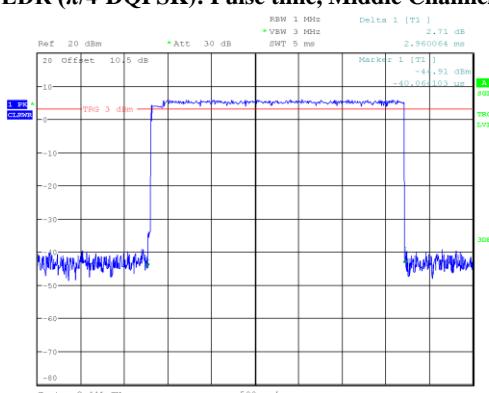
2DH3: Dwell time = Pulse time*(1600/4/79)*31.6S

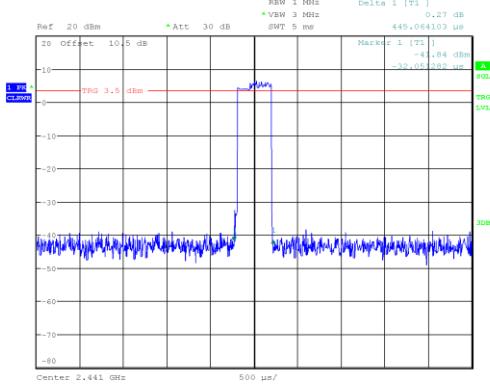
2DH5: Dwell time = Pulse time*(1600/6/79)*31.6S

3 DH1: Dwell time = Pulse time*(1600/2/79)*31.6S

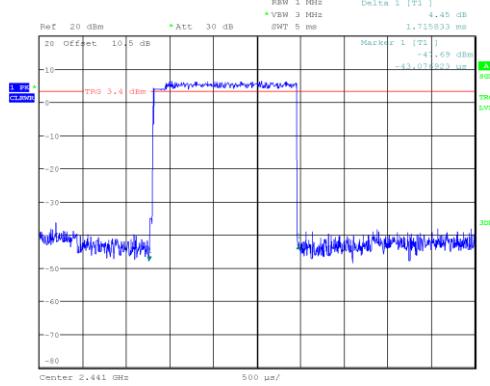
3DH3: Dwell time = Pulse time*(1600/4/79)*31.6S

3DH5: Dwell time = Pulse time*(1600/6/79)*31.6S

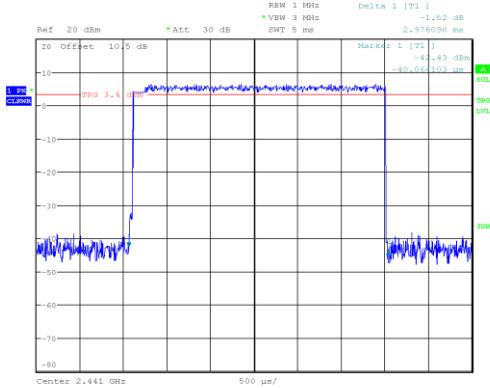
BDR (GFSK): Pulse time, Middle Channel, DH1**BDR (GFSK): Pulse time, Middle Channel, DH3****BDR (GFSK): Pulse time, Middle Channel, DH5****EDR ($\pi/4$ -DQPSK): Pulse time, Middle Channel, 2DH1****EDR ($\pi/4$ -DQPSK): Pulse time, Middle Channel, 2DH3****EDR ($\pi/4$ -DQPSK): Pulse time, Middle Channel, 2DH5**

EDR (8DPSK): Pulse time, Middle Channel, 3DH1

ProjectNo.:RKSA240816002 Tester:Neil Zhou
Date: 4.SEP.2024 11:54:23

EDR (8DPSK): Pulse time, Middle Channel, 3DH3

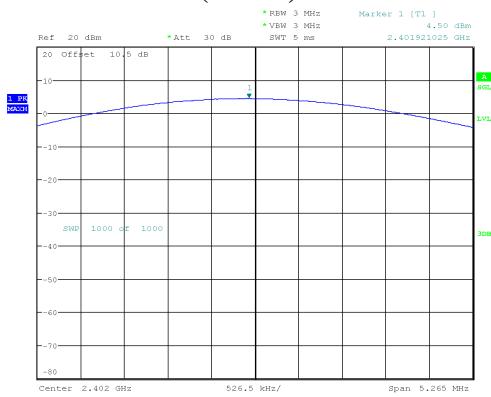
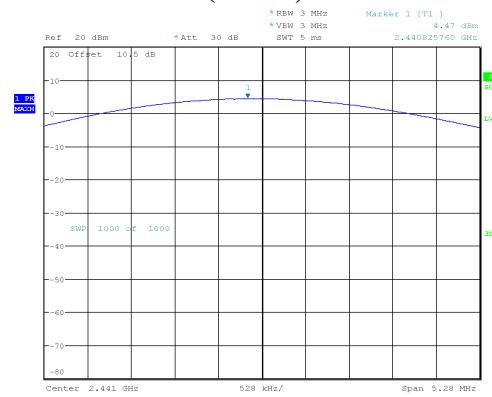
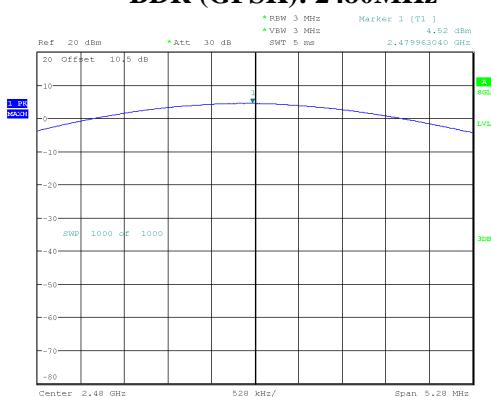
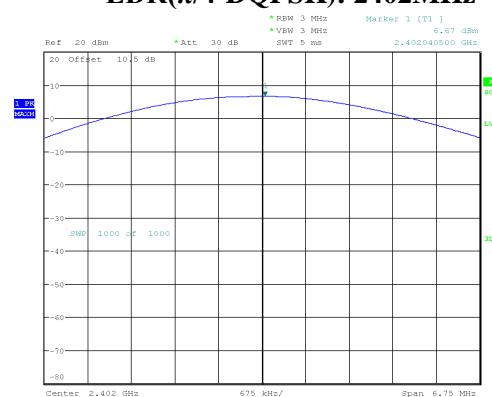
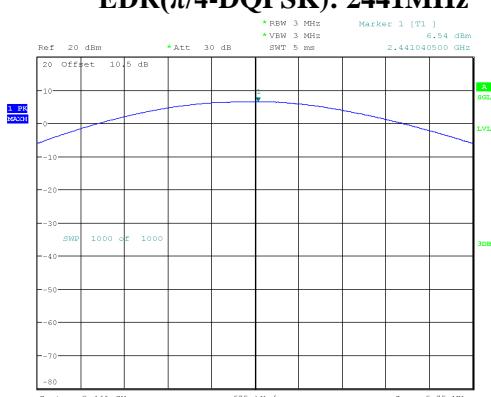
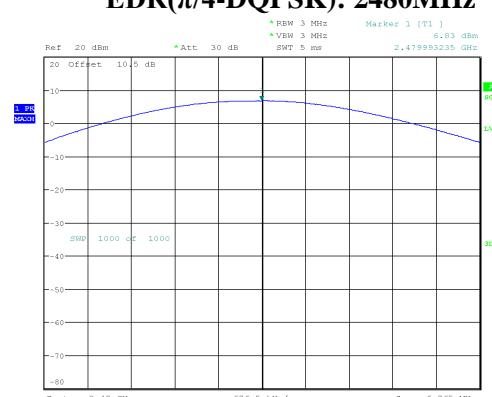
ProjectNo.:RKSA240816002 Tester:Neil Zhou
Date: 4.SEP.2024 11:58:31

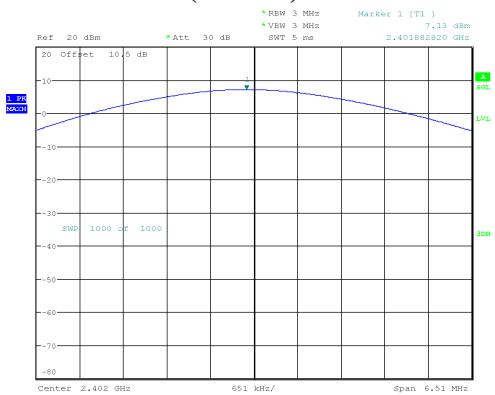
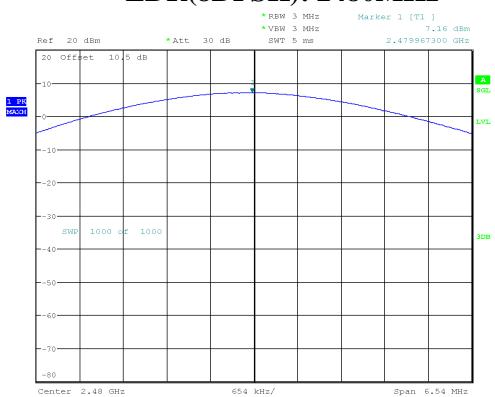
EDR (8DPSK): Pulse time, Middle Channel, 3DH5

ProjectNo.:RKSA240816002 Tester:Neil Zhou
Date: 4.SEP.2024 11:59:43

PEAK OUTPUT POWER MEASUREMENT*EUT operation mode: Transmitting*

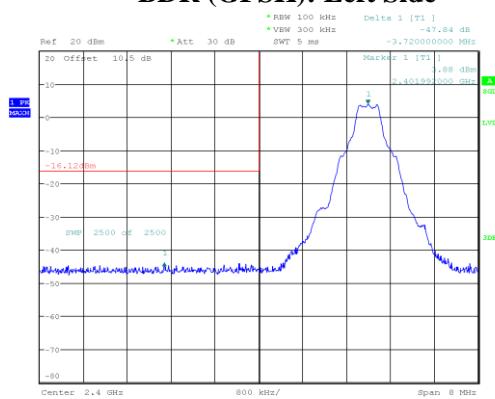
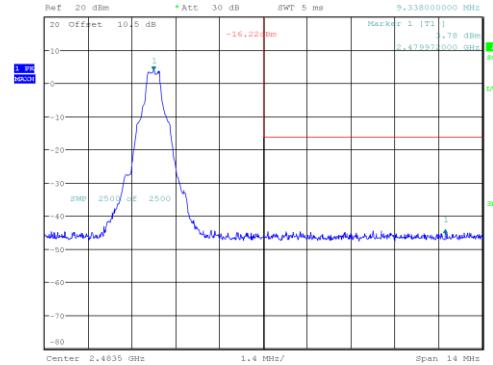
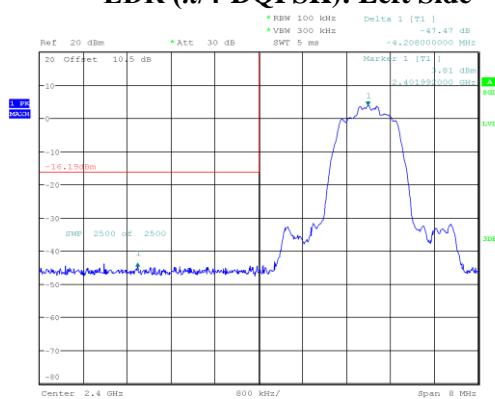
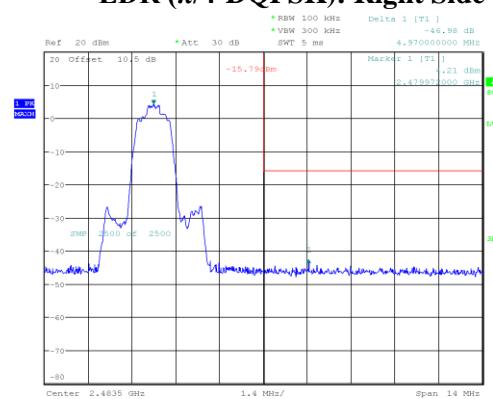
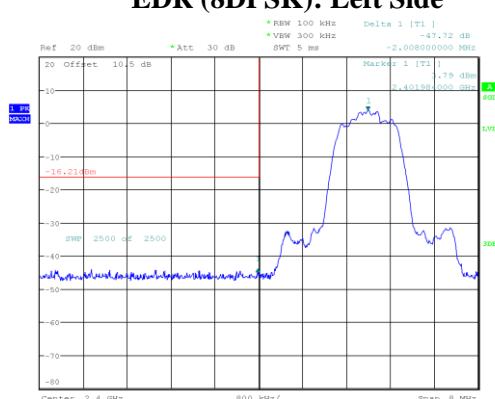
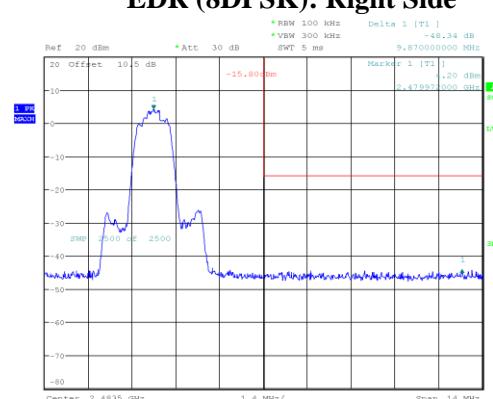
Mode	Channel	Frequency (MHz)	Result (dBm)	Limit (dBm)
GFSK	Low	2402	4.50	21
	Middle	2441	4.47	
	High	2480	4.52	
$\pi/4$ DQPSK	Low	2402	6.67	21
	Middle	2441	6.54	
	High	2480	6.83	
8DPSK	Low	2402	7.13	21
	Middle	2441	6.98	
	High	2480	7.16	

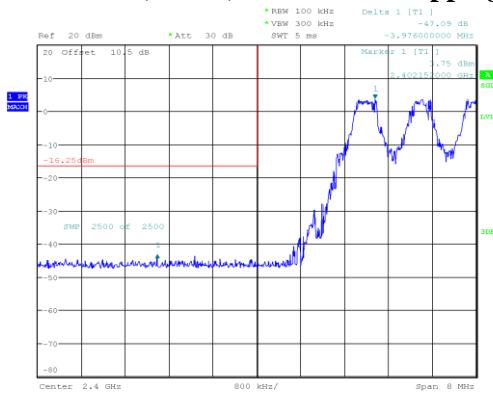
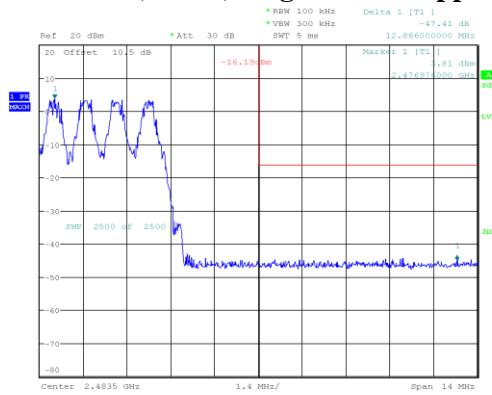
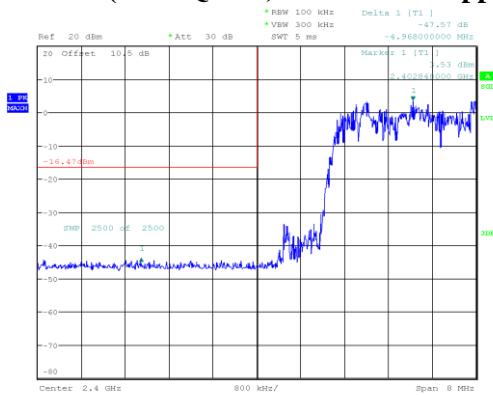
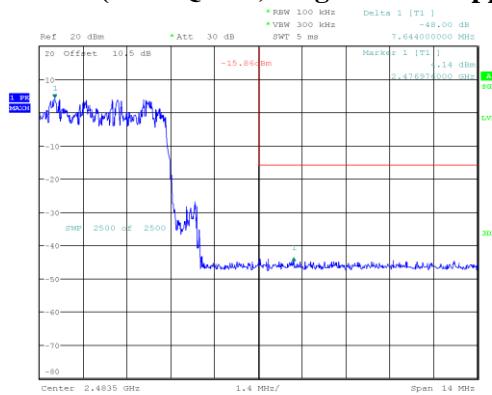
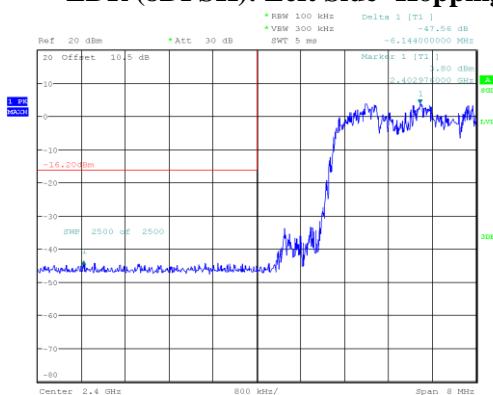
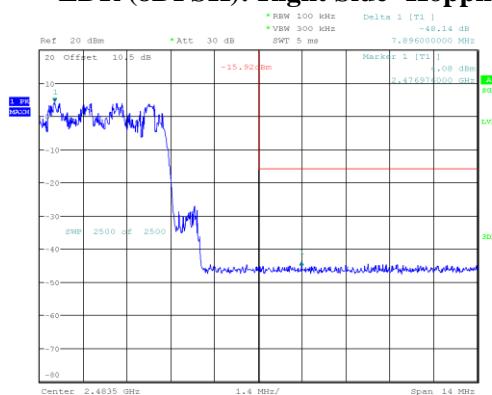
BDR (GFSK): 2402MHz**BDR (GFSK): 2441MHz****BDR (GFSK): 2480MHz****EDR($\pi/4$ -DQPSK): 2402MHz****EDR($\pi/4$ -DQPSK): 2441MHz****EDR($\pi/4$ -DQPSK): 2480MHz**

EDR(8DPSK): 2402MHz**EDR(8DPSK):2441MHz****EDR(8DPSK): 2480MHz**

BAND EDGES*EUT operation mode: Transmitting & Hopping**Test Result: Compliant.*

Mode	Channel	Frequency (MHz)	Result (dBc)	Limit (dBc)
GFSK	Low	2402	47.84	20
	High	2480	47.95	
$\pi/4$ DQPSK	Low	2402	47.47	20
	High	2480	46.98	
8DPSK	Low	2402	47.72	20
	High	2480	48.34	
GFSK (Hopping)	Low	2402	47.09	20
	High	2480	47.41	
$\pi/4$ DQPSK (Hopping)	Low	2402	47.57	20
	High	2480	48.00	
8DPSK (Hopping)	Low	2402	47.56	20
	High	2480	48.14	

Band Edge**BDR (GFSK): Left Side****BDR (GFSK): Right Side****EDR ($\pi/4$ -DQPSK): Left Side****EDR ($\pi/4$ -DQPSK): Right Side****EDR (8DPSK): Left Side****EDR (8DPSK): Right Side**

BDR (GFSK): Left Side - Hopping**BDR (GFSK): Right Side- Hopping****EDR ($\pi/4$ -DQPSK): Left Side- Hopping****EDR ($\pi/4$ -DQPSK): Right Side- Hopping****EDR (8DPSK): Left Side- Hopping****EDR (8DPSK): Right Side- Hopping**

EUT PHOTOGRAPHS

Please refer to the attachment EXHIBIT A - E UT EXTERNAL PHOTOGRAPHS and EXHIBIT B - EUT INTERNAL PHOTOGRAPHS.

TEST SETUP PHOTOGRAPHS

Please refer to the attachment EXHIBIT C - TEST SETUP PHOTOGRAPHS.

Declarations

1. The laboratory is not responsible for the authenticity of any information provided by the applicant. Information from the applicant that may affect test results is marked with “★”.
2. The test data was only valid for the test sample(s).
3. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.
4. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.
5. The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor k=2 with the 95.45% confidence interval.

***** END OF REPORT *****