


# 天线规格书

## Antenna Specific

### 产品技术指标(Technical parameter)

| Electronic Parameter        |                                   |
|-----------------------------|-----------------------------------|
| 频率范围(Frequency Range)       | 2400~2500MHz                      |
| 输入阻抗(input impedance)       | 50 $\Omega$                       |
| 驻波比(VSWR)                   | $\leq 2$                          |
| 增益(Gain)                    | Max 0.0dBi                        |
| Physical Parameter          |                                   |
| 材料(Material)                | PCB/Cu                            |
| 工作温度(operation temperature) | -30 $^{\circ}$ C~+80 $^{\circ}$ C |
| 储存温度(store temperature)     | -30 $^{\circ}$ C~+80 $^{\circ}$ C |



## 产品规格图(Antenna Specification chart)


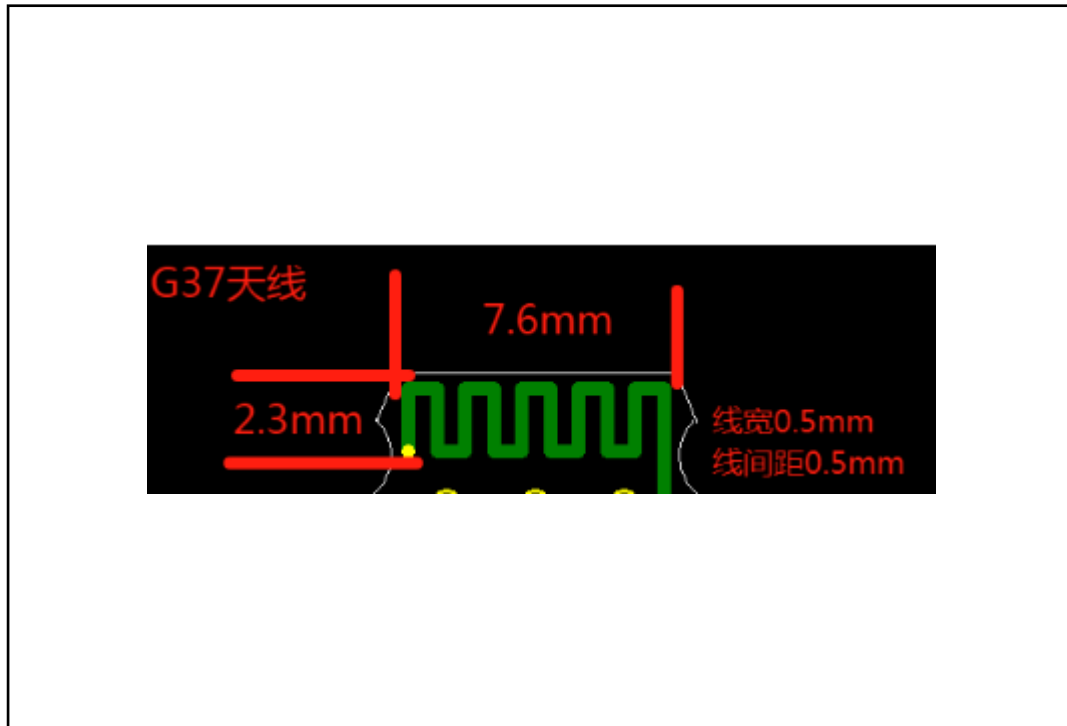


### Test Result:


| Frequency | Gain. dBi | Frequency | Efficiency |
|-----------|-----------|-----------|------------|
| 2400MHz   | -0.31     | 2400MHz   | 28%        |
| 2450MHz   | 0.0       | 2450MHz   | 31%        |
| 2500MHz   | -0.71     | 2500MHz   | 36%        |

**Direction:**

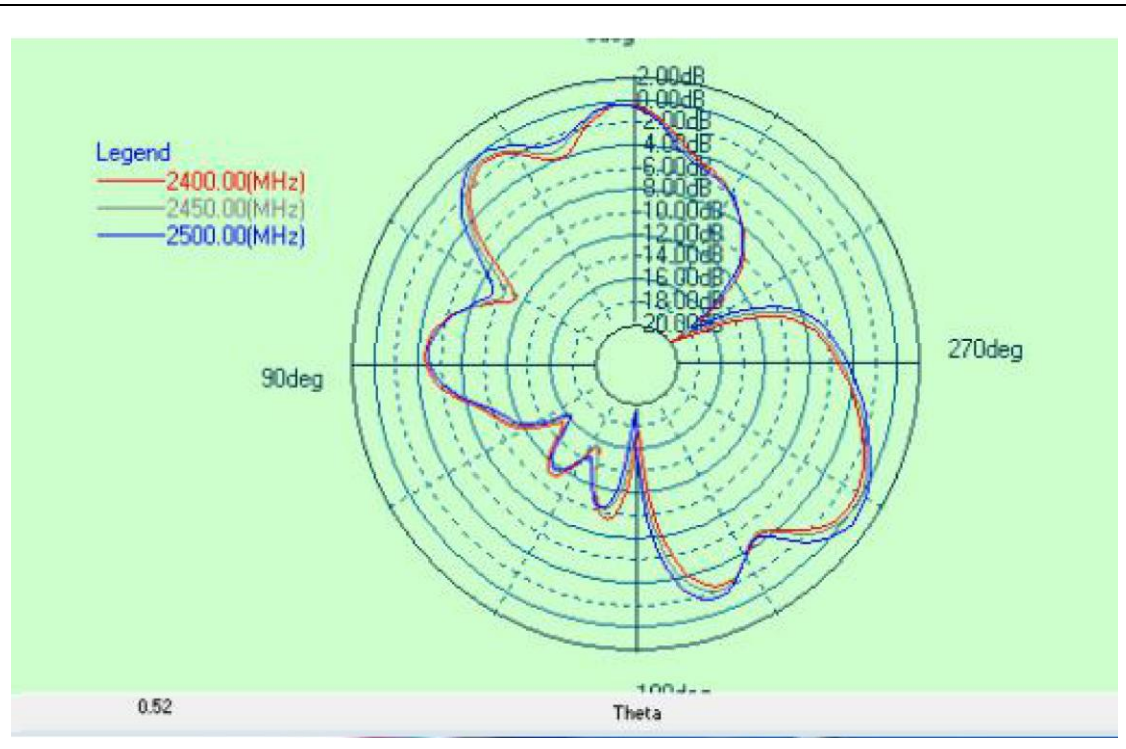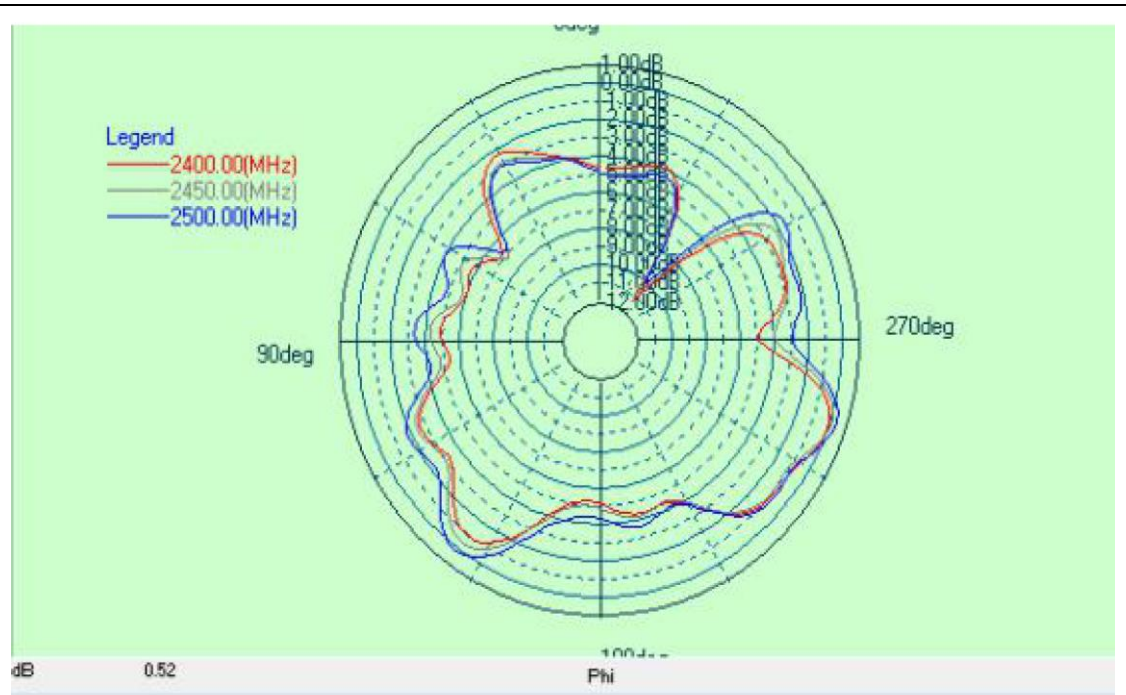

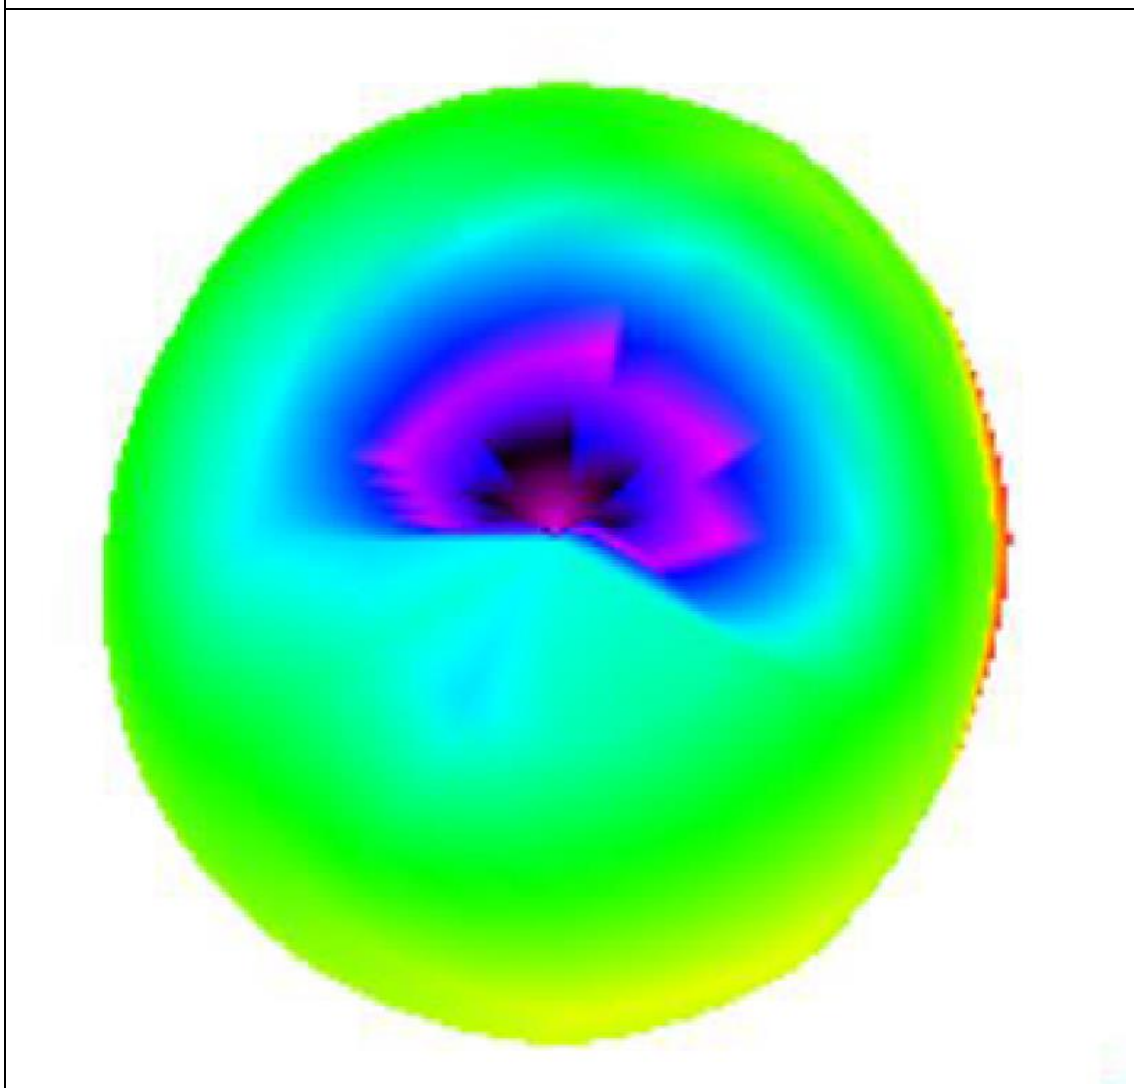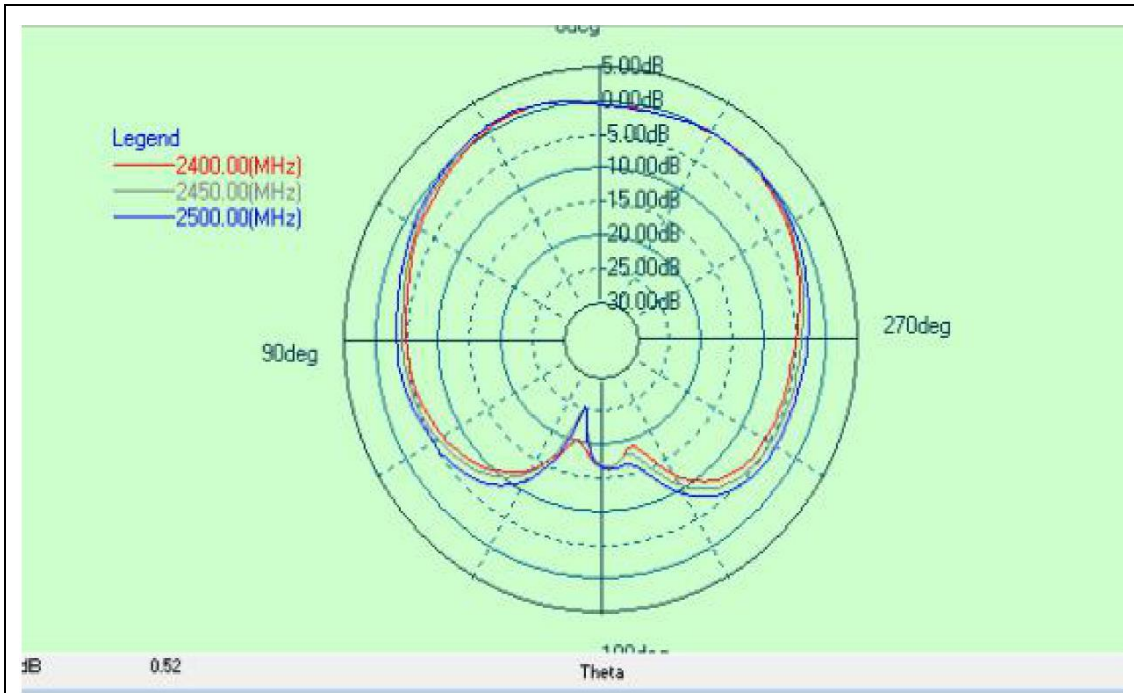

**Smith Chart:**

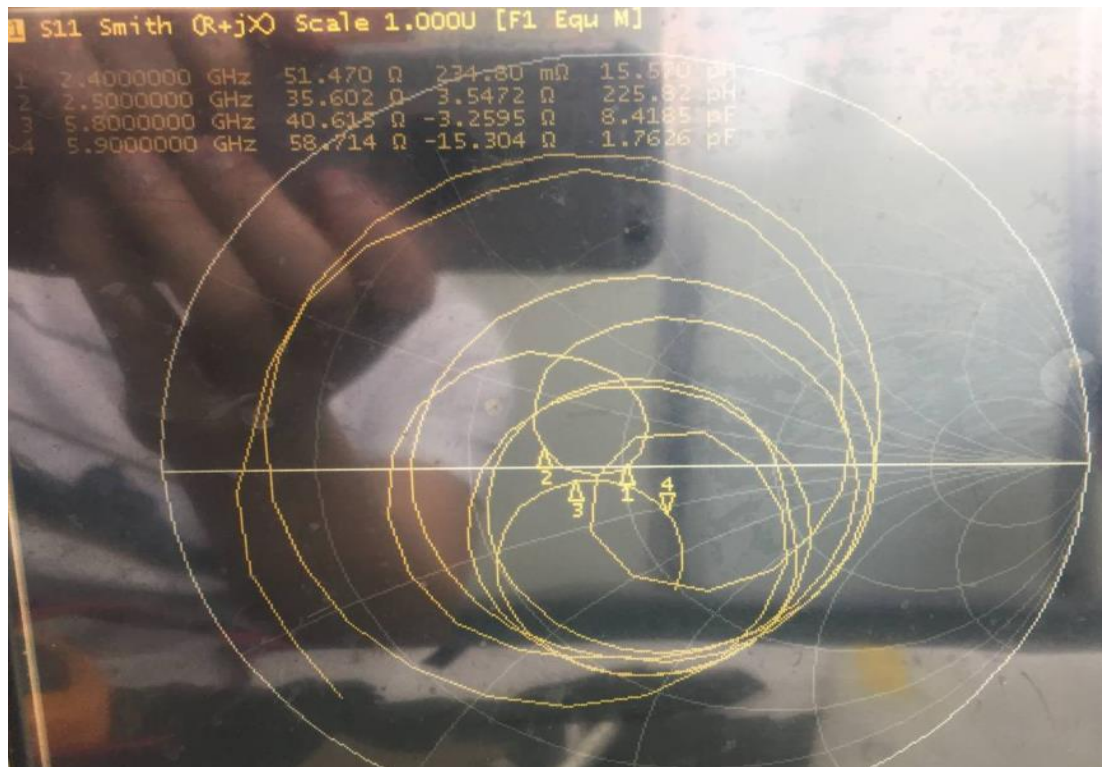

**VSWR:**

