



FCC TEST REPORT

FCC ID: 2BFEX-N5-A

Product	:	Robot vacuum cleaner
Model Name	:	N5-A
Additional model	:	N5-YA, N5-D, N5-YD, N5-B, N5-BG, N5-YB, N5-YBG, N5-BD, N5-BDG, N5-BYD, N5-BYDG, N5
Brand	:	N/A
Report No.	:	PTC24022201702E-FC03
Prepared for		
Shenzhen Pureatic Electromechanical Technology Co., Ltd		
Room 301, Building A2, Rongchang Industry Park, NO.440, Hedong country, guancheng community, guanhu street, longhua district, shenzhen city.		
Prepared by		
Precise Testing & Certification Co., Ltd		
Building 1, No. 6, Tongxin Road, Dongcheng Street, Dongguan, Guangdong, China		



1 TEST RESULT CERTIFICATION

Applicant's name : Shenzhen Pureatic Electromechanical Technology Co., Ltd
Address : Room 301, Building A2, Rongchang Industry Park, NO.440, Hedong country, guancheng community, guanhu street, longhua district, shenzhen city.
Manufacture's name : Shenzhen Pureatic Electromechanical Technology Co., Ltd
Address : Room 301, Building A2, Rongchang Industry Park, NO.440, Hedong country, guancheng community, guanhu street, longhua district, shenzhen city.
Product name : Robot vacuum cleaner
Model name : N5-A, N5-YA, N5-D, N5-YD, N5-B, N5-BG, N5-YB, N5-YBG, N5-BD, N5-BDG, N5-BYD, N5-BYDG, N5
Standards : FCC CFR47 Part 15 Section 15.247
Test procedure : ANSI C63.10:2013
Test Date : Mar. 07, 2024 to Mar. 15, 2024
Date of Issue : Mar. 27, 2024
Test Result : Pass

This device described above has been tested by PTC, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of PTC, this document may be altered or revised by PTC, personal only, and shall be noted in the revision of the document.

Test Engineer:

A handwritten signature in black ink, appearing to read 'Jack Zhou'.

Jack Zhou / Engineer

Technical Manager:

A handwritten signature in black ink, appearing to read 'Simon Pu'.

Simon Pu/ Manager



Contents

	Page
1 TEST RESULT CERTIFICATION	2
2 TEST SUMMARY	5
3 GENERAL INFORMATION	6
3.1 GENERAL DESCRIPTION OF E.U.T.	6
3.2 CHANNEL LIST	7
3.3 TEST SITE	14
4 EQUIPMENT DURING TEST	15
4.1 EQUIPMENTS LIST	15
4.2 MEASUREMENT UNCERTAINTY	17
4.3 DESCRIPTION OF SUPPORT UNITS	18
5 CONDUCTED EMISSION	19
5.1 E.U.T. OPERATION	19
5.2 EUT SETUP	19
5.3 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	20
5.4 MEASUREMENT PROCEDURE	20
5.5 CONDUCTED EMISSION LIMIT	20
5.6 MEASUREMENT DESCRIPTION	20
5.7 CONDUCTED EMISSION TEST RESULT	20
6 RADIATED SPURIOUS EMISSIONS	23
6.1 EUT OPERATION	23
6.2 TEST SETUP	24
6.3 SPECTRUM ANALYZER SETUP	25
6.4 TEST PROCEDURE	26
6.5 SUMMARY OF TEST RESULTS	27
7 CONDUCTED SPURIOUS EMISSION	43
7.1 TEST PROCEDURE	43
7.2 TEST SETUP	43
7.3 TEST RESULT	43
8 BAND EDGE MEASUREMENT	63



8.1 TEST PROCEDURE	63
8.2 TEST SETUP	63
8.3 TEST RESULT	64
9 6DB BANDWIDTH MEASUREMENT	69
9.1 TEST PROCEDURE	69
9.2 TEST SETUP	69
9.3 TEST RESULT	69
10 MAXIMUM PEAK OUTPUT POWER	76
10.1 TEST PROCEDURE	76
10.2 TEST SETUP	76
10.3 TEST RESULT	76
11 POWER SPECTRAL DENSITY	77
11.1 TEST PROCEDURE	77
11.2 TEST SETUP	77
11.3 TEST RESULT	77
12 ANTENNA APPLICATION	84
12.1 ANTENNA REQUIREMENT	84
12.2 RESULT	84
13 TEST SETUP	85
14 EUT PHOTOS	87



2 Test Summary

Test Items	Test Requirement	Result
Conduct Emission	15.207	PASS
Radiated Spurious Emissions	15.205(a) 15.209 15.247(d)	PASS
Conducted Spurious Emission	15.247(d)	PASS
Band edge	15.247(d) 15.205(a)	PASS
6dB Bandwidth	15.247(a)(2)	PASS
Maximum Peak Output Power	15.247(b)(3)	PASS
Power Spectral Density	15.247(e)	PASS
Antenna Requirement	15.203	PASS

Remark:

N/A: Not Applicable



3 General Information

3.1 General Description of E.U.T.

Product Name	:	Robot vacuum cleaner
Model Number	:	N5-A
Additional model	:	N5-YA, N5-D, N5-YD, N5-B, N5-BG, N5-YB, N5-YBG, N5-BD, N5-BDG, N5-BYD, N5-BYDG, N5
Model difference	:	Only the appearance color is different.
Specification	:	802.11b/g/n HT20/HT40
Operating frequency	:	2412-2462MHz for 802.11b/g/ n(HT20) 2422-2452MHz for 802.11 n(HT40)
Numbers of Channel	:	11 channels for 802.11b/g/n(HT20) 7 channels for 802.11 n(HT40)
Antenna Type	:	PIFA Antenna
Antenna Gain	:	4.02 dBi
Type of Modulation	:	DSSS with DBPSK/DQPSK/CCK for 802.11b; OFDM with BPSK/QPSK/16QAM/64QAM for 802.11g/n;
Power supply	:	Adapter 1: NLB100150W1A4S58 Input: 100-240V~, 50/60Hz, 0.4A Max Output: DC 15V, 1.0A Adapter 2: JF018WR-1500100UH Input: 100-240V~, 50/60Hz, 0.5A Output: DC 15V, 1.0A Battery 1: Capacity: 4400mAh, Input: DC 11.1V Battery 2: Capacity: 5200mAh, Input: DC 11.1V Battery 3: Capacity: 2600mAh, Input: DC 11.1V
Hardware Version/HMN	:	01
Software Version/FVIN	:	VV0.1
Test Sample No.	:	PTC24022201702E-1/2, PTC24022201702E-2/2



3.2 Channel List

The EUT has been tested under its typical operating condition.

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

Test of channel included the lowest and middle and highest frequency to perform the test, then record on this report.

Those data rates (802.11b: 1 Mbps; 802.11g: 6 Mbps; 802.11n (HT20): MCS0;) were used for all test.

Pre-defined engineering program for regulatory testing used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

Frequency and Channel list for 802.11 b/g/n (HT20)

Frequency and Channel list for 802.11 n (HT40): Support Channel 3,4,5,6,7,8,9.

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	5	2432	9	2452
2	2417	6	2437	10	2457
3	2422	7	2442	11	2462
4	2427	8	2447		

The maximum duty cycle as following table:

Test Mode	Antenna	Frequency[MHz]	Transmission Duration [ms]	Transmission Period [ms]	Duty Cycle [%]	Factor
11B	Ant1	2412	8.20	8.70	94.25	0.26
11B	Ant1	2437	8.20	8.70	94.25	0.26
11B	Ant1	2462	8.20	8.70	94.25	0.26
11G	Ant1	2412	1.36	1.86	73.12	1.36
11G	Ant1	2437	1.36	1.86	73.12	1.36
11G	Ant1	2462	1.36	1.86	73.12	1.36
11N20SISO	Ant1	2412	1.27	1.77	71.75	1.44
11N20SISO	Ant1	2437	1.27	1.78	71.35	1.47
11N20SISO	Ant1	2462	1.27	1.78	71.35	1.47
11N40SISO	Ant1	2422	0.63	1.13	55.75	2.54
11N40SISO	Ant1	2437	0.63	1.13	55.75	2.54
11N40SISO	Ant1	2452	0.63	1.13	55.75	2.54



Test Graphs



NTNV-11B-Ant1-2412



NTNV-11B-Ant1-2437



NTNV-11B-Ant1-2462



NTNV-11G-Ant1-2412




NTV-11G-Ant1-2437




NTV-11G-Ant1-2462




NTNV-11N20SISO-Ant1-2412

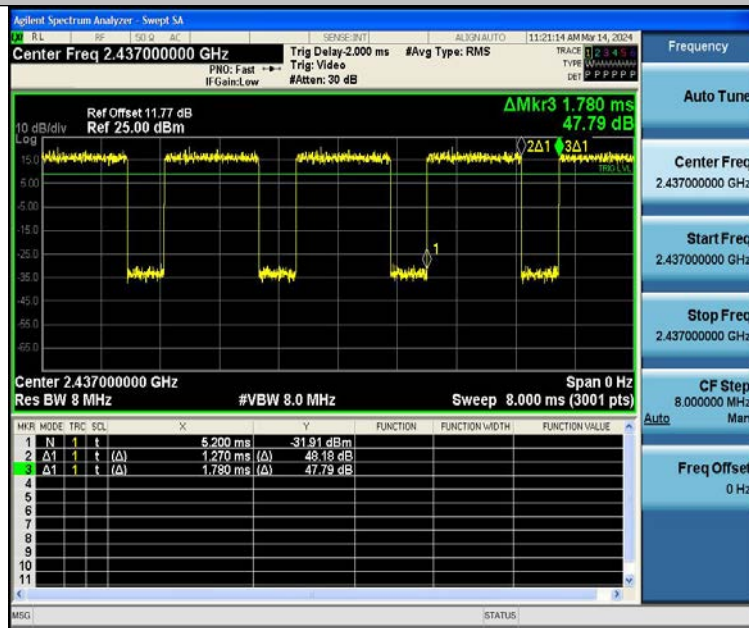


NTNV-11N20SISO-Ant1-2437

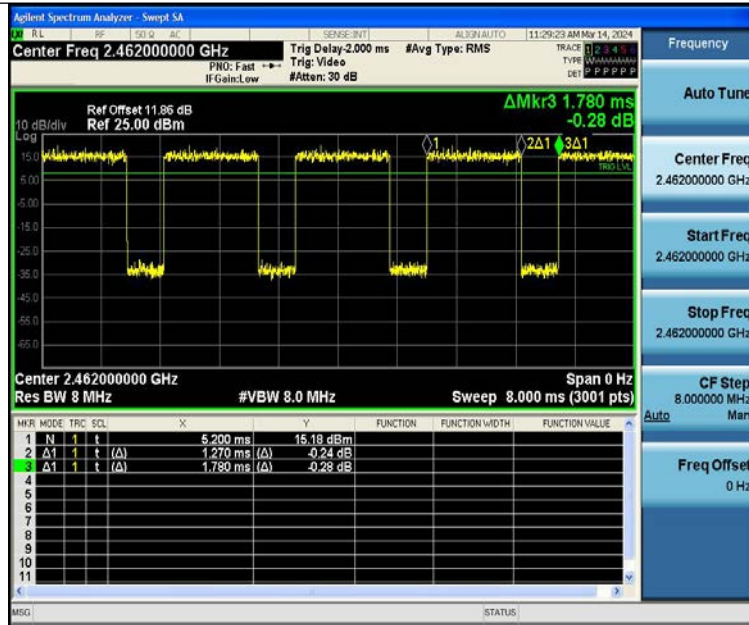


NTVN-11N20SISO-Ant1-2462

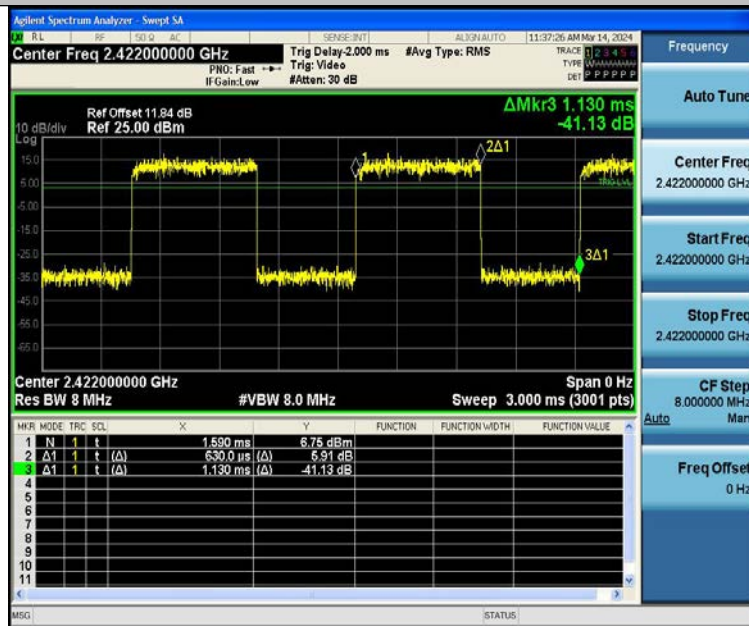

NTVN-11N40SISO-Ant1-2422

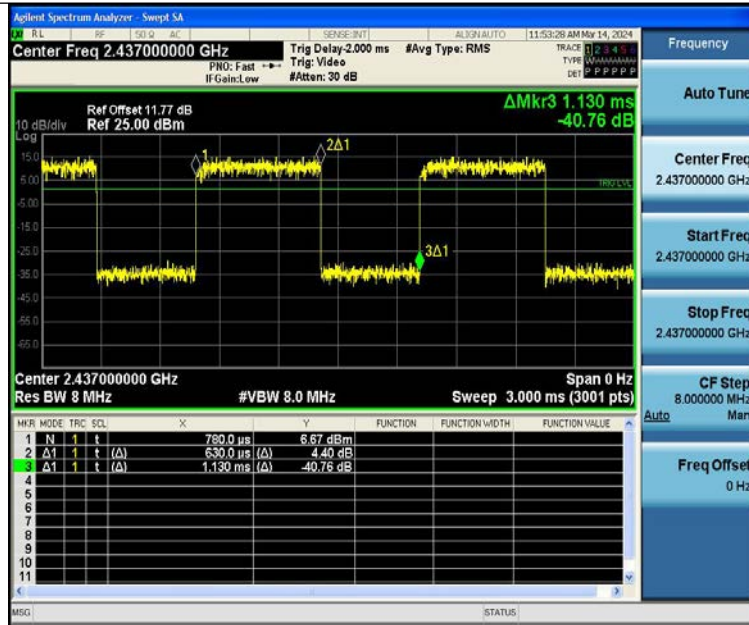

NTNV-11N40SISO-Ant1-2437

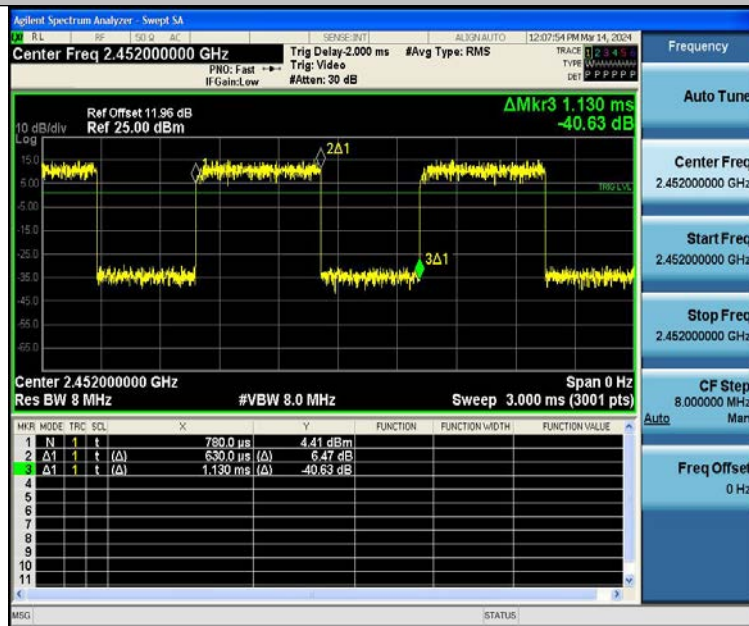

NTNV-11N40SISO-Ant1-2452



Report No.: PTC24022201702E-FC03

3.3 Test Site

Precise Testing & Certification Co., Ltd.

Address: Building 1, No.6 Tongxin Road, Dongcheng Street, Dongguan,China

FCC Registration Number: 790290

Designation Number: CN1219

A2LA Certificate No.: 4408.01

IC Registration Number: 12191A

CAB identifier: CN0080



4 Equipment During Test

4.1 Equipments List

RF Conducted Test

Name of Equipment	Manufacturer	Model	Serial No.	Characteristics	Last Calibration	Calibration Interval
MXG Signal Analyzer	Agilent	N9020A	SER MY5111038	10Hz-26.5GHz	Aug.17, 2023	1 Year
Coaxial Cable	CDS	79254	46107086	10Hz-30GHz	Aug.17, 2023	1 Year
Power Meter	Anritsu	ML2495A	0949003	300MHz-40GHz	Aug.17, 2023	1 Year
Power Sensor	Anritsu	MA2411B	0917017	300MHz-40GHz	Aug.17, 2023	1 Year
Test S/W	Tonscend	JS1120-3	/	/	/	/

Remark: The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.

Name of Equipment	Manufacturer	Model	Serial No.	Characteristics	Last Calibration	Calibration Interval
EMI Test Receiver	Rohde&Schwarz	ESPI7	101671	9KHz-7GHz	Aug. 17,2023	1 Year
Loop Antenna	Schwarzbeck	FMZB 1519	192	9 KHz -30MHz	Aug. 17,2023	1 Year
Bilog Antenna	SCHWARZBECK	VULB9160	9160-3355	25MHz-2GHz	Aug. 17,2023	1 Year
Preamplifier (low frequency)	SCHWARZBECK	BBV 9475	9745-0013	1MHz-1GHz	Aug. 17,2023	1 Year
Cable	IMRO	AK-9515E(9m)	Cable-L	9KHz-3GHz	Aug. 17,2023	1 Year
Spectrum Analyzer	Rohde&Schwarz	FSV40	6625-01-588-5515	9KHz-40GHz	Aug. 17,2023	1 Year
Horn Antenna	SCHWARZBECK	9120D	9120D-1246	1GHz-18GHz	Aug. 17,2023	1 Year
Power Amplifier	ZHINAN	ZN3380C	15002	1GHz-26.5GHz	Aug. 17,2023	1 Year



Horn Antenna	SCHWARZBEC K	BBHA 9170	9170-1066	15GHz- 40GHz	Jul. 19, 2023	1 Year
Amplifier	SCHWARZBEC K	BBV 9721	9721-205	18GHz- 40GHz	Jul. 19, 2023	1 Year
Cable	H+S	CBL-26	N/A	1GHz- 26.5GHz	Aug. 17,2023	1 Year
RF Cable	R&S	R204	R21X	1GHz-40GHz	Aug. 17,2023	1 Year
Test S/W	Tonscend	TS+	/	/	/	/

Conducted Emissions

Name of Equipment	Manufacturer	Model	Serial No.	Characteristics	Last Calibration	Calibration Interval
EMI Test Receiver	Rohde&Schwarz	ESCI	101417	9KHz-3GHz	Aug. 17,2023	1 Year
Artificial Mains Network	Rohde&Schwarz	ENV216	102453	9KHz-300MHz	Aug. 17,2023	1 Year
Artificial Mains Network	Rohde&Schwarz	ENV216	101342	9KHz-300MHz	Aug. 17,2023	1 Year
Limiter	R&S	ESH3-Z2	0357.8810.5 4-102808-NB	0Hz-30MHz	Aug. 16,2023	1 Year
RF Switch	DIAMOND ANTENNA	CX-210	/	0.09MHz- 6GHz	Mar. 24,2023	1 Year
Test S/W	Tonscend	JS32-CE	/	/	/	/



4.2 Measurement Uncertainty

Parameter	Uncertainty
RF output power, conducted	±1.0dB
Power Spectral Density, conducted	±2.2dB
Radio Frequency	± 1 x 10 ⁻⁶
Bandwidth	± 1.5 x 10 ⁻⁶
Time	±2%
Duty Cycle	±2%
Temperature	±1°C
Humidity	±5%
DC and low frequency voltages	±3%
Conducted Emissions (150kHz~30MHz)	±3.64dB
Radiated Emission(30MHz~1GHz)	±5.03dB
Radiated Emission(1GHz~25GHz)	±4.74dB
Radiated Emission(25GHz-40GHz)	±4.14dB
Remark: The coverage Factor (k=2), and measurement Uncertainty for a level of Confidence of 95%	



4.3 Description of Support Units

Equipment	Model No.	Series No.
N/A	N/A	N/A

5 Conducted Emission

Test Requirement: : FCC CFR 47 Part 15 Section 15.207
 Test Method : ANSI C63.10: 2013
 Test Result : PASS
 Frequency Range : 150kHz to 30MHz
 Class/Severity : Class B


5.1 E.U.T. Operation

Operating Environment :

Temperature : 23.9 °C
 Humidity : 51.4 % RH
 Atmospheric Pressure : 101.21kPa


5.2 EUT Setup

The conducted emission tests were performed using the setup accordance with the ANSI C63.10:2013.

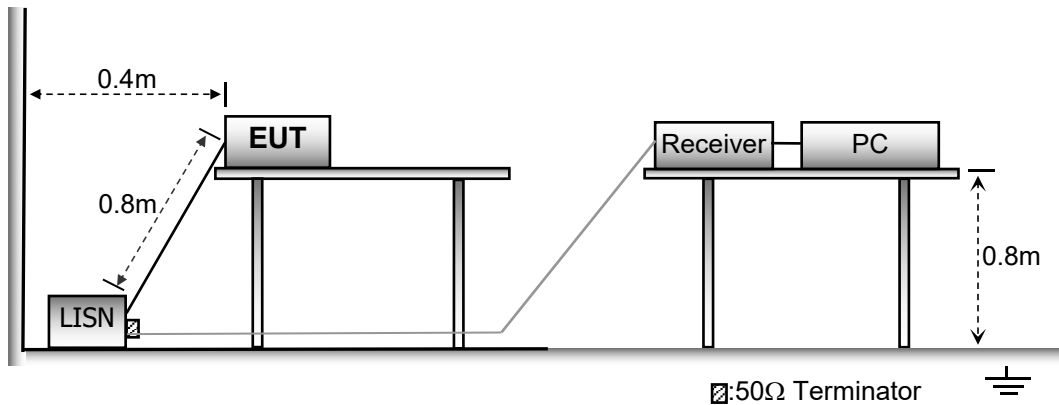



5.3 Test SET-UP (Block Diagram of Configuration)

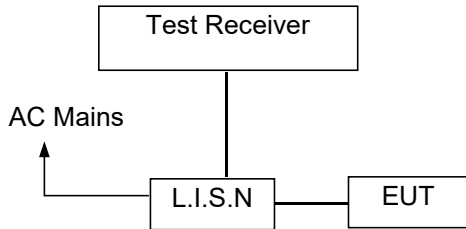

5.4 Measurement Procedure

1. The EUT was placed on a table, which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured was complete.

5.5 Conducted Emission Limit

Conducted Emission

Frequency(MHz)	Quasi-peak	Average
0.15-0.5	66-56	56-46
0.5-5.0	56	46
5.0-30.0	60	50

Note:

1. The lower limit shall apply at the transition frequencies
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

5.6 Measurement Description

The maximised peak emissions from the EUT was scanned and measured for both the Live and Neutral Lines. Quasi-peak & average measurements were performed if peak emissions were within 6dB of the average limit line.


5.7 Conducted Emission Test Result

Pass.

The data shown in this report is testing with battery 1.




Line-AC 120V/60Hz

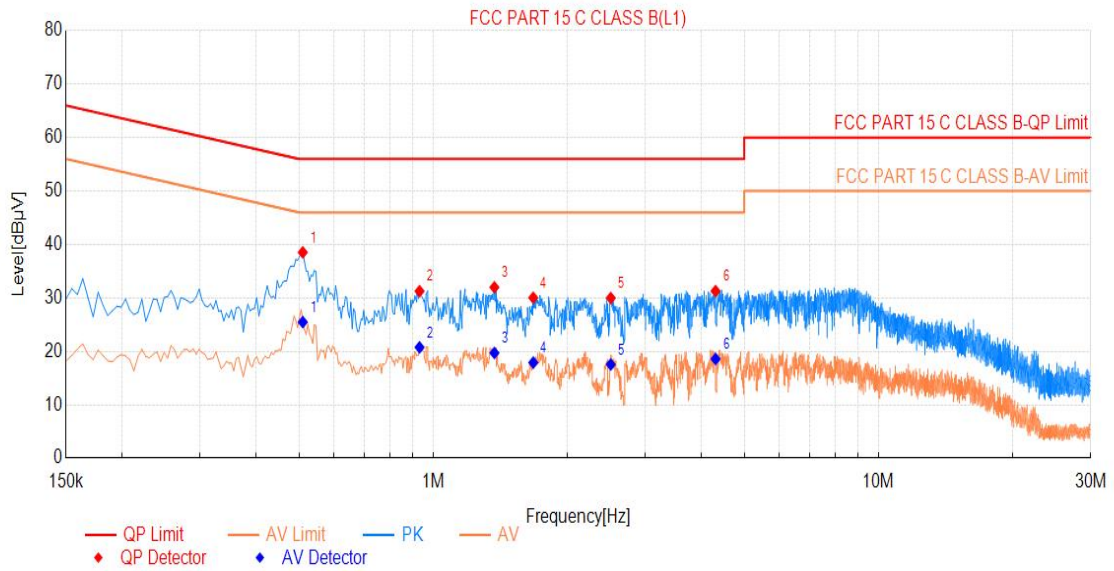

Final Data List									
NO.	Freq. [MHz]	Factor [dB]	QP Value	QP Limit	QP Margin	AV Value	AV Limit	AV Margin	Verdict
1	0.510	0.12	38.52	56.00	17.48	25.47	46.00	20.53	PASS
2	0.933	0.12	31.27	56.00	24.73	20.76	46.00	25.24	PASS
3	1.374	0.13	31.98	56.00	24.02	19.71	46.00	26.29	PASS
4	1.680	0.13	30.03	56.00	25.97	17.90	46.00	28.10	PASS
5	2.508	0.14	29.97	56.00	26.03	17.55	46.00	28.45	PASS
6	4.313	0.16	31.29	56.00	24.71	18.59	46.00	27.41	PASS



Neutral-AC 120V/60Hz

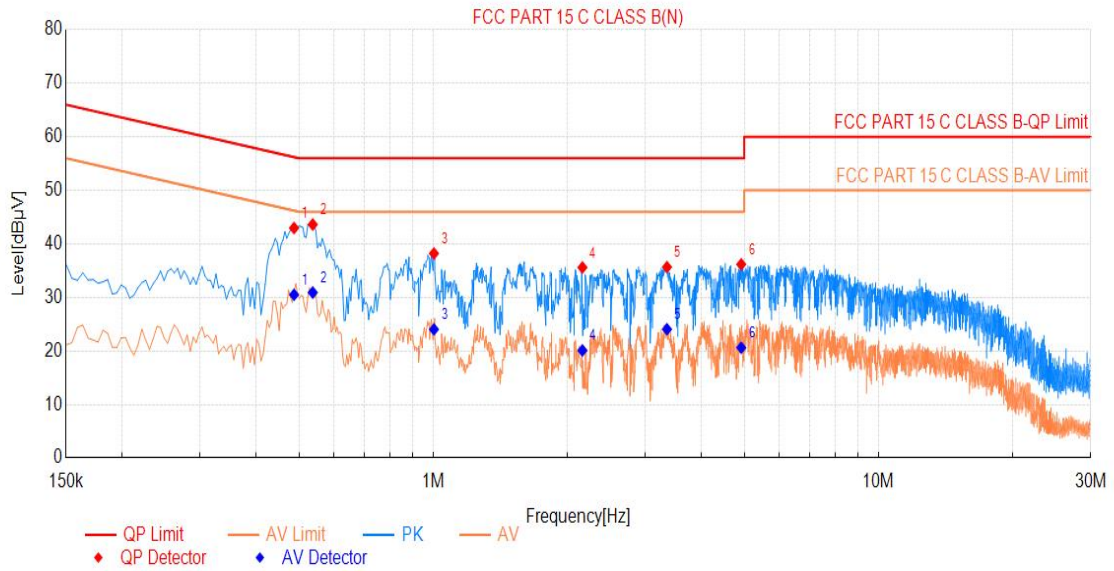

Final Data List									
NO.	Freq. [MHz]	Factor [dB]	QP Value	QP Limit	QP Margin	AV Value	AV Limit	AV Margin	Verdict
1	0.488	0.12	42.97	56.21	13.24	30.51	46.21	15.70	PASS
2	0.537	0.12	43.62	56.00	12.38	30.91	46.00	15.09	PASS
3	1.005	0.13	38.21	56.00	17.79	24.04	46.00	21.96	PASS
4	2.166	0.13	35.59	56.00	20.41	20.10	46.00	25.90	PASS
5	3.354	0.15	35.67	56.00	20.33	24.06	46.00	21.94	PASS
6	4.925	0.16	36.18	56.00	19.82	20.62	46.00	25.38	PASS

Note: QP Margin[dB]= QP Limit[dBµV]- QP Value[dBµV], AV Margin[dB]= AV Limit[dBµV]- AV Value[dBµV].



6 Radiated Spurious Emissions

Test Requirement : FCC CFR47 Part 15 Section 15.209 & 15.247
 Test Method : ANSI C63.10:2013
 Test Result : PASS
 Measurement Distance : 3m
 Limit : See the follow table

Frequency (MHz)	Field Strength		Field Strength Limit at 3m Measurement Dist	
	uV/m	Distance (m)	uV/m	dBuV/m
0.009 ~ 0.490	$2400/F(\text{kHz})$	300	$10000 * 2400/F(\text{kHz})$	$20\log^{(2400/F(\text{kHz}))} + 80$
0.490 ~ 1.705	$24000/F(\text{kHz})$	30	$100 * 24000/F(\text{kHz})$	$20\log^{(24000/F(\text{kHz}))} + 40$
1.705 ~ 30	30	30	$100 * 30$	$20\log^{(30)} + 40$
30 ~ 88	100	3	100	$20\log^{(100)}$
88 ~ 216	150	3	150	$20\log^{(150)}$
216 ~ 960	200	3	200	$20\log^{(200)}$
Above 960	500	3	500	$20\log^{(500)}$

6.1 EUT Operation


Operating Environment :

Temperature: : 24.5 °C
 Humidity: : 52 % RH
 Atmospheric Pressure: : 101.3kPa
 Test Voltage : DC 5V


6.2 Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site


The test setup for emission measurement below 30MHz

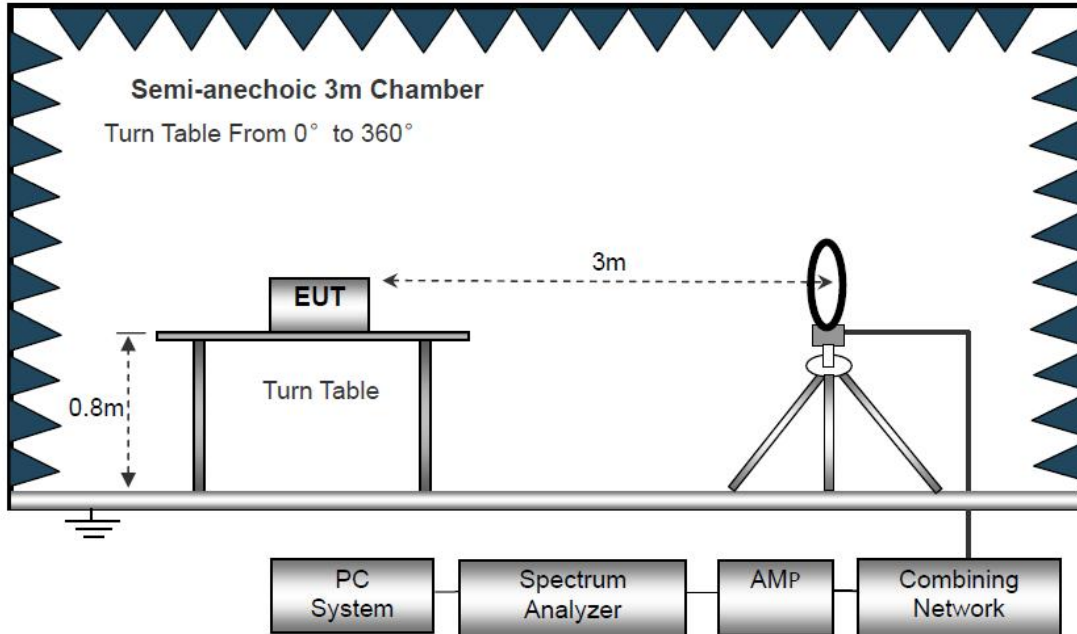

The test setup for emission measurement from 30 MHz to 1 GHz.

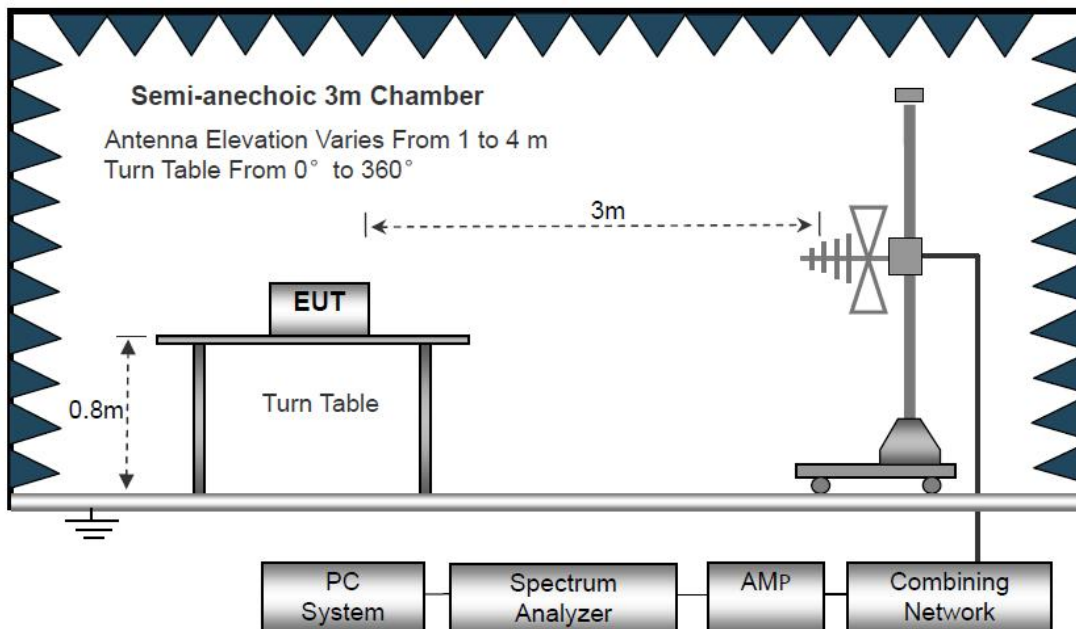

The test setup for emission measurement above 1 GHz

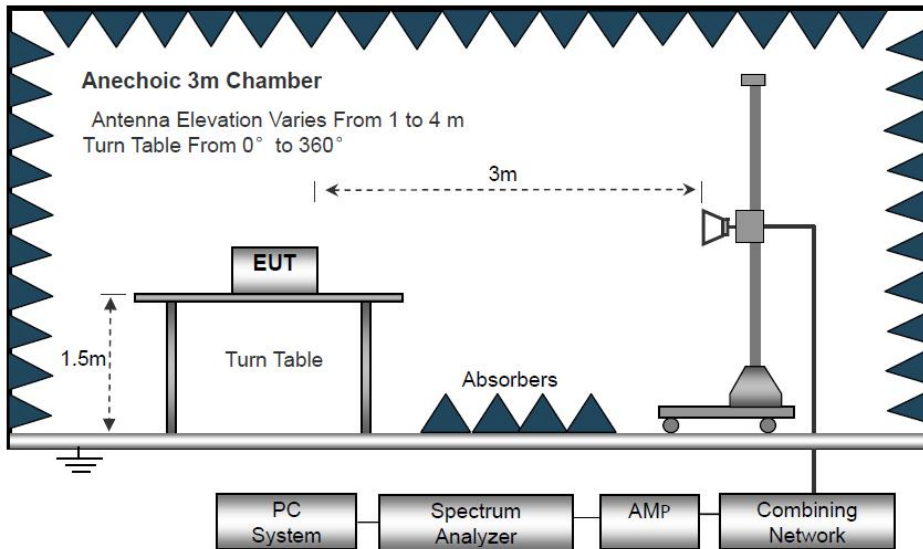

6.3 Spectrum Analyzer Setup

	Frequency	Detector	RBW	VBW	Remark
Receiver Setup	Below 30MHz	RMS	1MHz	3MHz	--
	30MHz ~ 1GHz	RMS	1MHz	3MHz	Quasi-peak Value
	Above 1GHz	Peak	1MHz	3MHz	Peak Value
		RMS	1MHz	3MHz	Average Value



6.4 Test Procedure

1. Below 1000MHz, The EUT was placed on a turn table which is 0.8m above ground plane, And above 1000MHz, The EUT was placed on a styrofoam table which is 1.5m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is moved from 1m to 4m to find out the maximum emissions. The spectrum was investigated from the lowest radio frequency signal generated in the device, without going below 9 kHz, up to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.
7. The radiation measurements are tested under 3-axes(X,Y,Z) position(X denotes lying on the table, Y denotes side stand and Z denotes vertical stand), After pre-test, It was found that the worse radiation emission was get at the X position. So the data shown was the X position only.
8. The test above 1GHz must be use the fully anechoic room, and the test below 1GHz use the half anechoic room



6.5 Summary of Test Results

Test Frequency: 9KHz-30MHz

Freq. (MHz)	Ant.Pol. H/V	Emission Level (dBuV/m)	Limit 3m (dBuV/m)	Over (dB)
--	--	--	--	>20

Note:

The amplitude of spurious emission that is attenuated by more than 20dB below the permissible limit has no need to be reported.

Distance extrapolation factor = $40\log(\text{Specific distance/ test distance})$ (dB);

Limit line=Specific limits(dBuV) + distance extrapolation factor.

Test Frequency: 30MHz ~ 1GHz


All the modulation modes were tested the data of the worst mode (TX 802.11b Low Channel) are recorded in the following pages and the others modulation methods do not exceed the limits.

The data shown in this report is testing with battery 1.

Please refer to the following test plots:



Antenna Polarization: Horizontal

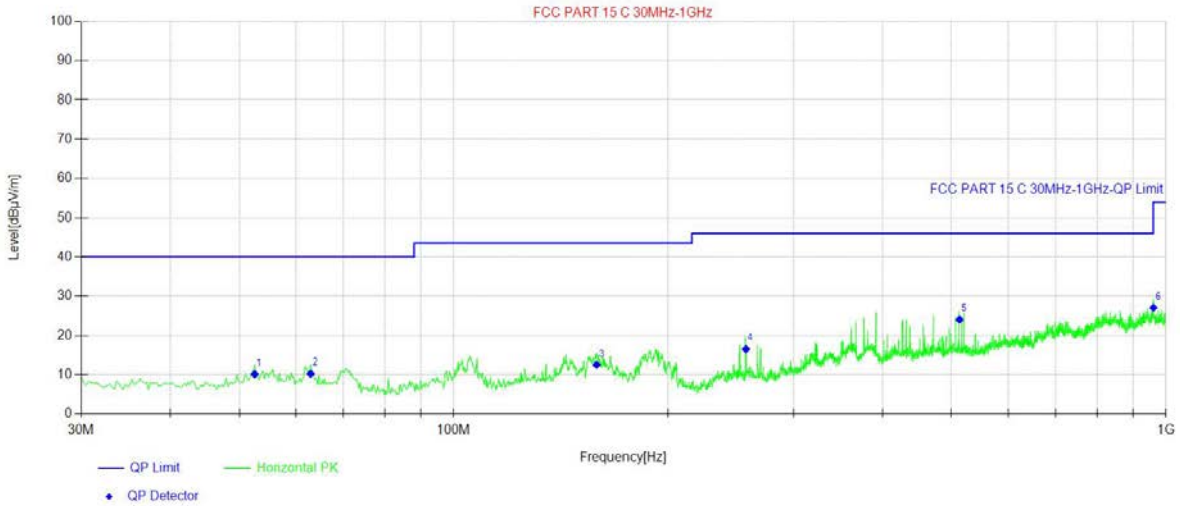


Final Data List[QP]								
NO.	Freq. [MHz]	QP Reading [dBµV/m]	Factor [dB]	QP Value [dBµV/m]	QP Limit [dBµV/m]	QP Margin [dB]	Polarity	Verdict
1	52.55	27.9	-17.74	10.16	40.00	29.84	Horizontal	PASS
2	62.98	28.14	-17.87	10.27	40.00	29.73	Horizontal	PASS
3	158.77	29.25	-16.71	12.54	43.50	30.96	Horizontal	PASS
4	257.22	33.48	-16.92	16.56	46.00	29.44	Horizontal	PASS
5	513.06	33.93	-9.87	24.06	46.00	21.94	Horizontal	PASS
6	960.23	29.09	-2.03	27.06	54.00	26.94	Horizontal	PASS

Remark: Emission Level = Reading + Cable Loss + ANT Factor - AMP Factor



Antenna Polarization: Vertical

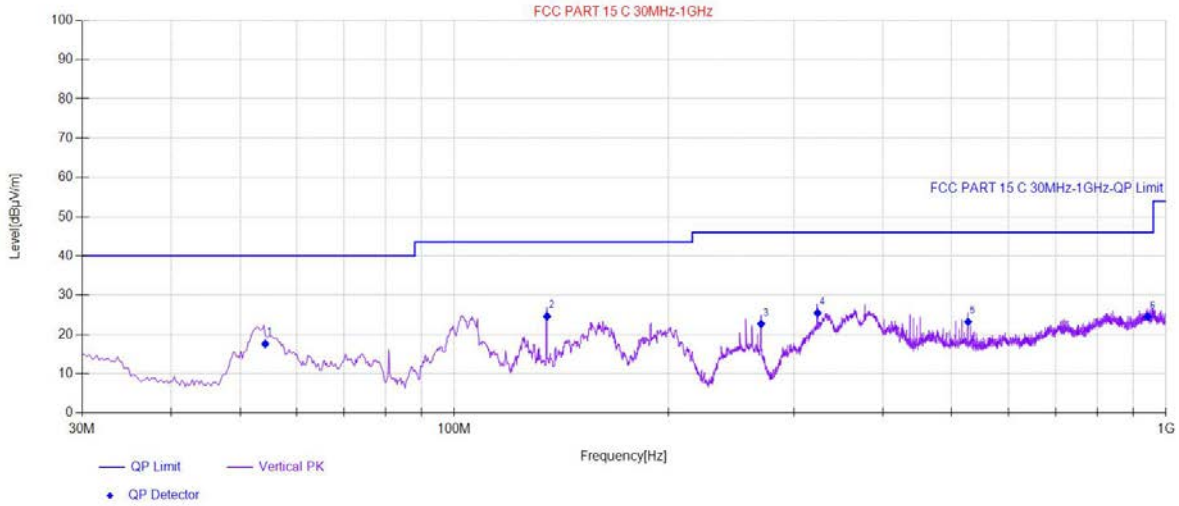

Final Data List[QP]								
NO.	Freq. [MHz]	QP Reading [dBμV/m]	Factor [dB]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]	Polarity	Verdict
1	54.25	35.31	-17.69	17.62	40.00	22.38	Vertical	PASS
2	135.00	41.42	-16.79	24.63	43.50	18.87	Vertical	PASS
3	269.83	39.15	-16.47	22.68	46.00	23.32	Vertical	PASS
4	323.91	40.32	-14.88	25.44	46.00	20.56	Vertical	PASS
5	527.13	33.26	-10.05	23.21	46.00	22.79	Vertical	PASS
6	942.77	26.75	-2.23	24.52	46.00	21.48	Vertical	PASS

Remark: Emission Level = Reading + Cable Loss + ANT Factor - AMP Factor



Test Frequency: From 1GHz to 25GHz

Worst case 802.11b

Test Mode: 2412					Test channel: Lowest			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
4824	46.37	32.29	4.10	28.45	54.31	74.00	-19.69	V
7236	39.13	35.99	6.22	27.83	53.51	74.00	-20.49	V
9648	35.44	38.11	7.83	25.10	56.28	74.00	-17.72	V
4824	44.09	32.29	4.10	28.45	52.03	74.00	-21.97	H
7236	38.56	35.99	6.22	27.83	52.94	74.00	-21.06	H
9648	32.19	38.11	7.83	25.10	53.03	74.00	-20.97	H
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
4824	31.54	32.29	4.10	28.45	39.48	54.00	-14.52	V
7236	26.00	35.99	6.22	27.83	40.38	54.00	-13.62	V
9648	20.43	38.11	7.83	25.10	41.27	54.00	-12.73	V
4824	32.54	32.29	4.10	28.45	40.48	54.00	-13.52	H
7236	26.91	35.99	6.22	27.83	41.29	54.00	-12.71	H
9648	20.84	38.11	7.83	25.10	41.68	54.00	-12.32	H



Worst case 802.11b

Test Mode: 2437					Test channel: Middle			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
4874	47.01	32.35	4.12	28.44	55.04	74.00	-18.96	V
7311	38.78	36.08	6.30	27.74	53.42	74.00	-20.58	V
9748	35.26	38.25	7.91	24.65	56.77	74.00	-17.23	V
4874	43.60	32.35	4.12	28.44	51.63	74.00	-22.37	H
7311	39.13	36.08	6.30	27.74	53.77	74.00	-20.23	H
9748	35.64	38.25	7.91	24.65	57.15	74.00	-16.85	H
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
4874	32.28	32.35	4.12	28.44	40.31	54.00	-13.69	V
7311	25.24	36.08	6.30	27.74	39.88	54.00	-14.12	V
9748	21.09	38.25	7.91	24.65	42.60	54.00	-11.40	V
4874	30.85	32.35	4.12	28.44	38.88	54.00	-15.12	H
7311	25.65	36.08	6.30	27.74	40.29	54.00	-13.71	H
9748	20.46	38.25	7.91	24.65	41.97	54.00	-12.03	H



Worst case 802.11b

Test Mode: 2462					Test channel: High			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
4924	46.84	32.41	4.14	28.42	54.97	74.00	-19.03	V
7386	39.23	36.15	6.36	27.68	54.06	74.00	-19.94	V
9848	35.19	38.35	7.97	24.33	57.18	74.00	-16.82	V
4924	45.07	32.41	4.14	28.42	53.20	74.00	-20.80	H
7386	38.25	36.15	6.36	27.68	53.08	74.00	-20.92	H
9848	35.16	38.35	7.97	24.33	57.15	74.00	-16.85	H
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
4924	32.27	32.41	4.14	28.42	40.40	54.00	-13.60	V
7386	25.36	36.15	6.36	27.68	40.19	54.00	-13.81	V
9848	19.95	38.35	7.97	24.33	41.94	54.00	-12.06	V
4924	30.44	32.41	4.14	28.42	38.57	54.00	-15.43	H
7386	26.79	36.15	6.36	27.68	41.62	54.00	-12.38	H
9848	19.65	38.35	7.97	24.33	41.64	54.00	-12.36	H

Note:

1. The testing has been conformed to 10*2462MHz=24620MHz.
2. All other emissions more than 30dB below the limit.
3. Factor = Antenna Factor + Cable Loss – Pre-amplifier.
Emission Level = Reading + Factor
Margin=Emission Level-Limit
4. X-Axis, Y-Axis and Z-Axis were investigated. The results above show only the worst case.

Spurious Emission in Restricted Band 2310-2390MHz and 2483.5-2500MHz
2.4G WiFi (802.11b/g/n)mode have been tested, and the worst result(802.11g) was report as below



Test Mode: Worst case 802.11g Low Channel 2412MHz

Test Mode: 802.11g Low Channel 2412MHz									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over (dB)	Polarity H/V	Test Value
2390	48.98	27.39	2.77	34.01	45.13	74.00	-28.87	H	Peak
2400	60.26	27.42	2.78	34.01	56.45	74.00	-17.55	H	
2390	48.59	27.39	2.77	34.01	44.74	74.00	-29.26	V	
2400	55.34	27.42	2.78	34.01	51.53	74.00	-22.47	V	
2390	40.43	27.39	2.77	34.01	36.58	54.00	-17.42	H	Average
2400	43.58	27.42	2.78	34.01	39.77	54.00	-14.23	H	
2390	39.98	27.39	2.77	34.01	36.13	54.00	-17.87	V	
2400	44.84	27.42	2.78	34.01	41.03	54.00	-12.97	V	

Test Mode: Worst case 802.11g High Channel 2462MHz

Test Mode: 802.11g High Channel 2462MHz									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over (dB)	Polarity H/V	Test Value
2483.5	60.29	27.70	2.84	34.03	56.80	74.00	-17.20	H	Peak
2500	48.95	27.75	2.86	34.03	45.53	74.00	-28.47	H	
2483.5	60.07	27.70	2.84	34.03	56.58	74.00	-17.42	V	
2500	47.80	27.75	2.86	34.03	44.38	74.00	-29.62	V	
2483.5	42.58	27.70	2.84	34.03	39.09	54.00	-14.91	H	Average
2500	39.85	27.75	2.86	34.03	36.43	54.00	-17.57	H	
2483.5	43.65	27.70	2.84	34.03	40.16	54.00	-13.84	V	
2500	40.09	27.75	2.86	34.03	36.67	54.00	-17.33	V	



Emissions in Restricted Bands

Test Mode	Antenna	Ch Name	Frequency [MHz]	Detector	Freq [MHz]	Result [dBm]	Limit [dBm]	Result [dBuV/m]	Limit [dBuV/m]	Verdict
11B	Ant1	Low	2412	Peak	2390.000	-38.8	≤-21.20	56.40	≤74	PASS
11B	Ant1	Low	2412	Peak	2310.000	-38.83	≤-21.20	56.37	≤74	PASS
11B	Ant1	Low	2412	Peak	2356.030	-34.8	≤-21.20	60.40	≤74	PASS
11B	Ant1	Low	2412	AV	2390.000	-43.85	≤-41.20	51.35	≤54	PASS
11B	Ant1	Low	2412	AV	2310.000	-45.65	≤-41.20	49.55	≤54	PASS
11B	Ant1	Low	2412	AV	2386.840	-43.77	≤-41.20	51.43	≤54	PASS
11B	Ant1	High	2462	Peak	2483.500	-39.04	≤-21.20	56.16	≤74	PASS
11B	Ant1	High	2462	Peak	2500.000	-37.53	≤-21.20	57.67	≤74	PASS
11B	Ant1	High	2462	Peak	2485.540	-36.05	≤-21.20	59.15	≤74	PASS
11B	Ant1	High	2462	AV	2483.500	-44.37	≤-41.20	50.83	≤54	PASS
11B	Ant1	High	2462	AV	2500.000	-45.02	≤-41.20	50.18	≤54	PASS
11B	Ant1	High	2462	AV	2484.000	-44.24	≤-41.20	50.96	≤54	PASS
11G	Ant1	Low	2412	Peak	2390.000	-32.48	≤-21.20	62.72	≤74	PASS
11G	Ant1	Low	2412	Peak	2310.000	-39.88	≤-21.20	55.32	≤74	PASS
11G	Ant1	Low	2412	Peak	2389.960	-32.48	≤-21.20	62.72	≤74	PASS
11G	Ant1	Low	2412	AV	2390.000	-42.69	≤-41.20	52.51	≤54	PASS
11G	Ant1	Low	2412	AV	2310.000	-45	≤-41.20	50.20	≤54	PASS
11G	Ant1	Low	2412	AV	2389.830	-42.68	≤-41.20	52.52	≤54	PASS
11G	Ant1	High	2462	Peak	2483.500	-41.12	≤-21.20	54.08	≤74	PASS
11G	Ant1	High	2462	Peak	2500.000	-39.26	≤-21.20	55.94	≤74	PASS
11G	Ant1	High	2462	Peak	2490.490	-37.69	≤-21.20	57.51	≤74	PASS
11G	Ant1	High	2462	AV	2483.500	-43.82	≤-41.20	51.38	≤54	PASS
11G	Ant1	High	2462	AV	2500.000	-44.63	≤-41.20	50.57	≤54	PASS
11G	Ant1	High	2462	AV	2483.560	-43.71	≤-41.20	51.49	≤54	PASS
11N20SISO	Ant1	Low	2412	Peak	2390.000	-37.64	≤-21.20	57.56	≤74	PASS
11N20SISO	Ant1	Low	2412	Peak	2310.000	-40.74	≤-21.20	54.46	≤74	PASS
11N20SISO	Ant1	Low	2412	Peak	2387.490	-32.62	≤-21.20	62.58	≤74	PASS
11N20SISO	Ant1	Low	2412	AV	2390.000	-42.56	≤-41.20	52.64	≤54	PASS
11N20SISO	Ant1	Low	2412	AV	2310.000	-45.14	≤-41.20	50.06	≤54	PASS
11N20SISO	Ant1	Low	2412	AV	2389.830	-42.5	≤-41.20	52.70	≤54	PASS
11N20SISO	Ant1	High	2462	Peak	2483.500	-39.09	≤-21.20	56.11	≤74	PASS
11N20SISO	Ant1	High	2462	Peak	2500.000	-37.42	≤-21.20	57.78	≤74	PASS
11N20SISO	Ant1	High	2462	Peak	2491.480	-35.23	≤-21.20	59.97	≤74	PASS
11N20SISO	Ant1	High	2462	AV	2483.500	-43.38	≤-41.20	51.82	≤54	PASS
11N20SISO	Ant1	High	2462	AV	2500.000	-44.62	≤-41.20	50.58	≤54	PASS
11N20SISO	Ant1	High	2462	AV	2483.560	-43.36	≤-41.20	51.84	≤54	PASS
11N40SISO	Ant1	Low	2422	Peak	2390.000	-40.74	≤-21.20	54.46	≤74	PASS
11N40SISO	Ant1	Low	2422	Peak	2310.000	-39.9	≤-21.20	55.30	≤74	PASS
11N40SISO	Ant1	Low	2422	Peak	2380.990	-28.84	≤-21.20	66.36	≤74	PASS
11N40SISO	Ant1	Low	2422	AV	2390.000	-42.35	≤-41.20	52.85	≤54	PASS
11N40SISO	Ant1	Low	2422	AV	2310.000	-44.94	≤-41.20	50.26	≤54	PASS
11N40SISO	Ant1	Low	2422	AV	2389.050	-42.29	≤-41.20	52.91	≤54	PASS
11N40SISO	Ant1	High	2452	Peak	2483.500	-40.17	≤-21.20	55.03	≤74	PASS
11N40SISO	Ant1	High	2452	Peak	2500.000	-39.33	≤-21.20	55.87	≤74	PASS
11N40SISO	Ant1	High	2452	Peak	2488.400	-36.72	≤-21.20	58.48	≤74	PASS
11N40SISO	Ant1	High	2452	AV	2483.500	-42.58	≤-41.20	52.62	≤54	PASS
11N40SISO	Ant1	High	2452	AV	2500.000	-44.26	≤-41.20	50.94	≤54	PASS
11N40SISO	Ant1	High	2452	AV	2483.670	-42.52	≤-41.20	52.68	≤54	PASS


Note:

1. The Antenna Gain is compensated in the graph.




- The limit in dBm for average detector is conversion from 54dBuV/m, according to 15.209(a). The limit in dBm for peak detector is 20dB above the limit of average detector in dBm.

Test Graphs

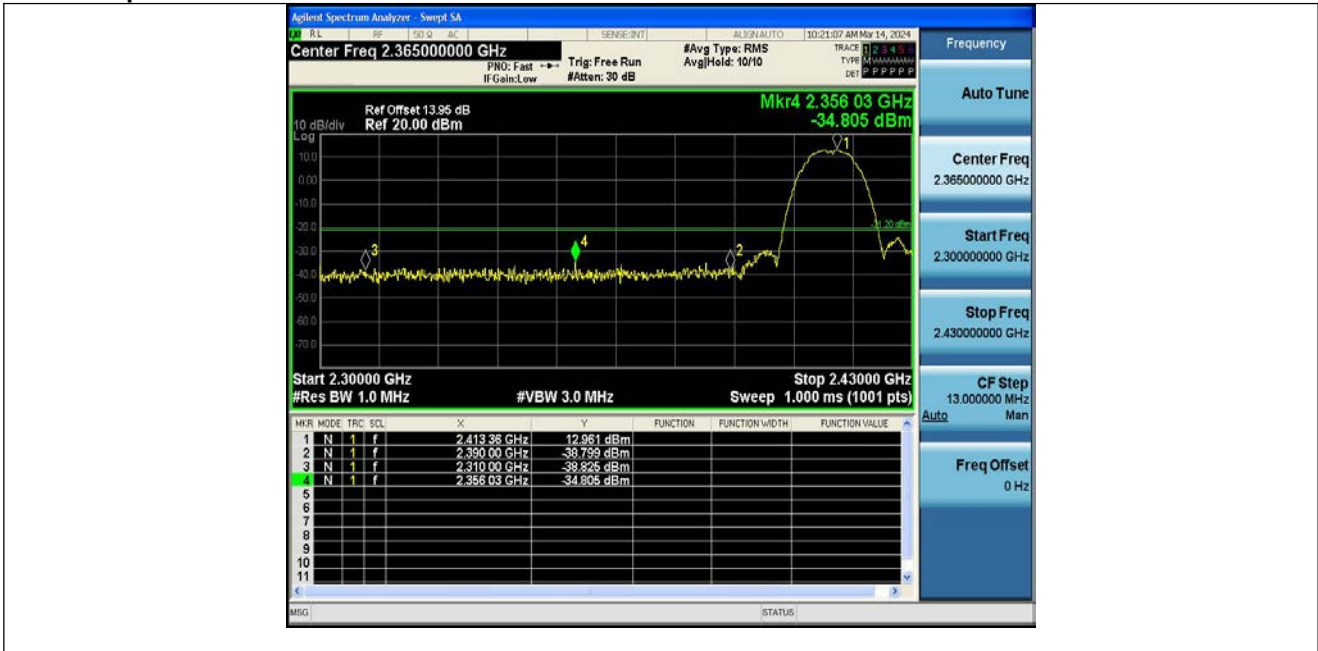

11B-Ant1-2412-PASS

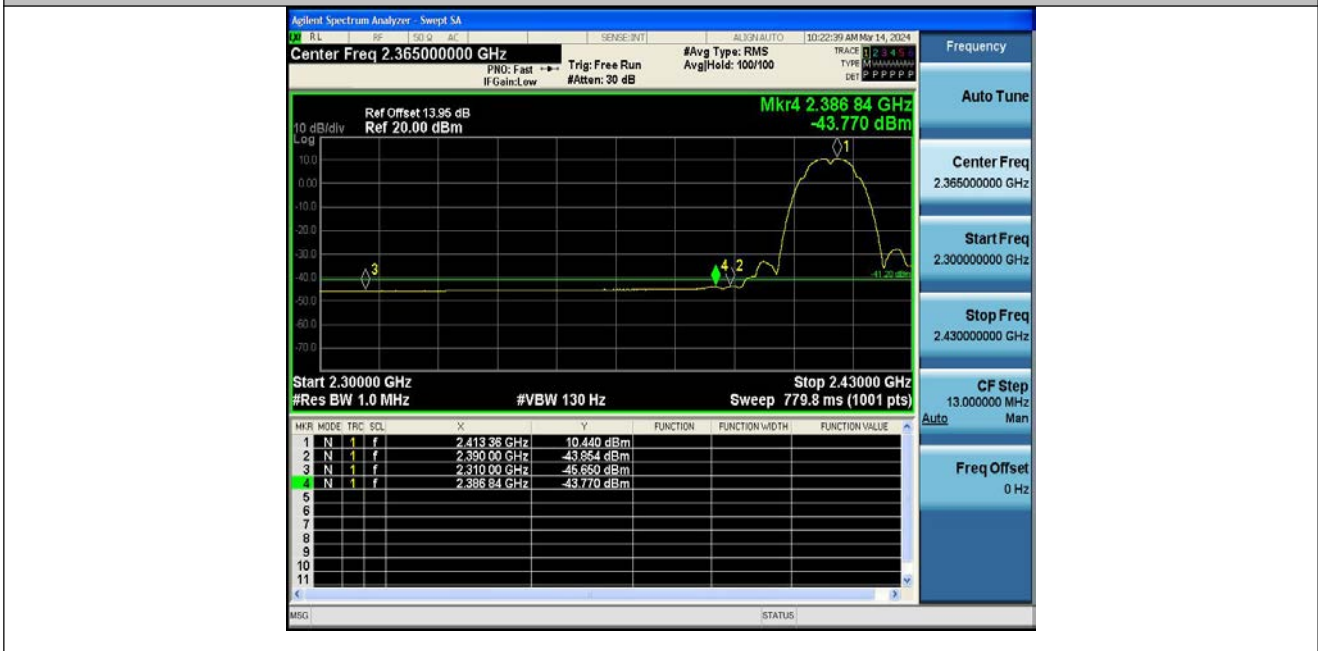

11B-Ant1-2412-PASS



11B-Ant1-2462-PASS



11B-Ant1-2462-PASS



11G-Ant1-2412-PASS



11G-Ant1-2412-PASS



11G-Ant1-2462-PASS



11G-Ant1-2462-PASS



11N20SISO-Ant1-2412-PASS



11N20SISO-Ant1-2412-PASS



11N20SISO-Ant1-2462-PASS



11N20SISO-Ant1-2462-PASS



11N40SISO-Ant1-2422-PASS



11N40SISO-Ant1-2422-PASS



11N40SISO-Ant1-2452-PASS



11N40SISO-Ant1-2452-PASS




7 Conducted Spurious Emission

Test Requirement : FCC CFR47 Part 15 Section 15.247
 Test Method : ANSI C63.10:2013
 Test Limit : Regulation 15.247 (d), In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

7.1 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: RBW = 100kHz, VBW = 300kHz, Sweep = auto
 Detector function = peak, Trace = max hold

7.2 Test Setup



7.3 Test Result

Test Mode	Antenna	Frequency[MHz]	Freq Range [Mhz]	Ref Level [dBm]	Result [dBm]	Limit [dBm]	Verdict
11B	Ant1	2412	0~Reference	6.81	6.81	---	PASS
11B	Ant1	2412	30~1000	6.81	-56.52	≤-13.19	PASS
11B	Ant1	2412	1000~26500	6.81	-41.51	≤-13.19	PASS
11B	Ant1	2437	0~Reference	6.75	6.75	---	PASS
11B	Ant1	2437	30~1000	6.75	-57.6	≤-13.25	PASS
11B	Ant1	2437	1000~26500	6.75	-42.54	≤-13.25	PASS
11B	Ant1	2462	0~Reference	5.99	5.99	---	PASS
11B	Ant1	2462	30~1000	5.99	-57.09	≤-14.01	PASS
11B	Ant1	2462	1000~26500	5.99	-42.66	≤-14.01	PASS
11G	Ant1	2412	0~Reference	-0.17	-0.17	---	PASS
11G	Ant1	2412	30~1000	-0.17	-56.7	≤-20.17	PASS
11G	Ant1	2412	1000~26500	-0.17	-41.14	≤-20.17	PASS
11G	Ant1	2437	0~Reference	-0.48	-0.48	---	PASS
11G	Ant1	2437	30~1000	-0.48	-57.35	≤-20.48	PASS
11G	Ant1	2437	1000~26500	-0.48	-42.06	≤-20.48	PASS
11G	Ant1	2462	0~Reference	-1.60	-1.60	---	PASS
11G	Ant1	2462	30~1000	-1.60	-56.99	≤-21.6	PASS




11G	Ant1	2462	1000~26500	-1.60	-41.54	≤-21.6	PASS
11N20SISO	Ant1	2412	0~Reference	-1.02	-1.02	---	PASS
11N20SISO	Ant1	2412	30~1000	-1.02	-57.13	≤-21.02	PASS
11N20SISO	Ant1	2412	1000~26500	-1.02	-42.37	≤-21.02	PASS
11N20SISO	Ant1	2437	0~Reference	1.78	1.78	---	PASS
11N20SISO	Ant1	2437	30~1000	1.78	-56.81	≤-18.22	PASS
11N20SISO	Ant1	2437	1000~26500	1.78	-42.35	≤-18.22	PASS
11N20SISO	Ant1	2462	0~Reference	1.10	1.10	---	PASS
11N20SISO	Ant1	2462	30~1000	1.10	-58.02	≤-18.9	PASS
11N20SISO	Ant1	2462	1000~26500	1.10	-41.49	≤-18.9	PASS
11N40SISO	Ant1	2422	0~Reference	-1.60	-1.60	---	PASS
11N40SISO	Ant1	2422	30~1000	-1.60	-58.28	≤-21.6	PASS
11N40SISO	Ant1	2422	1000~26500	-1.60	-41.91	≤-21.6	PASS
11N40SISO	Ant1	2437	0~Reference	-3.89	-3.89	---	PASS
11N40SISO	Ant1	2437	30~1000	-3.89	-57.62	≤-23.89	PASS
11N40SISO	Ant1	2437	1000~26500	-3.89	-42.18	≤-23.89	PASS
11N40SISO	Ant1	2452	0~Reference	-3.31	-3.31	---	PASS
11N40SISO	Ant1	2452	30~1000	-3.31	-57.56	≤-23.31	PASS
11N40SISO	Ant1	2452	1000~26500	-3.31	-41.86	≤-23.31	PASS


Test Graphs



11B-Ant1-2412-0~Reference-PASS

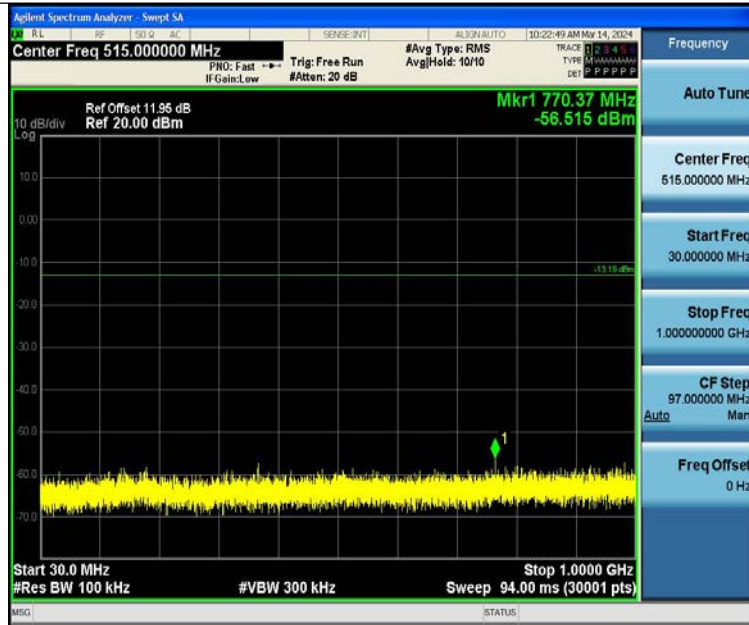


11B-Ant1-2412-30~1000-PASS

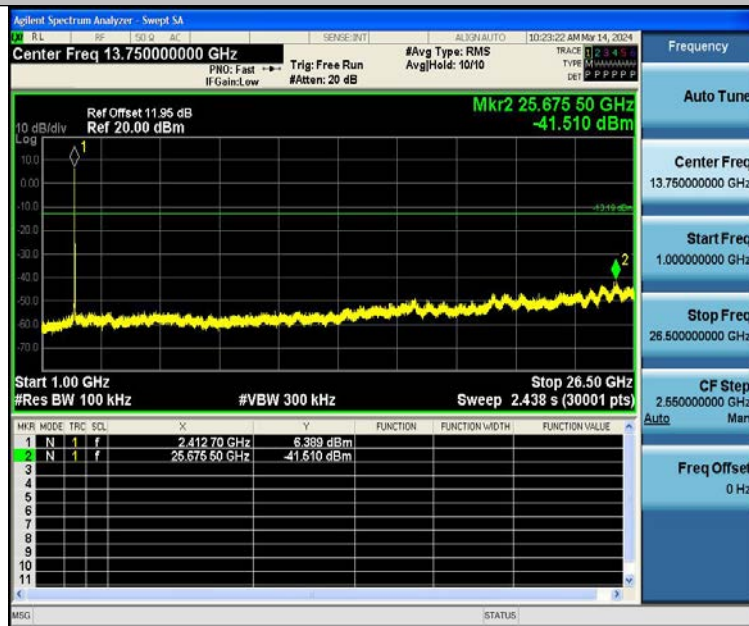


11B-Ant1-2412-1000~26500-PASS



11B-Ant1-2437-0~Reference-PASS

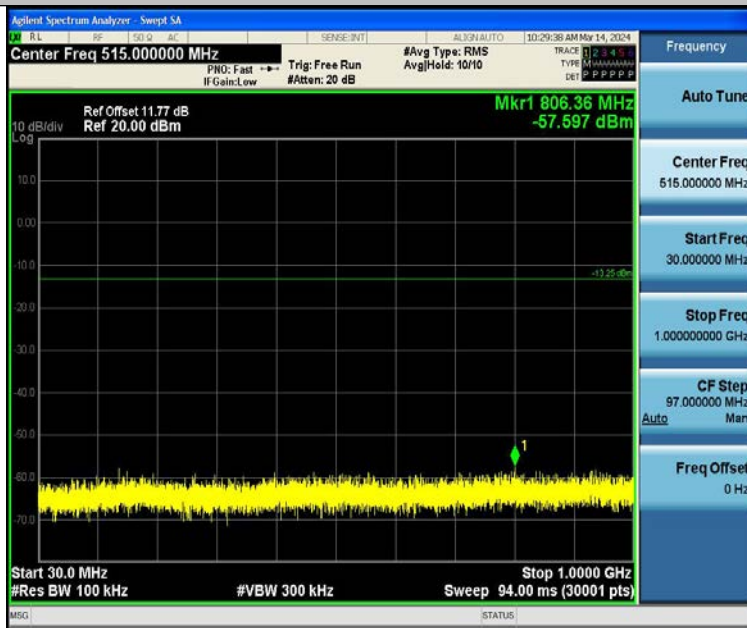


11B-Ant1-2437-30~1000-PASS

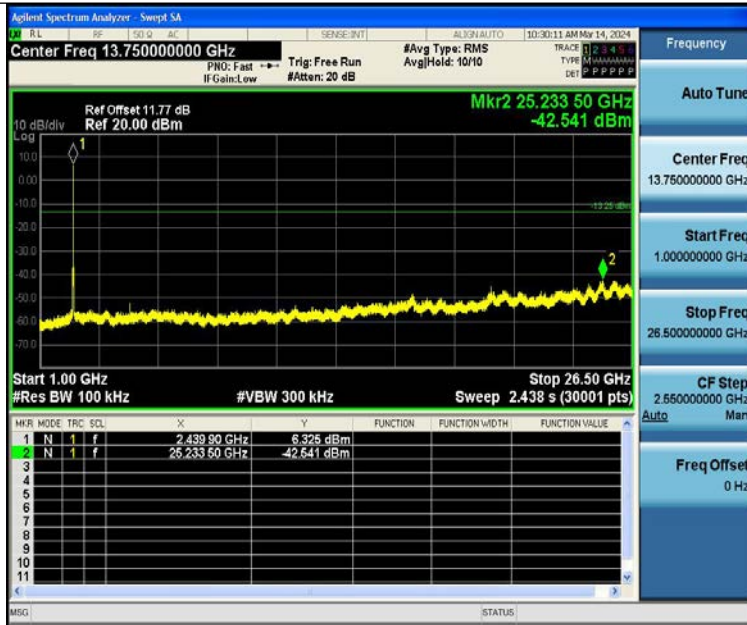

11B-Ant1-2437-1000~26500-PASS




11B-Ant1-2462-0-Reference-PASS

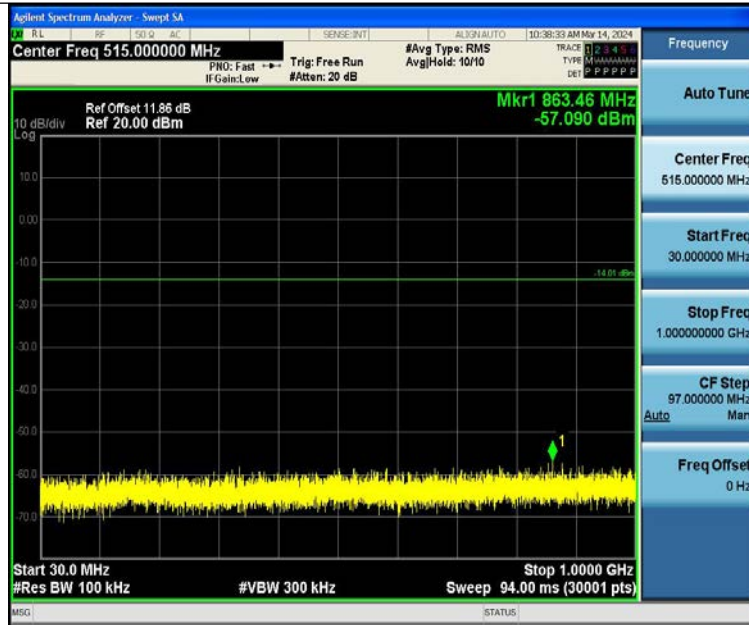


11B-Ant1-2462-30~1000-PASS



11B-Ant1-2462-1000~26500-PASS

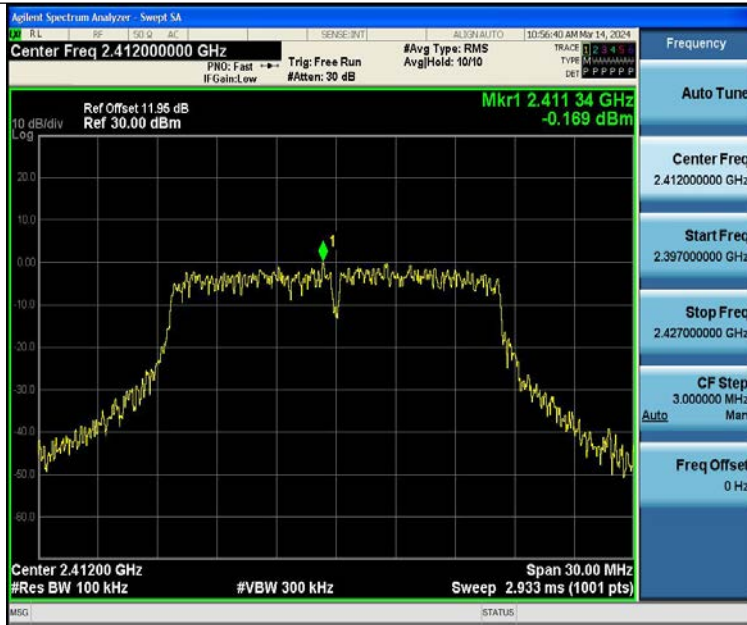

11G-Ant1-2412-0~Reference-PASS

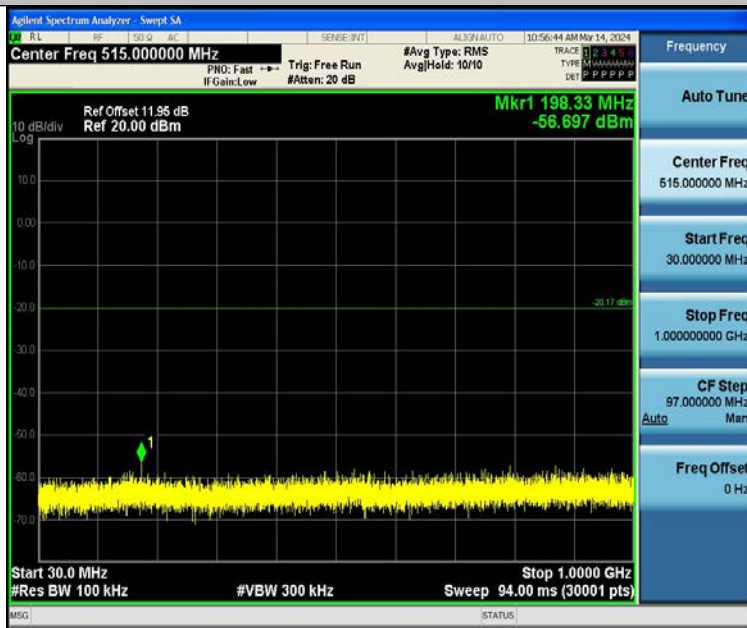


11G-Ant1-2412-30~1000-PASS



11G-Ant1-2412-1000~26500-PASS



11G-Ant1-2437-0~Reference-PASS

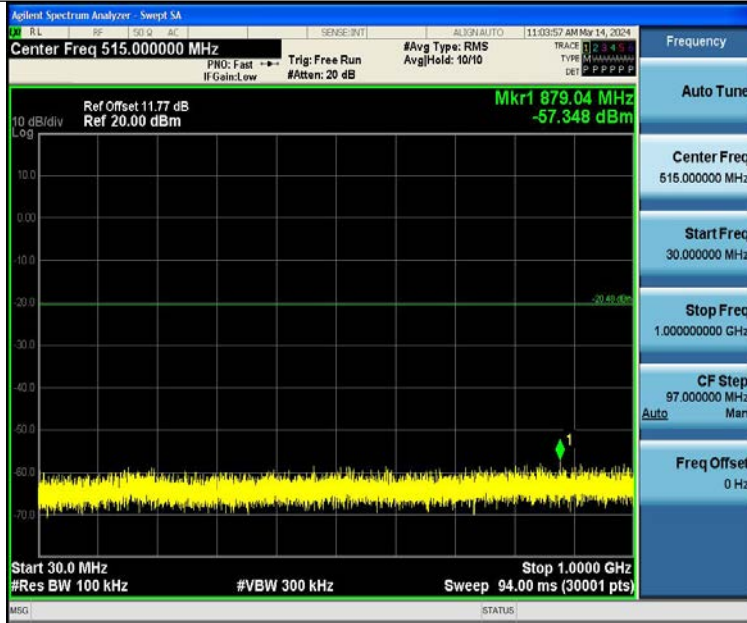


11G-Ant1-2437-30~1000-PASS




11G-Ant1-2437-1000~26500-PASS



11G-Ant1-2462-0~Reference-PASS

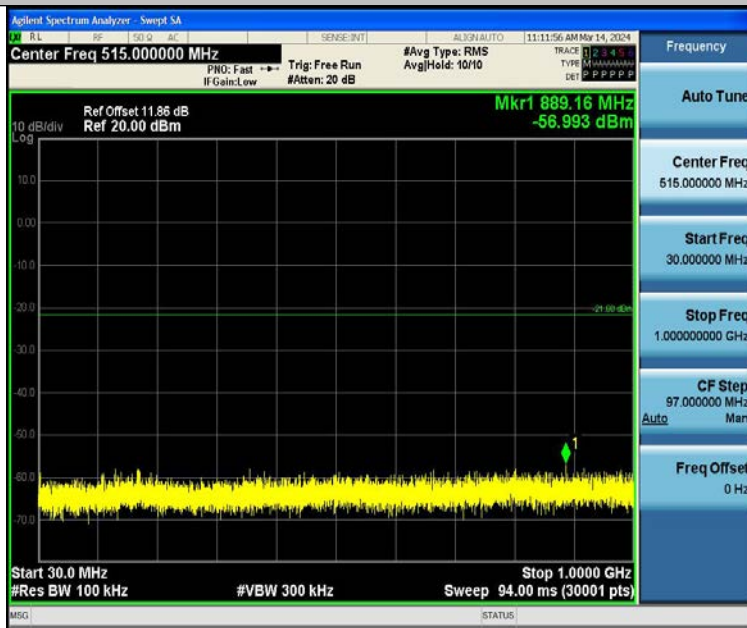


11G-Ant1-2462-30~1000-PASS

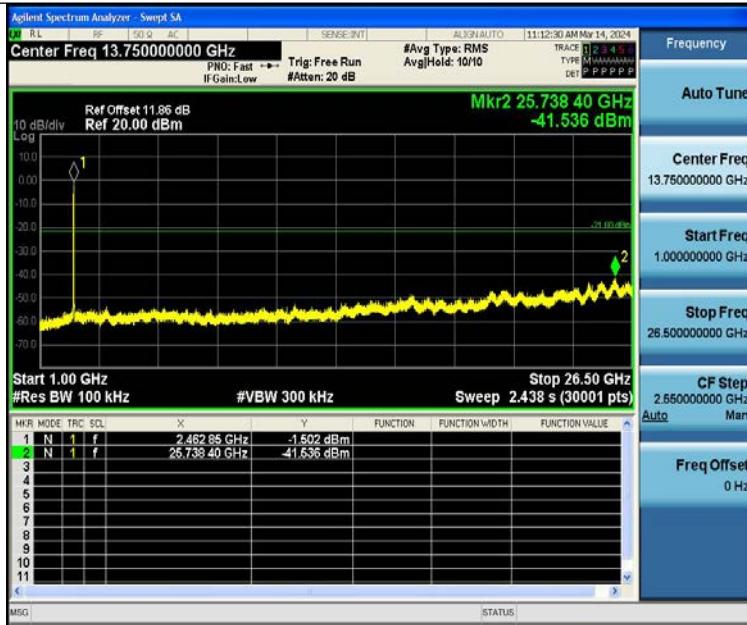


11G-Ant1-2462-1000~26500-PASS




11N20SISO-Ant1-2412-0~Reference-PASS

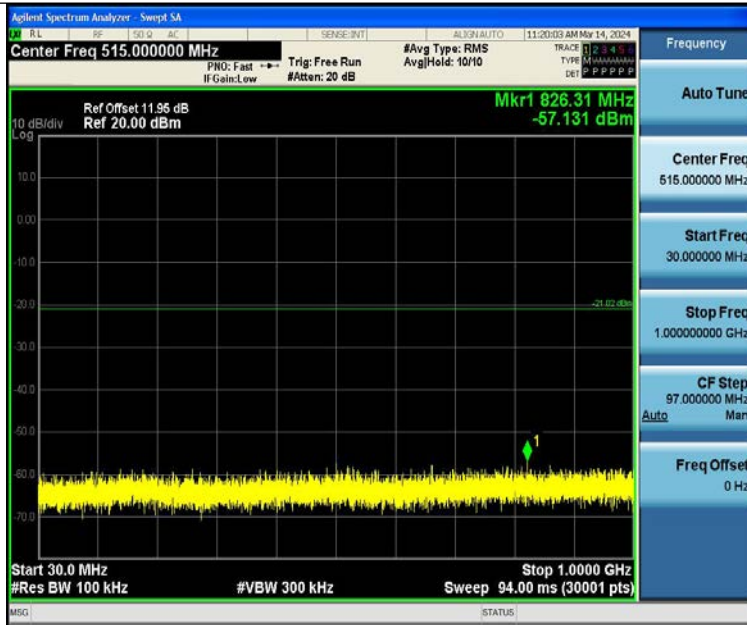

11N20SISO-Ant1-2412-30~1000-PASS

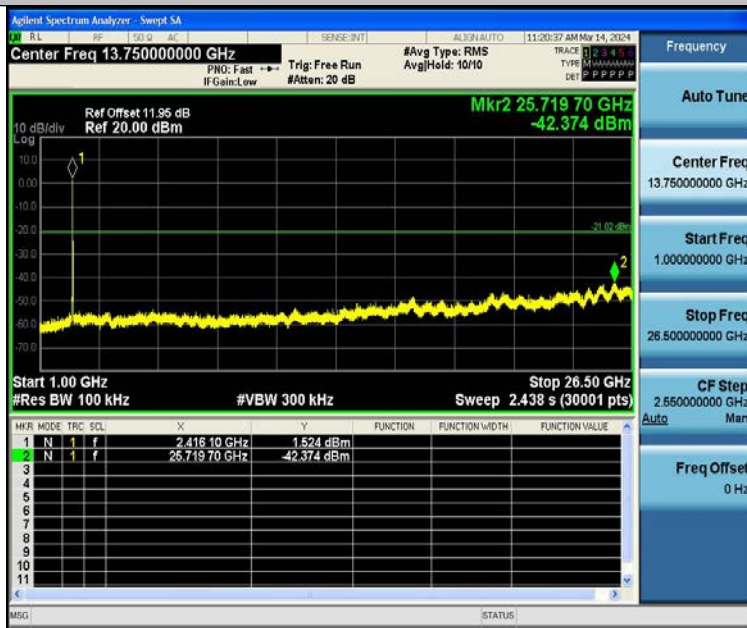


11N20SISO-Ant1-2412-1000~26500-PASS

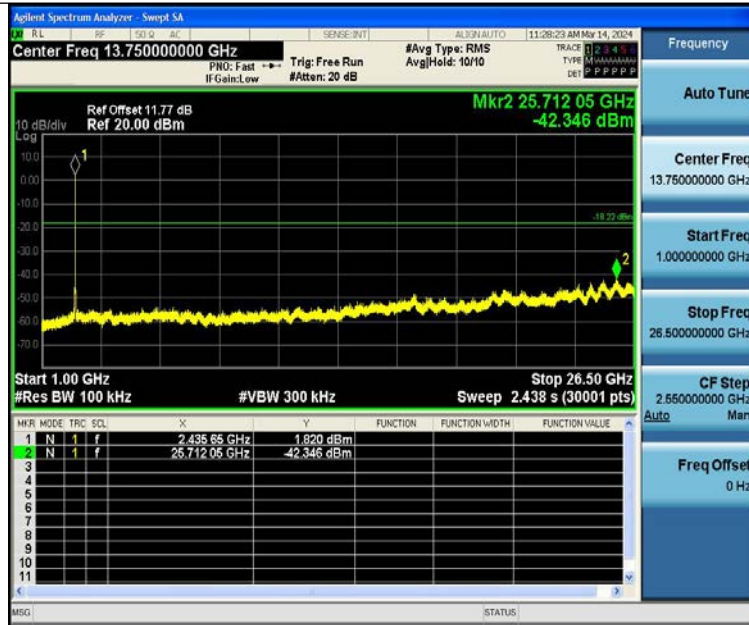


11N20SISO-Ant1-2437-1000~26500-PASS



11N20SISO-Ant1-2462-0~Reference-PASS

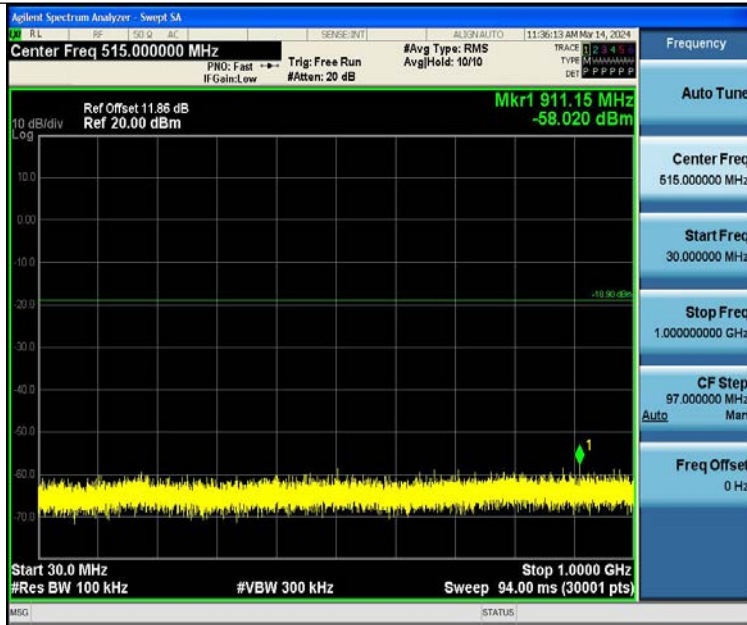


11N20SISO-Ant1-2462-30~1000-PASS

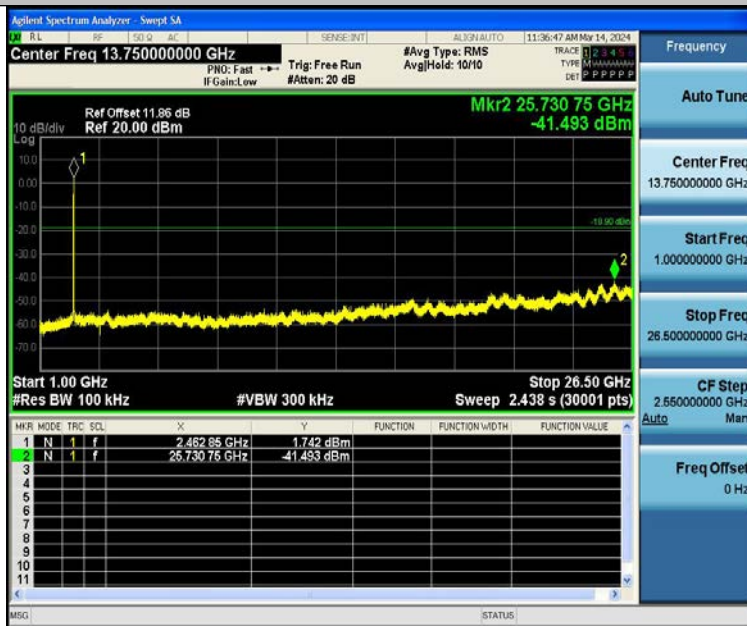


11N20SISO-Ant1-2462-1000~26500-PASS



11N40SISO-Ant1-2422-0~Reference-PASS

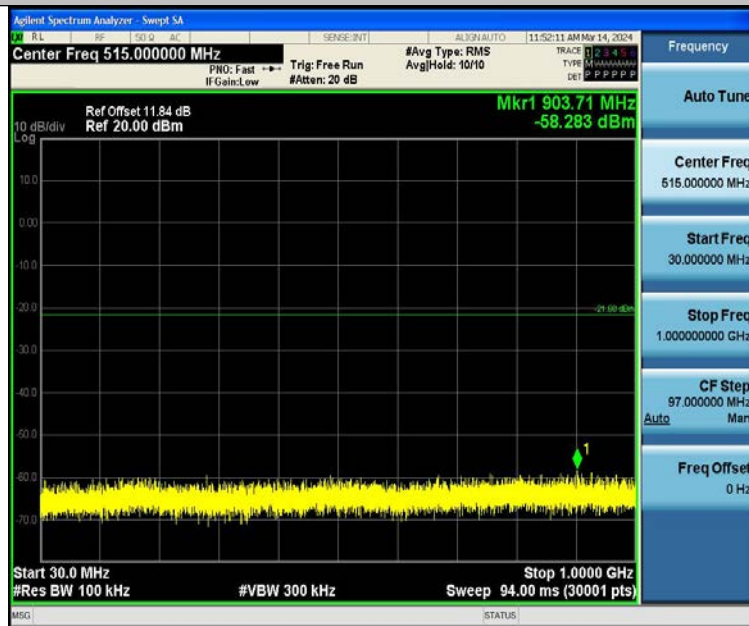


11N40SISO-Ant1-2422-30~1000-PASS

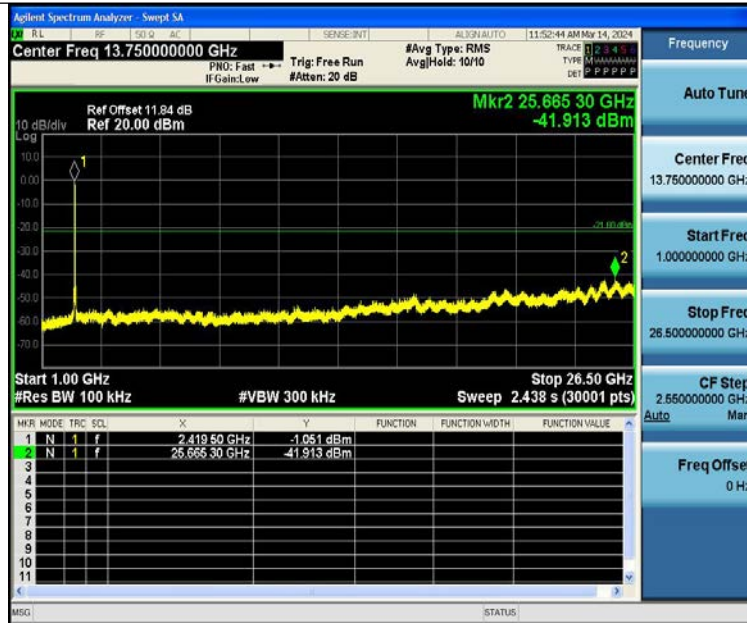


11N40SISO-Ant1-2422-1000~26500-PASS



11N40SISO-Ant1-2437-0~Reference-PASS

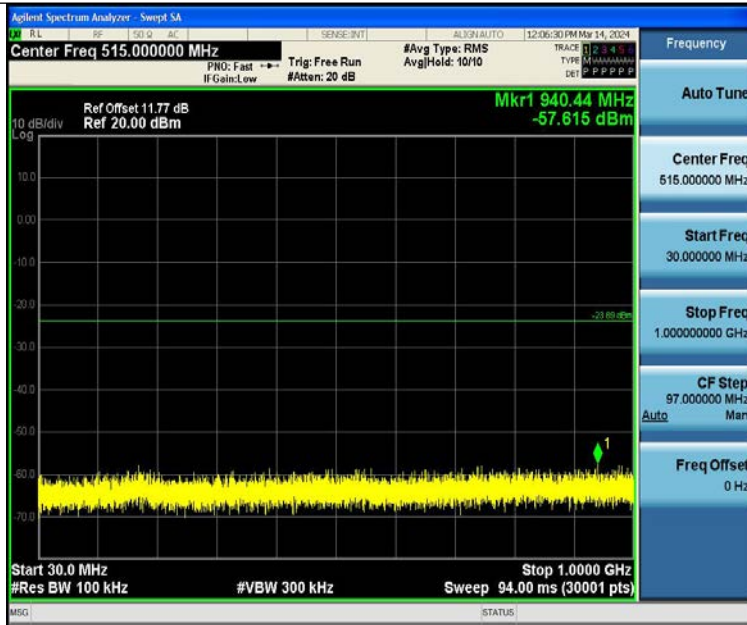


11N40SISO-Ant1-2437-30~1000-PASS

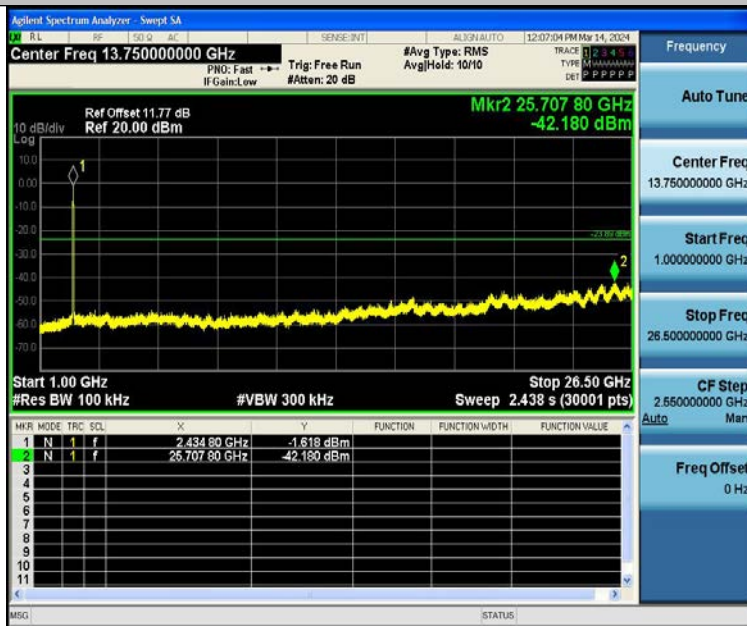

11N40SISO-Ant1-2437-1000~26500-PASS



11N40SISO-Ant1-2452-0~Reference-PASS

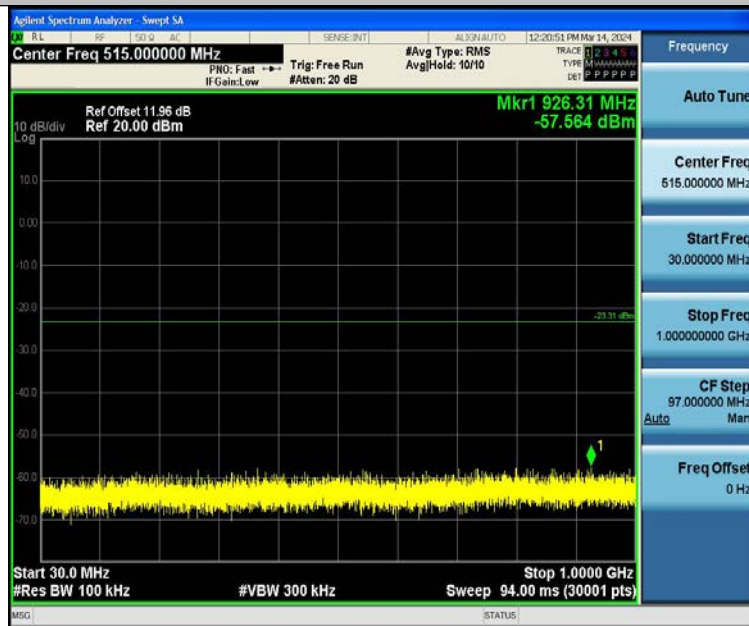

11N40SISO-Ant1-2452-30~1000-PASS



11N40SISO-Ant1-2452-1000~26500-PASS




8 Band Edge Measurement

- Test Requirement : Section 15.247(d) In addition, radiated emissions which fall in the restricted bands. as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).
- Test Method : ANSI C63.10:2013
- Test Limit : Regulation 15.247 (d),In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

8.1 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: RBW = 100kHz, VBW = 300kHz, Sweep = auto
Detector function = peak, Trace = max hold

8.2 Test Setup





8.3 Test Result

Test Mode	Antenna	Ch Name	Frequency[MHz]	Ref Level[dBm]	Result[dBm]	Limit[dBm]	Verdict
11B	Ant1	Low	2412	7.67	-37.13	≤-12.33	PASS
11B	Ant1	High	2462	7.11	-45.93	≤-12.89	PASS
11G	Ant1	Low	2412	3.04	-35.3	≤-16.96	PASS
11G	Ant1	High	2462	0.98	-46.05	≤-19.02	PASS
11N20SISO	Ant1	Low	2412	2.53	-33.46	≤-17.47	PASS
11N20SISO	Ant1	High	2462	1.09	-44.72	≤-18.91	PASS
11N40SISO	Ant1	Low	2422	-0.04	-37.12	≤-20.04	PASS
11N40SISO	Ant1	High	2452	-1.64	-44.93	≤-21.64	PASS

Test Graphs




11B-Ant1-2412-PASS



11B-Ant1-2462-PASS




11G-Ant1-2412-PASS

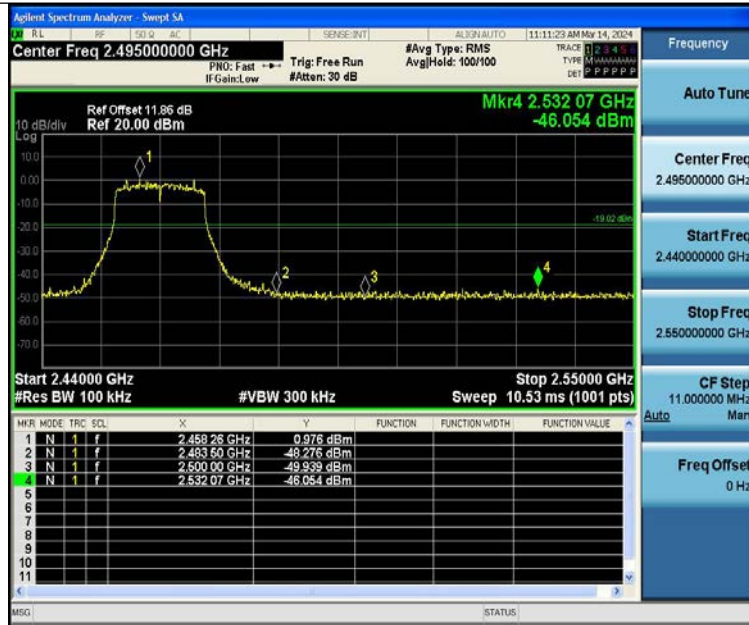

11G-Ant1-2462-PASS



11N20SISO-Ant1-2412-PASS

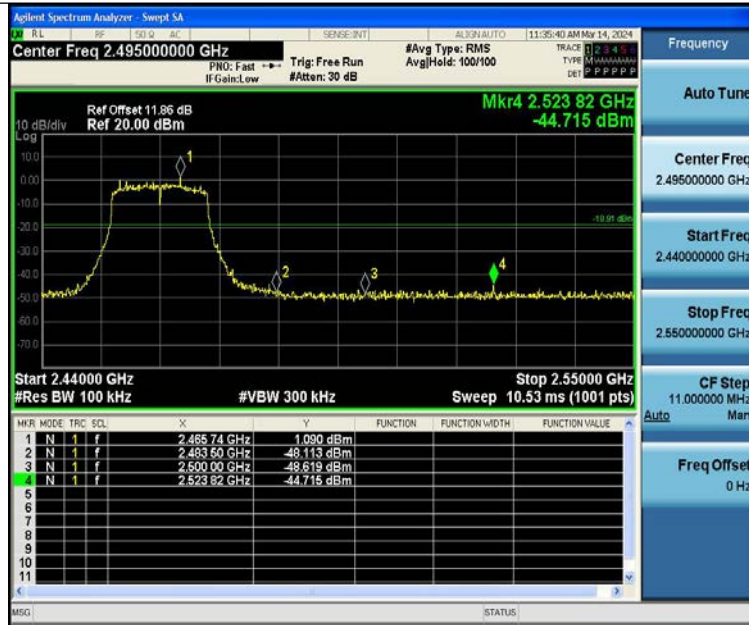

11N20SISO-Ant1-2462-PASS



11N40SISO-Ant1-2422-PASS



11N40SISO-Ant1-2452-PASS



9 6dB Bandwidth Measurement

Test Requirement : FCC CFR47 Part 15 Section 15.247


Test Method : ANSI C63.10:2013

Test Limit : Systems using digital modulation techniques may operate in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

9.1 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: RBW = 100kHz, VBW = 300kHz

9.2 Test Setup



9.3 Test Result

Test Mode	Antenna	Frequency[MHz]	DTS BW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11B	Ant1	2412	10.080	2406.960	2417.040	0.5	PASS
11B	Ant1	2437	10.080	2431.960	2442.040	0.5	PASS
11B	Ant1	2462	10.040	2457.000	2467.040	0.5	PASS
11G	Ant1	2412	16.320	2403.840	2420.160	0.5	PASS
11G	Ant1	2437	15.400	2429.120	2444.520	0.5	PASS
11G	Ant1	2462	15.640	2454.080	2469.720	0.5	PASS
11N20SISO	Ant1	2412	16.320	2404.080	2420.400	0.5	PASS
11N20SISO	Ant1	2437	16.920	2428.480	2445.400	0.5	PASS
11N20SISO	Ant1	2462	16.240	2453.880	2470.120	0.5	PASS
11N40SISO	Ant1	2422	35.040	2404.480	2439.520	0.5	PASS
11N40SISO	Ant1	2437	35.120	2419.400	2454.520	0.5	PASS
11N40SISO	Ant1	2452	33.920	2435.520	2469.440	0.5	PASS



Test Graphs



11B-Ant1-2412-PASS



11B-Ant1-2437-PASS



11B-Ant1-2462-PASS



11G-Ant1-2412-PASS