



FCC TEST REPORT

FCC ID: 2BFJT-CORE2PRO

Product	:	MINI PC
Model Name	:	CORE 2 pro,AERO 2,AERO 2pro,AERO 2plus,CORE 2, CORE 2pro,CORE 2plus
Brand	:	N/A
Report No.	:	PTC24022004701E-FC01
Prepared for		
Shenzhen Dongfang Box Core Information Technology Co., Ltd		
3rd Floor, Factory 01, New World Industrial City, Wanke City Community, Bantian Street, Longgang District, Shenzhen		
Prepared by		
Precise Testing & Certification Co., Ltd		
Building 1, No. 6, Tongxin Road, Dongcheng Street, Dongguan, Guangdong, China		



1 TEST RESULT CERTIFICATION

Applicant's name : Shenzhen Dongfang Box Core Information Technology Co., Ltd
Address : 3rd Floor, Factory 01, New World Industrial City, Wanke City Community, Bantian Street, Longgang District, Shenzhen
Manufacture's name : Shenzhen Dongfang Box Core Information Technology Co., Ltd
Address : 3rd Floor, Factory 01, New World Industrial City, Wanke City Community, Bantian Street, Longgang District, Shenzhen
Product name : MINI PC
Model name : CORE 2 pro,AERO 2,AERO 2pro,AERO 2plus,CORE 2, CORE 2pro,CORE 2plus
Standards : FCC CFR47 Part 15 Section 15.247
Test procedure : ANSI C63.10:2013
Test Date : Feb. 26, 2024 to Mar. 29, 2024
Date of Issue : Mar. 29, 2024
Test Result : Pass

This device described above has been tested by PTC, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of PTC, this document may be altered or revised by PTC, personal only, and shall be noted in the revision of the document.

Test Engineer:

A handwritten signature in black ink, appearing to read 'Jack Zhou'.

Jack Zhou / Engineer

Technical Manager:

A handwritten signature in black ink, appearing to read 'Simon Pu'.

Simon Pu / Manager



Contents

	Page
1 TEST RESULT CERTIFICATION	2
2 TEST SUMMARY	5
3 GENERAL INFORMATION	6
3.1 GENERAL DESCRIPTION OF E.U.T.....	6
3.2 CHANNEL LIST	7
3.3 TEST SITE	8
4 EQUIPMENT DURING TEST	9
4.1 EQUIPMENTS LIST.....	9
4.2 MEASUREMENT UNCERTAINTY.....	11
4.3 DESCRIPTION OF SUPPORT UNITS.....	12
5 CONDUCTED EMISSION	13
5.1 E.U.T. OPERATION.....	13
5.2 EUT SETUP	13
5.3 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION).....	14
5.4 MEASUREMENT PROCEDURE	14
5.5 CONDUCTED EMISSION LIMIT	14
5.6 MEASUREMENT DESCRIPTION.....	14
5.7 CONDUCTED EMISSION TEST RESULT	14
6 RADIATED SPURIOUS EMISSIONS	17
6.1 EUT OPERATION	17
6.2 TEST SETUP	18
6.3 SPECTRUM ANALYZER SETUP.....	19
6.4 TEST PROCEDURE	20
6.5 SUMMARY OF TEST RESULTS	21
7 CONDUCTED SPURIOUS EMISSION	28
7.1 TEST PROCEDURE	28
7.2 TEST SETUP	28
7.3 TEST RESULT	28
8 BAND EDGE MEASUREMENT	66



8.1 TEST PROCEDURE.....	66
8.2 TEST SETUP	66
8.3 TEST RESULT	66
9 6DB BANDWIDTH MEASUREMENT	75
9.1 TEST PROCEDURE.....	75
9.2 TEST SETUP	75
9.3 TEST RESULT	75
10 MAXIMUM CONDUCTED OUTPUT POWER	88
10.1 TEST PROCEDURE.....	88
10.2 TEST SETUP	88
10.3 TEST RESULT	88
11 POWER SPECTRAL DENSITY	90
11.1 TEST PROCEDURE.....	90
11.2 TEST SETUP	90
11.3 TEST RESULT	90
12 ANTENNA APPLICATION	104
12.1 ANTENNA REQUIREMENT	104
12.2 RESULT	104
13 TEST SETUP	105
14 EUT PHOTOS.....	107



2 Test Summary

Test Items	Test Requirement	Result
Conduct Emission	15.207	PASS
Radiated Spurious Emissions	15.205(a) 15.209 15.247(d)	PASS
Conducted Spurious Emission	15.247(d)	PASS
Band edge	15.247(d) 15.205(a)	PASS
6dB Bandwidth	15.247(a)(2)	PASS
Maximum Peak Output Power	15.247(b)(3)	PASS
Power Spectral Density	15.247(e)	PASS
Antenna Requirement	15.203	PASS
Remark: N/A: Not Applicable		



3 General Information

3.1 General Description of E.U.T.

Product Name	:	MINI PC
Model Name	:	CORE 2 pro
Additional model	:	AERO 2,AERO 2pro,AERO 2plus,CORE 2,CORE 2pro,CORE 2plus
Specification	:	802.11b/g/n HT20/HT40
Operating frequency	:	2412-2462MHz for 802.11b/g/ n(HT20) 2422-2452MHz for 802.11 n(HT40)
Numbers of Channel	:	11 channels for 802.11b/g/ n(HT20) 7 channels for 802.11n(HT40)
Antenna Type	:	FPC Antenna
Antenna Gain	:	Ant1:-0.71 dBi Ant2: 2.32 dBi
Smart System		<input checked="" type="checkbox"/> SISO:(for 802.11 b/g/n20/n40) <input type="checkbox"/> MIMO:(for 802.11 b/g/n20/n40)
Type of Modulation	:	DSSS with DBPSK/DQPSK/CCK for 802.11b; OFDM with BPSK/QPSK/16QAM/64QAM for 802.11g/n;
Rated Power Supply	:	Input: 100-240VAC 0.65A 24W
Test Power Supply	:	Adapter:CQ24-120200-DU Input: AC 100-240V~50/60Hz 1.0A Output: DC 12V $\overline{\overline{=}}$ 2.0A
Hardware Version	:	N/A
Software Version	:	N/A
Test sample No.	:	PTC24022004701E-1/2, PTC24022004701E-2/2



3.2 Channel List

The EUT has been tested under its typical operating condition.

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

Test of channel included the lowest and middle and highest frequency to perform the test, then record on this report.

Those data rates (802.11b: 1 Mbps; 802.11g: 6 Mbps; 802.11n (HT20): MCS0;) were used for all test.

Pre-defined engineering program for regulatory testing used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

Frequency and Channel list for 802.11 b/g/n (HT20/HT40)

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	5	2432	9	2452
2	2417	6	2437	10	2457
3	2422	7	2442	11	2462
4	2427	8	2447		

The maximum duty cycle as following table:

Test Mode	Duty Cycle(%)
802.11b	100%
802.11g	100%
802.11n(HT20)	100%
802.11n(HT40)	100%



Report No.: PTC24022004701E-FC01

3.3 Test Site

Precise Testing & Certification Co., Ltd

Address: Building 1, No. 6, Tongxin Road, Dongcheng Street, Dongguan, Guangdong, China

FCC Registration Number: 790290

A2LA Certificate No.: 4408.01

IC Registration Number: 12191A

FCC Designation Number: CN1219



4 Equipment During Test

4.1 Equipments List

RF Conducted Test

Name of Equipment	Manufacturer	Model	Serial No.	Characteristics	Last Calibration	Calibration Interval
MXG Signal Analyzer	Agilent	N9020A	SER MY5111038	10Hz-26.5GHz	Aug.17, 2023	1 Year
Coaxial Cable	CDS	79254	46107086	10Hz-30GHz	Aug.17, 2023	1 Year
Power Meter	Anritsu	ML2495A	0949003	300MHz-40GHz	Aug.17, 2023	1 Year
Power Sensor	Anritsu	MA2411B	0917017	300MHz-40GHz	Aug.17, 2023	1 Year
Test S/W	Tonscend	JS1120-3	/	/	/	/

Remark: The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.

Name of Equipment	Manufacturer	Model	Serial No.	Characteristics	Last Calibration	Calibration Interval
EMI Test Receiver	Rohde&Schwarz	ESPI7	101671	9KHz-7GHz	Aug. 17,2023	1 Year
Loop Antenna	Schwarzbeck	FMZB 1519	192	9 KHz -30MHz	Aug. 17,2023	1 Year
Bilog Antenna	SCHWARZBECK	VULB9160	9160-3355	25MHz-2GHz	Aug. 17,2023	1 Year
Preamplifier (low frequency)	SCHWARZBECK	BBV 9475	9745-0013	1MHz-1GHz	Aug. 17,2023	1 Year
Cable	IMRO	AK-9515E(9m)	Cable-L	9KHz-3GHz	Aug. 17,2023	1 Year
Spectrum Analyzer	Rohde&Schwarz	FSV40	6625-01-588-5515	9KHz-40GHz	Aug. 17,2023	1 Year
Horn Antenna	SCHWARZBECK	9120D	9120D-1246	1GHz-18GHz	Aug. 17,2023	1 Year
Power Amplifier	ZHINAN	ZN3380C	15002	1GHz-26.5GHz	Aug. 17,2023	1 Year



Horn Antenna	SCHWARZBECK	BBHA 9170	9170-1066	15GHz-40GHz	Jul. 19, 2023	1 Year
Amplifier	SCHWARZBECK	BBV 9721	9721-205	18GHz-40GHz	Jul. 19, 2023	1 Year
Cable	H+S	CBL-26	N/A	1GHz-26.5GHz	Aug. 17,2023	1 Year
RF Cable	R&S	R204	R21X	1GHz-40GHz	Aug. 17,2023	1 Year
Test S/W	Tonscend	TS+	/	/	/	/

Conducted Emissions

Name of Equipment	Manufacturer	Model	Serial No.	Characteristics	Calibration Date	Calibration Interval
EMI Test Receiver	Rohde&Schwarz	ESCI	101417	9KHz-3GHz	Aug. 17, 2023	1 Year
Artificial Mains Network	Rohde&Schwarz	ENV216	102453	9KHz-300MHz	Aug. 17, 2023	1 Year
Artificial Mains Network	Rohde&Schwarz	ENV216	101342	9KHz-300MHz	Aug. 17, 2023	1 Year
Limiter	R&S	ESH3-Z2	0357.8810.54-102808-NB	0Hz-30MHz	Aug. 16,2023	1 Year
RF Switch	DIAMOND ANTENNA	CX-210	/	0.09MHz-6GHz	Mar. 24,2023	1 Year
Test S/W	Tonscend	JS32-CE	/	/	/	/



4.2 Measurement Uncertainty

Parameter	Uncertainty
RF output power, conducted	±1.0dB
Power Spectral Density, conducted	±2.2dB
Radio Frequency	± 1 x 10 ⁻⁶
Bandwidth	± 1.5 x 10 ⁻⁶
Time	±2%
Duty Cycle	±2%
Temperature	±1°C
Humidity	±5%
DC and low frequency voltages	±3%
Conducted Emissions (150kHz~30MHz)	±3.64dB
Radiated Emission(9kHz~30MHz)	±3.15dB
Radiated Emission(30MHz~1GHz)	±5.03dB
Radiated Emission(1GHz~25GHz)	±4.74dB



4.3 Description of Support Units

Equipment	Model No.	Series No.	Parameters
LCD	HU20270FB0	1S6S39BCS4L EGK1P3809	N/A
Mouse	OP-300	SA8177323	N/A
Keyboard	G2	SA8173709103	N/A

5 Conducted Emission

Test Requirement: : FCC CFR 47 Part 15 Section 15.207
 Test Method : ANSI C63.10: 2013
 Test Result : PASS
 Frequency Range : 150kHz to 30MHz
 Class/Severity : Class B


5.1E.U.T. Operation

Operating Environment :

Temperature : 23.9 °C
 Humidity : 51.4 % RH
 Atmospheric Pressure : 101.21kPa


5.2EUT Setup

The conducted emission tests were performed using the setup accordance with the ANSI C63.10:2013.

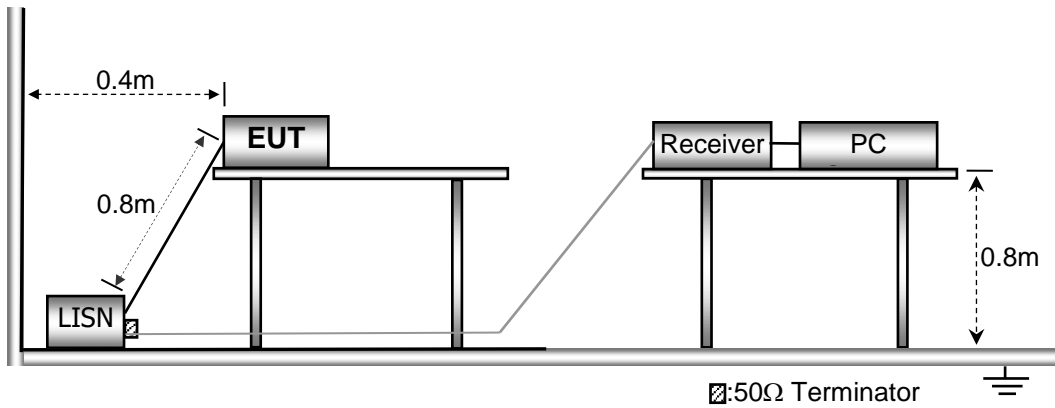



5.3 Test SET-UP (Block Diagram of Configuration)

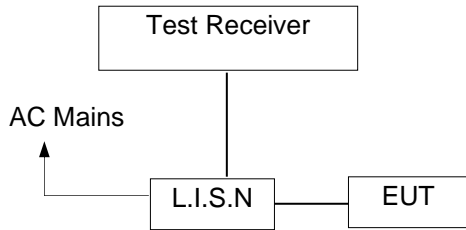

5.4 Measurement Procedure

1. The EUT was placed on a table, which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured was complete.

5.5 Conducted Emission Limit

Conducted Emission

Frequency(MHz)	Quasi-peak	Average
0.15-0.5	66-56	56-46
0.5-5.0	56	46
5.0-30.0	60	50

Note:

1. The lower limit shall apply at the transition frequencies
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

5.6 Measurement Description

The maximised peak emissions from the EUT was scanned and measured for both the Live and Neutral Lines. Quasi-peak & average measurements were performed if peak emissions were within 6dB of the average limit line.

5.7 Conducted Emission Test Result


Pass.

During the test, the 120Vac/60Hz and 240Vac/60Hz power supplies were scanned in advance, and it was found that (120Vac/60Hz, TX 802.11b Low Channel) was a poor mode, and the report only reflected the poor mode.

Please refer to the following pages.




Line- AC 120V/60Hz

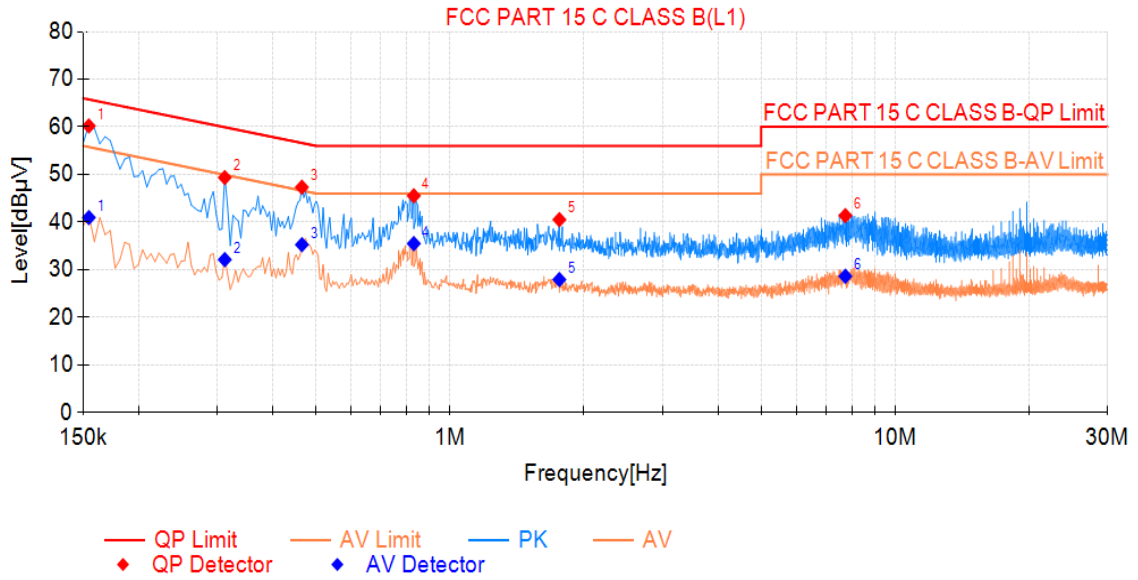

Final Data List									
NO.	Freq. [MHz]	Factor [dB]	QP Value [dBµV]	QP Limit [dBµV]	QP Margin [dB]	AV Value [dBµV]	AV Limit [dBµV]	AV Margin [dB]	Verdict
1	0.155	19.21	60.19	65.75	5.56	40.93	55.75	14.82	PASS
2	0.312	19.24	49.34	59.92	10.58	32.09	49.92	17.83	PASS
3	0.465	19.25	47.31	56.60	9.29	35.24	46.60	11.36	PASS
4	0.830	19.27	45.50	56.00	10.50	35.45	46.00	10.55	PASS
5	1.761	19.33	40.50	56.00	15.50	27.90	46.00	18.10	PASS
6	7.728	19.50	41.35	60.00	18.65	28.60	50.00	21.40	PASS



Neutral-AC 120V/60Hz

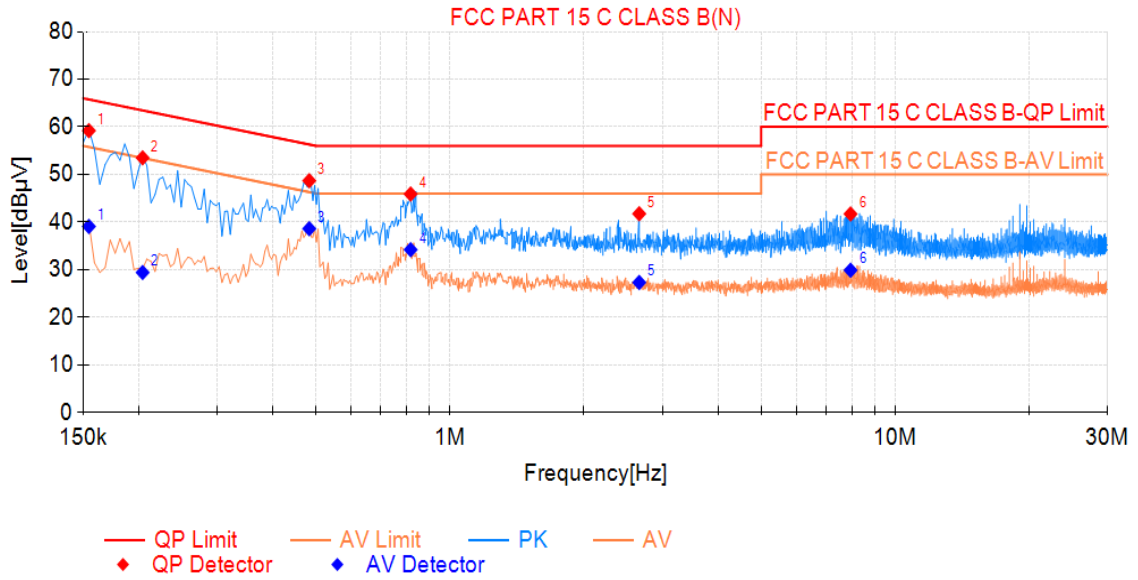

Final Data List									
NO.	Freq. [MHz]	Factor [dB]	QP Value [dBµV]	QP Limit [dBµV]	QP Margin [dB]	AV Value [dBµV]	AV Limit [dBµV]	AV Margin [dB]	Verdict
1	0.155	19.01	59.20	65.75	6.55	39.07	55.75	16.68	PASS
2	0.204	19.08	53.49	63.45	9.96	29.39	53.45	24.06	PASS
3	0.483	19.18	48.68	56.29	7.61	38.59	46.29	7.70	PASS
4	0.816	19.26	45.88	56.00	10.12	34.18	46.00	11.82	PASS
5	2.661	19.23	41.73	56.00	14.27	27.29	46.00	18.71	PASS
6	7.940	19.48	41.69	60.00	18.31	29.87	50.00	20.13	PASS

Note: QP Margin[dB]= QP Limit[dBµV]- QP Value[dBµV], AV Margin[dB]= AV Limit[dBµV]- AV Value[dBµV].



6 Radiated Spurious Emissions

Test Requirement : FCC CFR47 Part 15 Section 15.209 & 15.247
 Test Method : ANSI C63.10:2013
 Test Result : PASS
 Measurement Distance : 3m
 Limit : See the follow table

Frequency (MHz)	Field Strength		Field Strength Limit at 3m Measurement Dist	
	uV/m	Distance (m)	uV/m	dBuV/m
0.009 ~ 0.490	$2400/F(\text{kHz})$	300	$10000 * 2400/F(\text{kHz})$	$20\log^{(2400/F(\text{kHz}))} + 80$
0.490 ~ 1.705	$24000/F(\text{kHz})$	30	$100 * 24000/F(\text{kHz})$	$20\log^{(24000/F(\text{kHz}))} + 40$
1.705 ~ 30	30	30	$100 * 30$	$20\log^{(30)} + 40$
30 ~ 88	100	3	100	$20\log^{(100)}$
88 ~ 216	150	3	150	$20\log^{(150)}$
216 ~ 960	200	3	200	$20\log^{(200)}$
Above 960	500	3	500	$20\log^{(500)}$

6.1EUT Operation


Operating Environment :

Temperature: : 24.5 °C
 Humidity: : 52 % RH
 Atmospheric Pressure: : 101.3kPa
 Test Voltage : AC 120V 60Hz


6.2 Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site


The test setup for emission measurement below 30MHz

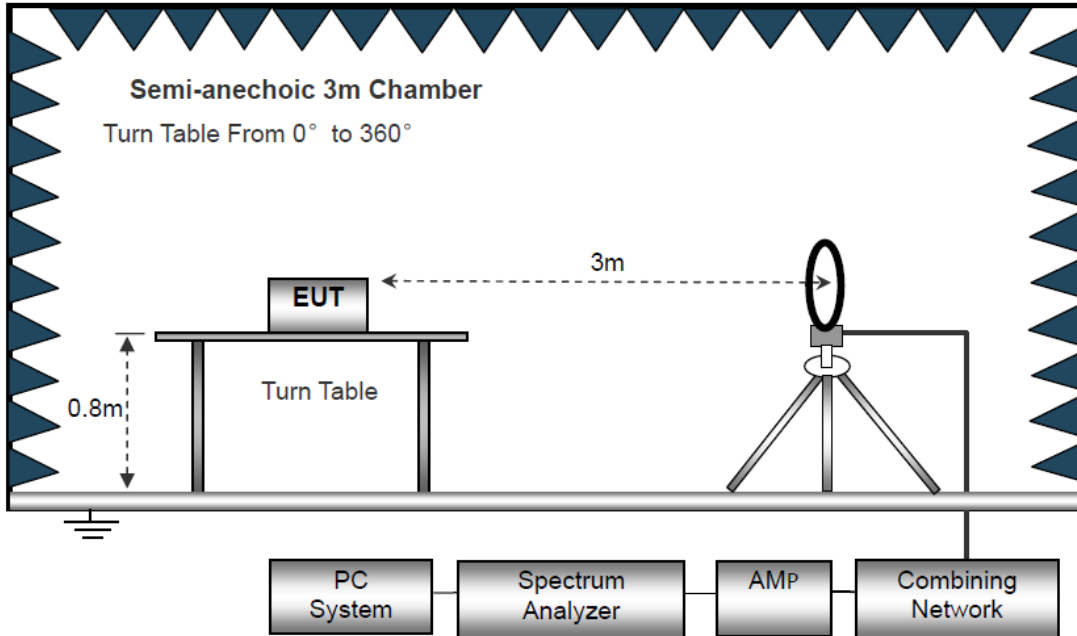

The test setup for emission measurement from 30 MHz to 1 GHz.

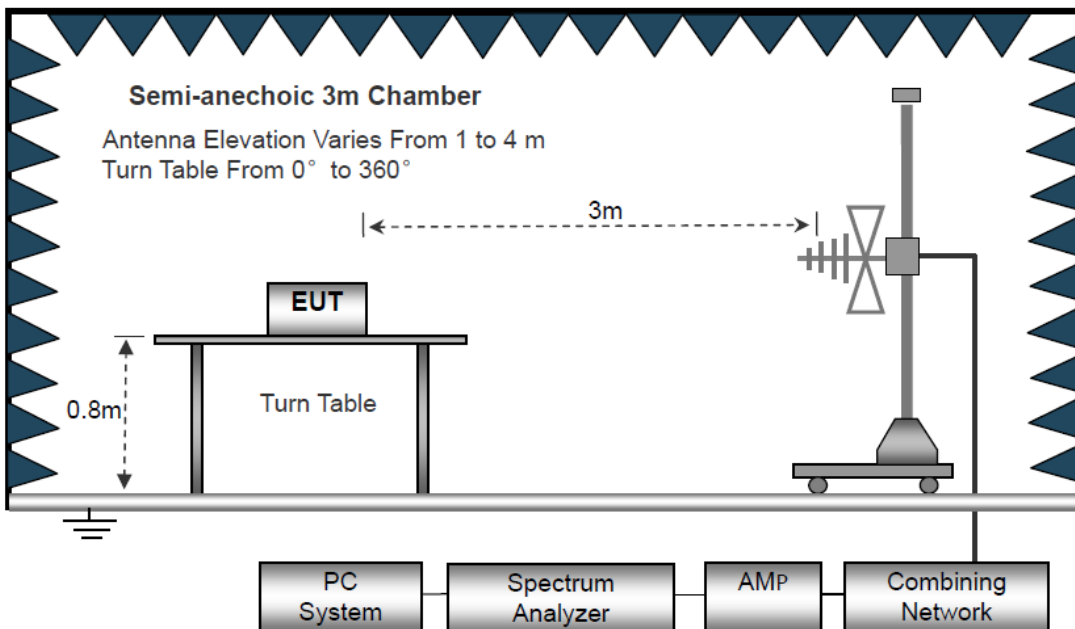

The test setup for emission measurement above 1 GHz

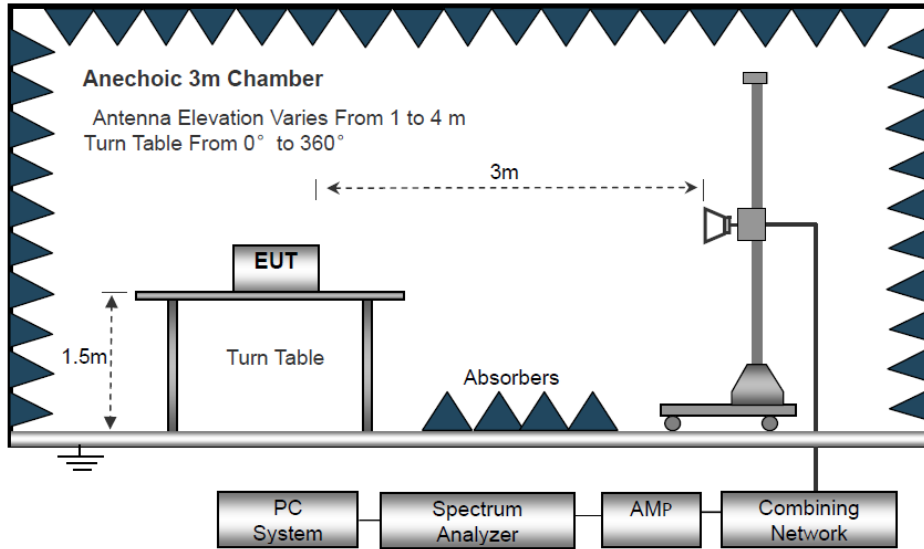

6.3 Spectrum Analyzer Setup

	Frequency	Detector	RBW	VBW	Remark
Receiver Setup	Below 30MHz	--	10kHz	10kHz	--
	30MHz ~ 1GHz	Quasi-peak	120kHz	300kHz	Quasi-peak Value
	Above 1GHz	Peak	1MHz	3MHz	Peak Value
		RMS	1MHz	3MHz	Average Value



6.4 Test Procedure

1. Below 1000MHz, The EUT was placed on a turn table which is 0.8m above ground plane, And above 1000MHz, The EUT was placed on a styrofoam table which is 1.5m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is moved from 1m to 4m to find out the maximum emissions. The spectrum was investigated from the lowest radio frequency signal generated in the device, without going below 9 kHz, up to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.
7. The radiation measurements are tested under 3-axes(X,Y,Z) position(X denotes lying on the table, Y denotes side stand and Z denotes vertical stand), After pre-test, It was found that the worse radiation emission was get at the X position. So the data shown was the X position only.
8. The test above 1GHz must be use the fully anechoic room, and the test below 1GHz use the half anechoic room



6.5 Summary of Test Results

Test Frequency: 9KHz-30MHz

Freq. (MHz)	Ant.Pol. H/V	Emission Level (dBuV/m)	Limit 3m (dBuV/m)	Over (dB)
--	--	--	--	>20

Note:

The amplitude of spurious emission that is attenuated by more than 20dB below the permissible limit has no need to be reported.

Distance extrapolation factor = $40\log(\text{Specific distance} / \text{test distance})$ (dB);

Limit line = Specific limits (dBuV) + distance extrapolation factor.


Test Frequency: 30MHz ~ 1GHz

All the modulation modes were tested the data of the worst mode (TX 802.11b Low Channel) are recorded in the following pages and the others modulation methods do not exceed the limits.

Please refer to the following test plots:



Antenna Polarization: Horizontal

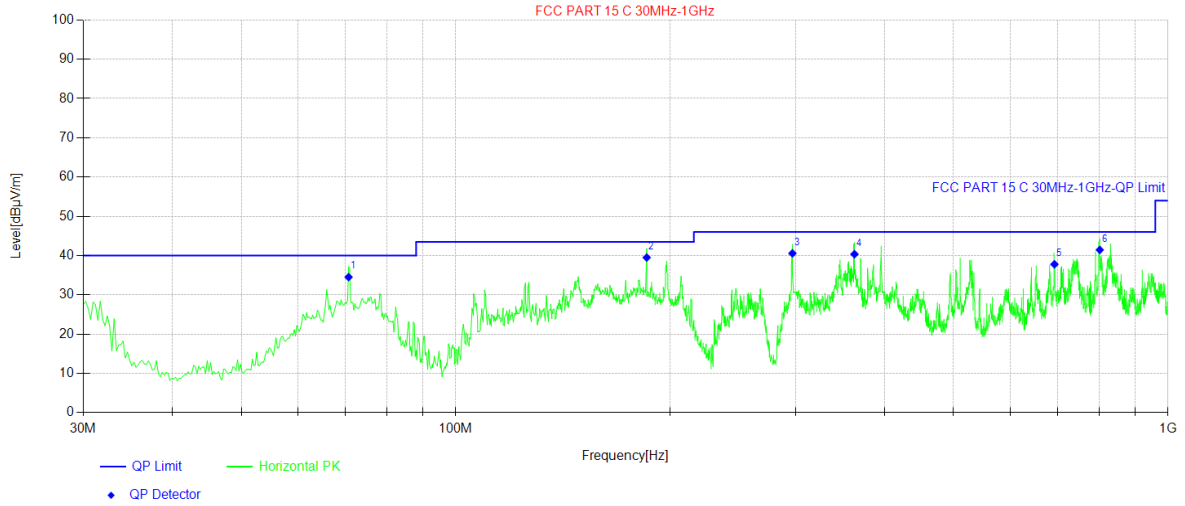


Final Data List[QP]								
NO.	Freq. [MHz]	QP Reading [dBµV/m]	Factor [dB]	QP Value [dBµV/m]	QP Limit [dBµV/m]	QP Margin [dB]	Polarity	Verdict
1	70.74	53.97	-19.44	34.53	40.00	5.47	Horizontal	PASS
2	185.44	57.42	-17.91	39.51	43.50	3.99	Horizontal	PASS
3	296.99	55.93	-15.36	40.57	46.00	5.43	Horizontal	PASS
4	362.95	54.41	-14.05	40.36	46.00	5.64	Horizontal	PASS
5	692.75	43.88	-6.10	37.78	46.00	8.22	Horizontal	PASS
6	802.12	45.21	-3.75	41.46	46.00	4.54	Horizontal	PASS

Remark: Emission Level = Reading + Cable Loss + ANT Factor - AMP Factor



Antenna Polarization: Vertical

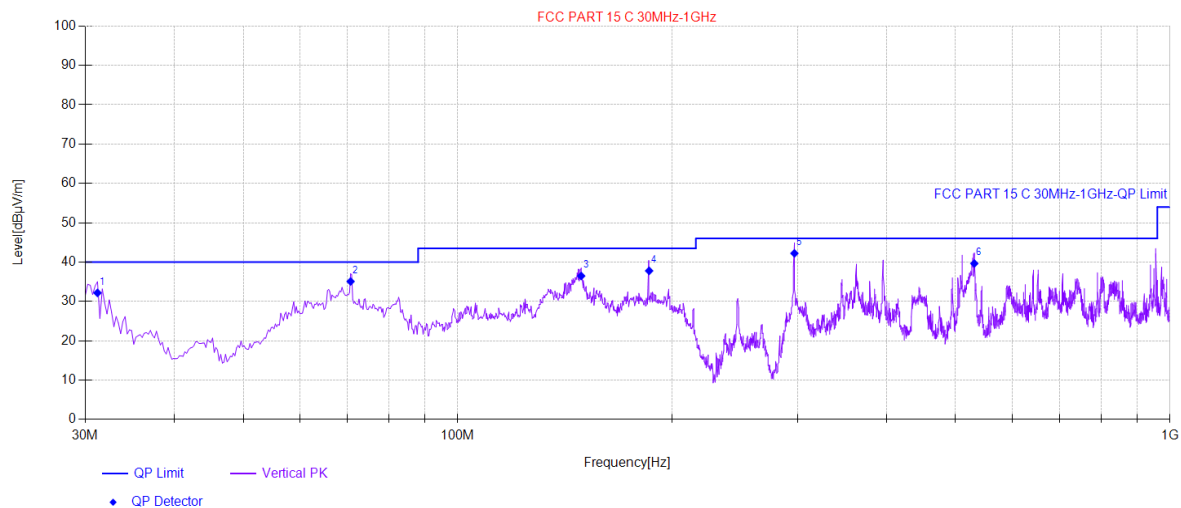

Final Data List[QP]								
NO.	Freq. [MHz]	QP Reading [dBµV/m]	Factor [dB]	QP Value [dBµV/m]	QP Limit [dBµV/m]	QP Margin [dB]	Polarity	Verdict
1	31.21	50.53	-18.36	32.17	40.00	7.83	Vertical	PASS
2	70.74	54.52	-19.44	35.08	40.00	4.92	Vertical	PASS
3	149.07	52.53	-16.06	36.47	43.50	7.03	Vertical	PASS
4	185.69	55.71	-17.93	37.78	43.50	5.72	Vertical	PASS
5	296.99	57.59	-15.36	42.23	46.00	3.77	Vertical	PASS
6	531.25	49.82	-10.17	39.65	46.00	6.35	Vertical	PASS

Remark: Emission Level = Reading + Cable Loss + ANT Factor - AMP Factor



Test Frequency: From 1GHz to 18GHz

Worst case 802.11b

Test Mode: 2412					Test channel: Lowest			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
4824	46.14	32.35	4.12	28.44	54.17	74	-19.83	V
7236	38.31	36.08	6.3	27.74	52.95	74	-21.05	V
9648	35.77	38.25	7.91	24.65	57.28	74	-16.72	V
4824	43.65	32.35	4.12	28.44	51.68	74	-22.32	H
7236	37.68	36.08	6.3	27.74	52.32	74	-21.68	H
9648	35.39	38.25	7.91	24.65	56.90	74	-17.10	H
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
4824	32.21	32.35	4.12	28.44	40.24	54	-13.76	V
7236	24.00	36.08	6.3	27.74	38.64	54	-15.36	V
9648	20.56	38.25	7.91	24.65	42.07	54	-11.93	V
4824	30.20	32.35	4.12	28.44	38.23	54	-15.77	H
7236	24.43	36.08	6.3	27.74	39.07	54	-14.93	H
9648	21.89	38.25	7.91	24.65	43.40	54	-10.60	H



Worst case 802.11b

Test Mode: 2437					Test channel: Middle			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
4874	46.94	32.35	4.12	28.44	54.97	74	-19.03	V
7311	38.14	36.08	6.3	27.74	52.78	74	-21.22	V
9748	35.34	38.25	7.91	24.65	56.85	74	-17.15	V
4874	43.91	32.35	4.12	28.44	51.94	74	-22.06	H
7311	38.48	36.08	6.3	27.74	53.12	74	-20.88	H
9748	33.75	38.25	7.91	24.65	55.26	74	-18.74	H
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
4874	31.98	32.35	4.12	28.44	40.01	54	-13.99	V
7311	24.56	36.08	6.3	27.74	39.20	54	-14.80	V
9748	21.41	38.25	7.91	24.65	42.92	54	-11.08	V
4874	30.05	32.35	4.12	28.44	38.08	54	-15.92	H
7311	24.86	36.08	6.3	27.74	39.50	54	-14.50	H
9748	21.40	38.25	7.91	24.65	42.91	54	-11.09	H



Worst case 802.11b

Test Mode: 2462					Test channel: High			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
4924	46.27	32.41	4.14	28.42	54.40	74	-19.60	V
7386	38.13	36.15	6.36	27.68	52.96	74	-21.04	V
9848	35.02	38.35	7.97	24.33	57.01	74	-16.99	V
4924	42.74	32.41	4.14	28.42	50.87	74	-23.13	H
7386	38.48	36.15	6.36	27.68	53.31	74	-20.69	H
9848	34.23	38.35	7.97	24.33	56.22	74	-17.78	H
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
4924	32.12	32.41	4.14	28.42	40.25	54	-13.75	V
7386	23.37	36.15	6.36	27.68	38.20	54	-15.80	V
9848	21.04	38.35	7.97	24.33	43.03	54	-10.97	V
4924	31.08	32.41	4.14	28.42	39.21	54	-14.79	H
7386	25.65	36.15	6.36	27.68	40.48	54	-13.52	H
9848	20.73	38.35	7.97	24.33	42.72	54	-11.28	H

Note:

1. The testing has been conformed to $10 \times 2462 \text{MHz} = 24620 \text{MHz}$.
2. All other emissions more than 30dB below the limit.
3. Factor = Antenna Factor + Cable Loss – Pre-amplifier.
Emission Level = Reading + Factor
Margin = Emission Level - Limit
4. X-Axis, Y-Axis and Z-Axis were investigated. The results above show only the worst case.

Spurious Emission in Restricted Band 2310-2390MHz and 2483.5-2500MHz



2.4G WiFi (802.11b/g/n) mode have been tested, and the worst result(802.11g) was report as below
 Test Mode: Worst case 802.11g Low Channel 2412MHz

Test Mode: 802.11g Low Channel 2412MHz									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over (dB)	Polarity H/V	Test Value
2390	47.75	27.39	2.77	34.01	43.90	74	-30.10	H	Peak
2400	59.18	27.42	2.78	34.01	55.37	74	-18.63	H	
2390	48.33	27.39	2.77	34.01	44.48	74	-29.52	V	
2400	55.51	27.42	2.78	34.01	51.70	74	-22.30	V	
2390	41.04	27.39	2.77	34.01	37.19	54	-16.81	H	Average
2400	43.61	27.42	2.78	34.01	39.80	54	-14.20	H	
2390	39.42	27.39	2.77	34.01	35.57	54	-18.43	V	
2400	44.03	27.42	2.78	34.01	40.22	54	-13.78	V	

Test Mode: Worst case 802.11g High Channel 2462MHz

Test Mode: 802.11g High Channel 2462MHz									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over (dB)	Polarity H/V	Test Value
2483.5	60.93	27.39	2.77	34.01	57.08	74	-16.92	H	Peak
2500	48.65	27.42	2.78	34.01	44.84	74	-29.16	H	
2483.5	60.37	27.39	2.77	34.01	56.52	74	-17.48	V	
2500	49.76	27.42	2.78	34.01	45.95	74	-28.05	V	
2483.5	42.96	27.39	2.77	34.01	39.11	54	-14.89	H	Average
2500	39.49	27.42	2.78	34.01	35.68	54	-18.32	H	
2483.5	43.46	27.39	2.77	34.01	39.61	54	-14.39	V	
2500	40.03	27.42	2.78	34.01	36.22	54	-17.78	V	

Test Frequency: From 18GHz to 25GHz

The measurements were more than 20dB below the limit and not reported.




7 Conducted Spurious Emission

- Test Requirement : FCC CFR47 Part 15 Section 15.247
 Test Method : ANSI C63.10:2013
 Test Limit : Regulation 15.247 (d), In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

7.1 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: RBW = 100kHz, VBW = 300kHz, Sweep = auto
 Detector function = peak, Trace = max hold

7.2 Test Setup

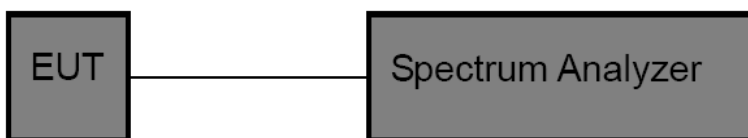

7.3 Test Result


TestMode	Antenna	Frequency[MHz]	FreqRange [Mhz]	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
11B	Ant1	2412	0~Reference	1.67	1.67	---	PASS
11B	Ant1	2412	30~1000	1.67	-57.16	≤-18.33	PASS
11B	Ant1	2412	1000~26500	1.67	-41.51	≤-18.33	PASS
11B	Ant2	2412	0~Reference	3.29	3.29	---	PASS
11B	Ant2	2412	30~1000	3.29	-57.12	≤-16.71	PASS
11B	Ant2	2412	1000~26500	3.29	-41.39	≤-16.71	PASS
11B	Ant1	2437	0~Reference	2.51	2.51	---	PASS
11B	Ant1	2437	30~1000	2.51	-56.99	≤-17.49	PASS
11B	Ant1	2437	1000~26500	2.51	-42.11	≤-17.49	PASS
11B	Ant2	2437	0~Reference	3.21	3.21	---	PASS
11B	Ant2	2437	30~1000	3.21	-57.54	≤-16.79	PASS
11B	Ant2	2437	1000~26500	3.21	-41.96	≤-16.79	PASS
11B	Ant1	2462	0~Reference	2.79	2.79	---	PASS
11B	Ant1	2462	30~1000	2.79	-57.54	≤-17.21	PASS
11B	Ant1	2462	1000~26500	2.79	-42.05	≤-17.21	PASS
11B	Ant2	2462	0~Reference	2.43	2.43	---	PASS
11B	Ant2	2462	30~1000	2.43	-57.72	≤-17.57	PASS




11B	Ant2	2462	1000~26500	2.43	-41.79	≤-17.57	PASS
11G	Ant1	2412	0~Reference	-1.63	-1.63	---	PASS
11G	Ant1	2412	30~1000	-1.63	-56.57	≤-21.63	PASS
11G	Ant1	2412	1000~26500	-1.63	-40.91	≤-21.63	PASS
11G	Ant2	2412	0~Reference	-2.31	-2.31	---	PASS
11G	Ant2	2412	30~1000	-2.31	-57.46	≤-22.31	PASS
11G	Ant2	2412	1000~26500	-2.31	-41.89	≤-22.31	PASS
11G	Ant1	2437	0~Reference	-1.05	-1.05	---	PASS
11G	Ant1	2437	30~1000	-1.05	-56.97	≤-21.05	PASS
11G	Ant1	2437	1000~26500	-1.05	-42.45	≤-21.05	PASS
11G	Ant2	2437	0~Reference	-1.11	-1.11	---	PASS
11G	Ant2	2437	30~1000	-1.11	-59.09	≤-21.11	PASS
11G	Ant2	2437	1000~26500	-1.11	-42.08	≤-21.11	PASS
11G	Ant1	2462	0~Reference	-1.67	-1.67	---	PASS
11G	Ant1	2462	30~1000	-1.67	-57.16	≤-21.67	PASS
11G	Ant1	2462	1000~26500	-1.67	-42.42	≤-21.67	PASS
11G	Ant2	2462	0~Reference	-2.31	-2.31	---	PASS
11G	Ant2	2462	30~1000	-2.31	-57.18	≤-22.31	PASS
11G	Ant2	2462	1000~26500	-2.31	-41.68	≤-22.31	PASS
11N20SISO	Ant1	2412	0~Reference	-2.88	-2.88	---	PASS
11N20SISO	Ant1	2412	30~1000	-2.88	-56.59	≤-22.88	PASS
11N20SISO	Ant1	2412	1000~26500	-2.88	-41.35	≤-22.88	PASS
11N20SISO	Ant2	2412	0~Reference	-2.96	-2.96	---	PASS
11N20SISO	Ant2	2412	30~1000	-2.96	-58.81	≤-22.96	PASS
11N20SISO	Ant2	2412	1000~26500	-2.96	-41.25	≤-22.96	PASS
11N20SISO	Ant1	2437	0~Reference	-1.49	-1.49	---	PASS
11N20SISO	Ant1	2437	30~1000	-1.49	-58.28	≤-21.49	PASS
11N20SISO	Ant1	2437	1000~26500	-1.49	-41.23	≤-21.49	PASS
11N20SISO	Ant2	2437	0~Reference	-0.74	-0.74	---	PASS
11N20SISO	Ant2	2437	30~1000	-0.74	-58.3	≤-20.74	PASS
11N20SISO	Ant2	2437	1000~26500	-0.74	-41.65	≤-20.74	PASS
11N20SISO	Ant1	2462	0~Reference	0.58	0.58	---	PASS
11N20SISO	Ant1	2462	30~1000	0.58	-57.21	≤-19.42	PASS
11N20SISO	Ant1	2462	1000~26500	0.58	-42.61	≤-19.42	PASS
11N20SISO	Ant2	2462	0~Reference	-2.73	-2.73	---	PASS
11N20SISO	Ant2	2462	30~1000	-2.73	-58.38	≤-22.73	PASS
11N20SISO	Ant2	2462	1000~26500	-2.73	-41.8	≤-22.73	PASS
11N40SISO	Ant1	2422	0~Reference	-5.41	-5.41	---	PASS
11N40SISO	Ant1	2422	30~1000	-5.41	-56.91	≤-25.41	PASS
11N40SISO	Ant1	2422	1000~26500	-5.41	-41.83	≤-25.41	PASS
11N40SISO	Ant2	2422	0~Reference	-4.61	-4.61	---	PASS
11N40SISO	Ant2	2422	30~1000	-4.61	-58.81	≤-24.61	PASS
11N40SISO	Ant2	2422	1000~26500	-4.61	-42.27	≤-24.61	PASS
11N40SISO	Ant1	2437	0~Reference	-1.28	-1.28	---	PASS
11N40SISO	Ant1	2437	30~1000	-1.28	-58.47	≤-21.28	PASS
11N40SISO	Ant1	2437	1000~26500	-1.28	-42.17	≤-21.28	PASS
11N40SISO	Ant2	2437	0~Reference	-4.03	-4.03	---	PASS
11N40SISO	Ant2	2437	30~1000	-4.03	-57.17	≤-24.03	PASS
11N40SISO	Ant2	2437	1000~26500	-4.03	-41.79	≤-24.03	PASS
11N40SISO	Ant1	2452	0~Reference	-5.06	-5.06	---	PASS
11N40SISO	Ant1	2452	30~1000	-5.06	-57.08	≤-25.06	PASS
11N40SISO	Ant1	2452	1000~26500	-5.06	-42.35	≤-25.06	PASS
11N40SISO	Ant2	2452	0~Reference	-5.09	-5.09	---	PASS
11N40SISO	Ant2	2452	30~1000	-5.09	-57.52	≤-25.09	PASS
11N40SISO	Ant2	2452	1000~26500	-5.09	-41.81	≤-25.09	PASS



Test Graphs:

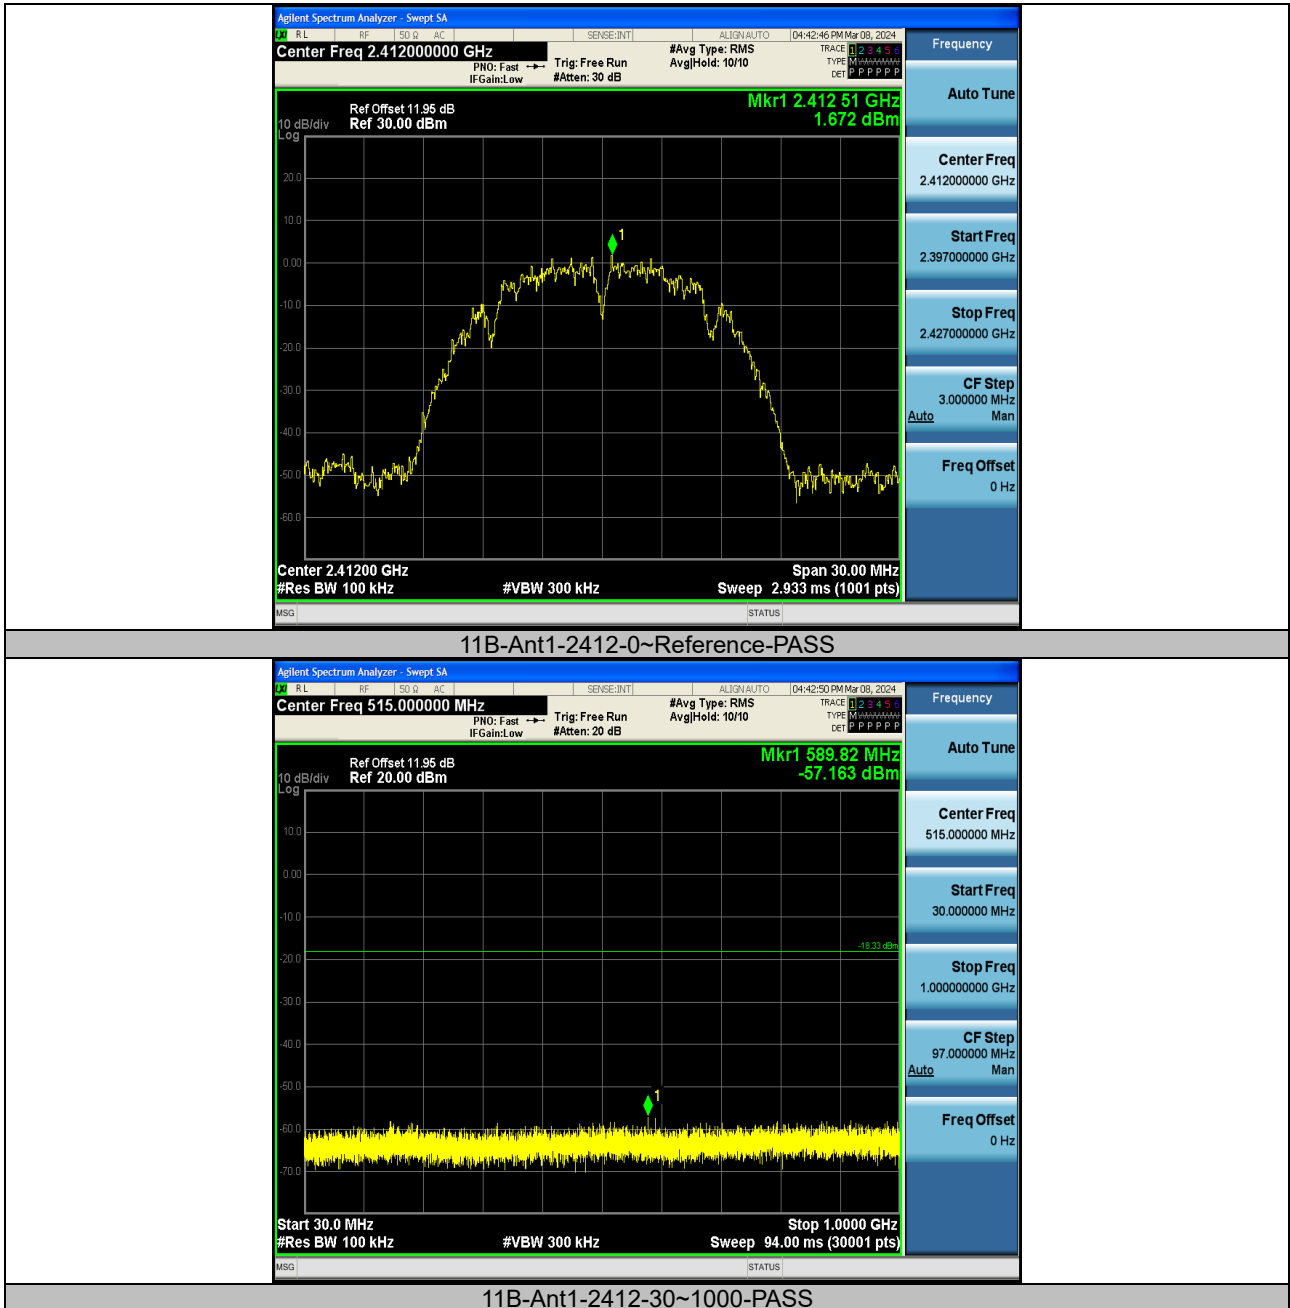


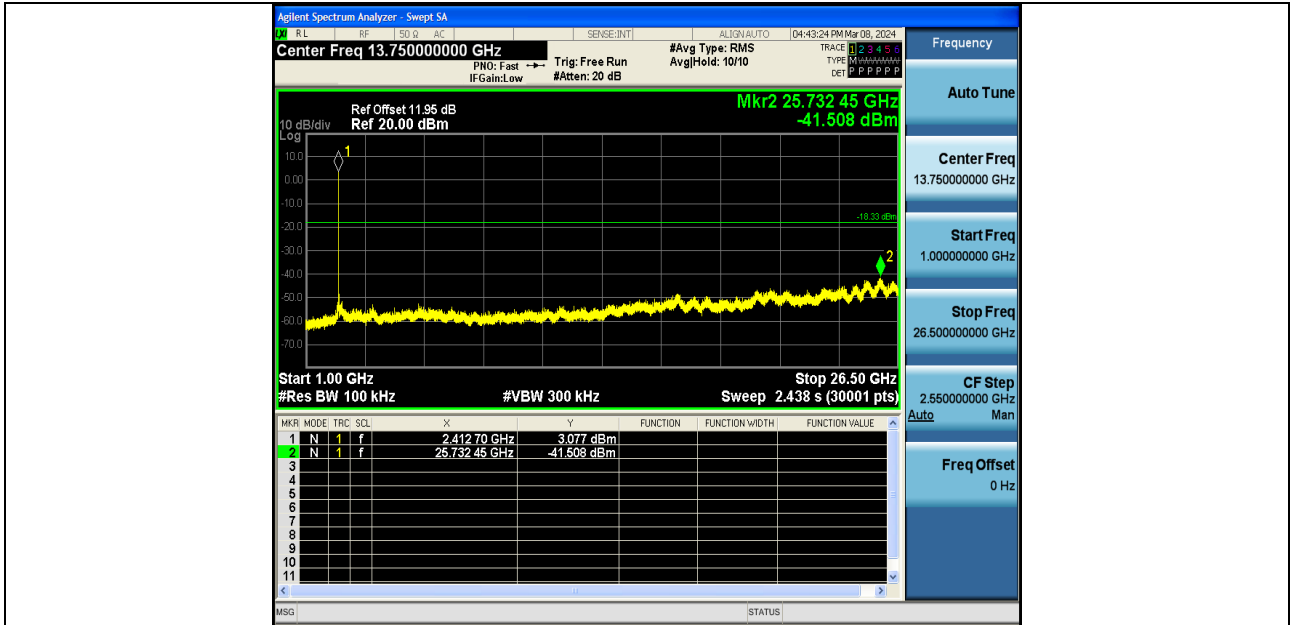


11B-Ant1-2412-1000~26500-PASS




11B-Ant2-2412-0~Reference-PASS


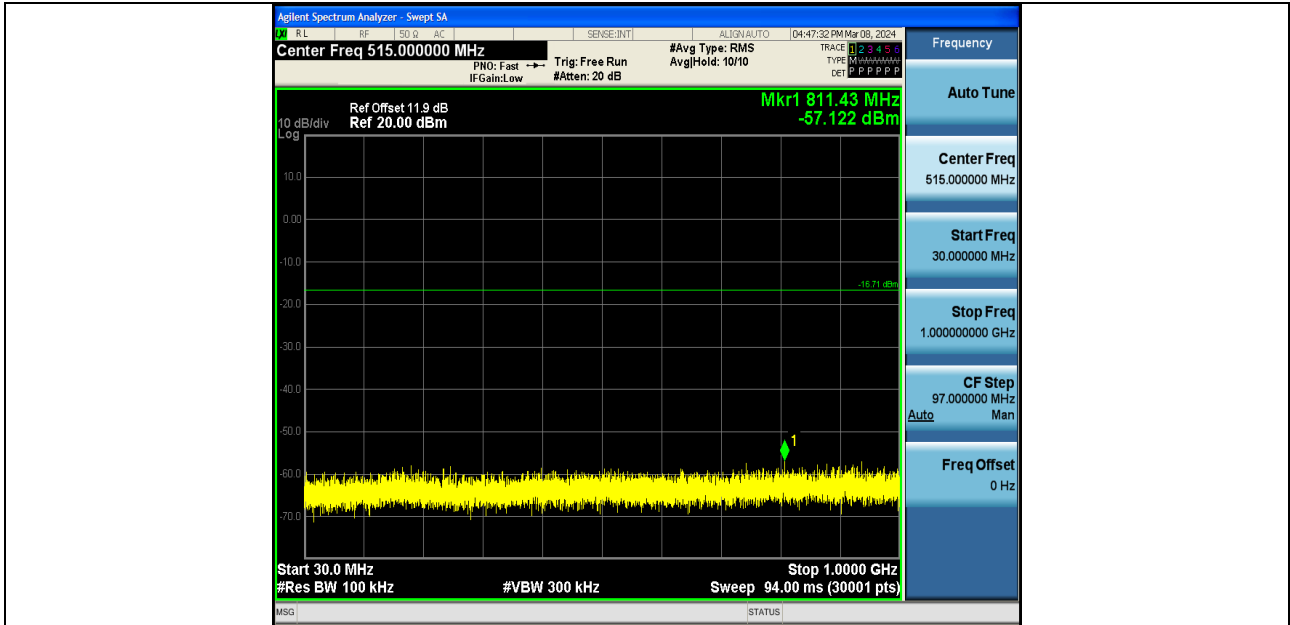



11B-Ant2-2412-30~1000-PASS

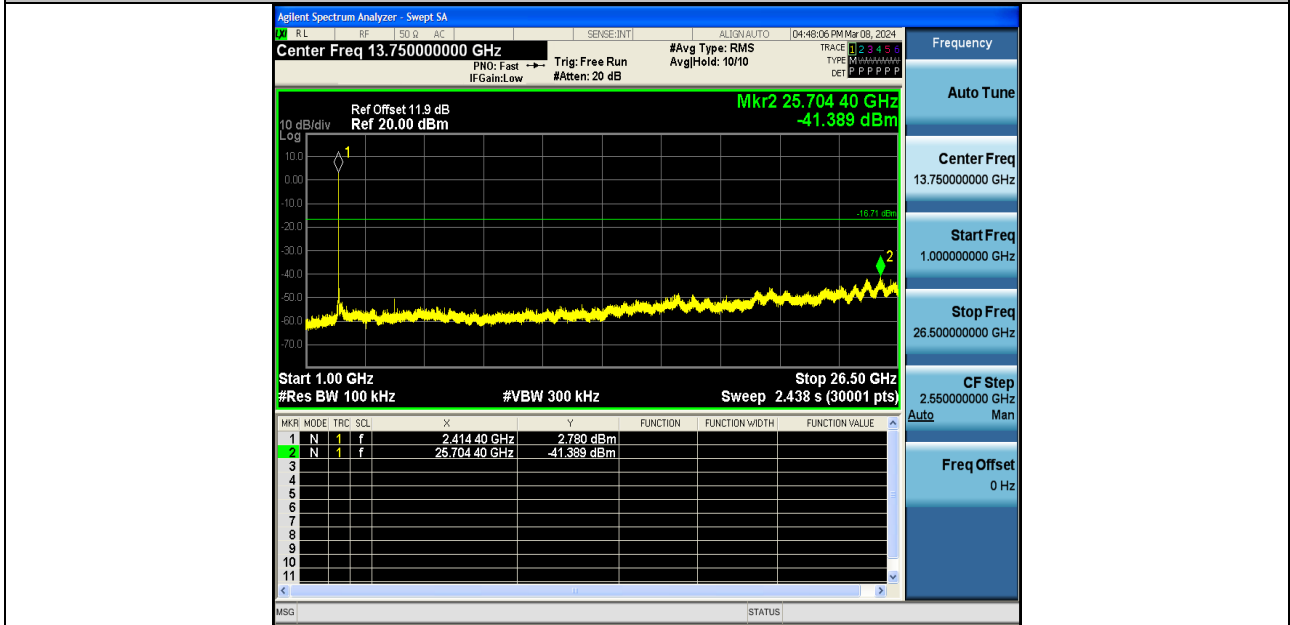


11B-Ant2-2412-1000~26500-PASS

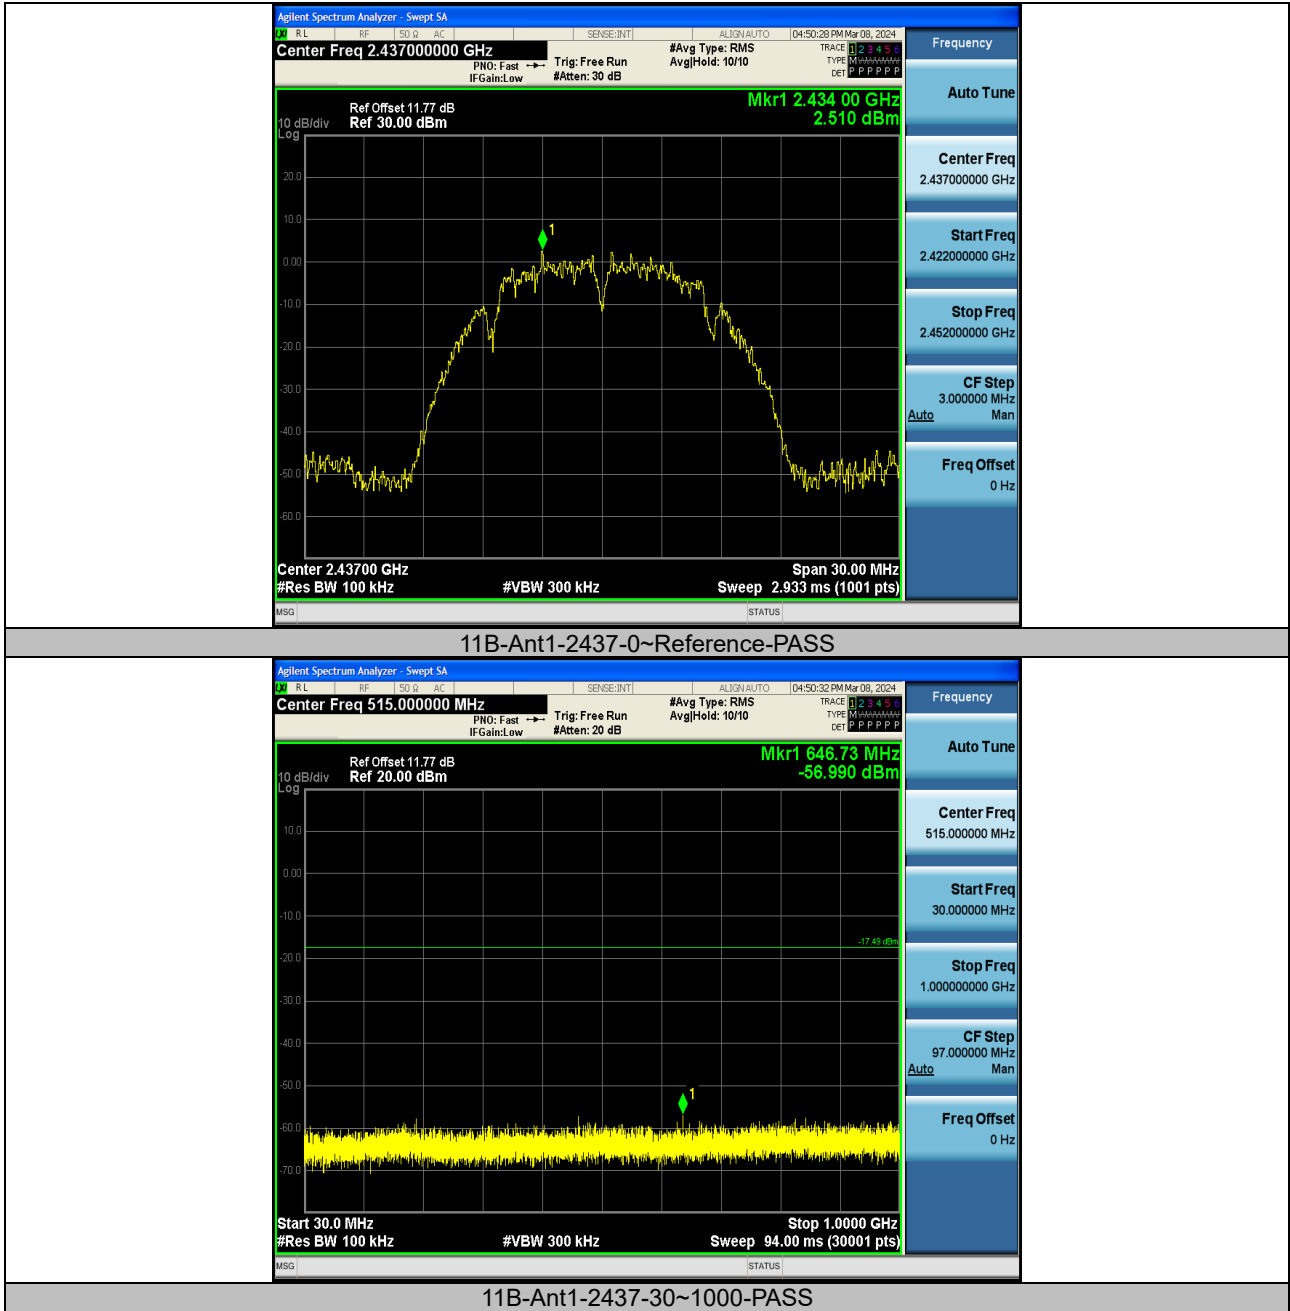

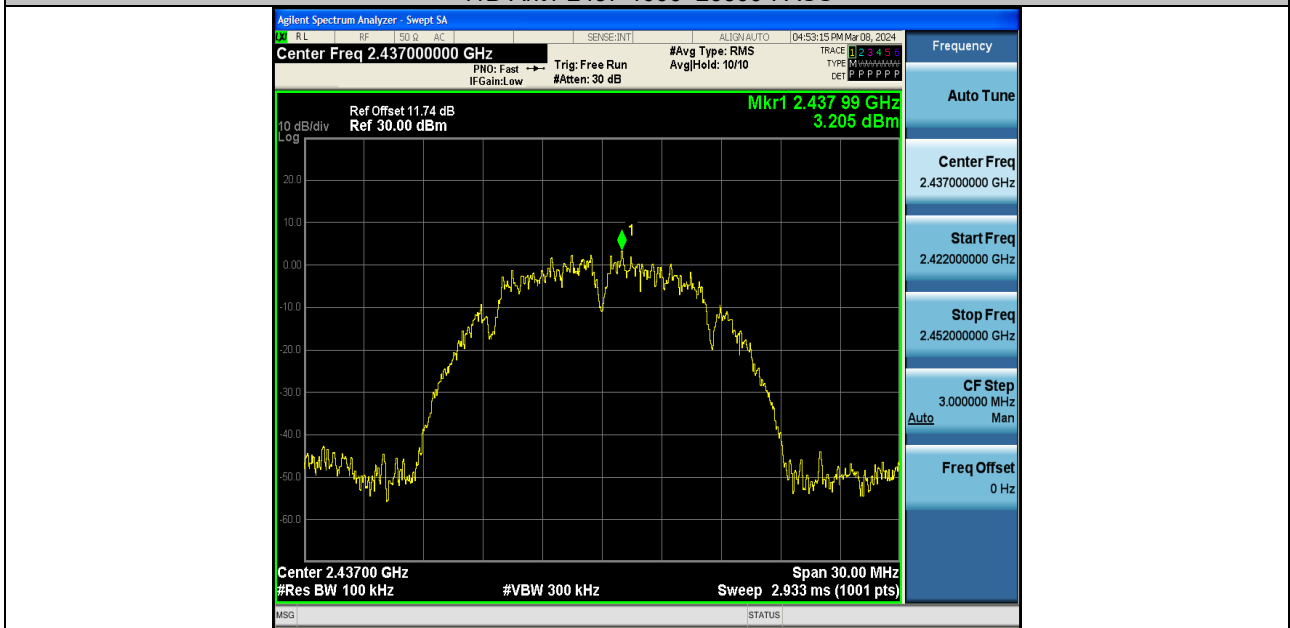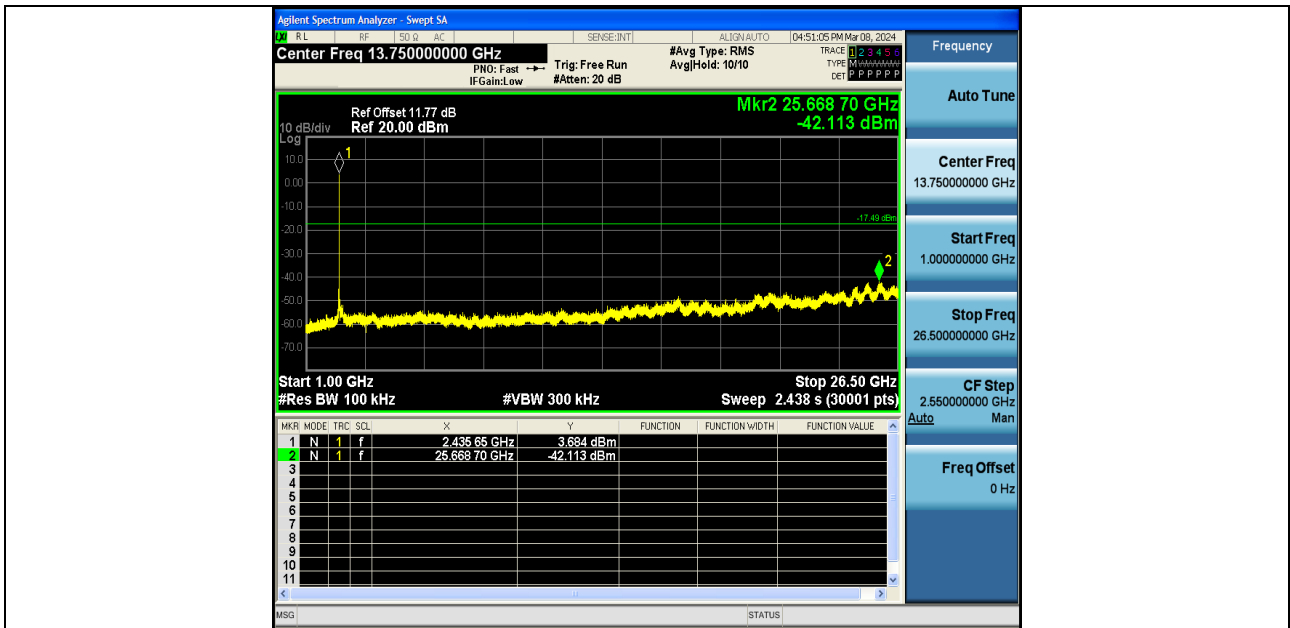


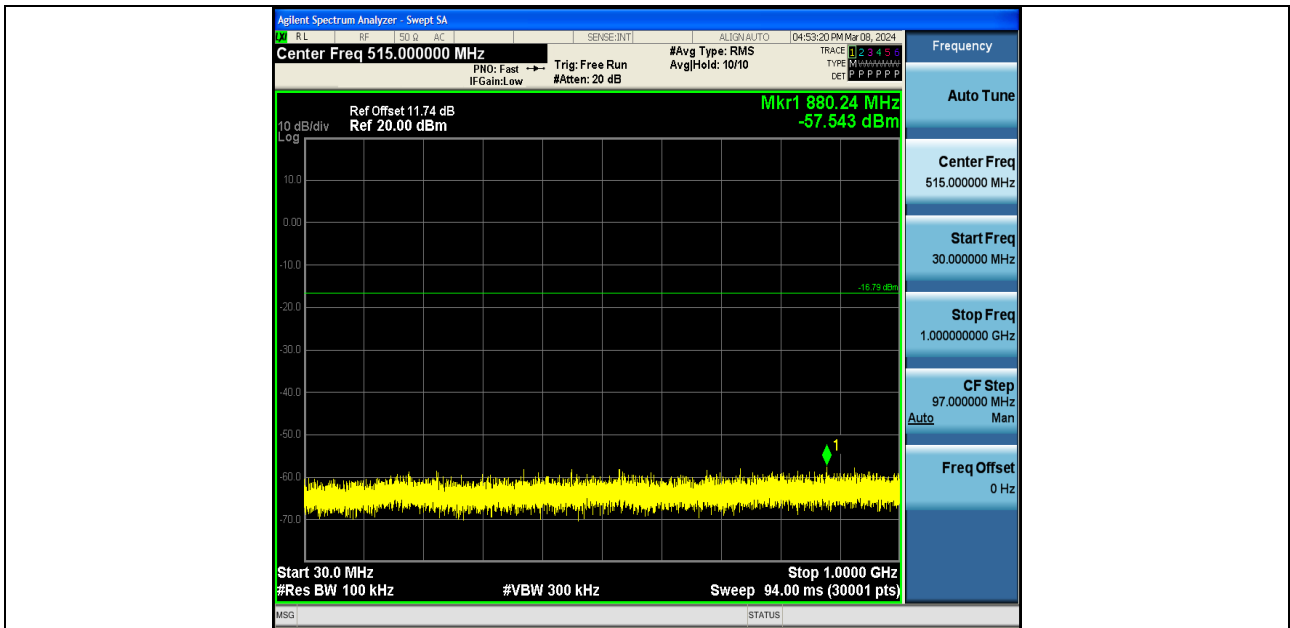


11B-Ant2-2437-30~1000-PASS

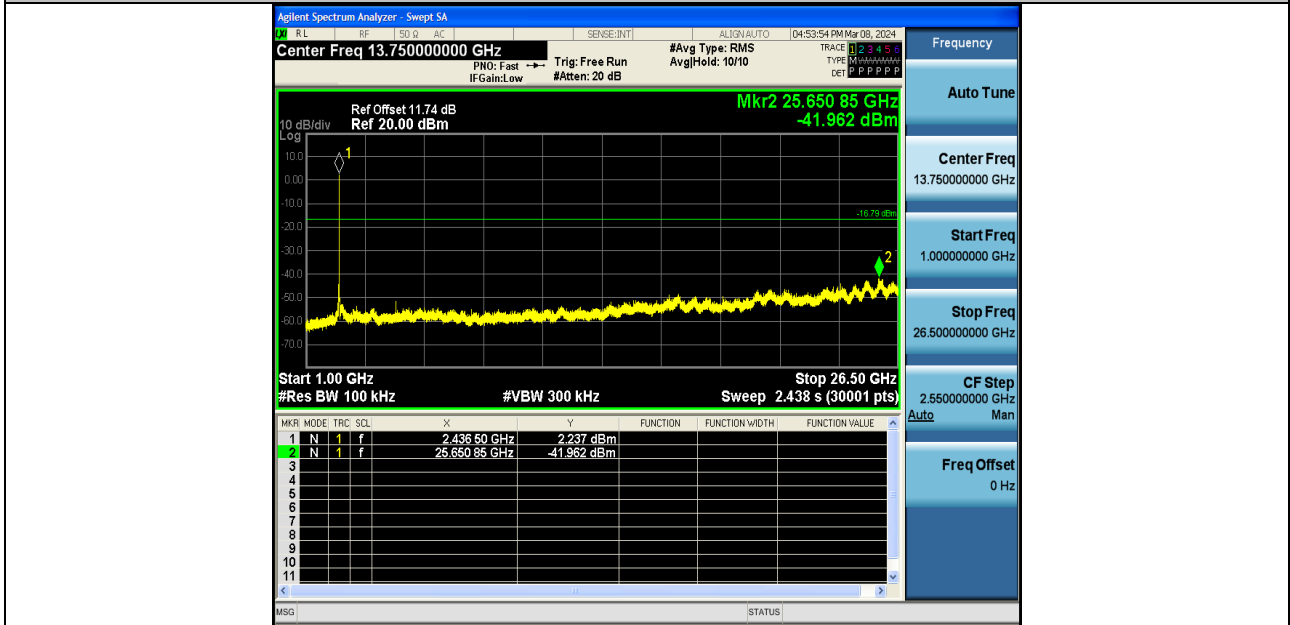

11B-Ant2-2437-1000~26500-PASS

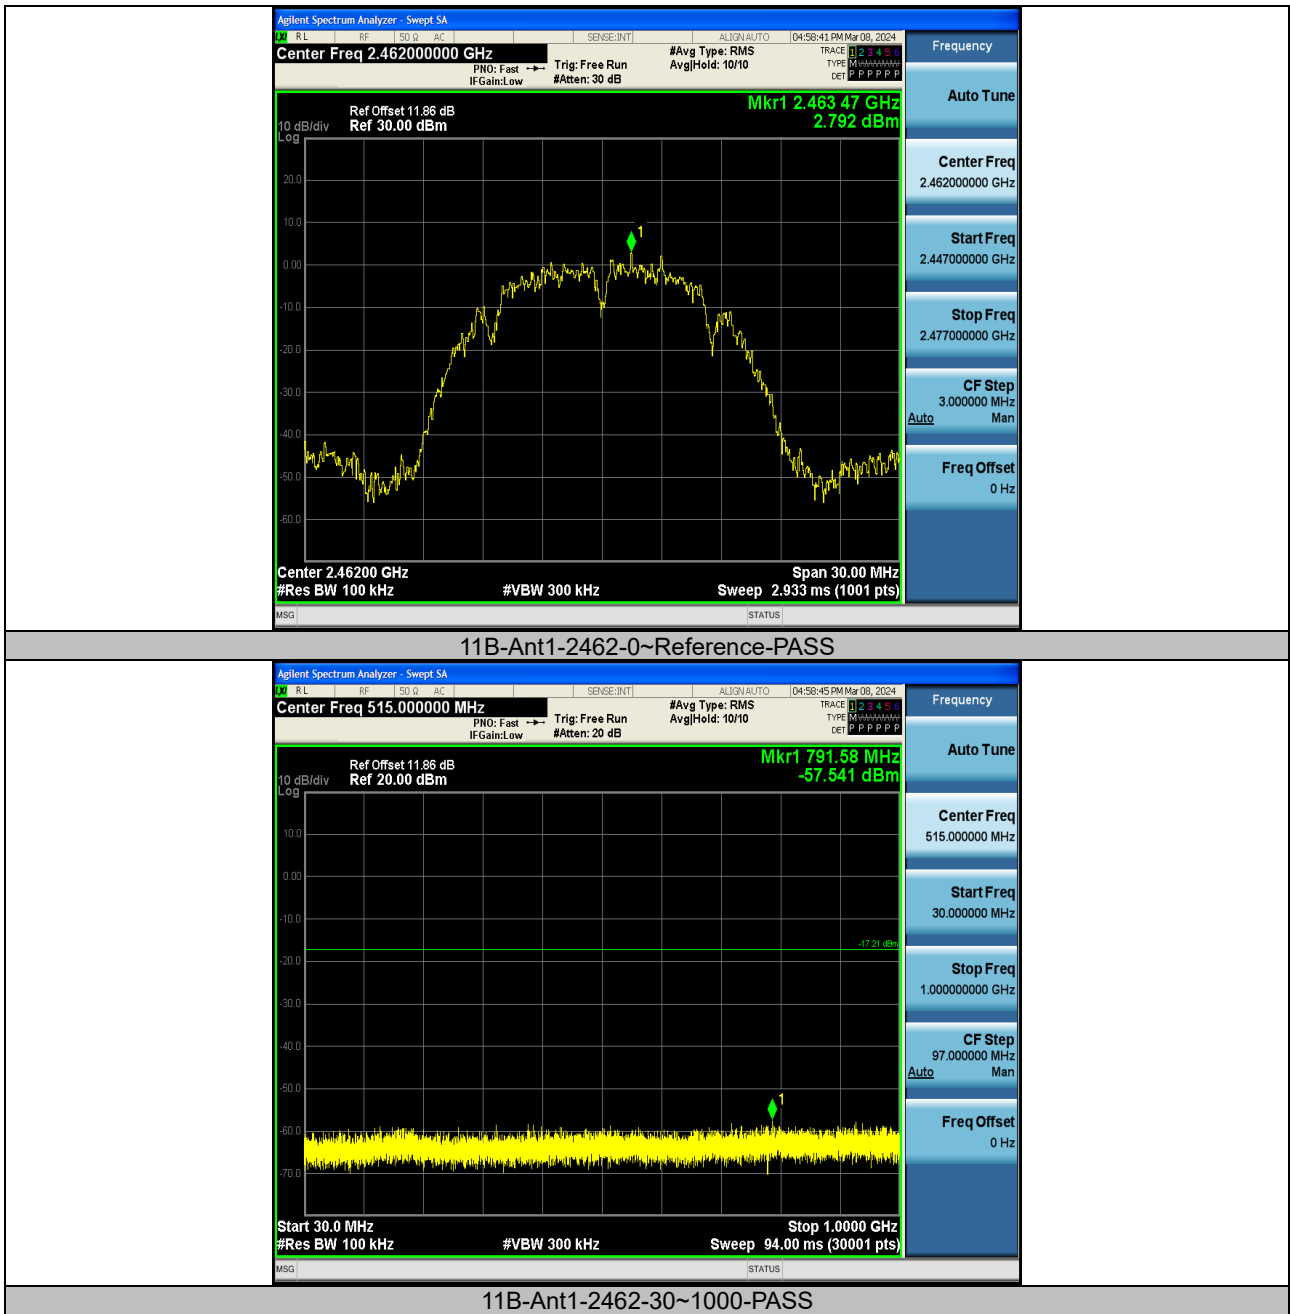


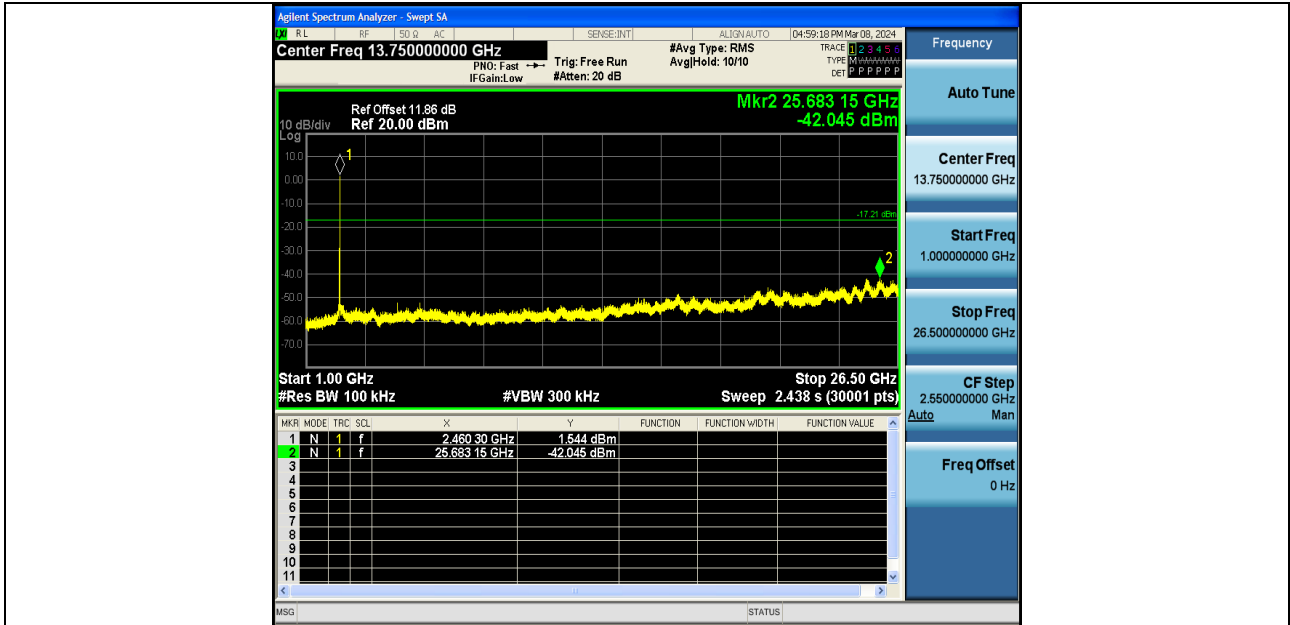


11B-Ant1-2462-1000~26500-PASS




11B-Ant2-2462-0~Reference-PASS

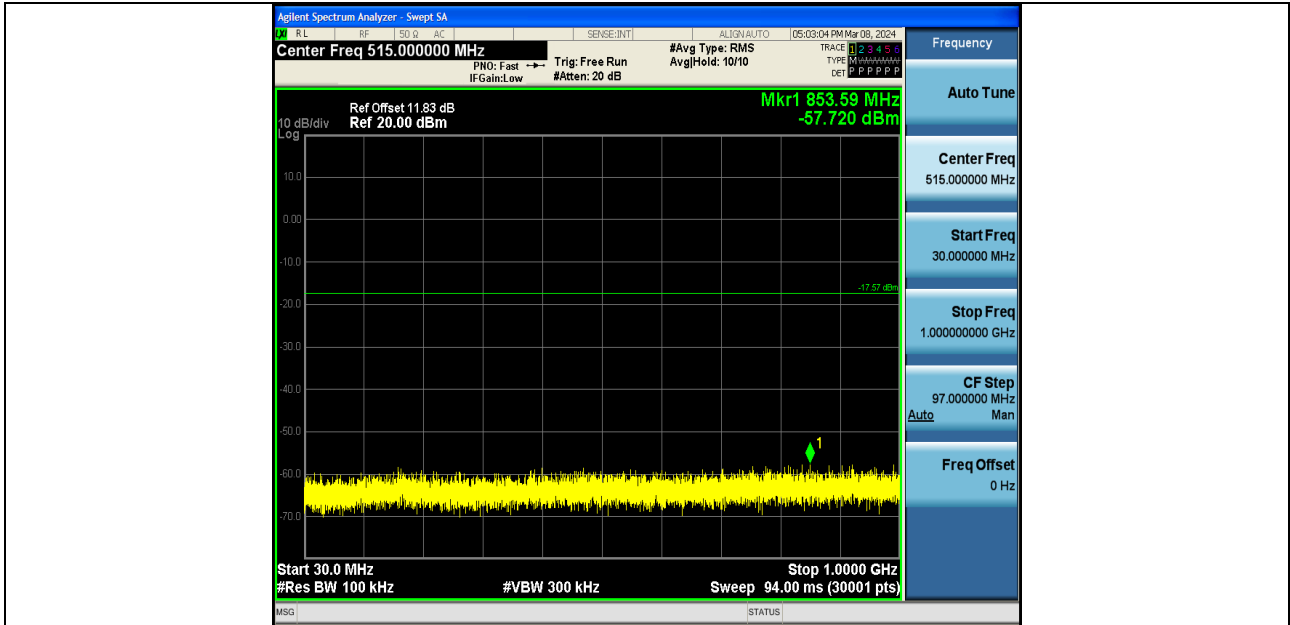


11B-Ant2-2462-30~1000-PASS

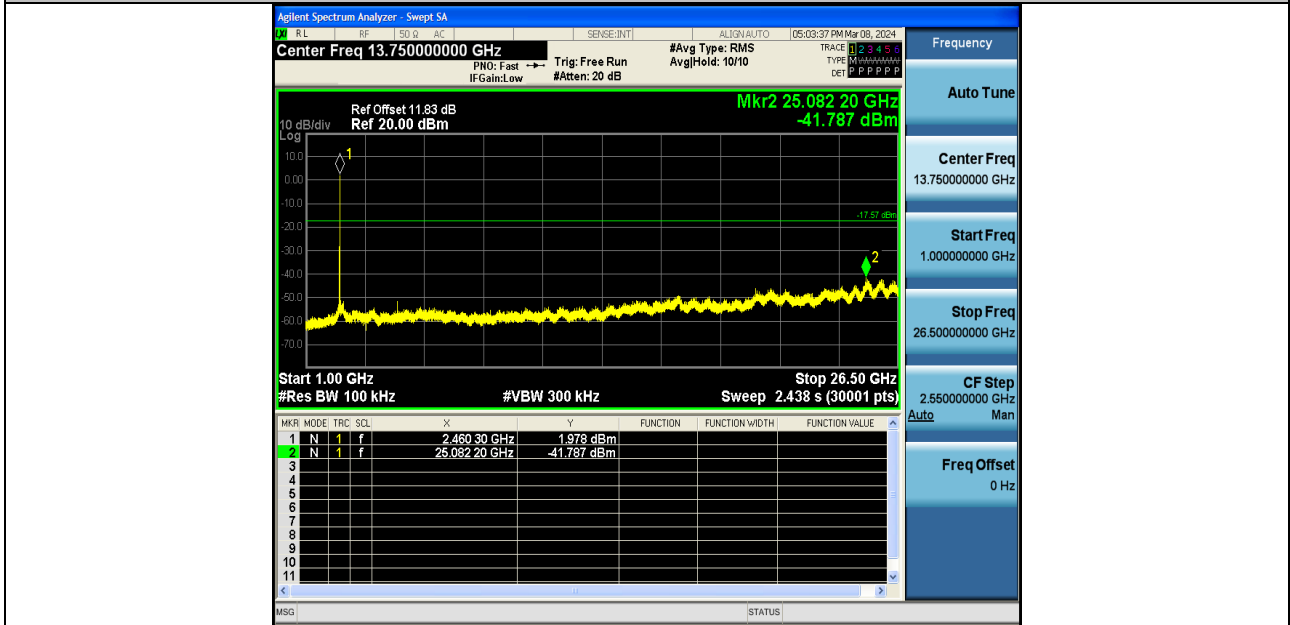


11B-Ant2-2462-1000~26500-PASS

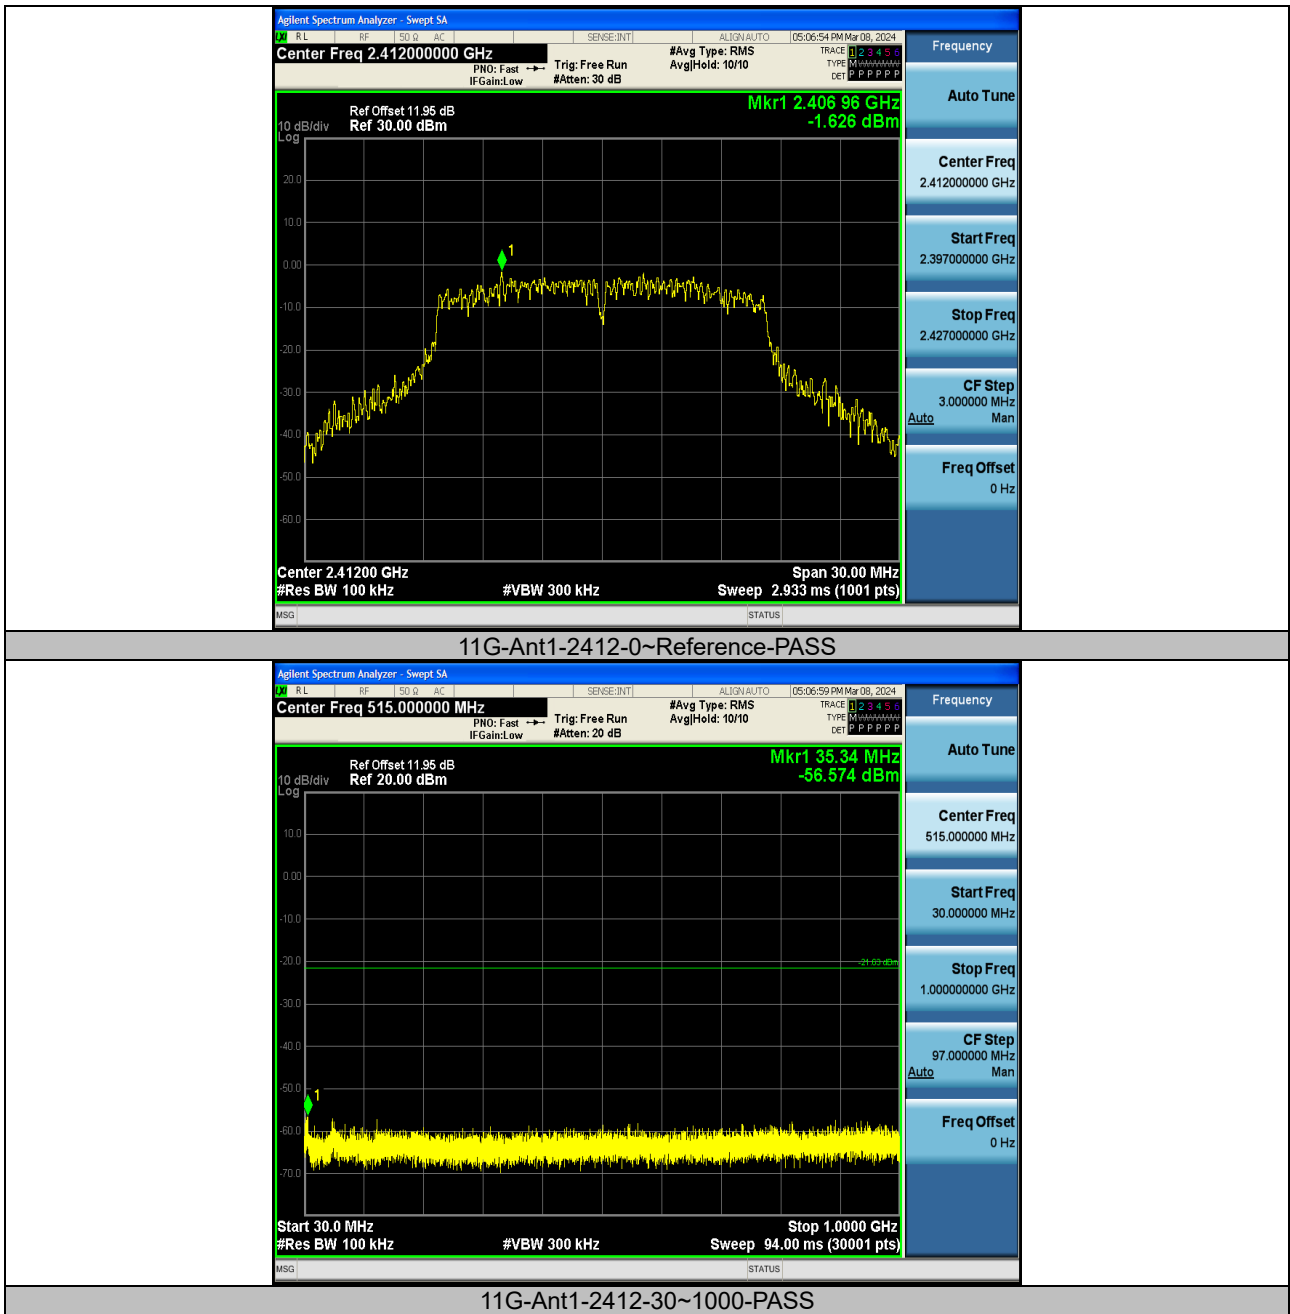


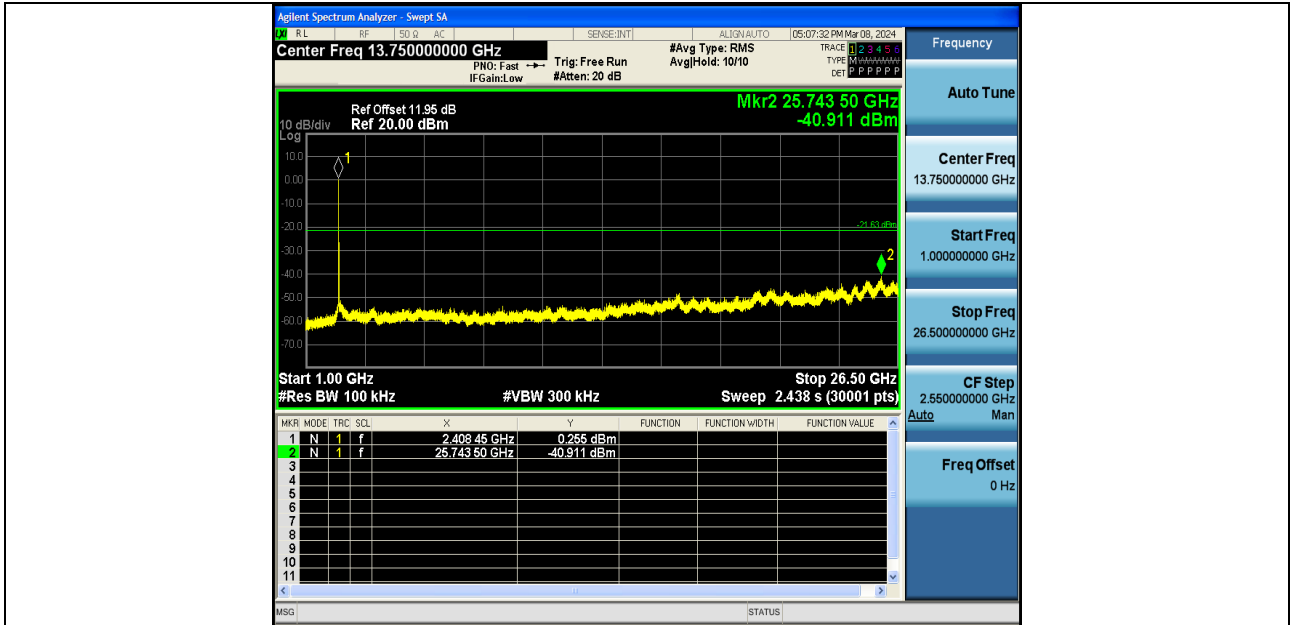


11G-Ant1-2412-1000~26500-PASS

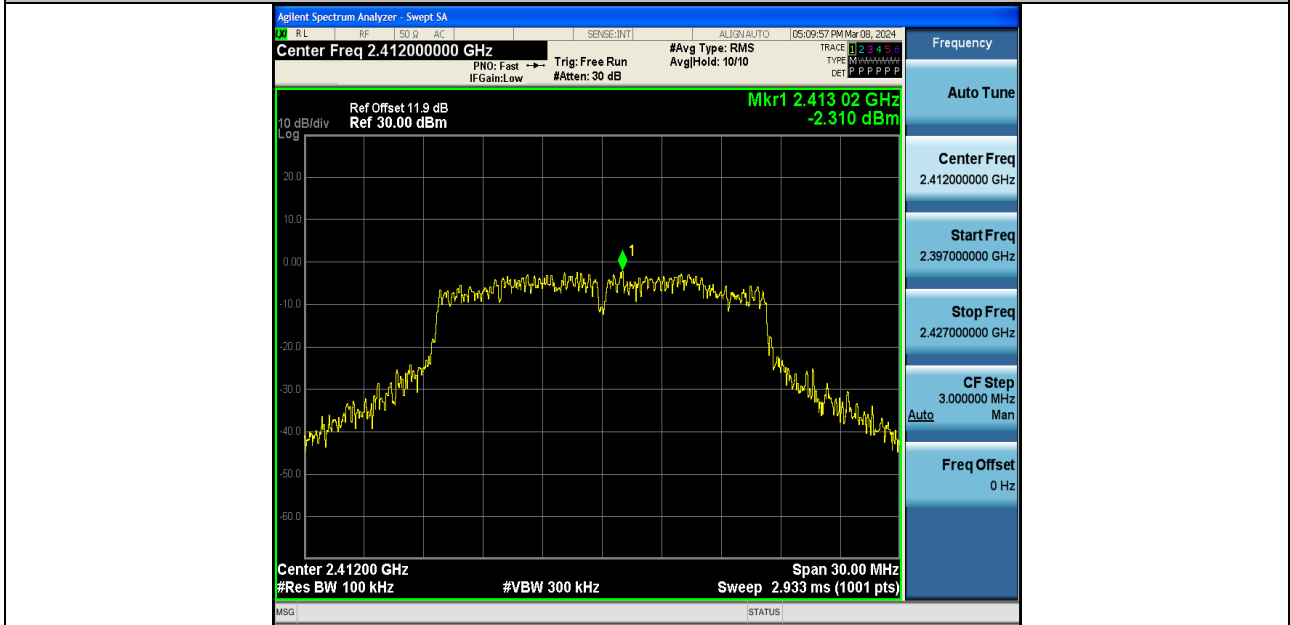


11G-Ant2-2412-0~Reference-PASS

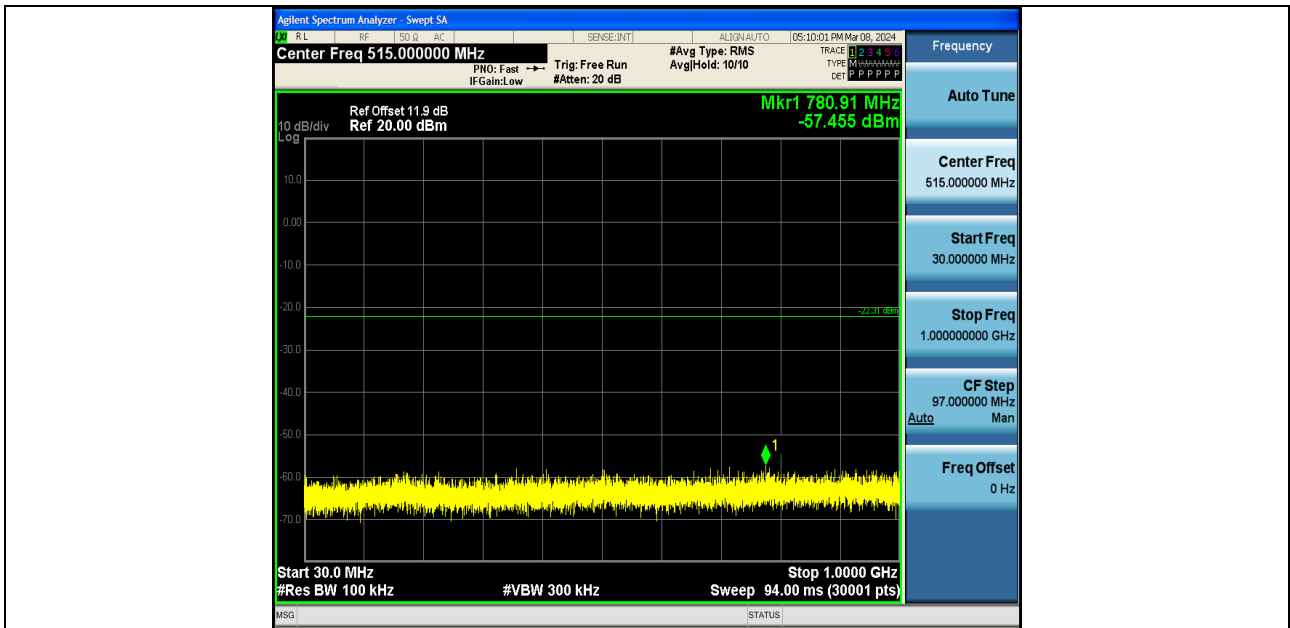


11G-Ant2-2412-30~1000-PASS

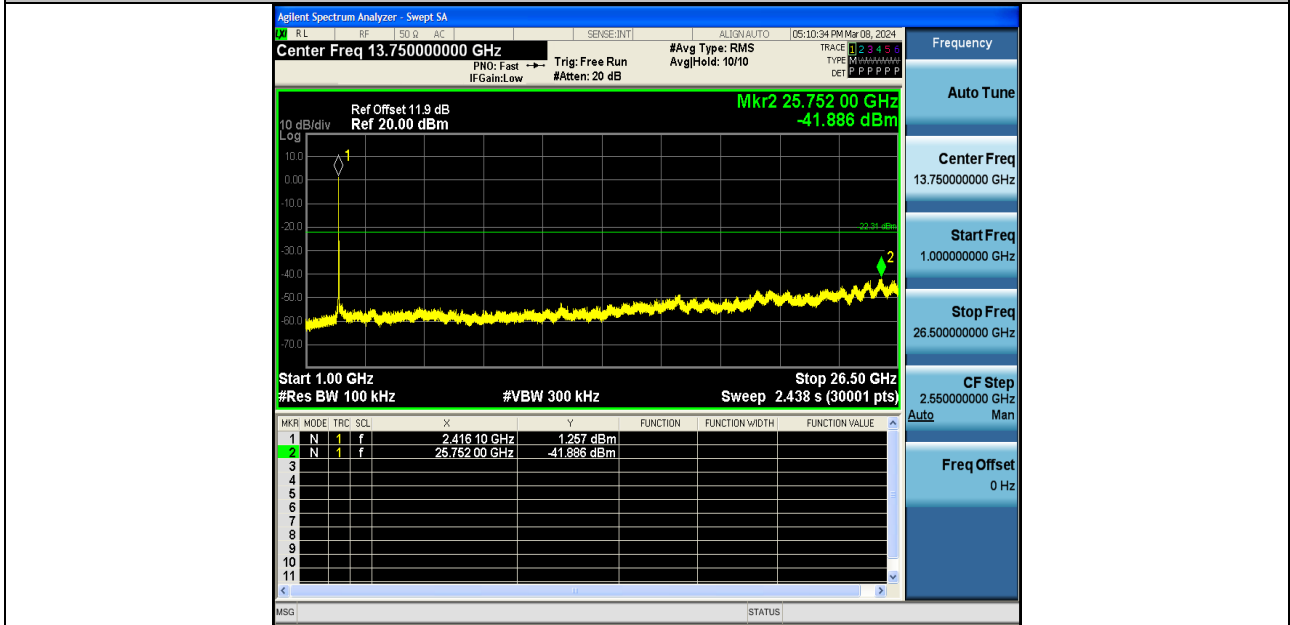


11G-Ant2-2412-1000~26500-PASS

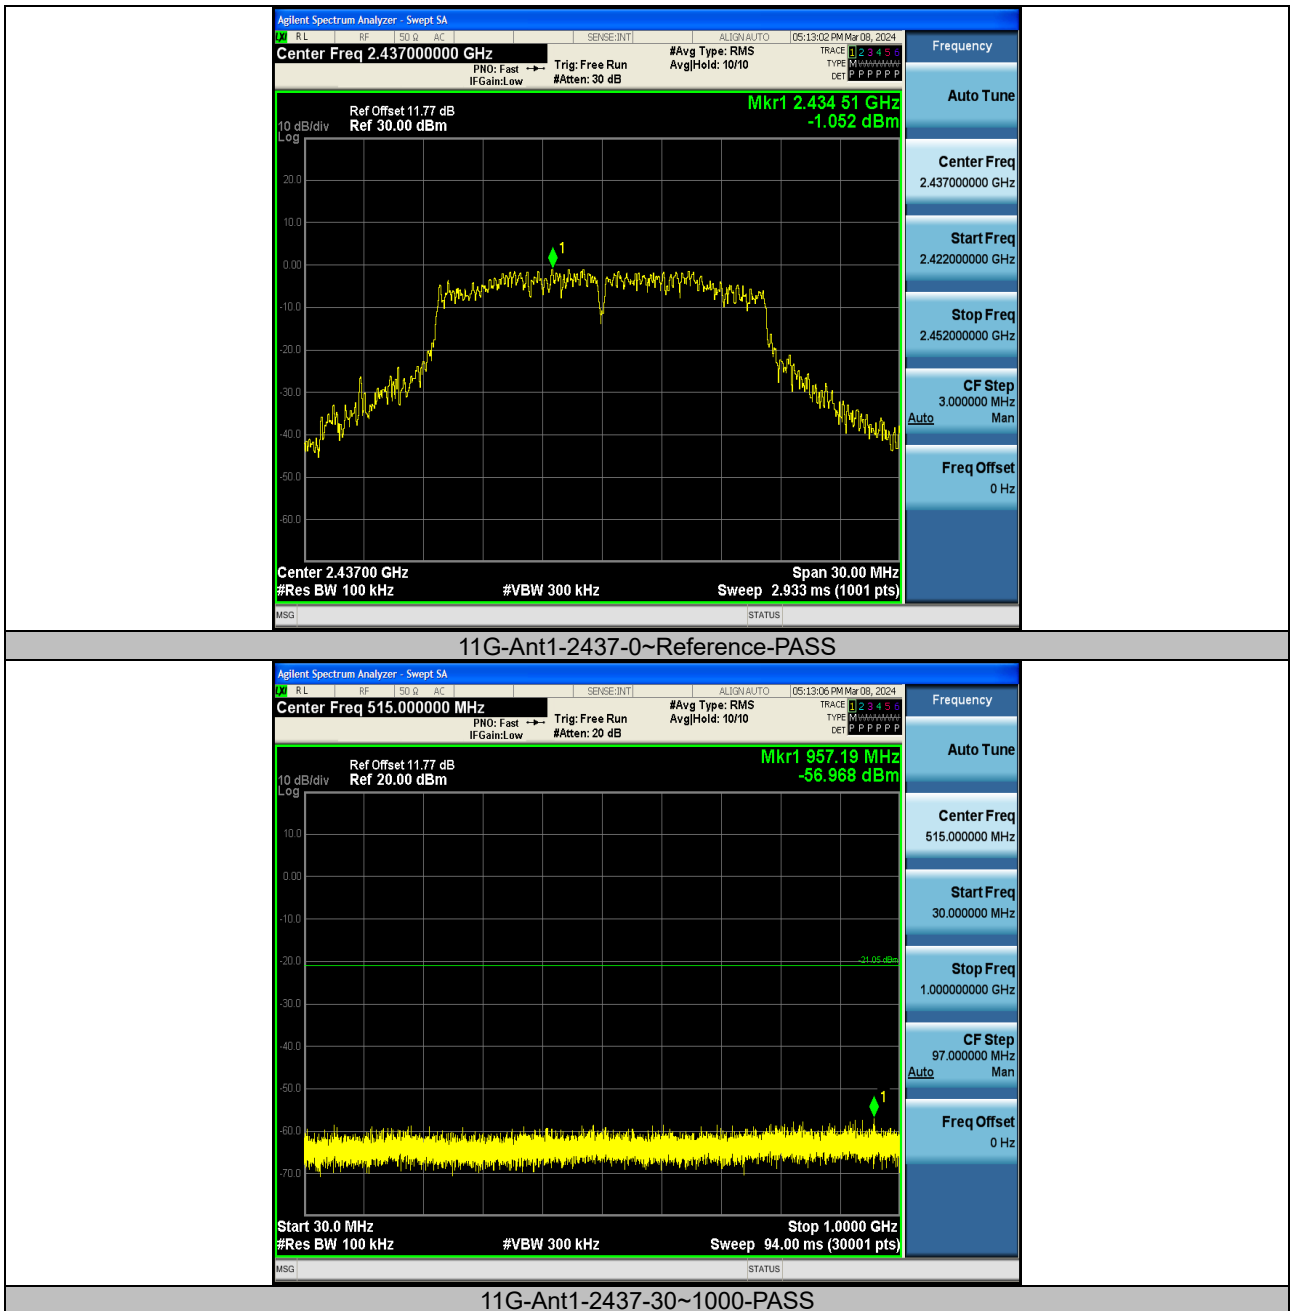


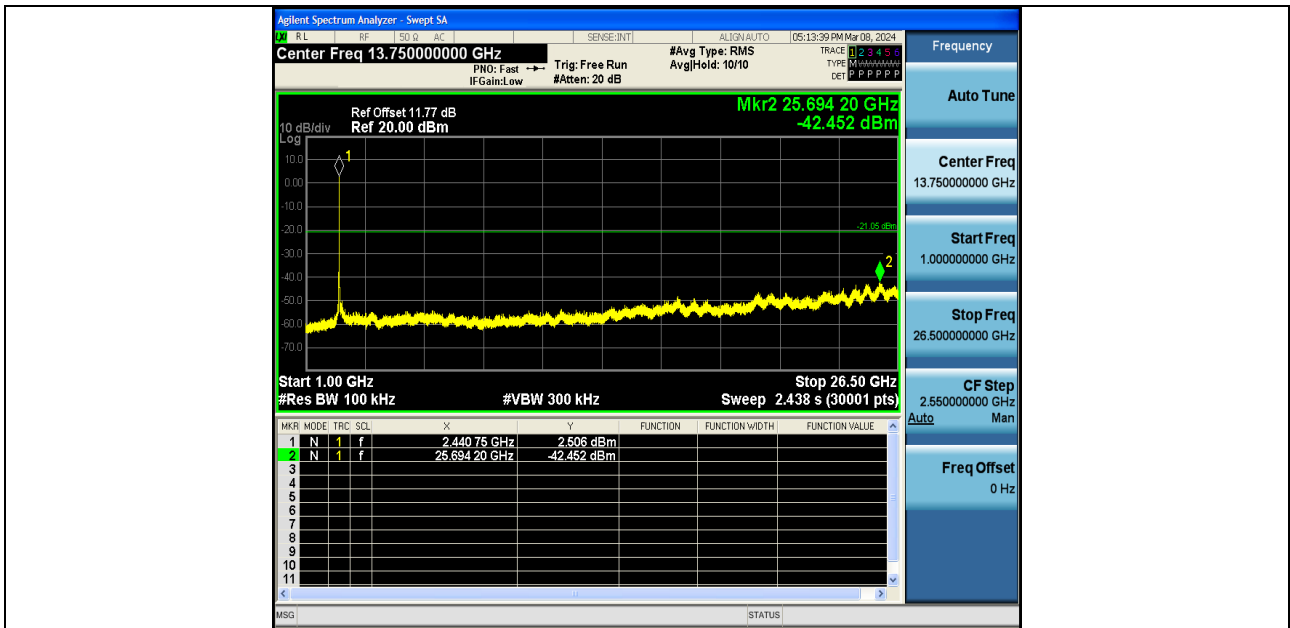


11G-Ant1-2437-1000~26500-PASS

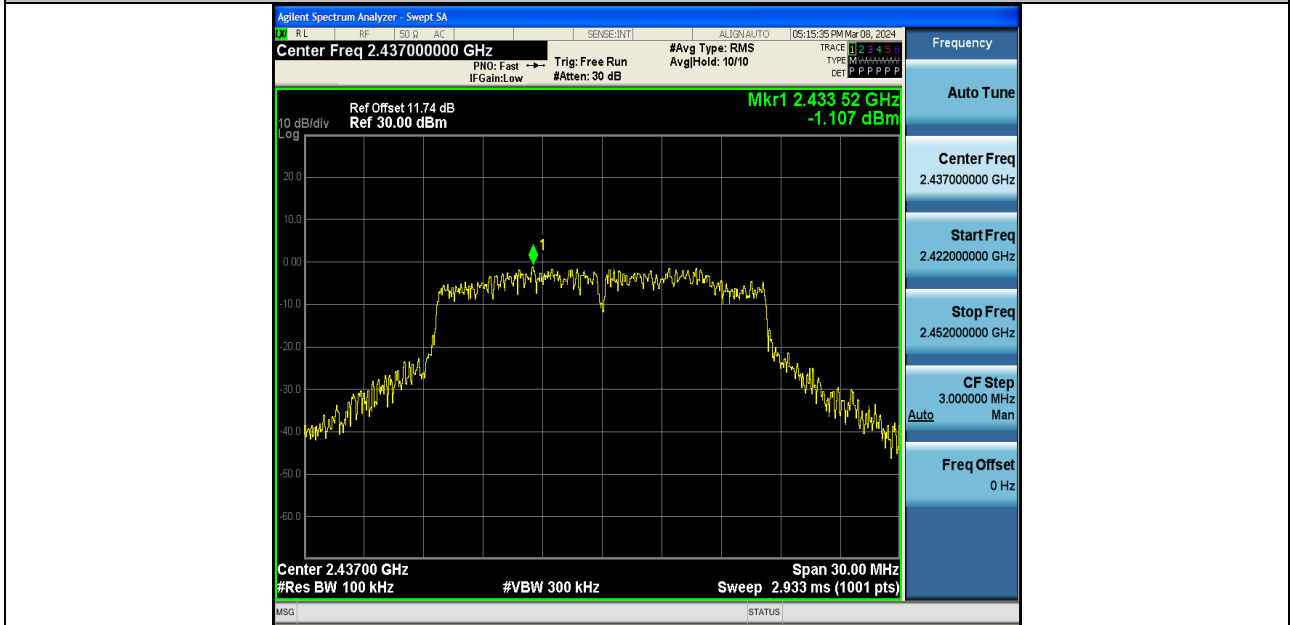


11G-Ant2-2437-0~Reference-PASS

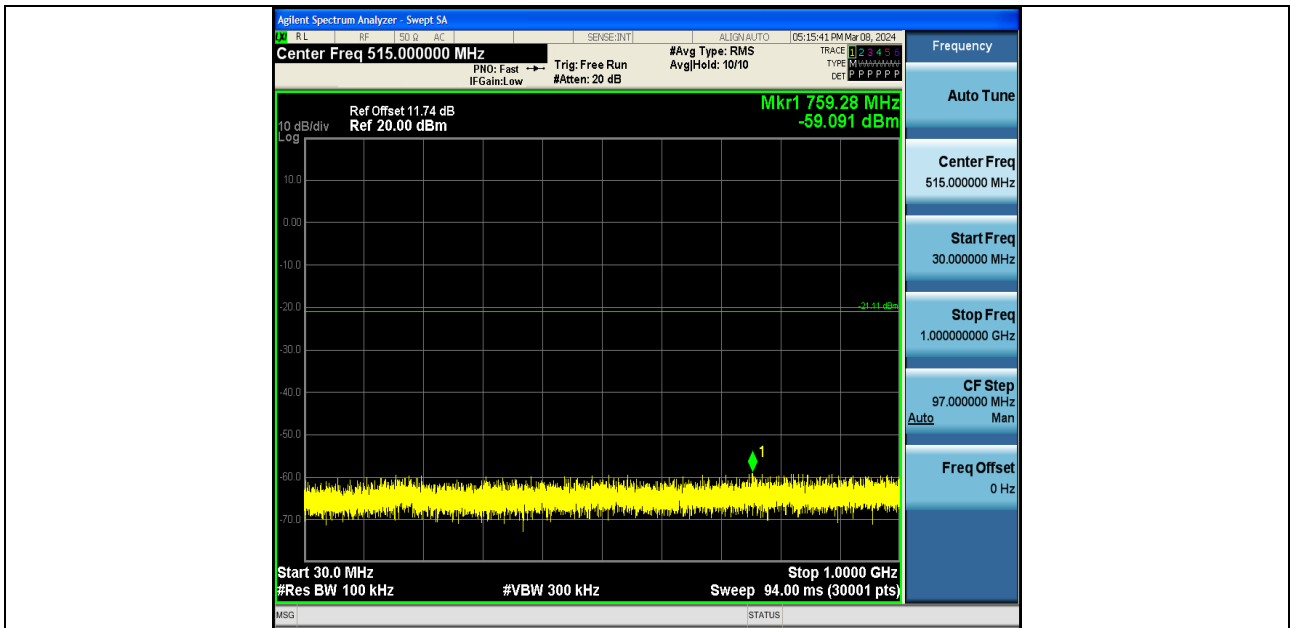


11G-Ant2-2437-30~1000-PASS

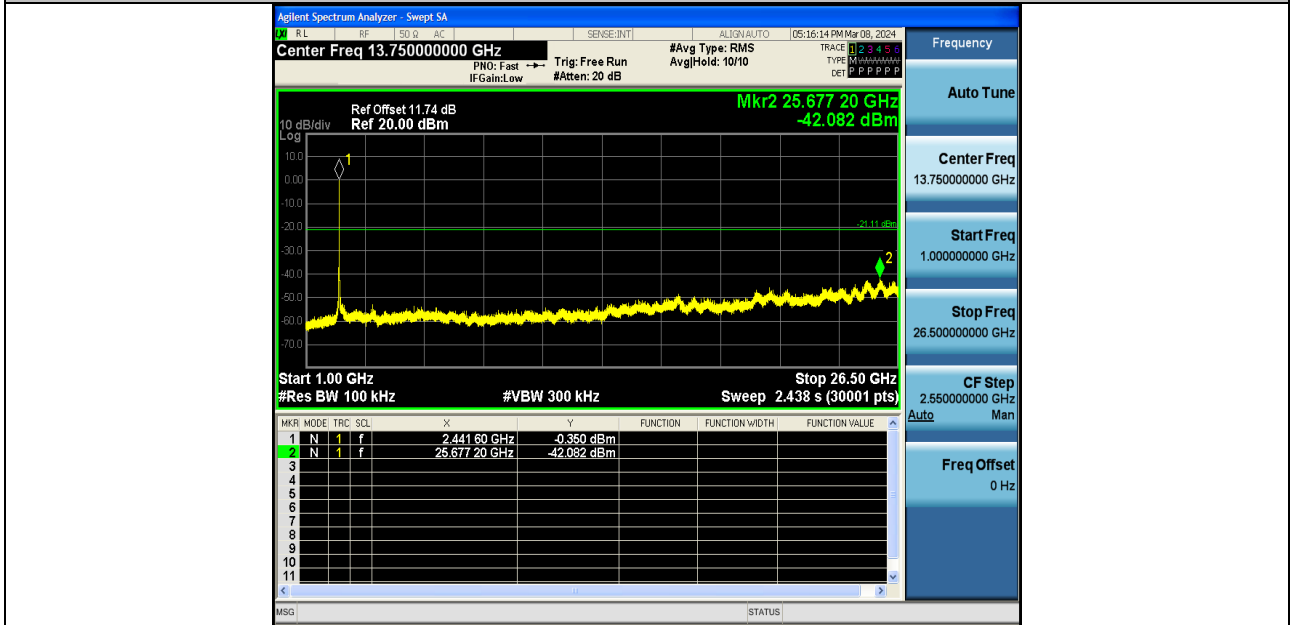

11G-Ant2-2437-1000~26500-PASS

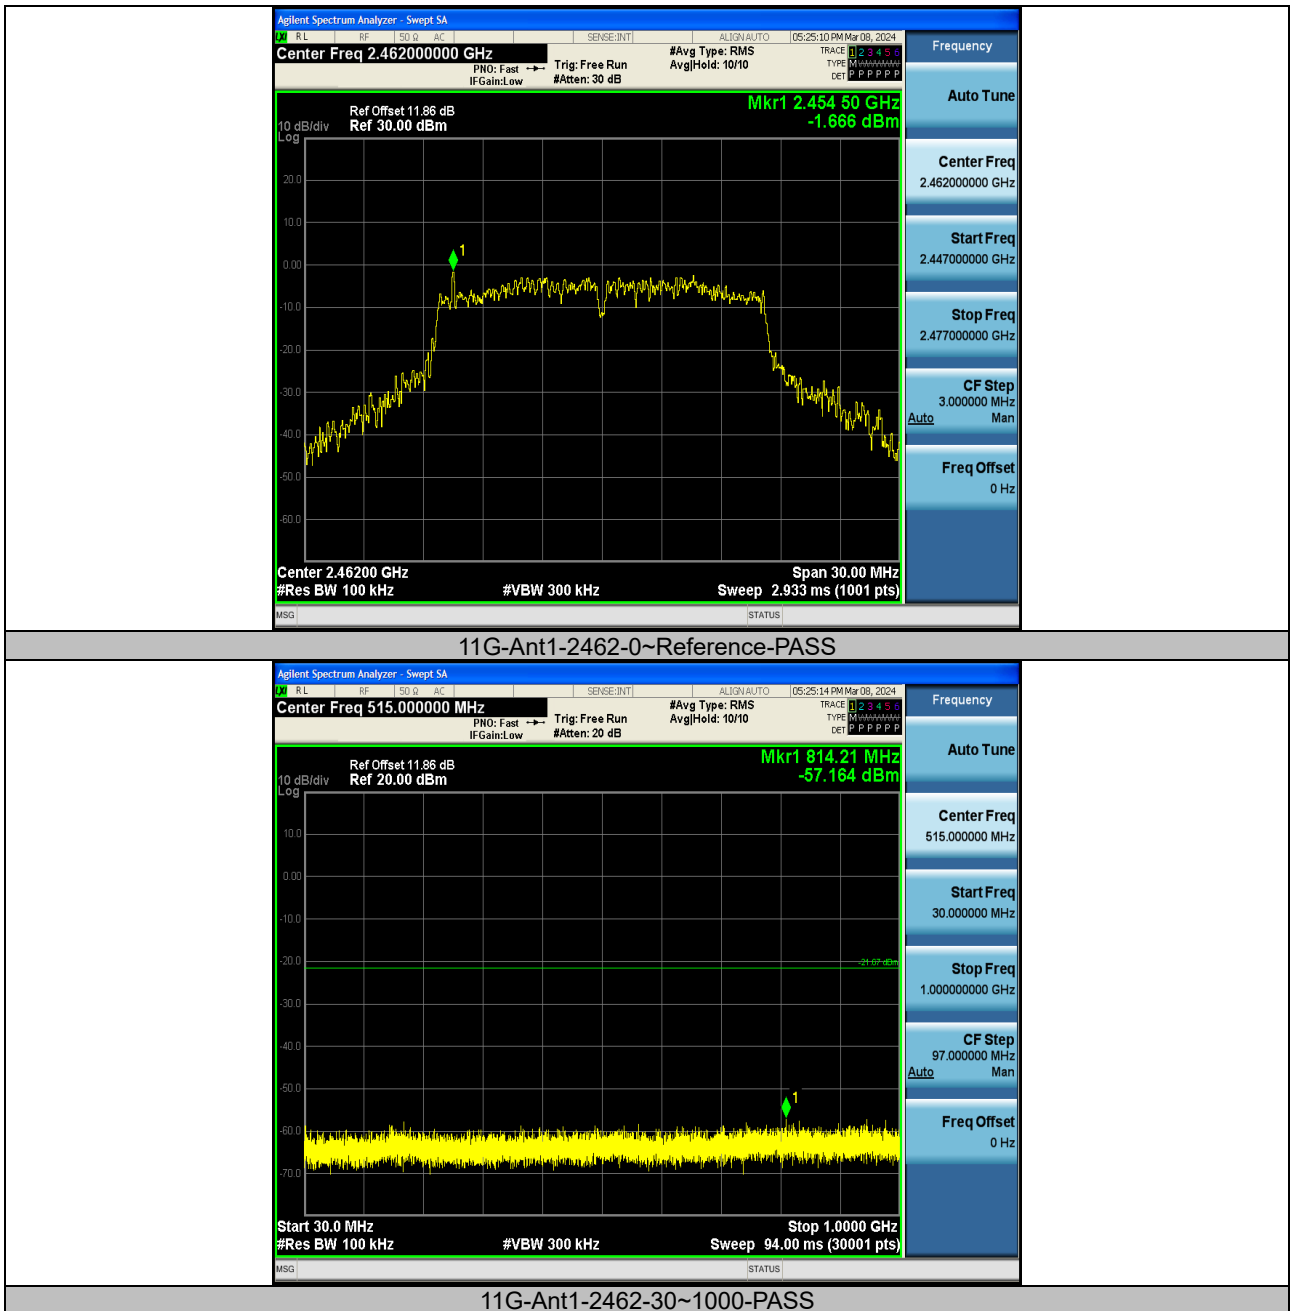


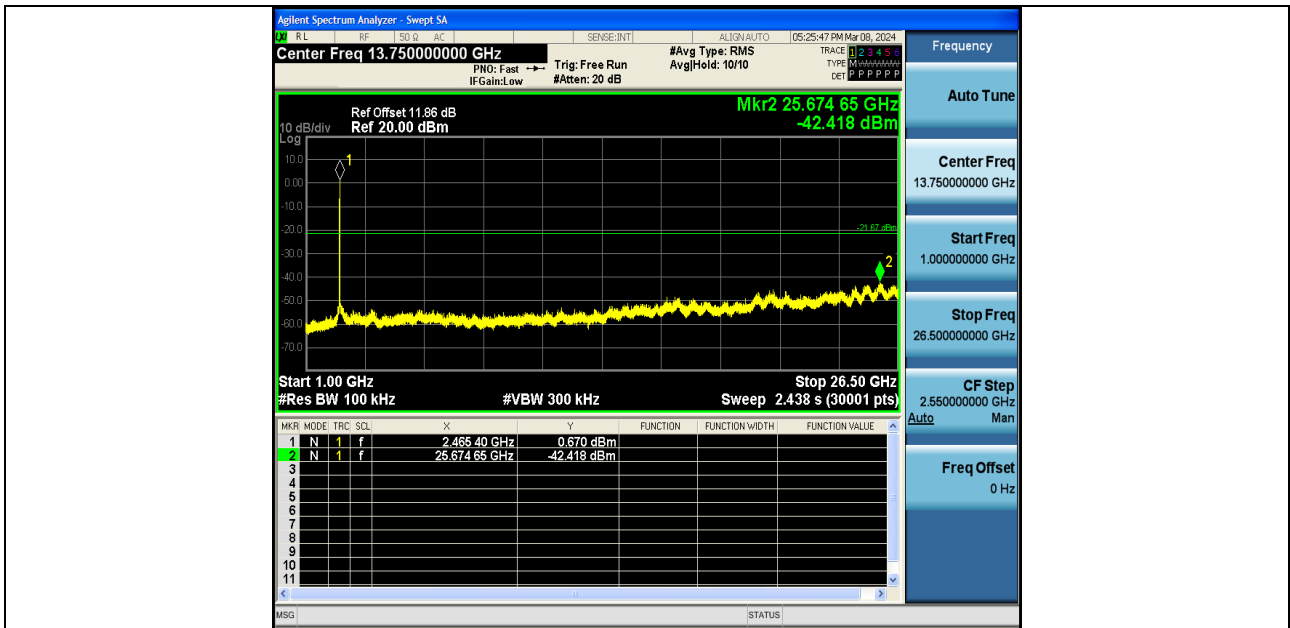


11G-Ant1-2462-1000~26500-PASS




11G-Ant2-2462-0~Reference-PASS

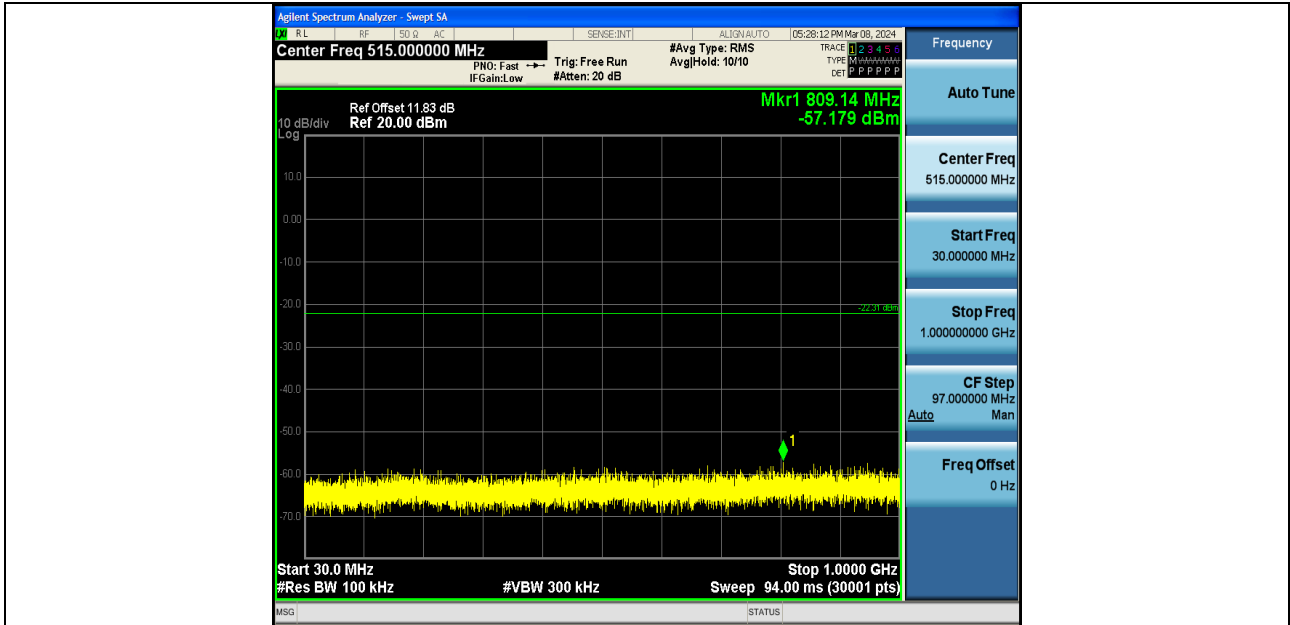


11G-Ant2-2462-30~1000-PASS

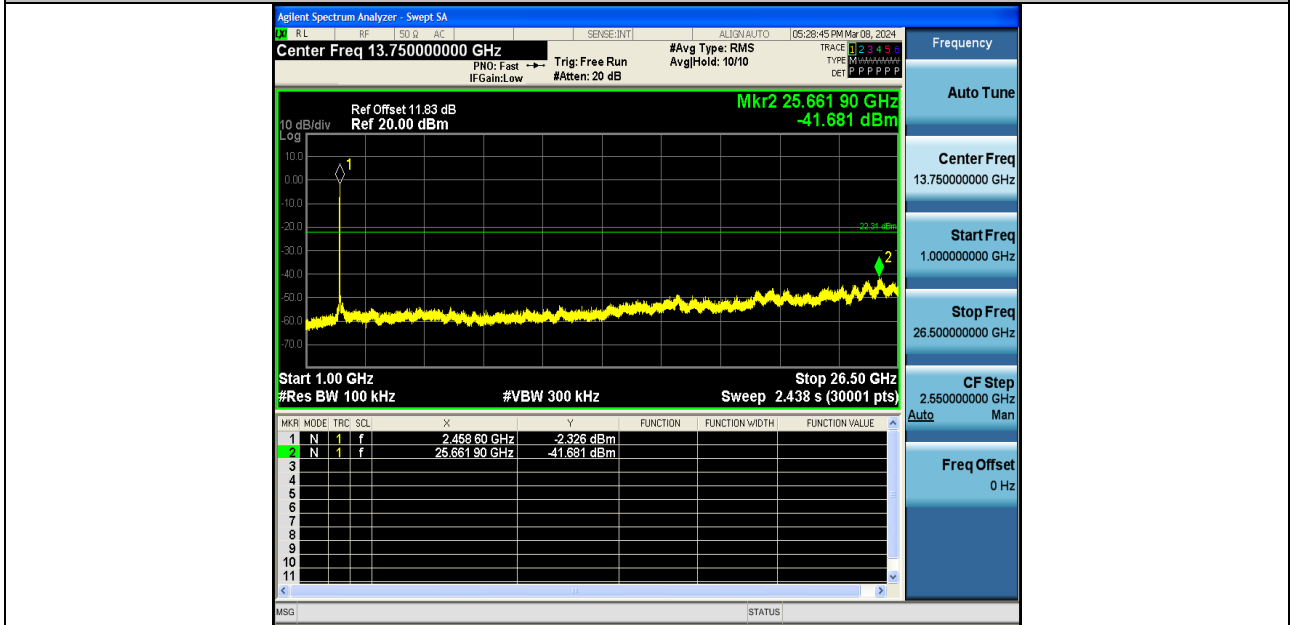


11G-Ant2-2462-1000~26500-PASS

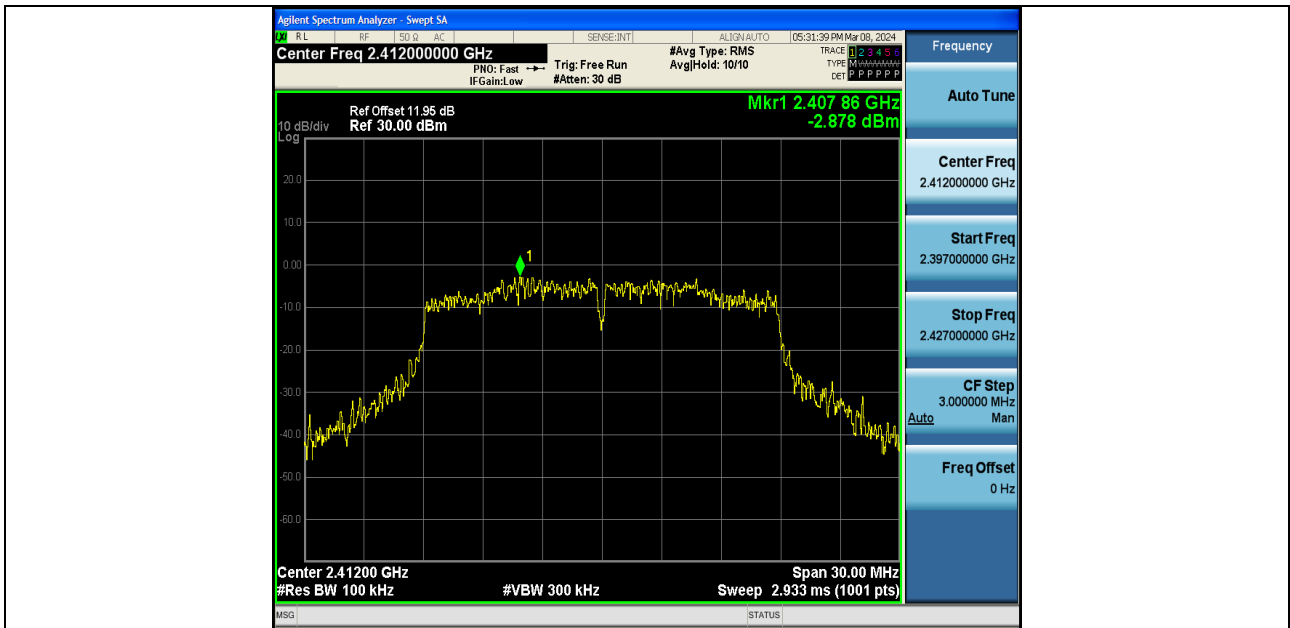


11N20SISO-Ant1-2412-0~Reference-PASS

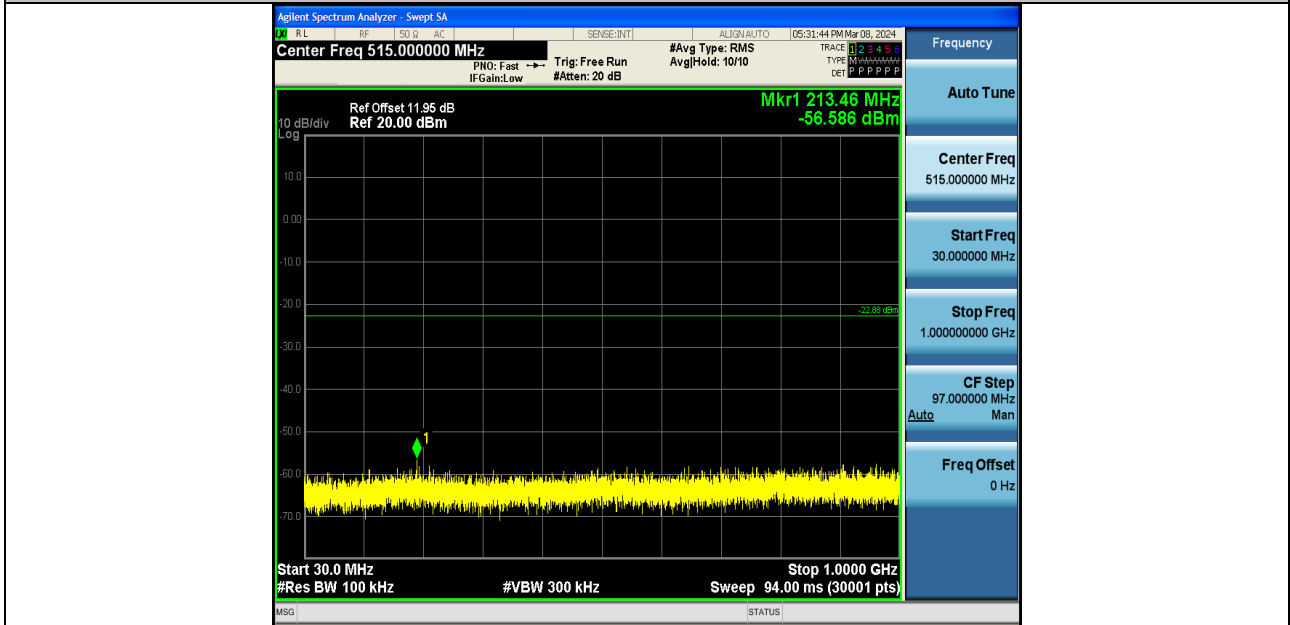


11N20SISO-Ant1-2412-30~1000-PASS

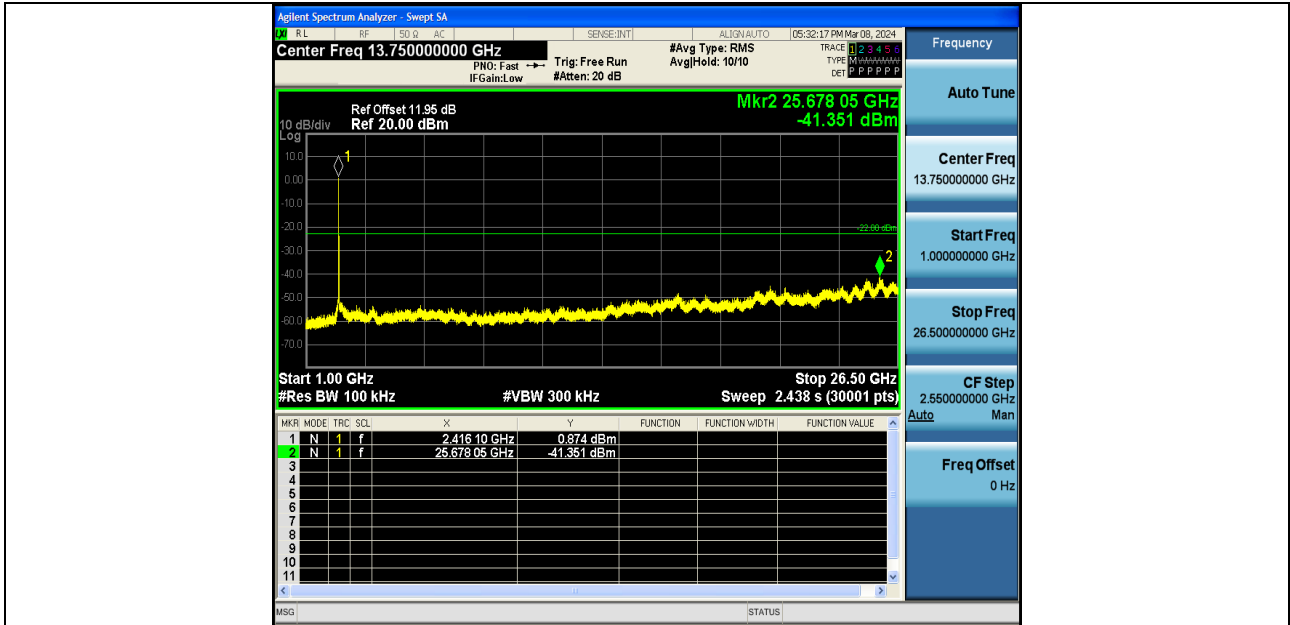


11N20SISO-Ant1-2412-1000~26500-PASS

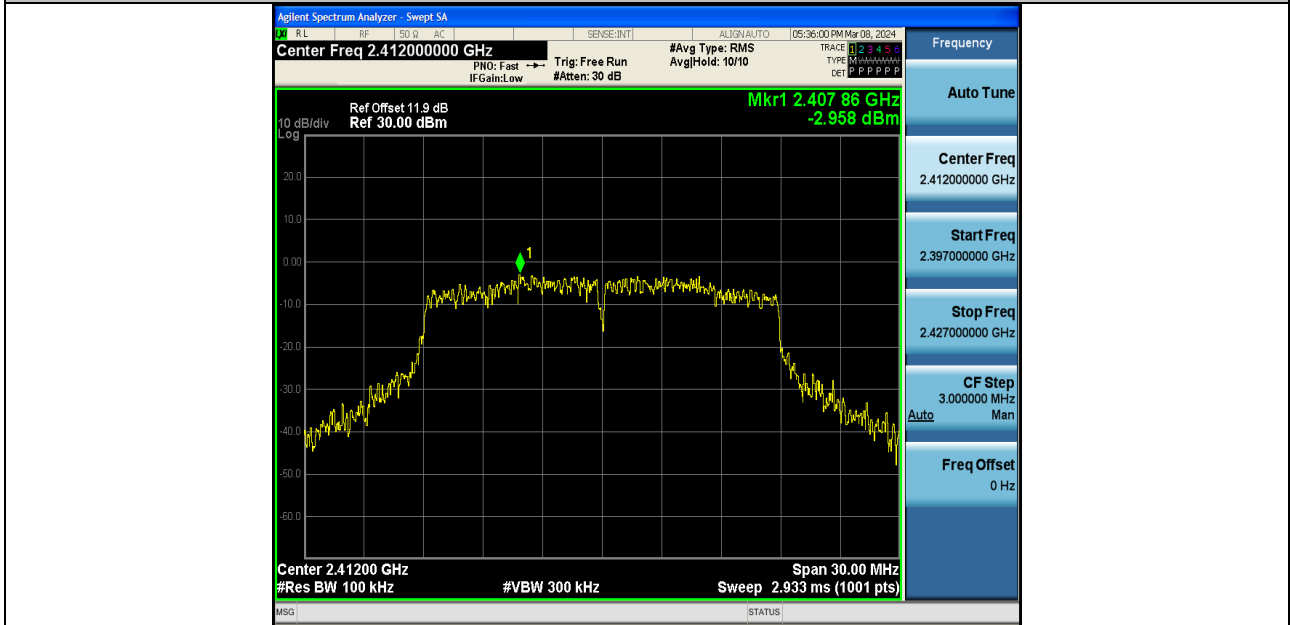


11N20SISO-Ant2-2412-0~Reference-PASS


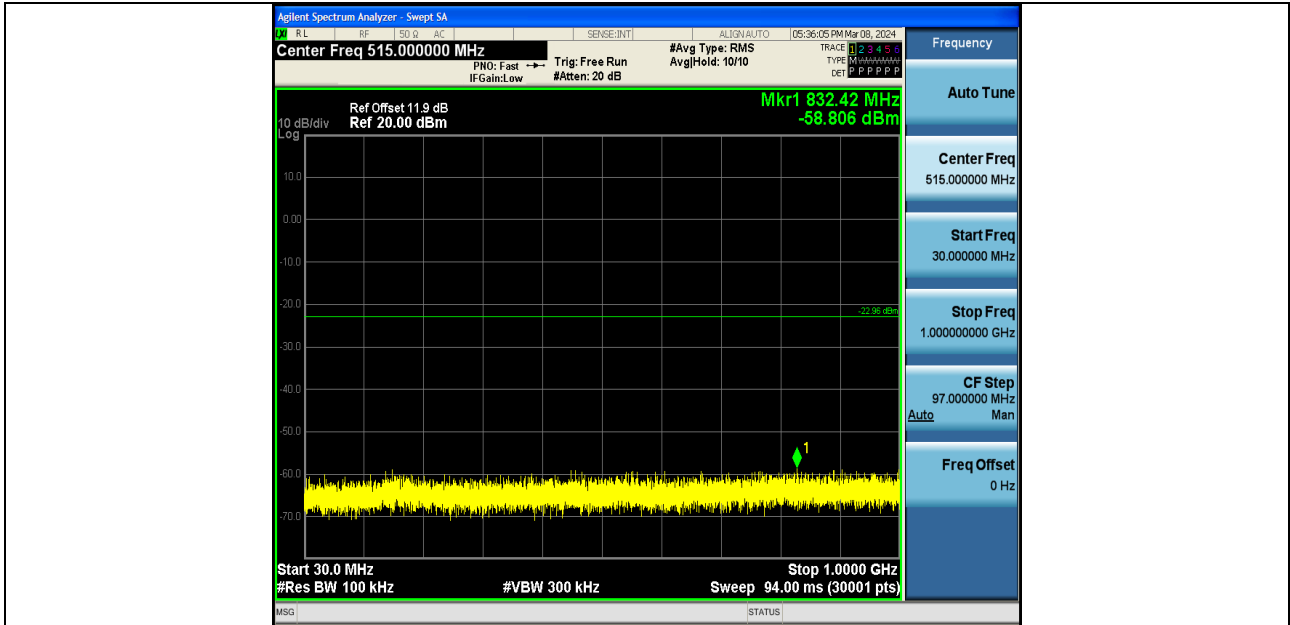



11N20SISO-Ant2-2412-30~1000-PASS

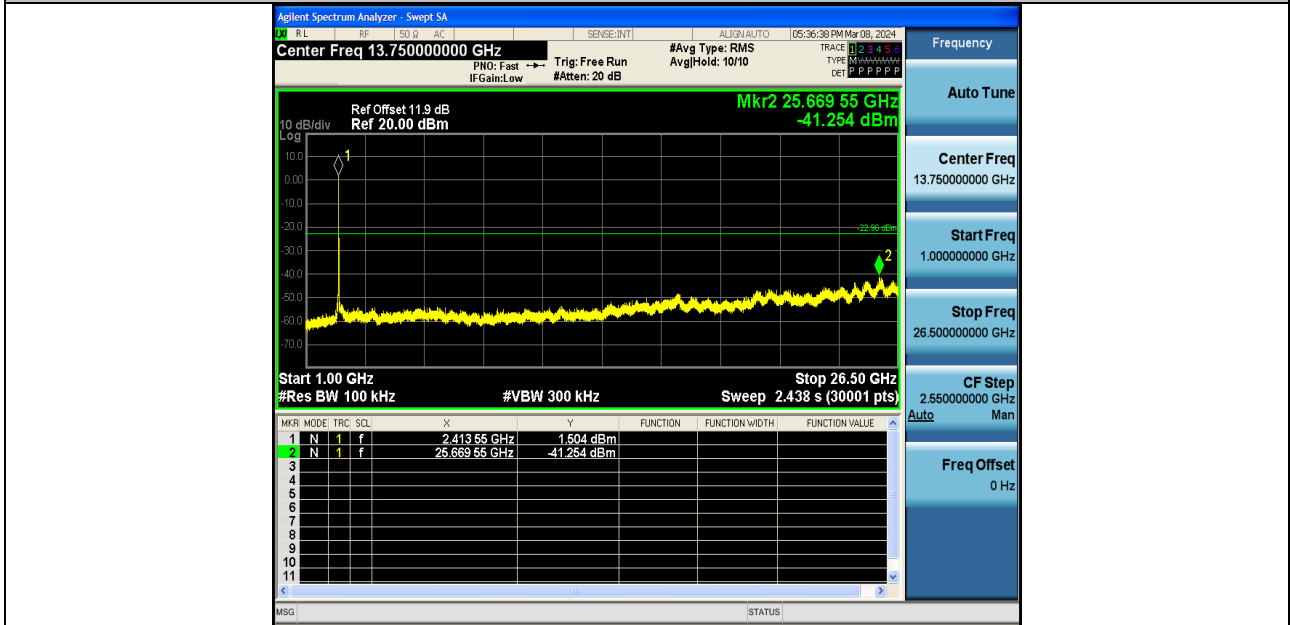


11N20SISO-Ant2-2412-1000~26500-PASS

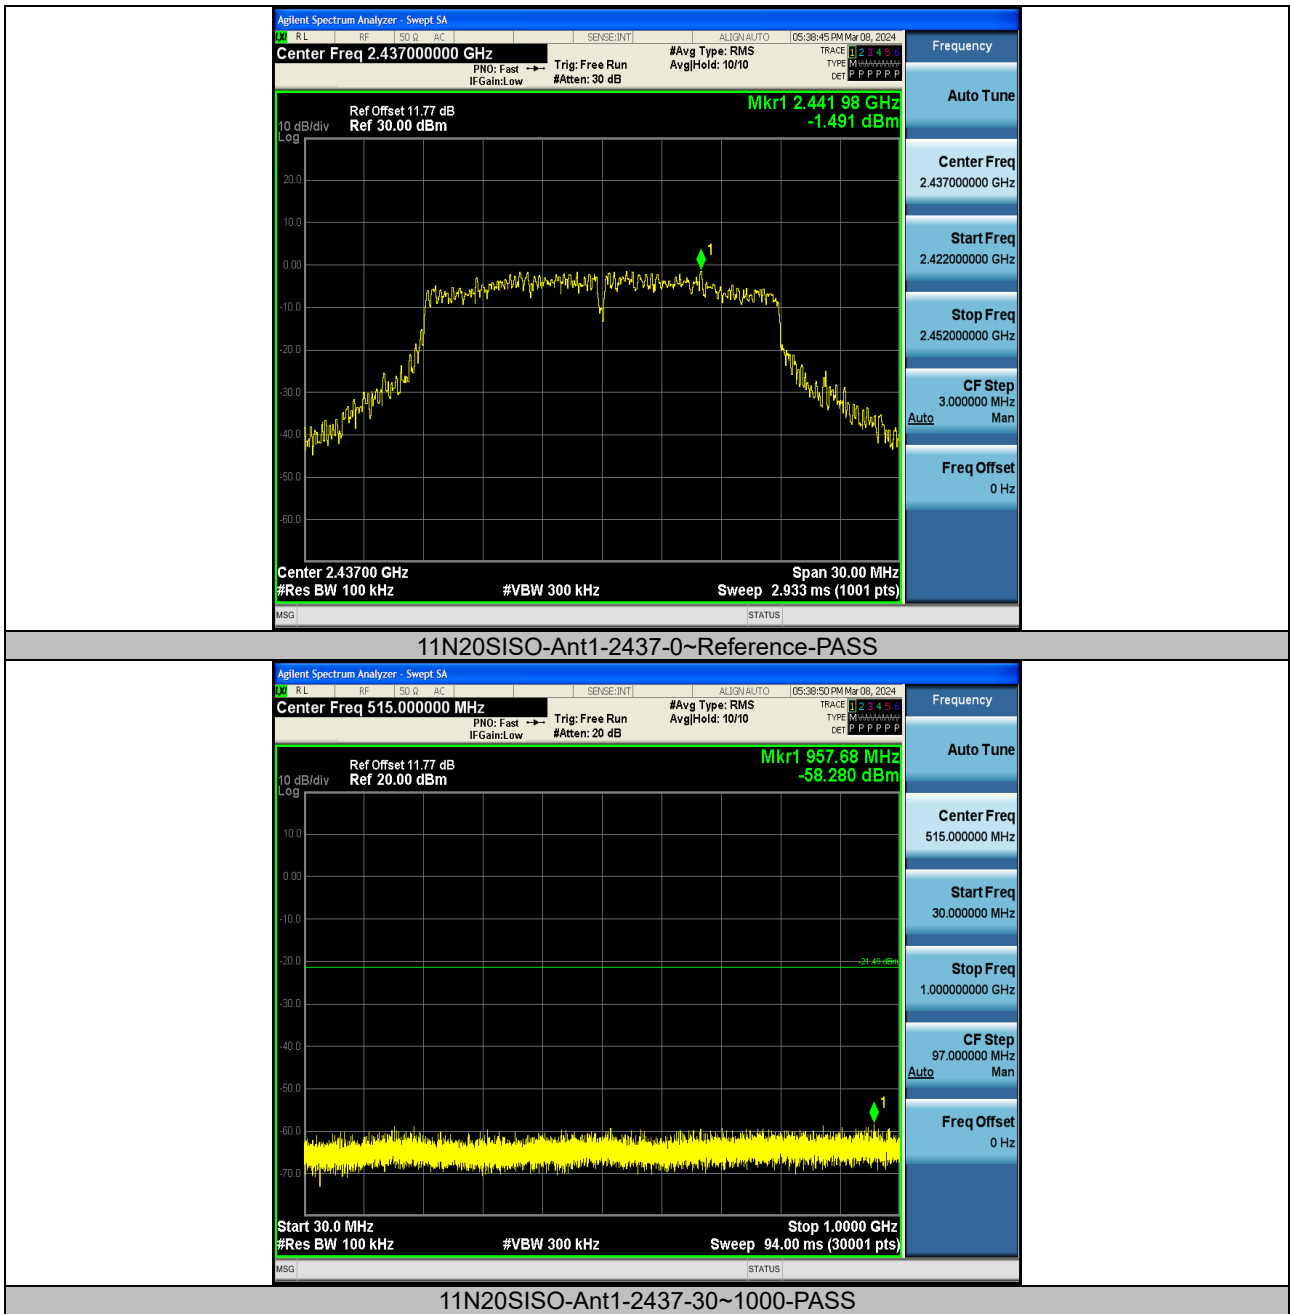

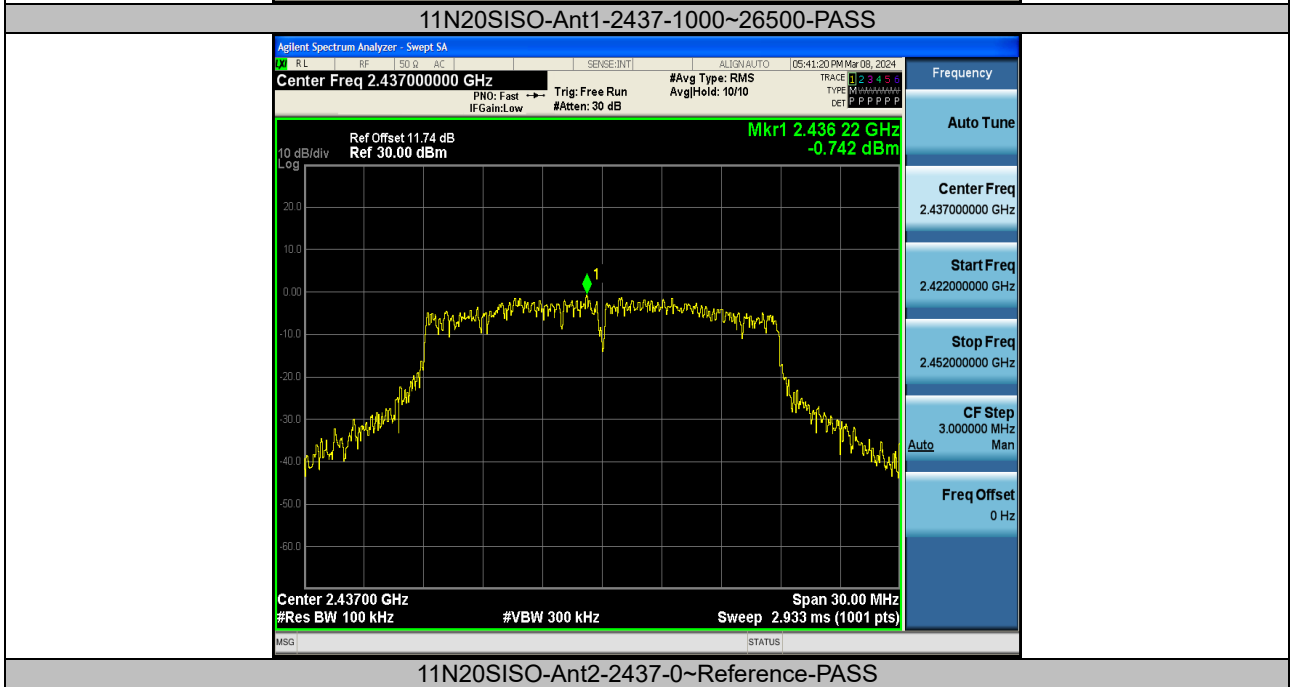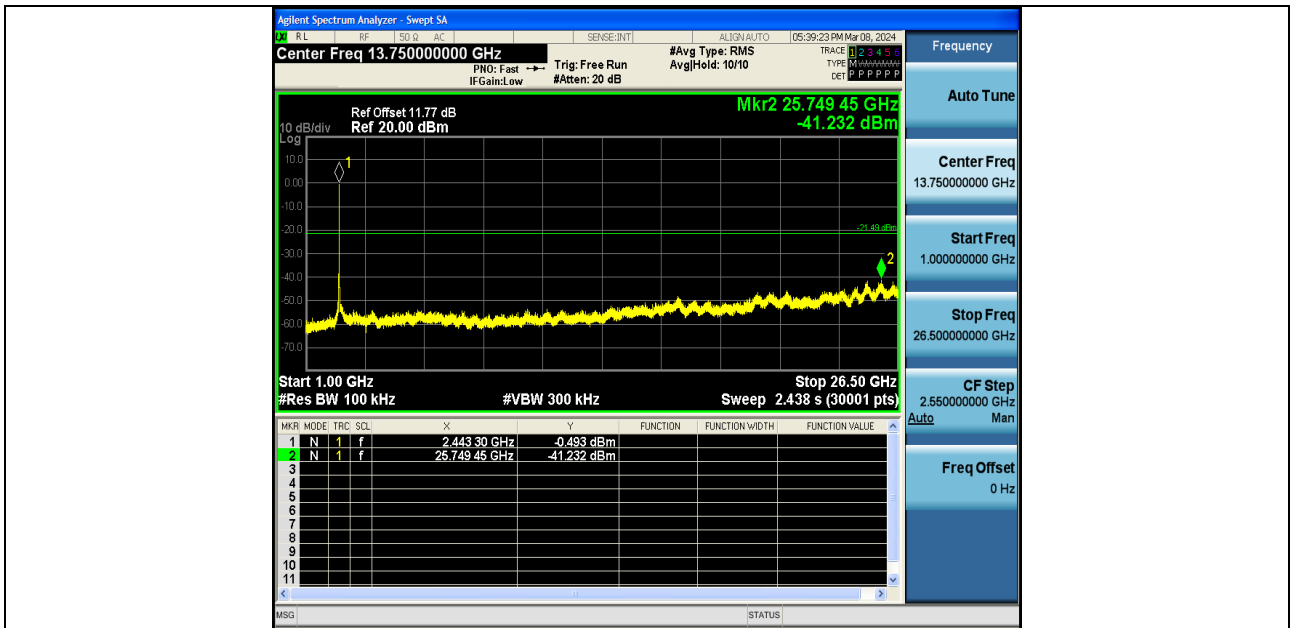


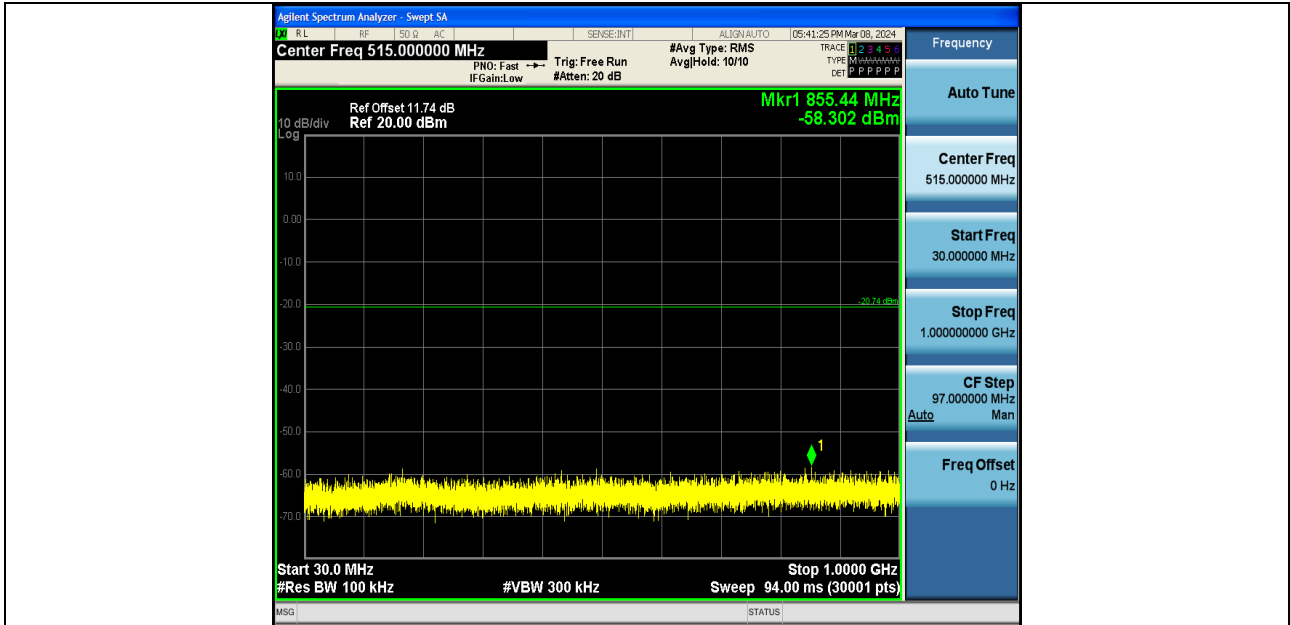


11N20SISO-Ant2-2437-30~1000-PASS

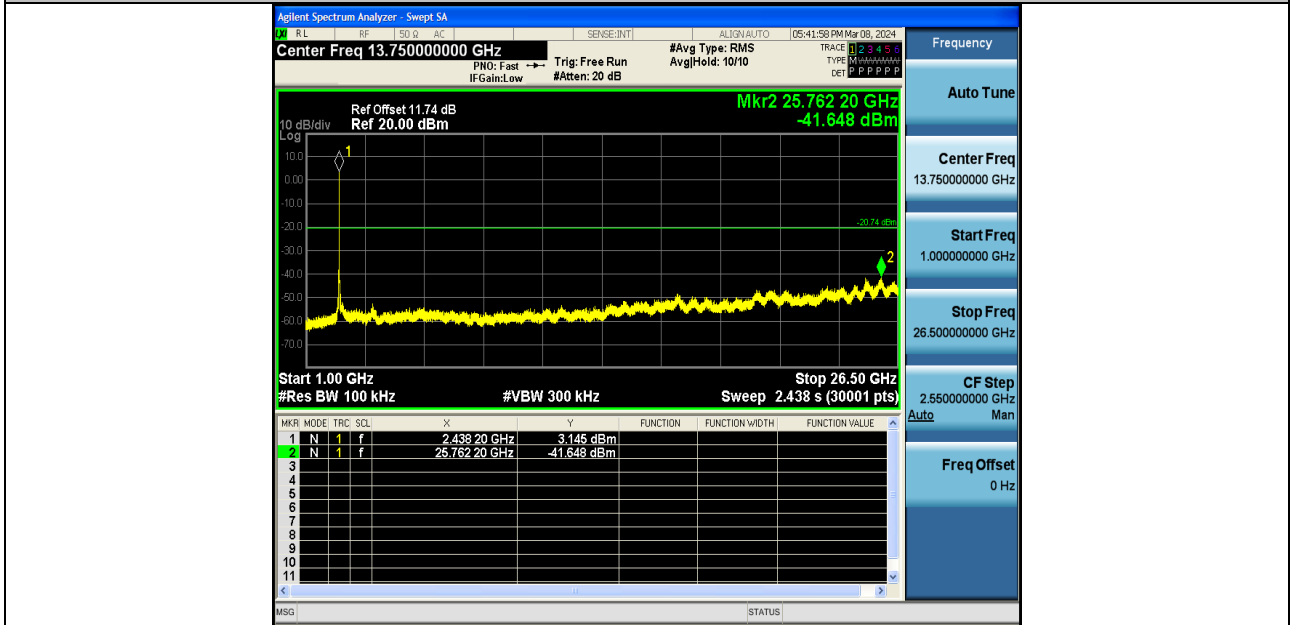


11N20SISO-Ant2-2437-1000~26500-PASS

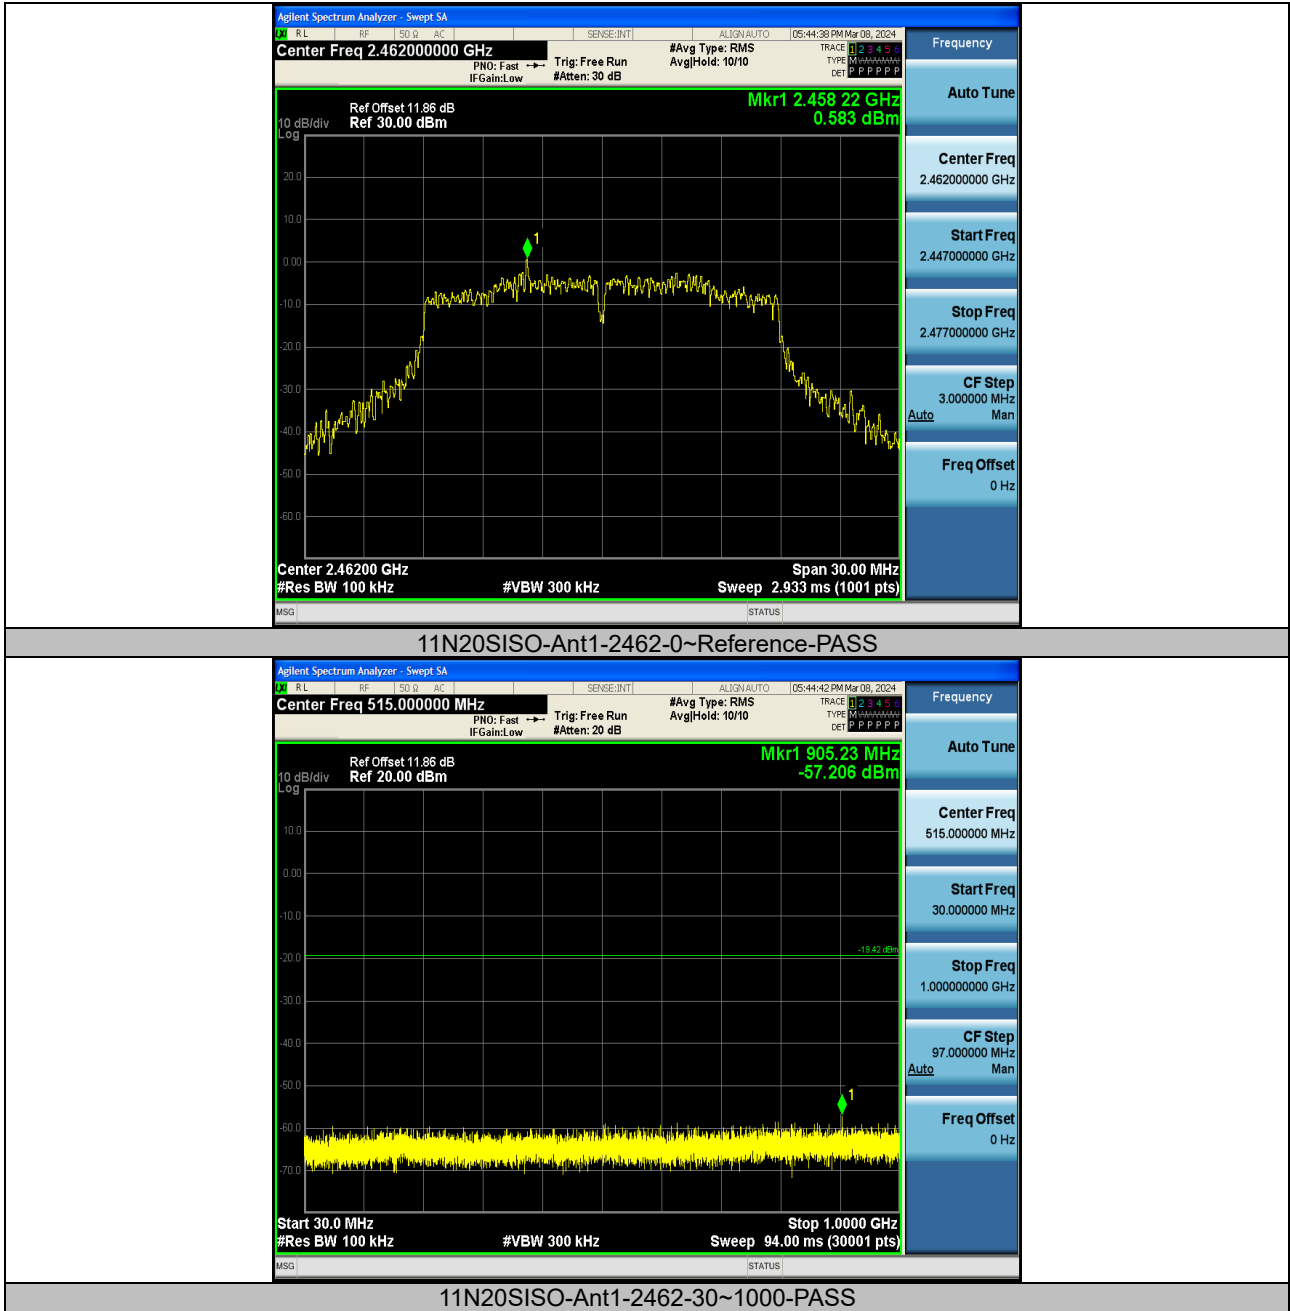


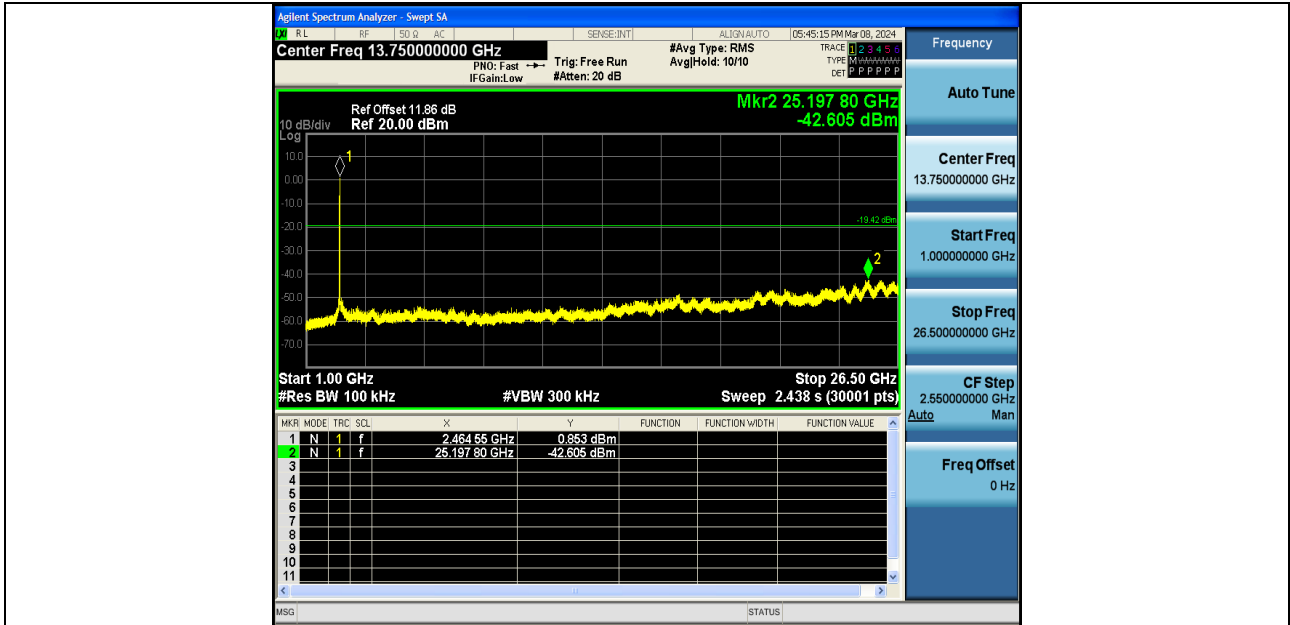


11N20SISO-Ant1-2462-1000~26500-PASS

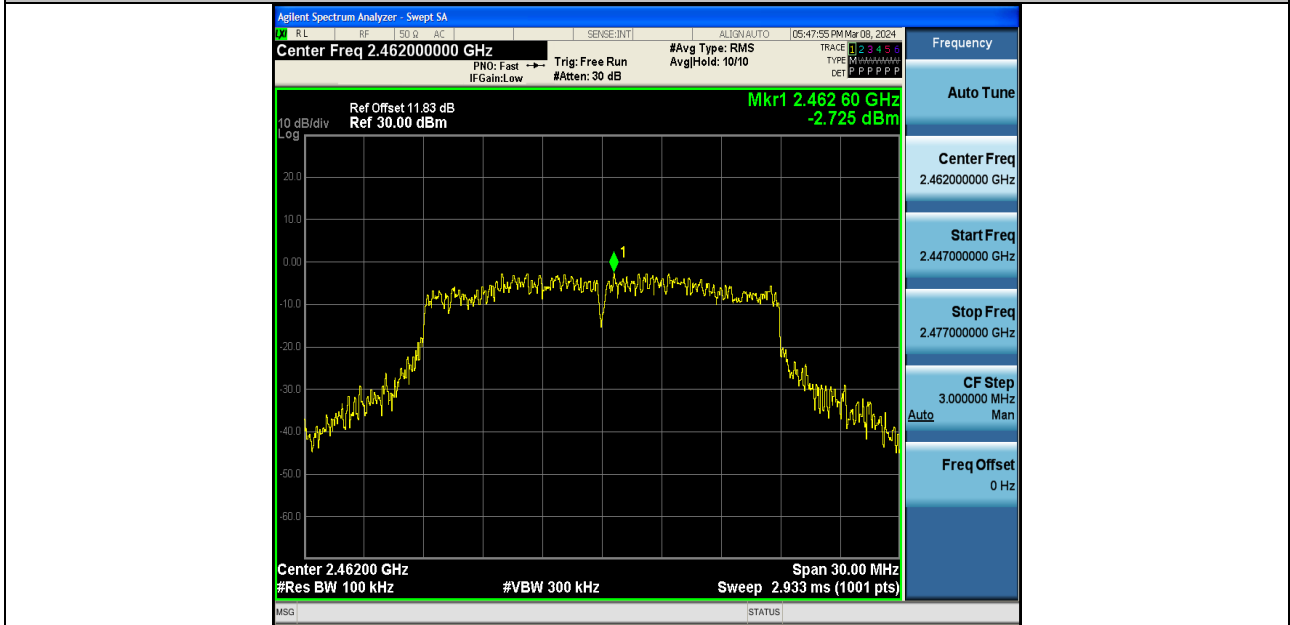


11N20SISO-Ant2-2462-0~Reference-PASS


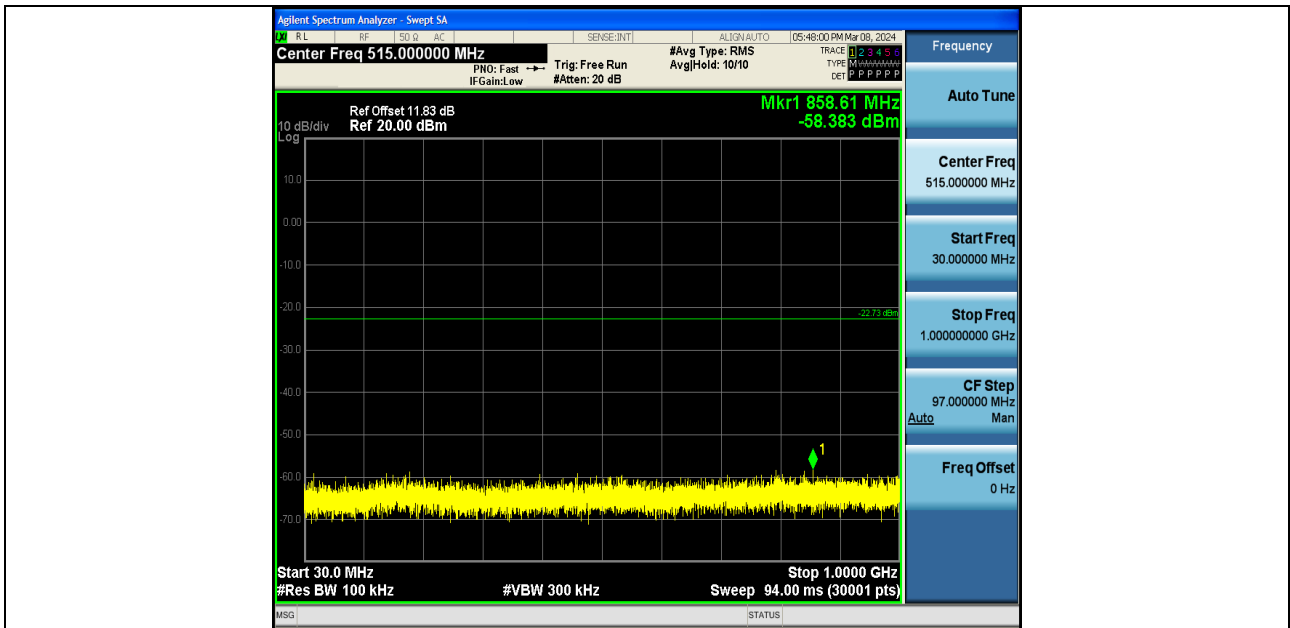



11N20SISO-Ant2-2462-30~1000-PASS

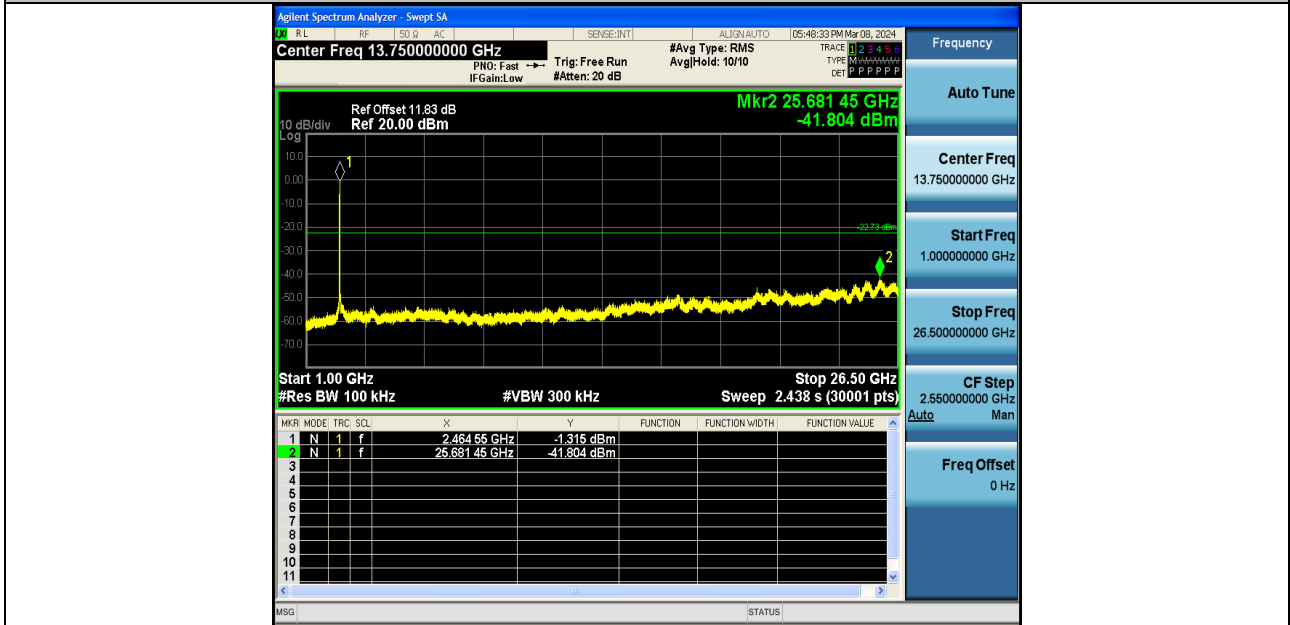


11N20SISO-Ant2-2462-1000~26500-PASS

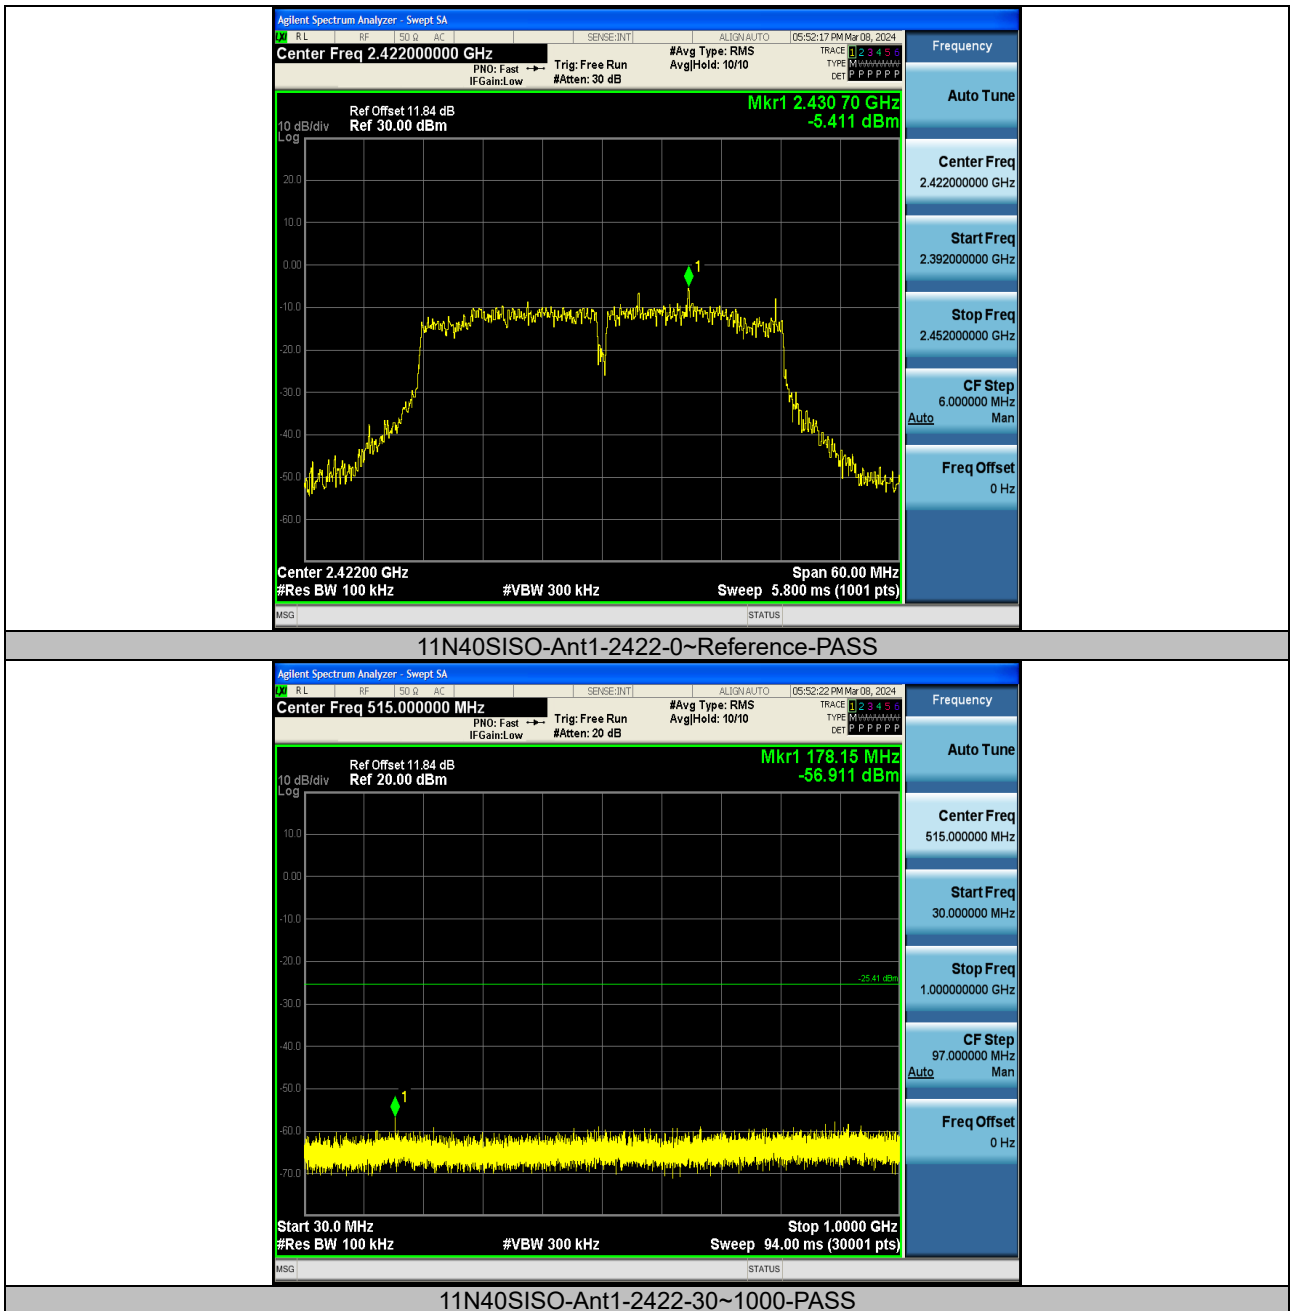

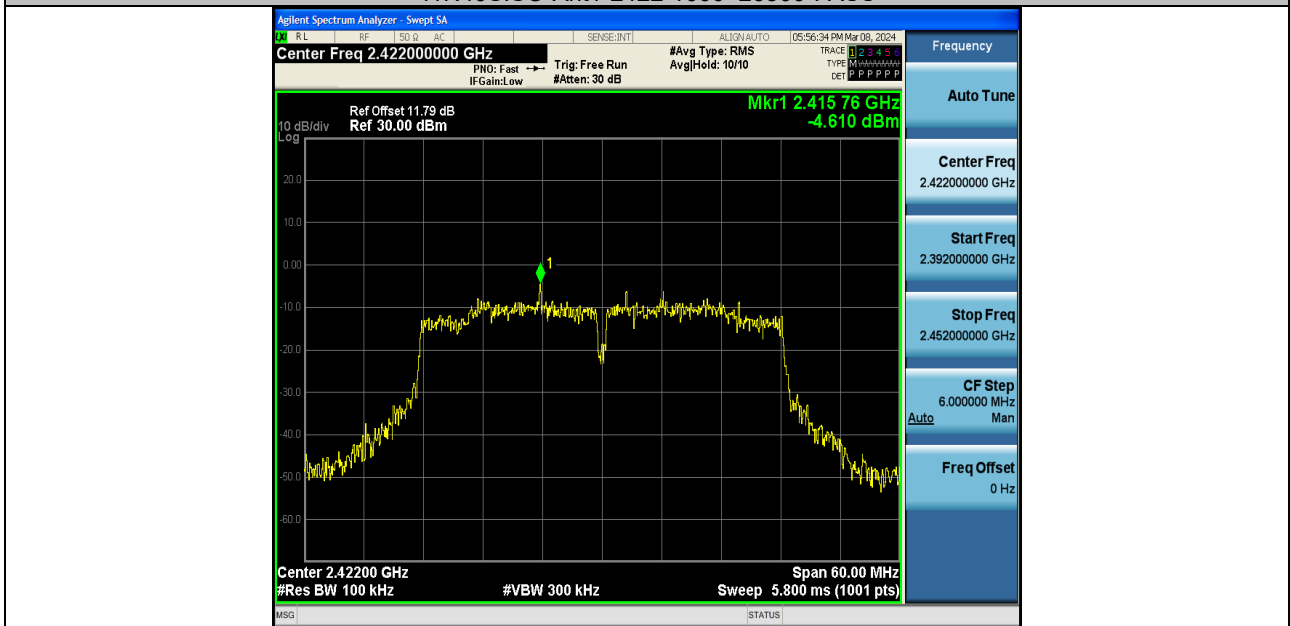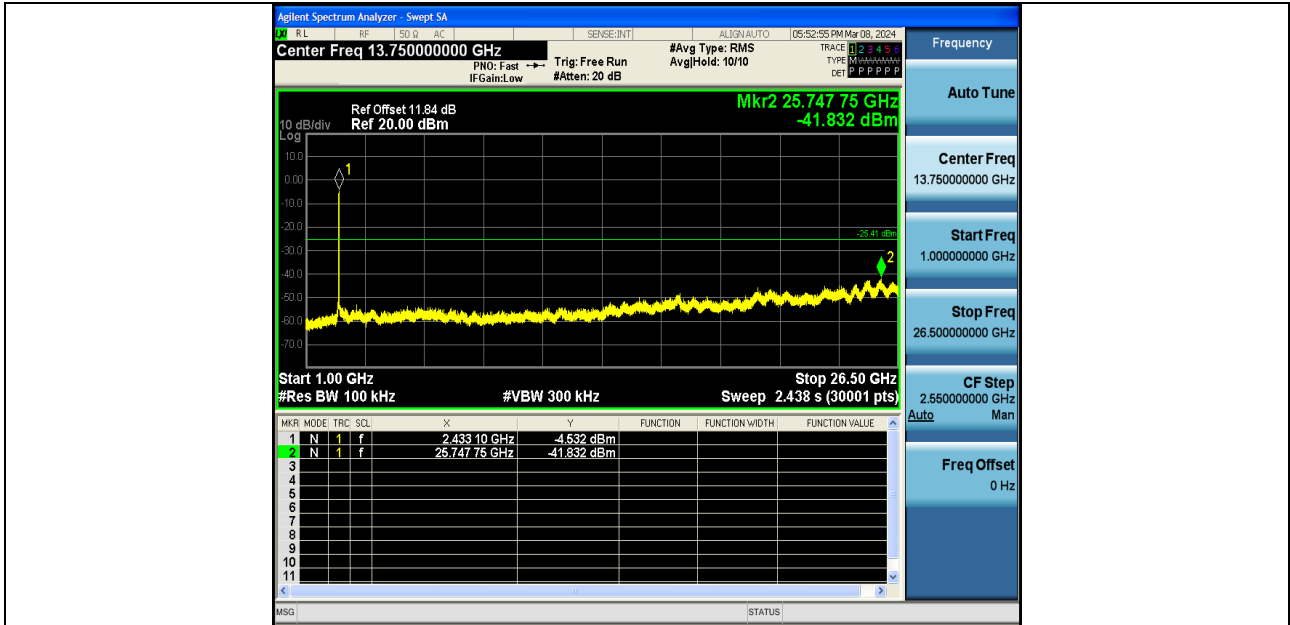


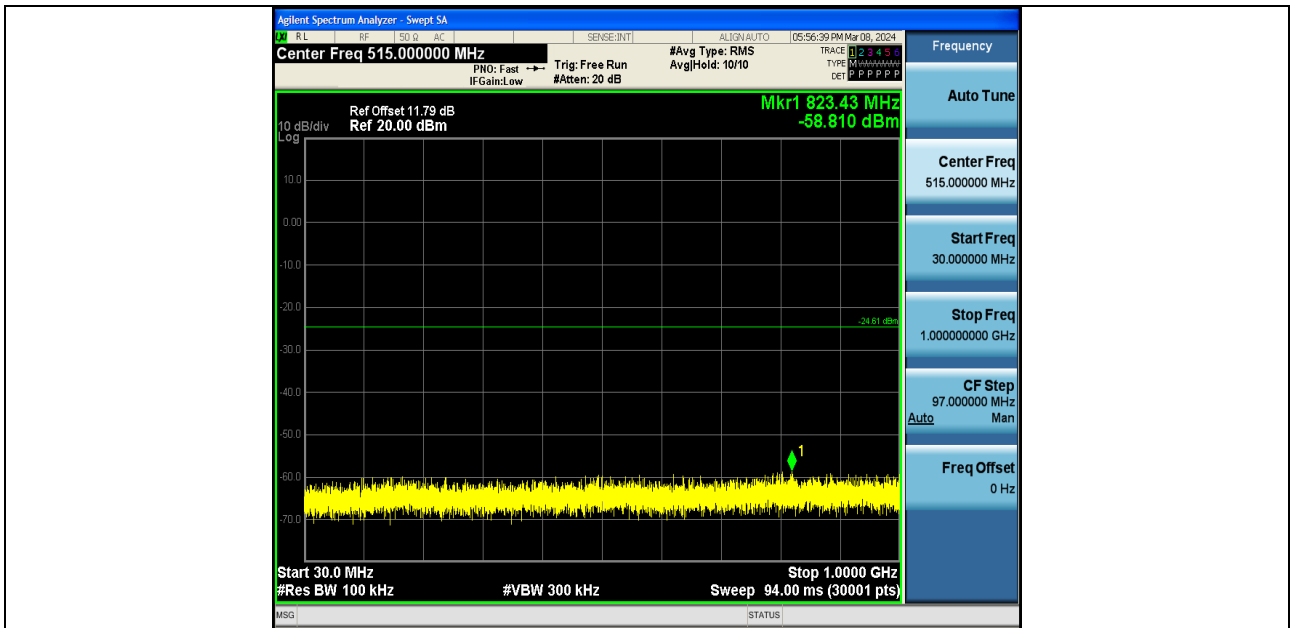


11N40SISO-Ant2-2422-30~1000-PASS

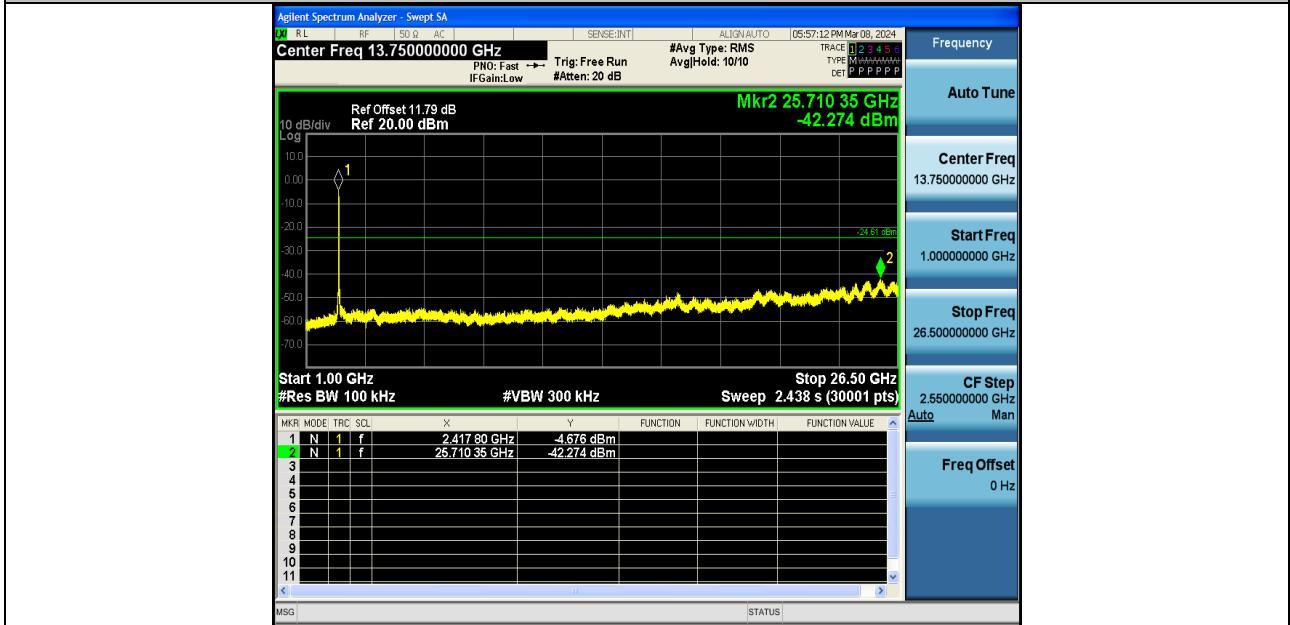

11N40SISO-Ant2-2422-1000~26500-PASS

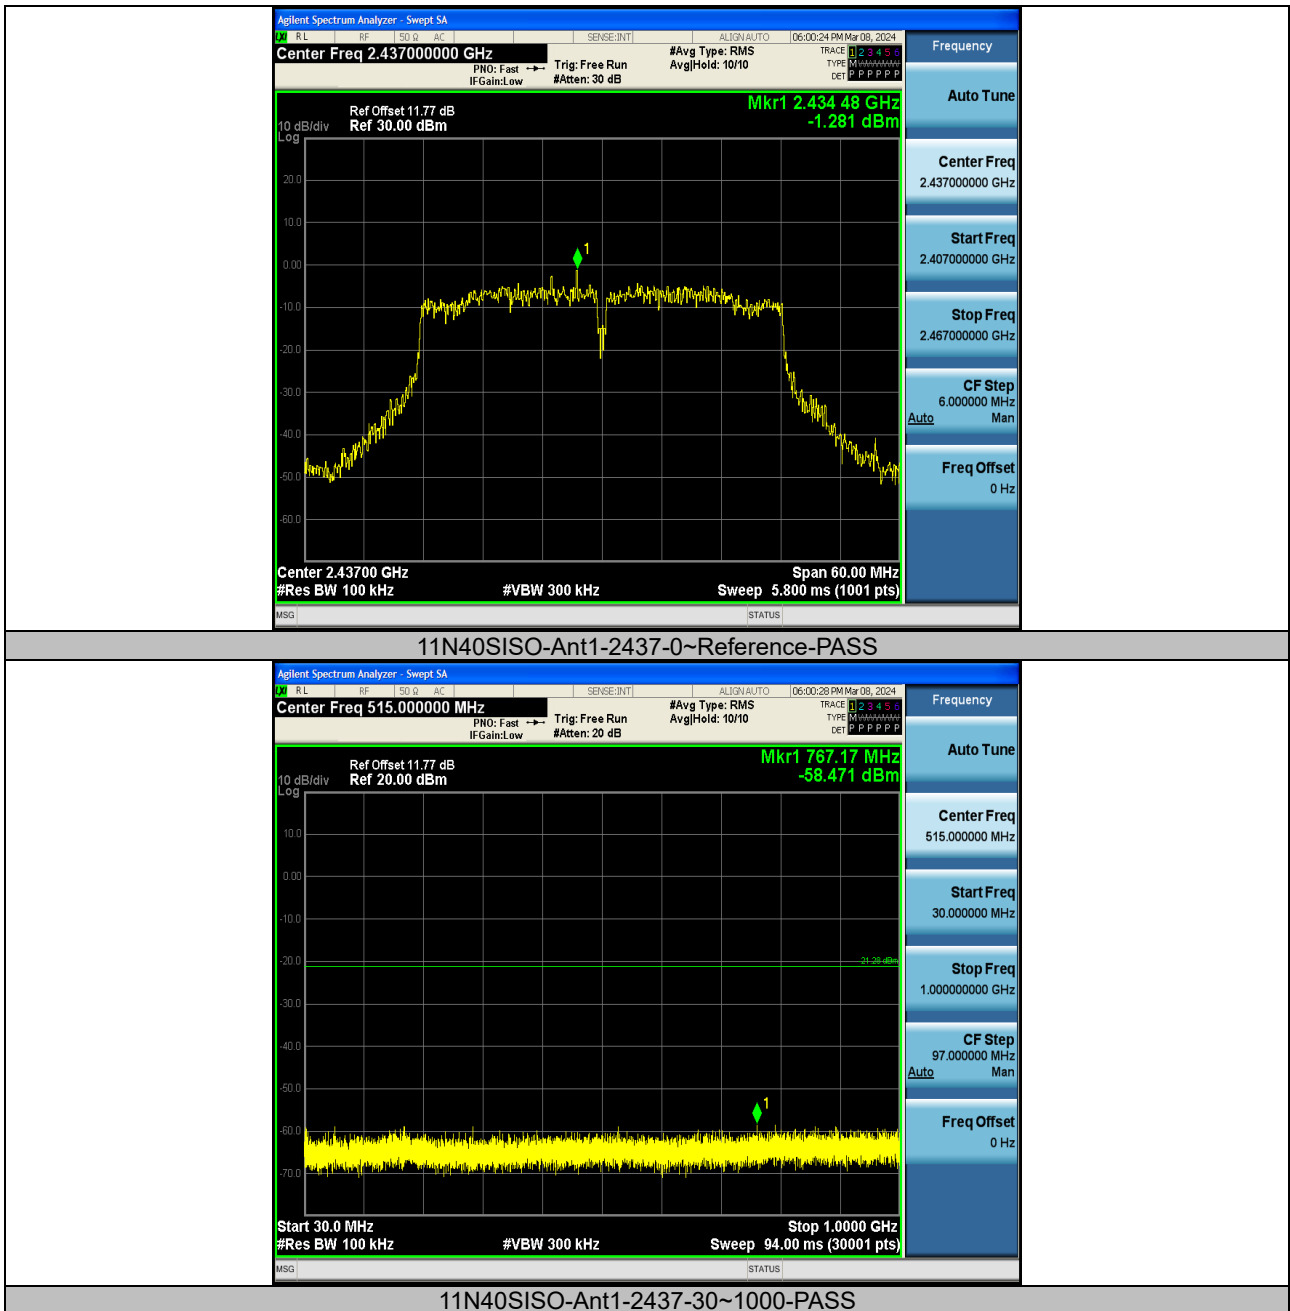


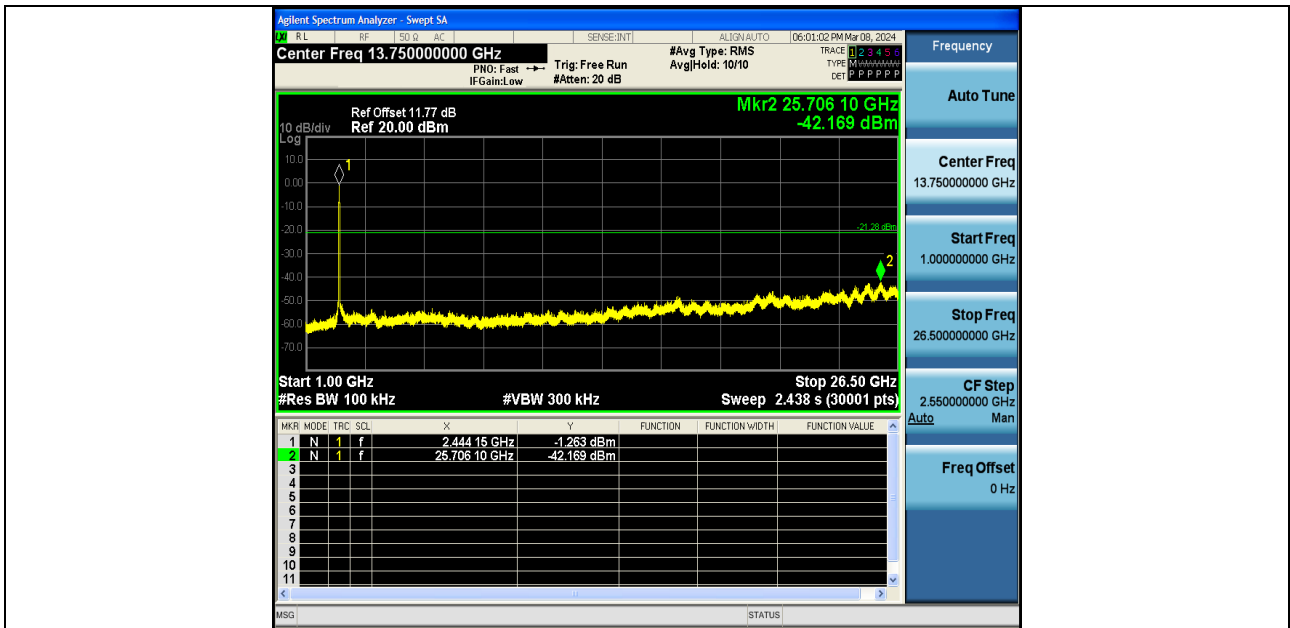


11N40SISO-Ant1-2437-1000~26500-PASS




11N40SISO-Ant2-2437-0~Reference-PASS

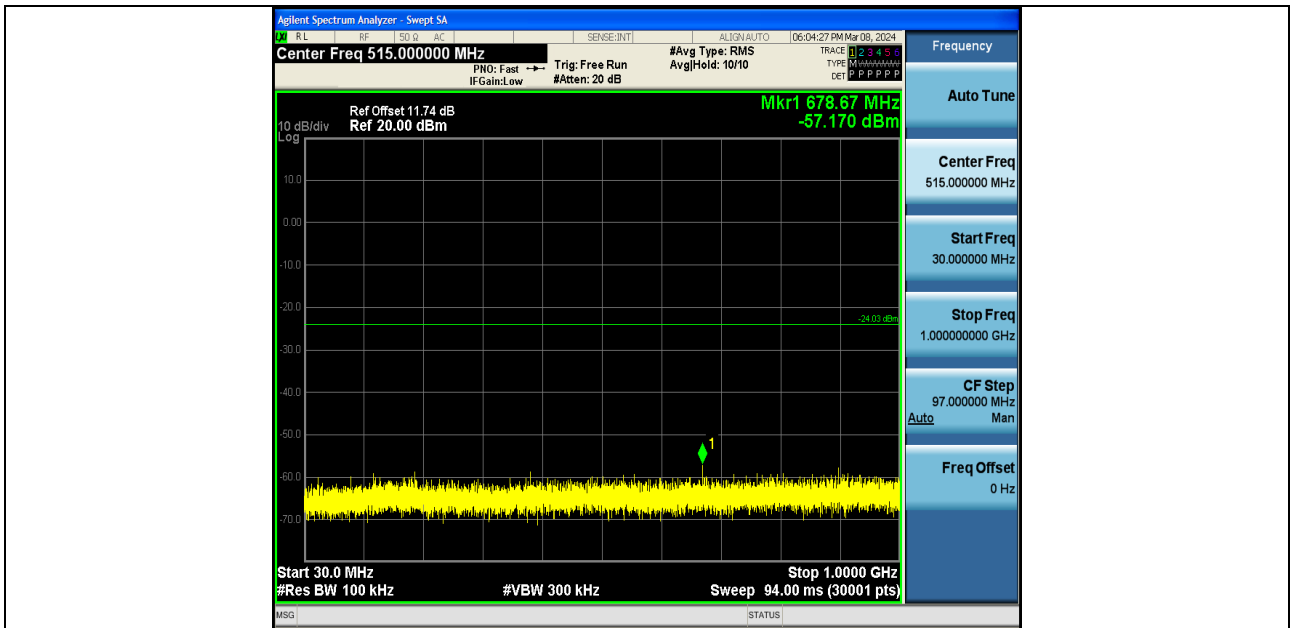


11N40SISO-Ant2-2437-30~1000-PASS

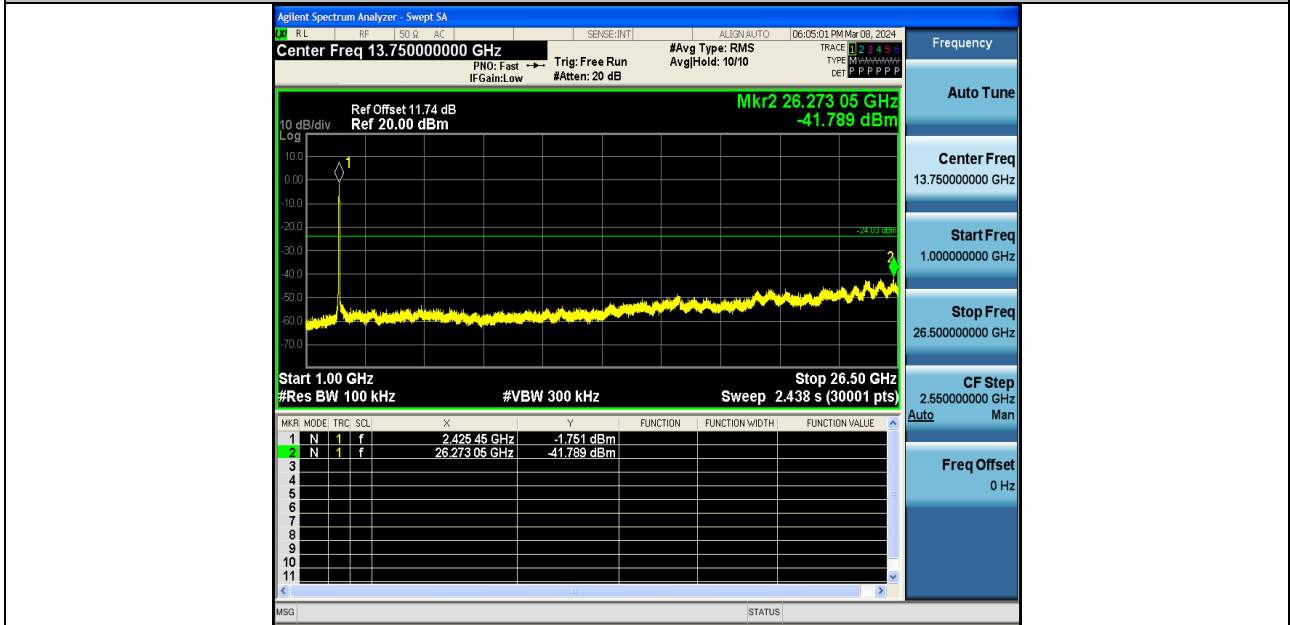


11N40SISO-Ant2-2437-1000~26500-PASS

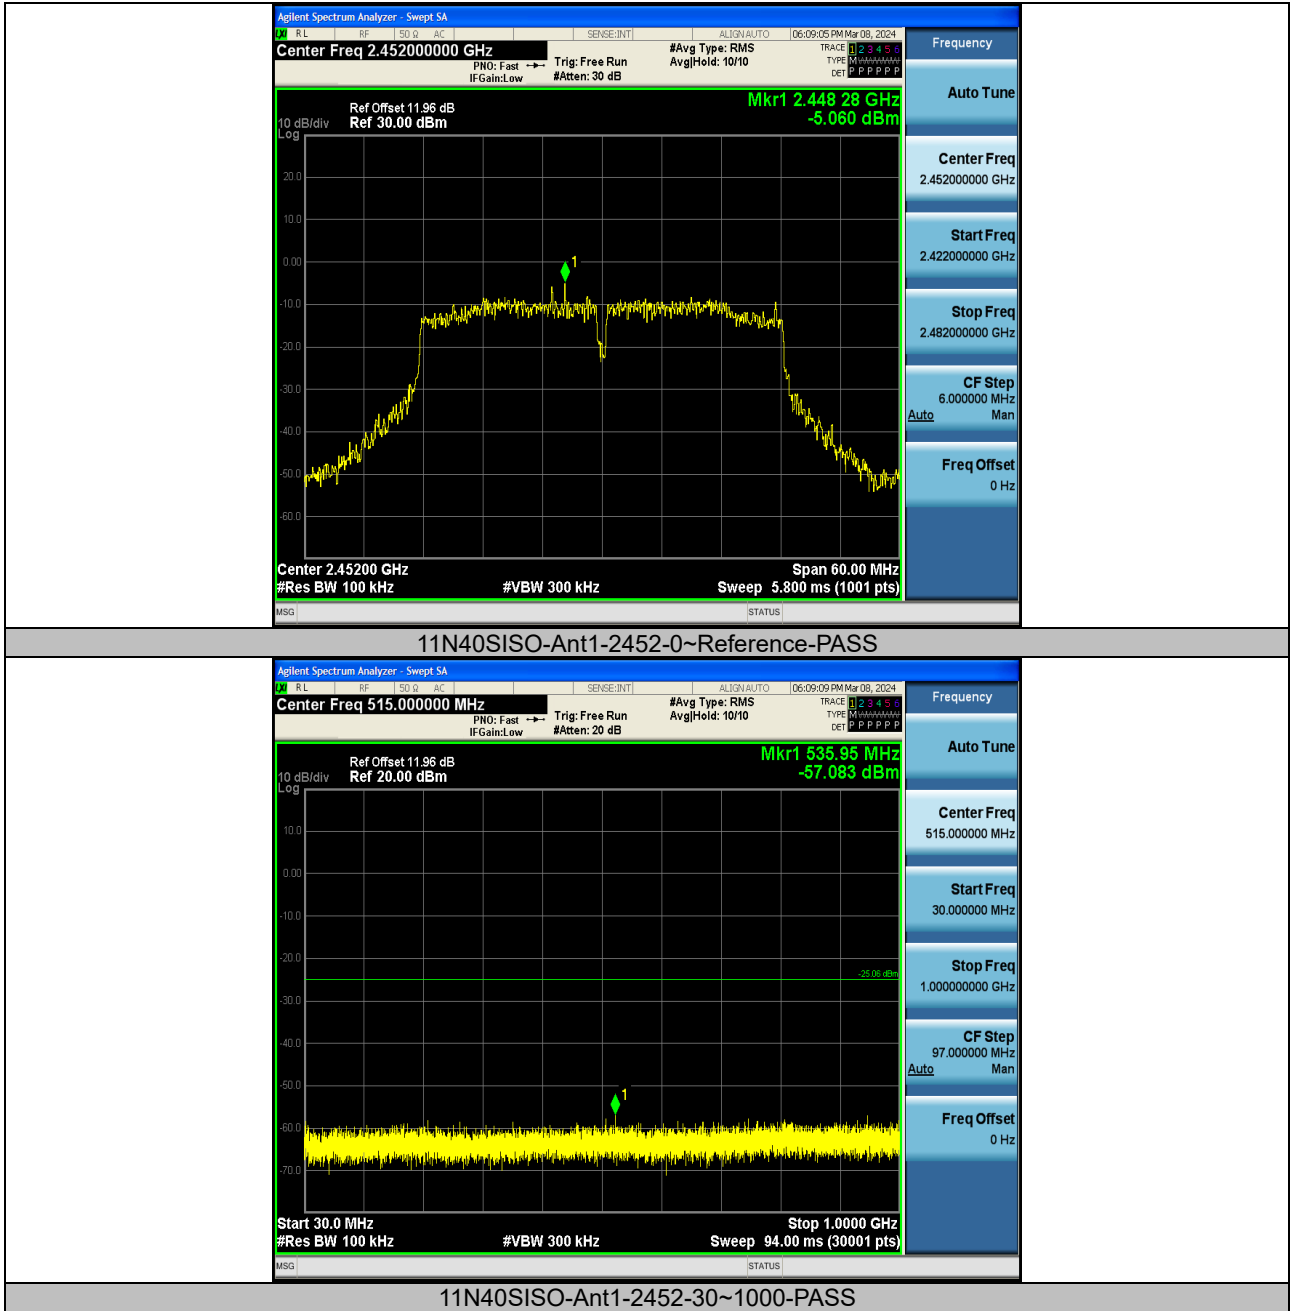


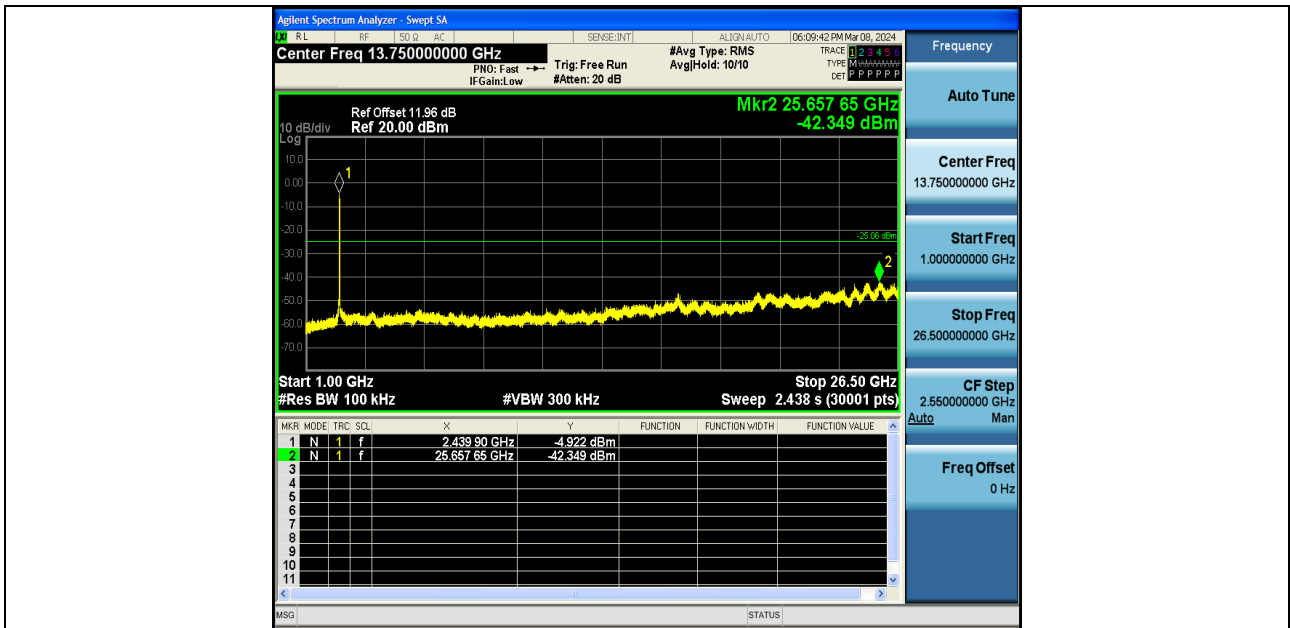


11N40SISO-Ant1-2452-1000~26500-PASS

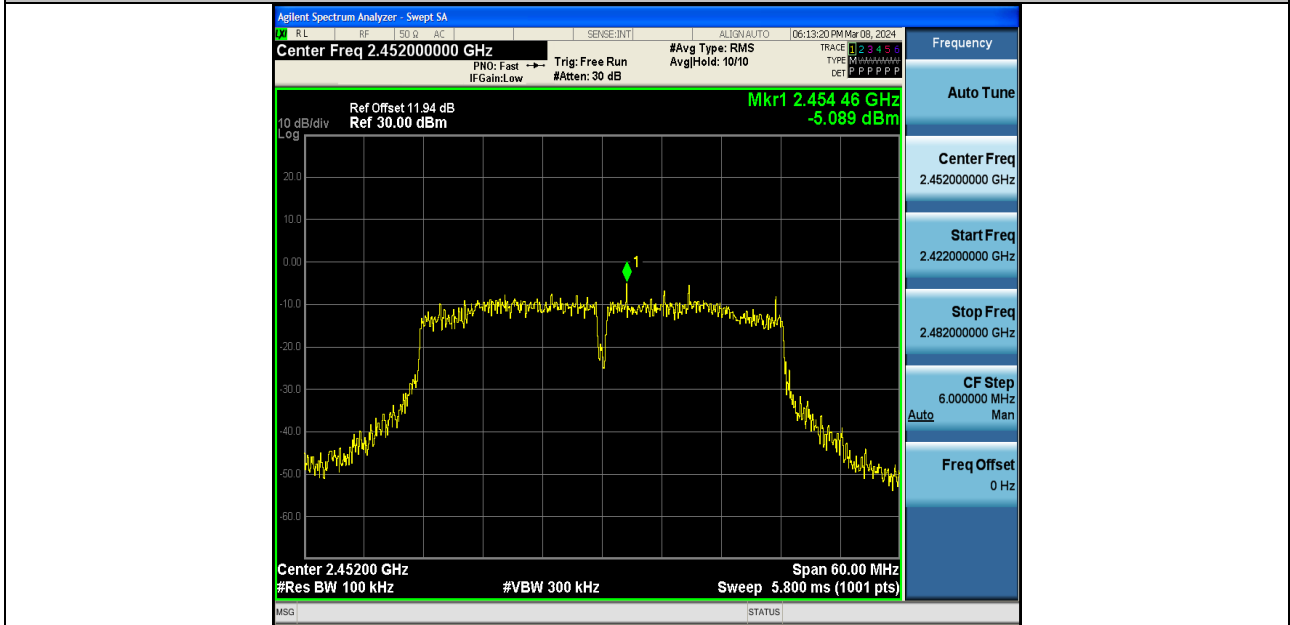

11N40SISO-Ant2-2452-0~Reference-PASS

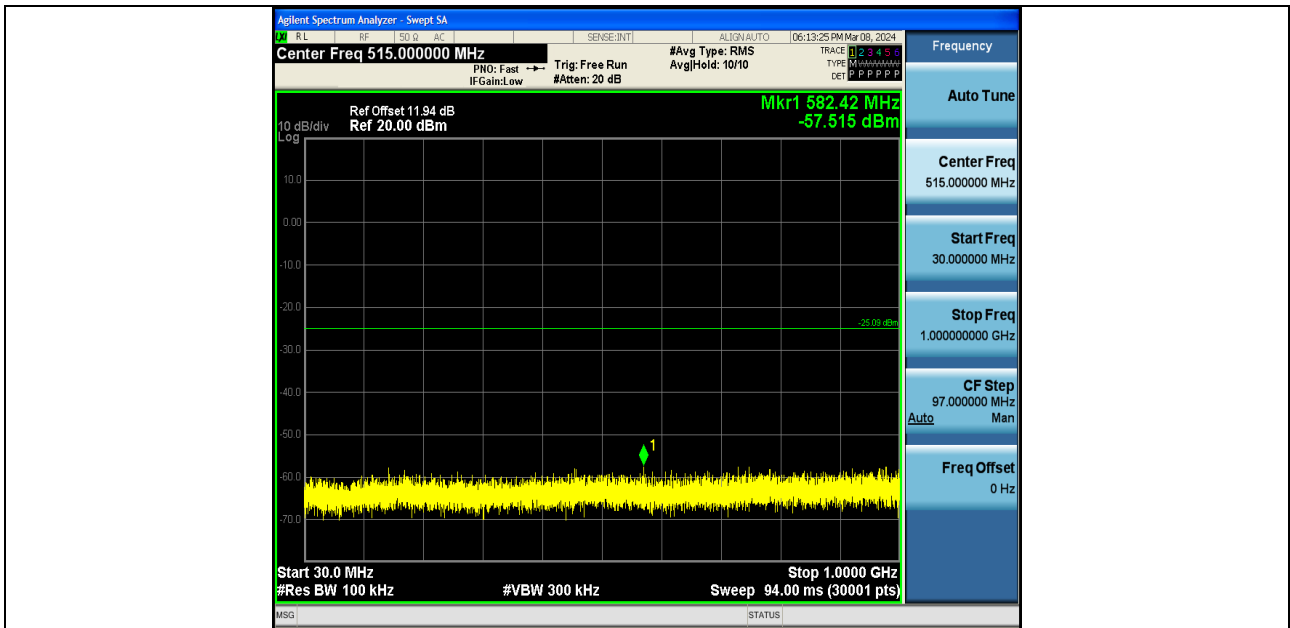

11N40SISO-Ant2-2452-30~1000-PASS

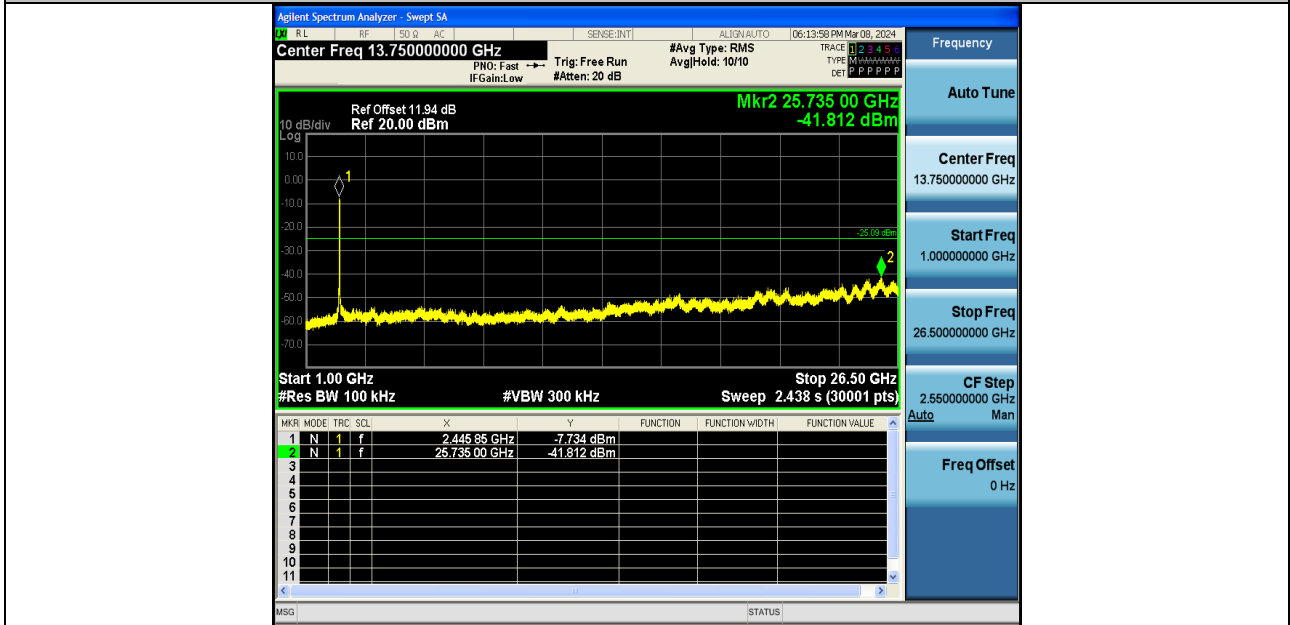

11N40SISO-Ant2-2452-1000~26500-PASS




8 Band Edge Measurement

- Test Requirement : Section 15.247(d) In addition, radiated emissions which fall in the restricted bands. as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).
- Test Method : ANSI C63.10:2013
- Test Limit : Regulation 15.247 (d),In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

8.1 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: RBW = 100kHz, VBW = 300kHz, Sweep = auto
Detector function = peak, Trace = max hold

8.2 Test Setup




8.3 Test Result

TestMode	Antenna	ChName	Frequency[MHz]	RefLevel[dBm]	Result[dBm]	Limit[dBm]	Verdict
11B	Ant1	Low	2412	3.18	-43.43	≤-16.82	PASS
11B	Ant2	Low	2412	4.28	-42.08	≤-15.72	PASS
11B	Ant1	High	2462	3.35	-46.26	≤-16.66	PASS
11B	Ant2	High	2462	4.11	-45.66	≤-15.89	PASS
11G	Ant1	Low	2412	0.87	-29.37	≤-19.13	PASS
11G	Ant2	Low	2412	1.39	-29.7	≤-18.61	PASS
11G	Ant1	High	2462	0.94	-45.53	≤-19.06	PASS
11G	Ant2	High	2462	1.44	-45.77	≤-18.56	PASS
11N20SISO	Ant1	Low	2412	0.79	-28.99	≤-19.21	PASS
11N20SISO	Ant2	Low	2412	1.20	-29.31	≤-18.8	PASS
11N20SISO	Ant1	High	2462	1.13	-45.12	≤-18.87	PASS
11N20SISO	Ant2	High	2462	-0.34	-44.94	≤-20.34	PASS
11N40SISO	Ant1	Low	2422	-5.15	-36.5	≤-25.15	PASS




11N40SISO	Ant2	Low	2422	-4.23	-35.88	≤-24.23	PASS
11N40SISO	Ant1	High	2452	-4.38	-45.11	≤-24.38	PASS
11N40SISO	Ant2	High	2452	-4.09	-45.26	≤-24.09	PASS


Test Graphs:

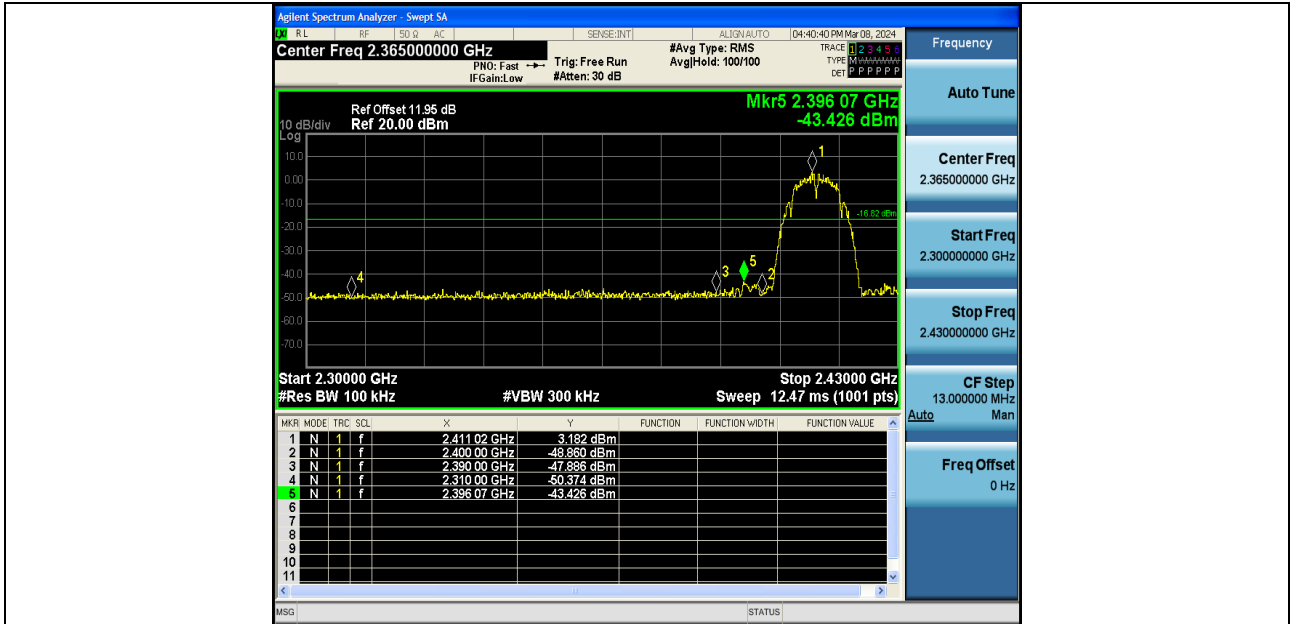


11B-Ant1-2412-PASS

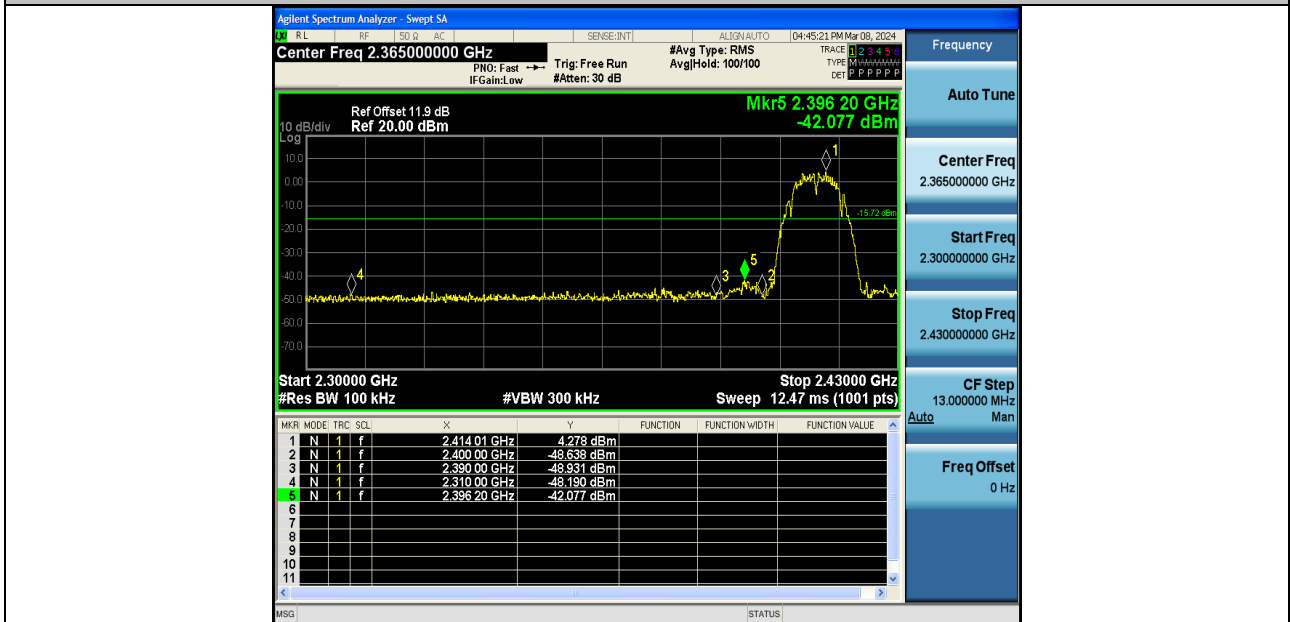


11B-Ant2-2412-PASS

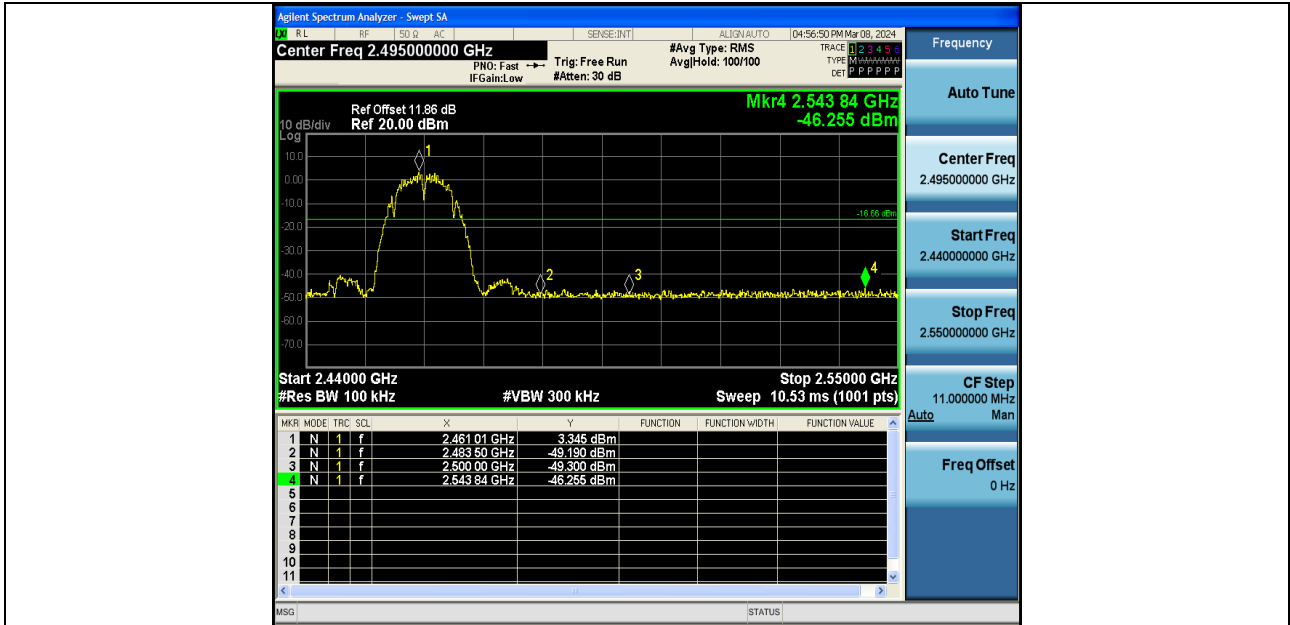


11B-Ant1-2462-PASS

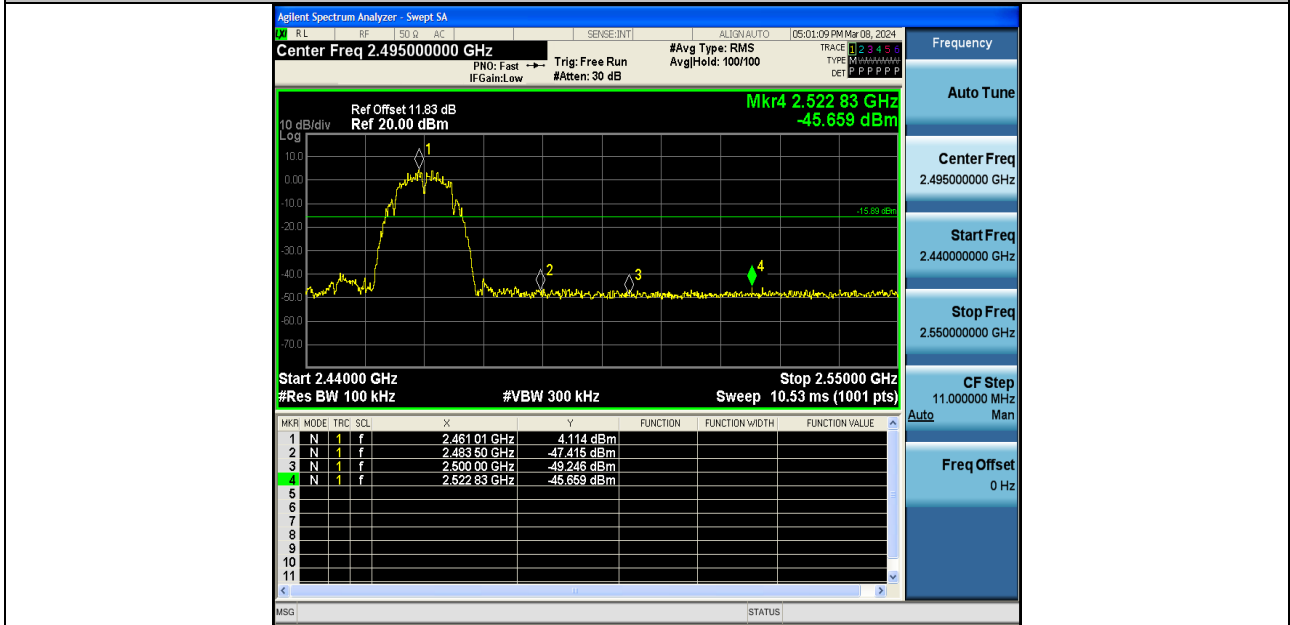


11B-Ant2-2462-PASS

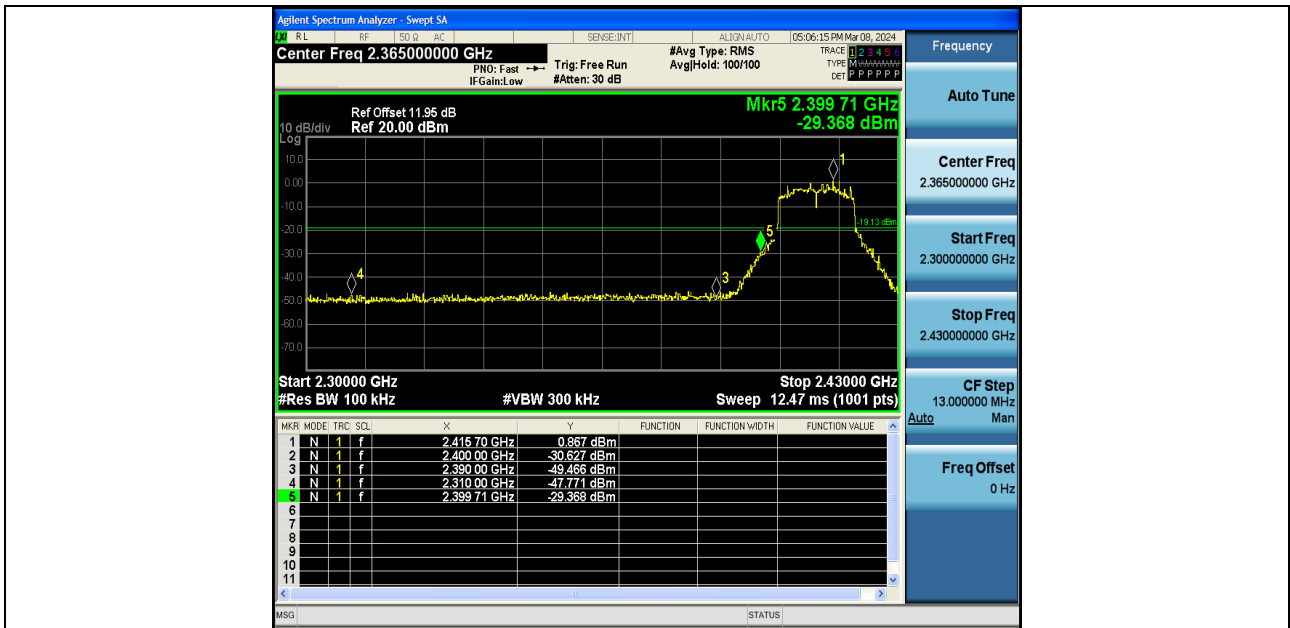


11G-Ant1-2412-PASS

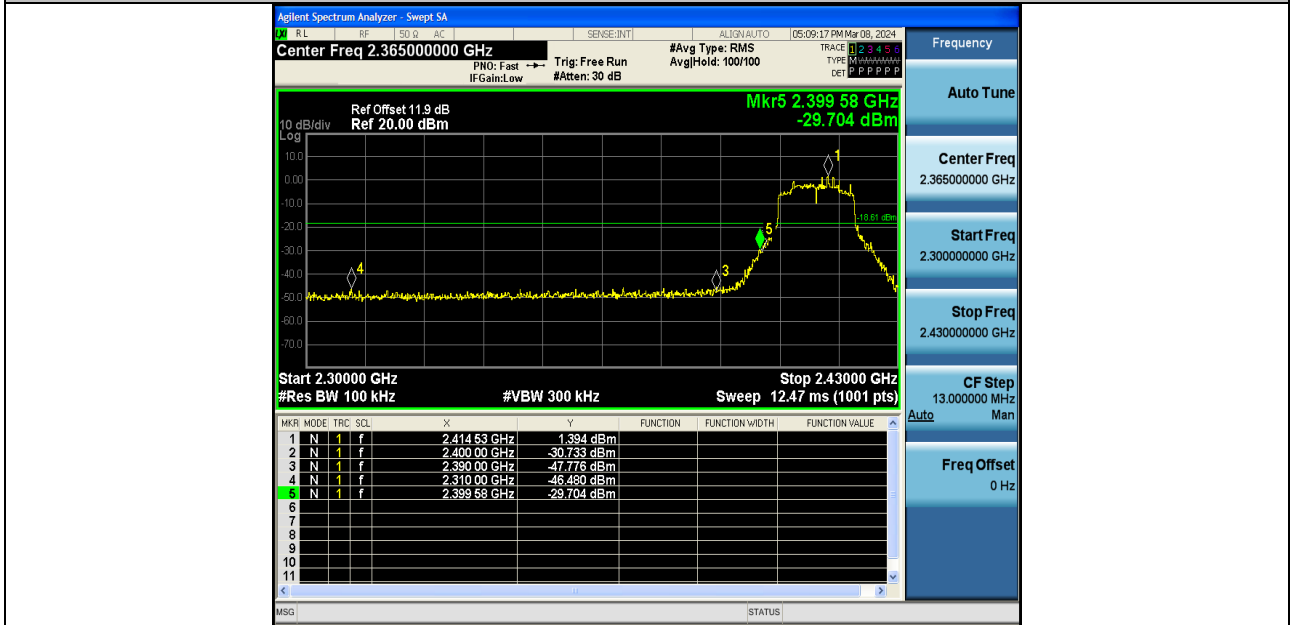


11G-Ant2-2412-PASS

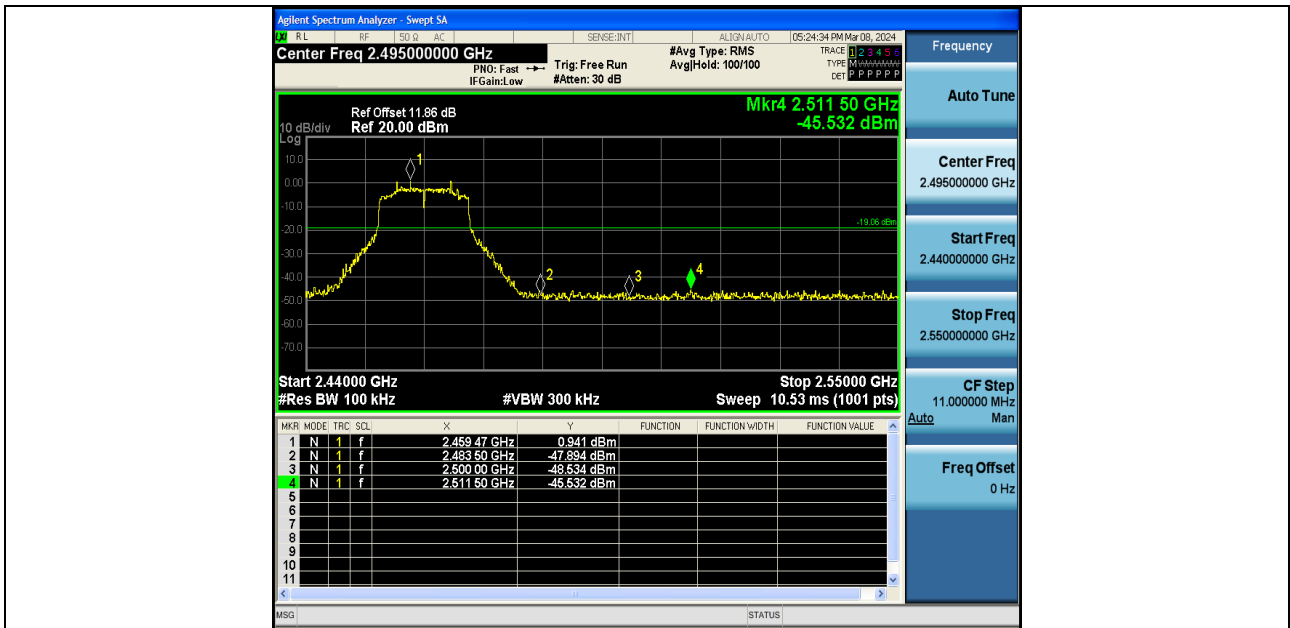


11G-Ant1-2462-PASS

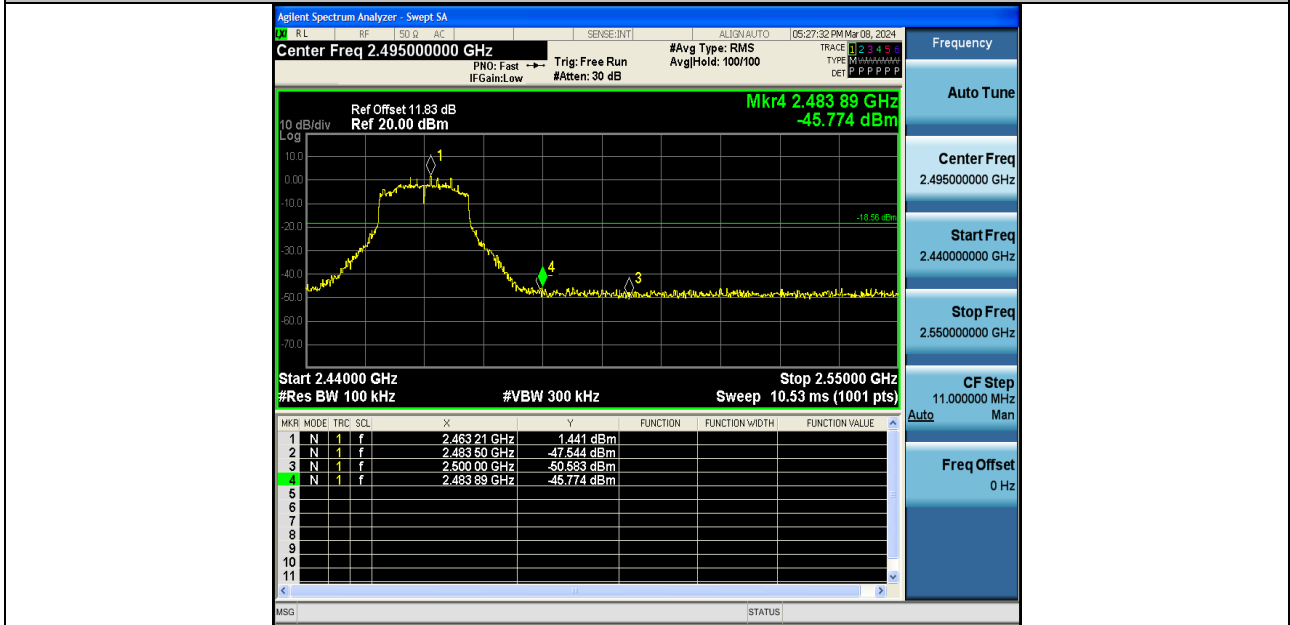


11G-Ant2-2462-PASS

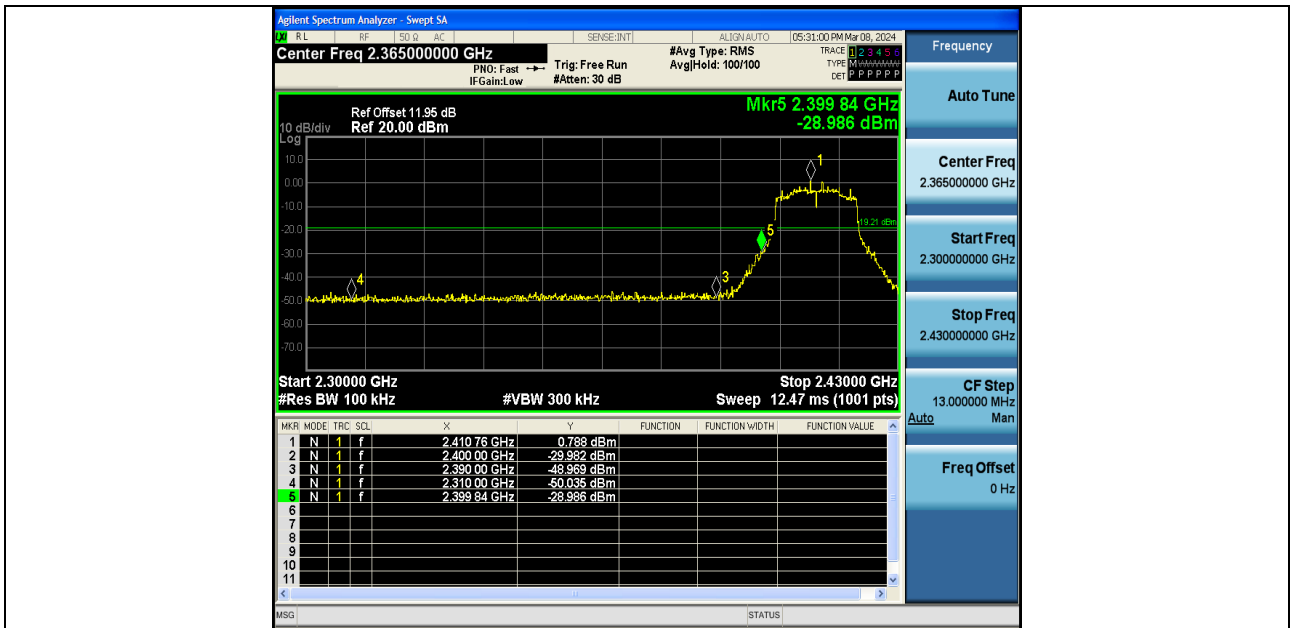


11N20SISO-Ant1-2412-PASS

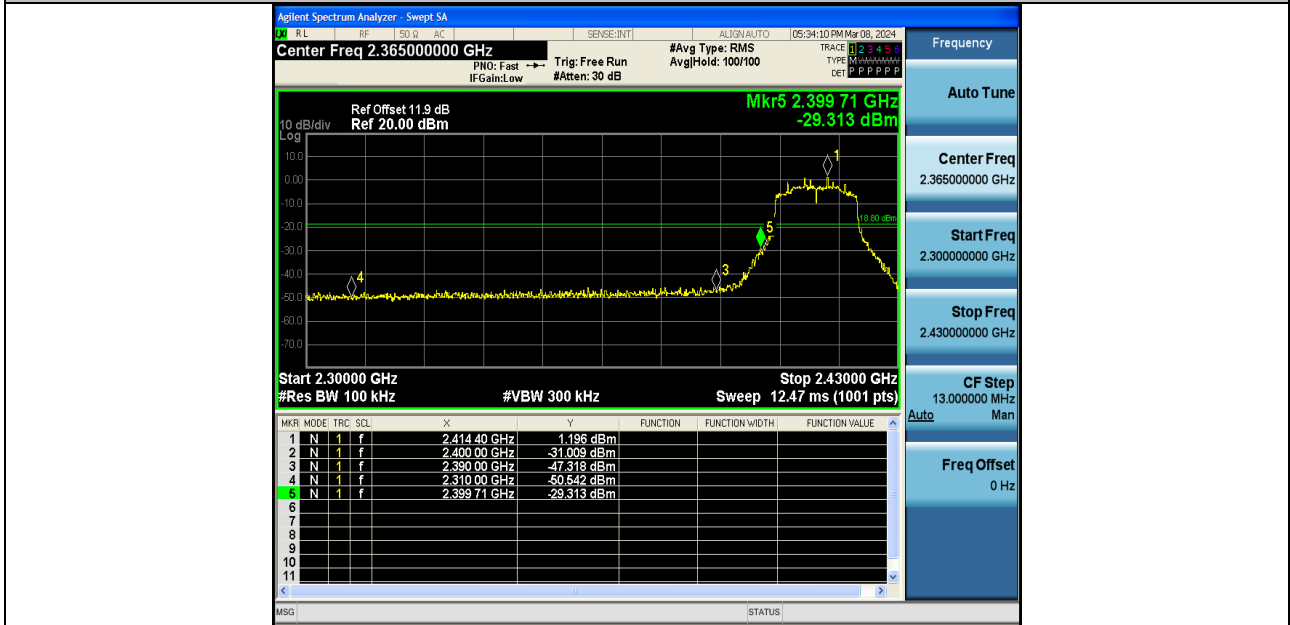


11N20SISO-Ant2-2412-PASS

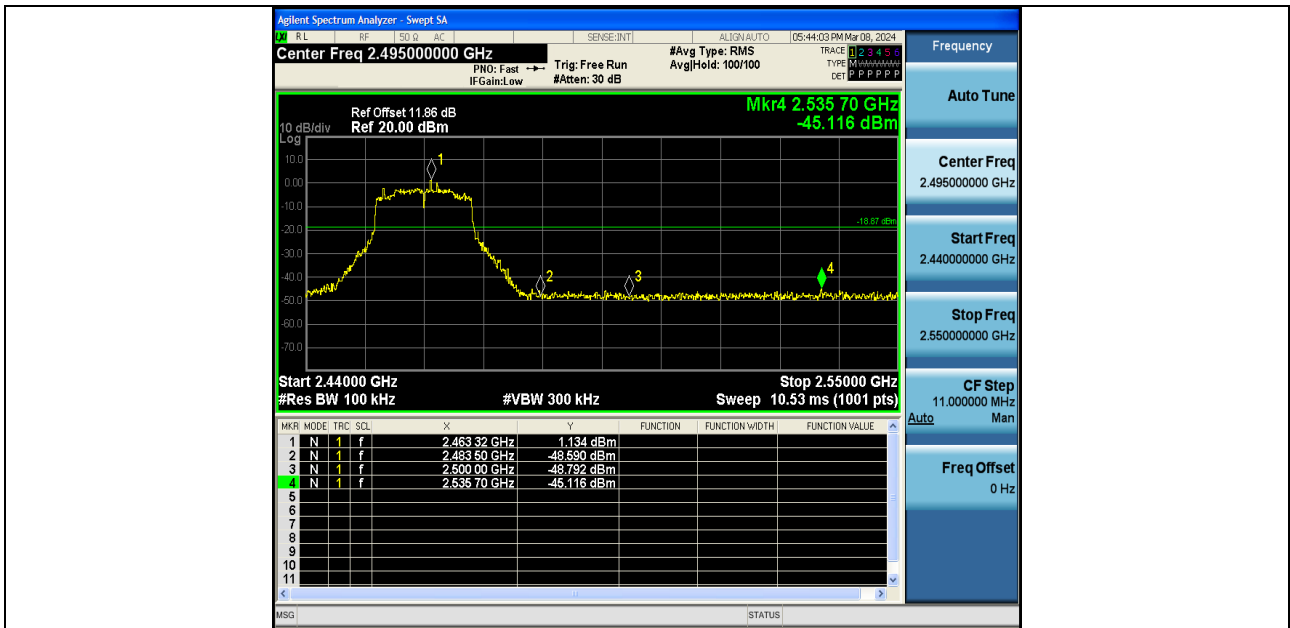


11N20SISO-Ant1-2462-PASS

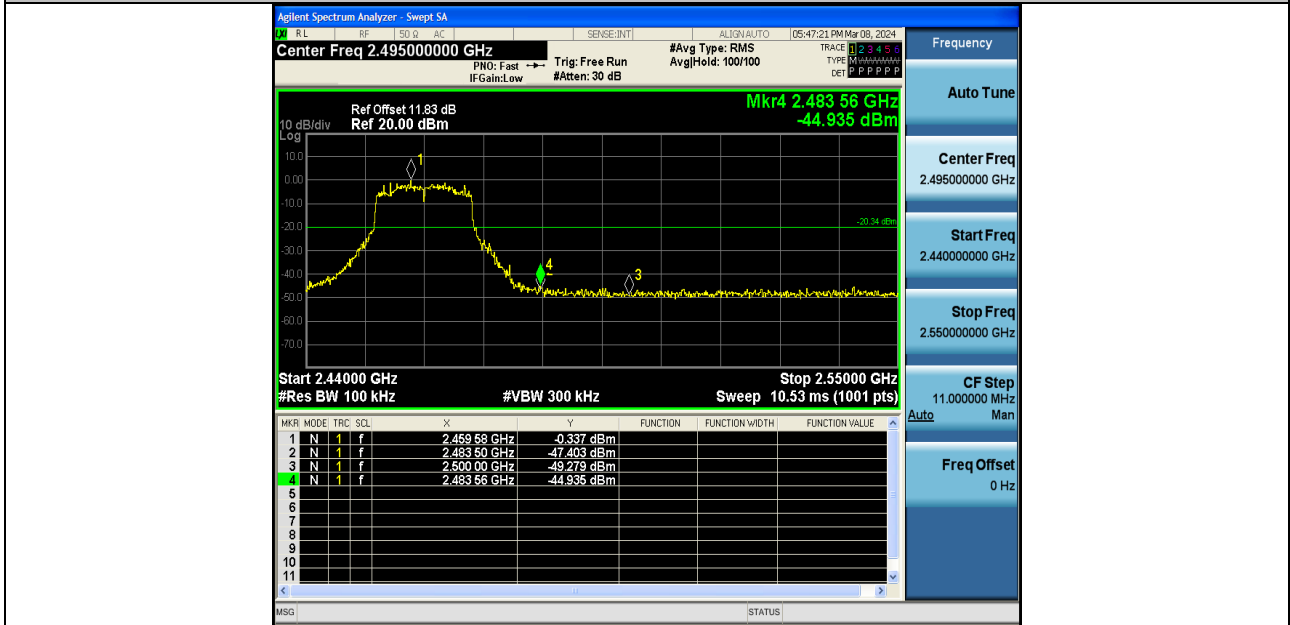


11N20SISO-Ant2-2462-PASS

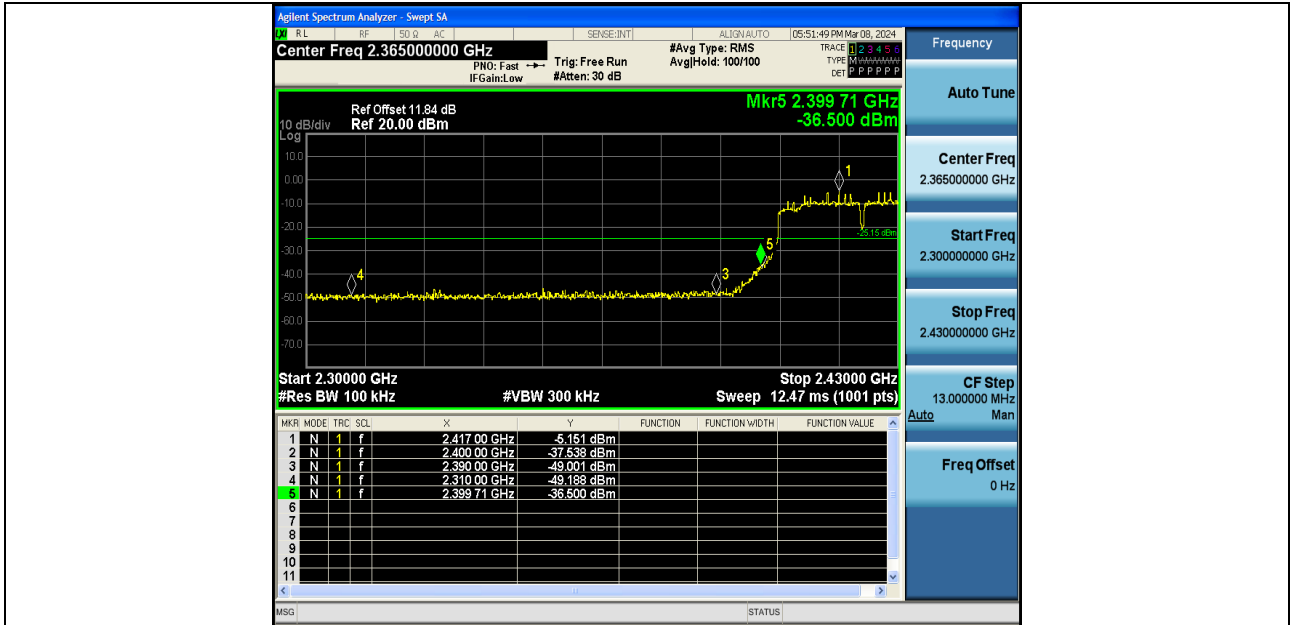


11N40SISO-Ant1-2422-PASS

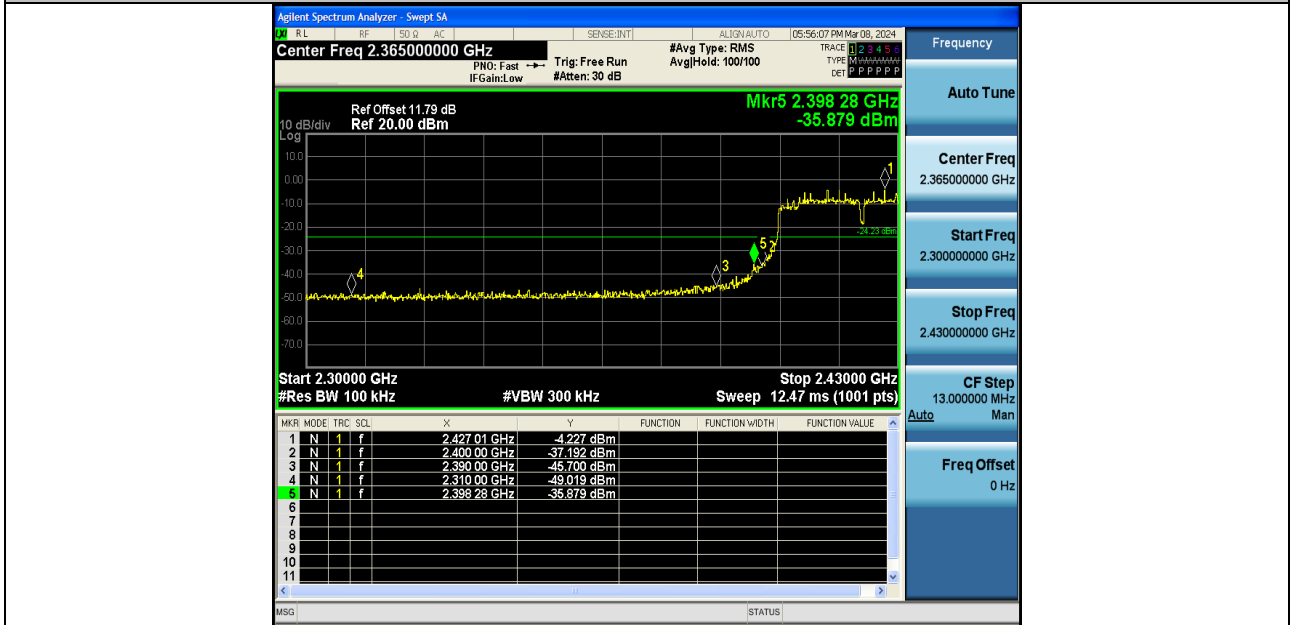

11N40SISO-Ant2-2422-PASS

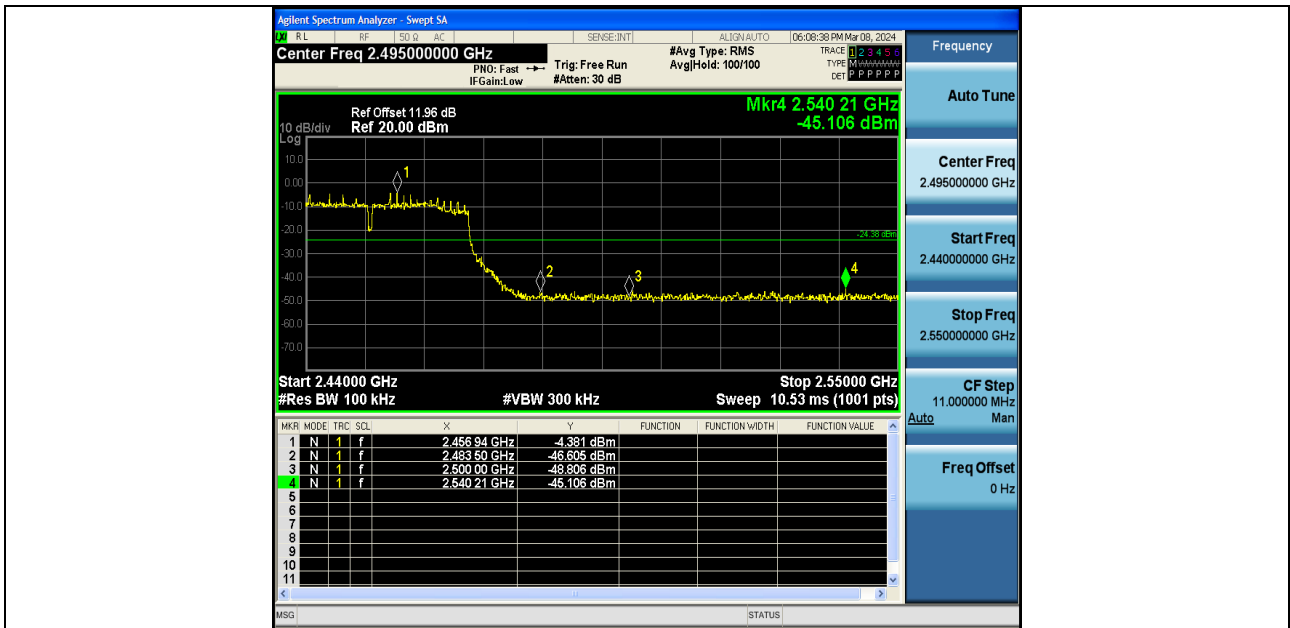

11N40SISO-Ant1-2452-PASS

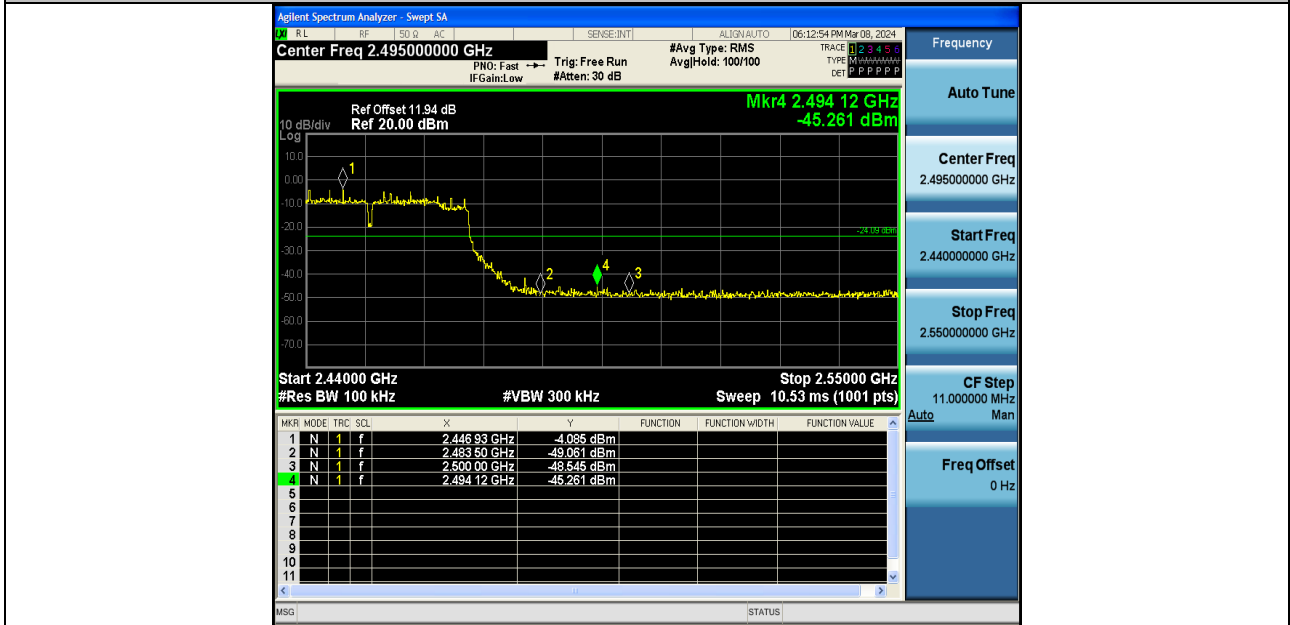

11N40SISO-Ant2-2452-PASS



9 6dB Bandwidth Measurement

Test Requirement : FCC CFR47 Part 15 Section 15.247


Test Method : ANSI C63.10:2013

Test Limit : Systems using digital modulation techniques may operate in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

9.1 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: RBW = 100kHz, VBW = 300kHz

9.2 Test Setup




9.3 Test Result

TestMode	Antenna	Frequency[MHz]	DTS BW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11B	Ant1	2412	9.560	2406.960	2416.520	0.5	PASS
11B	Ant2	2412	9.560	2406.960	2416.520	0.5	PASS
11B	Ant1	2437	9.720	2432.240	2441.960	0.5	PASS
11B	Ant2	2437	9.560	2431.960	2441.520	0.5	PASS
11B	Ant1	2462	9.080	2457.440	2466.520	0.5	PASS
11B	Ant2	2462	9.560	2456.960	2466.520	0.5	PASS
11G	Ant1	2412	13.000	2405.480	2418.480	0.5	PASS
11G	Ant2	2412	11.320	2406.320	2417.640	0.5	PASS
11G	Ant1	2437	15.160	2429.400	2444.560	0.5	PASS
11G	Ant2	2437	15.120	2429.440	2444.560	0.5	PASS
11G	Ant1	2462	15.080	2454.480	2469.560	0.5	PASS
11G	Ant2	2462	11.920	2455.720	2467.640	0.5	PASS
11N20SISO	Ant1	2412	13.840	2405.640	2419.480	0.5	PASS
11N20SISO	Ant2	2412	13.960	2405.520	2419.480	0.5	PASS
11N20SISO	Ant1	2437	14.840	2429.240	2444.080	0.5	PASS
11N20SISO	Ant2	2437	14.960	2429.480	2444.440	0.5	PASS
11N20SISO	Ant1	2462	13.840	2454.480	2468.320	0.5	PASS
11N20SISO	Ant2	2462	13.800	2454.400	2468.200	0.5	PASS
11N40SISO	Ant1	2422	31.360	2408.160	2439.520	0.5	PASS
11N40SISO	Ant2	2422	34.000	2404.480	2438.480	0.5	PASS
11N40SISO	Ant1	2437	31.280	2421.960	2453.240	0.5	PASS
11N40SISO	Ant2	2437	35.120	2419.400	2454.520	0.5	PASS
11N40SISO	Ant1	2452	35.120	2434.400	2469.520	0.5	PASS




11N40SISO	Ant2	2452	33.840	2435.680	2469.520	0.5	PASS
-----------	------	------	--------	----------	----------	-----	------


Test Graphs:

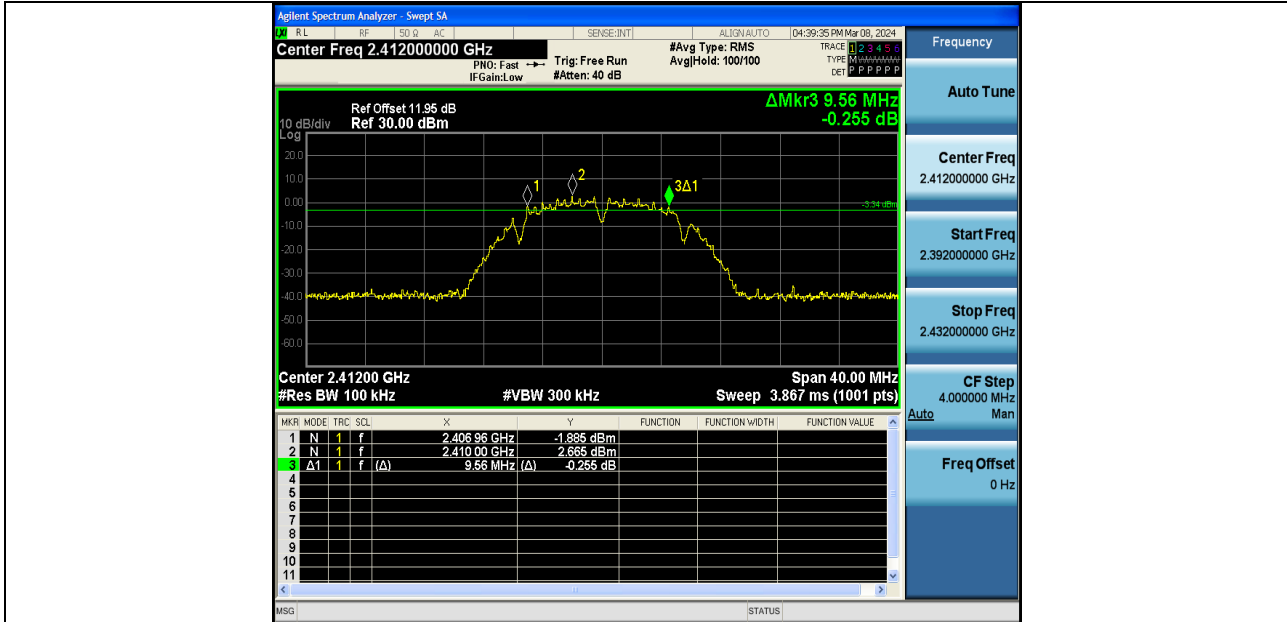


11B-Ant1-2412-PASS

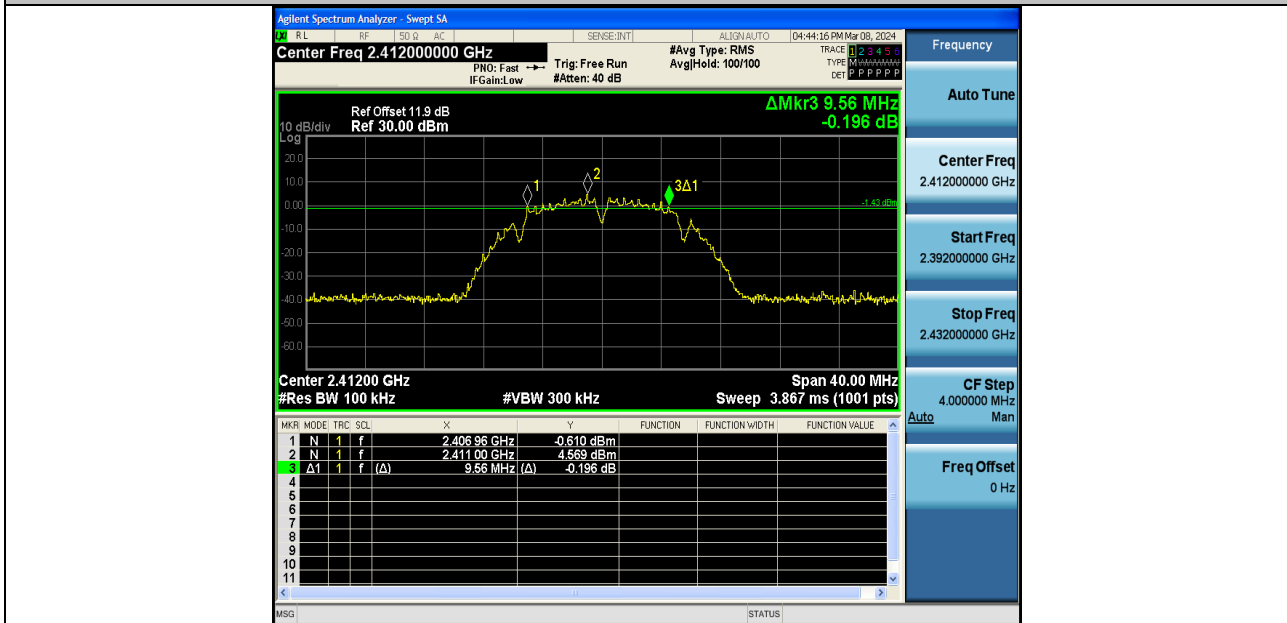


11B-Ant2-2412-PASS

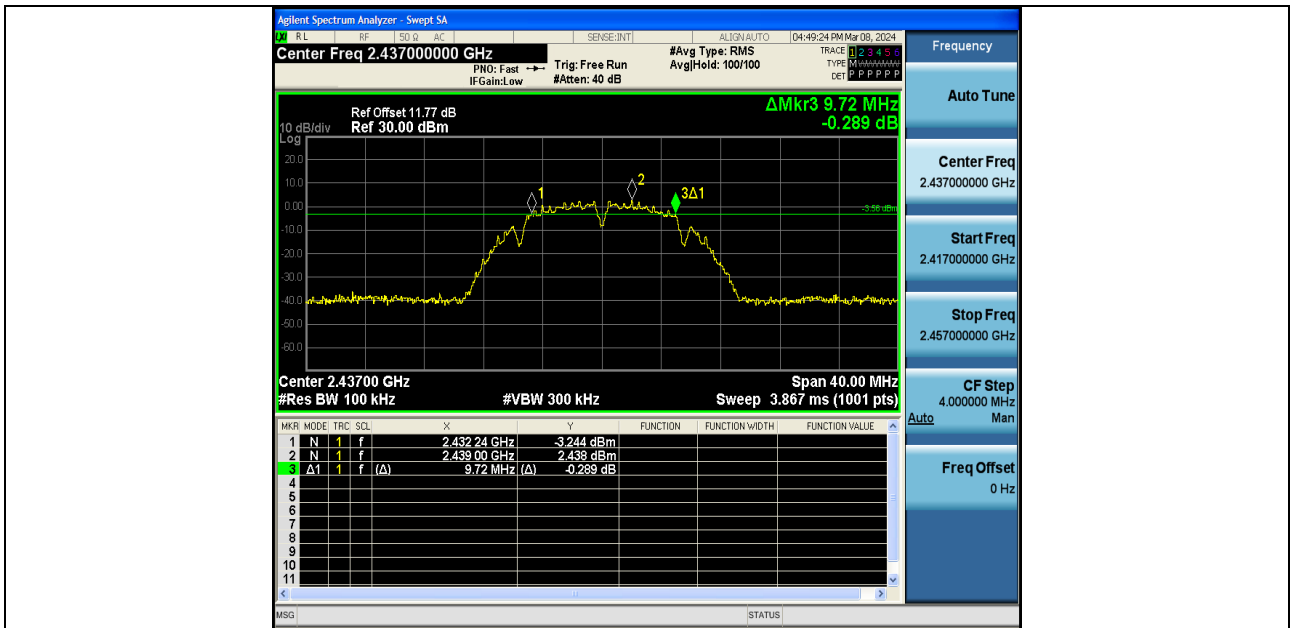


11B-Ant1-2437-PASS

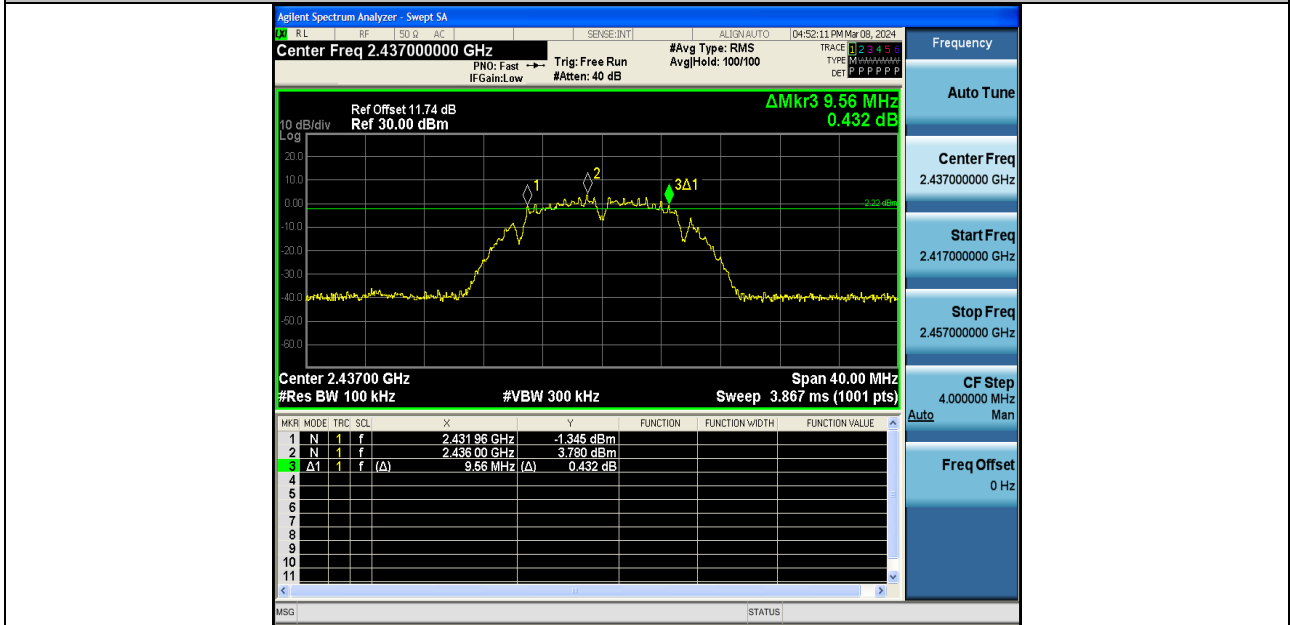

11B-Ant2-2437-PASS

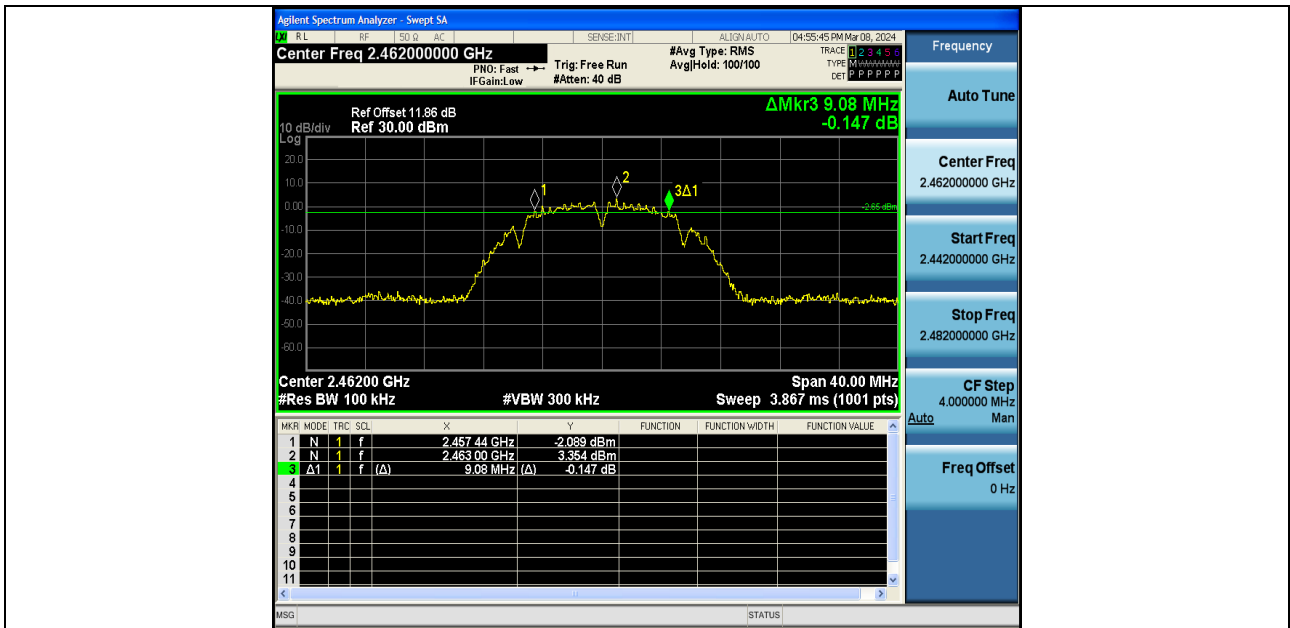


11B-Ant1-2462-PASS

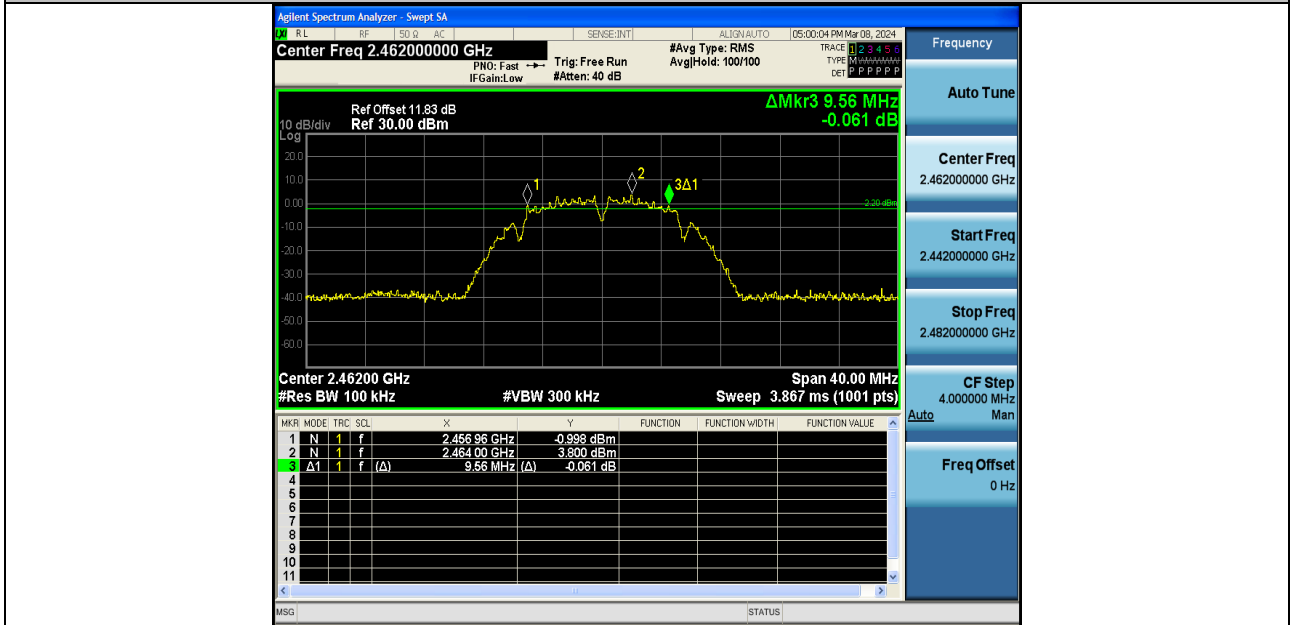


11B-Ant2-2462-PASS




11G-Ant1-2412-PASS

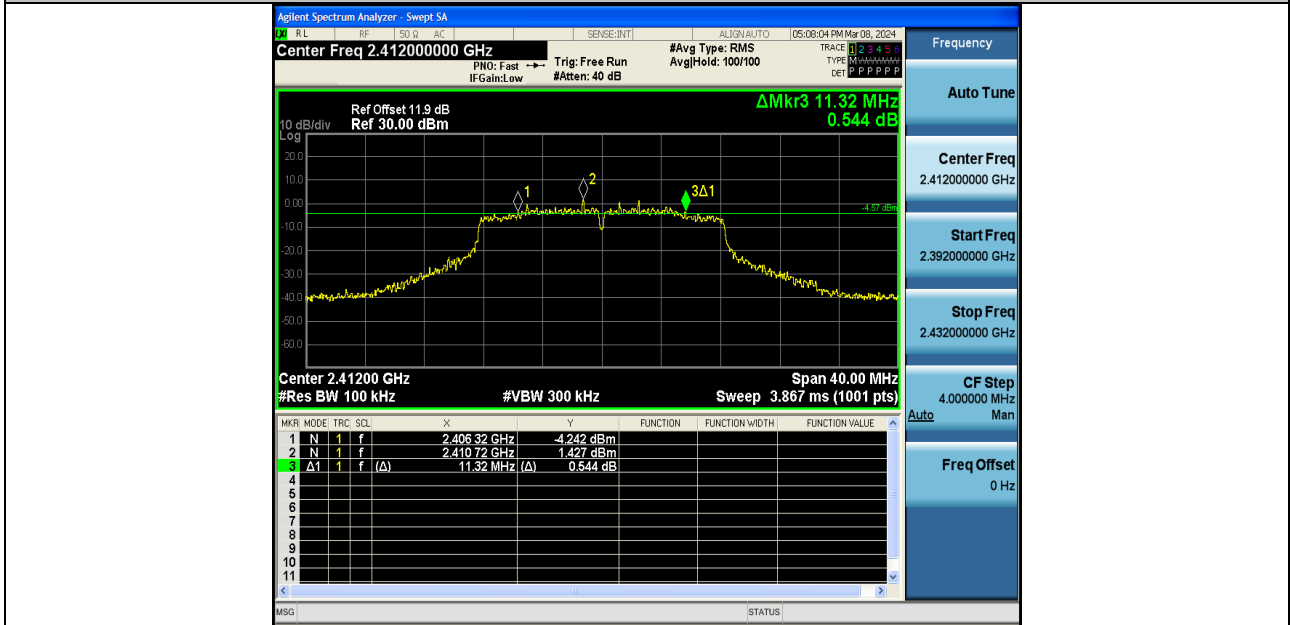

11G-Ant2-2412-PASS

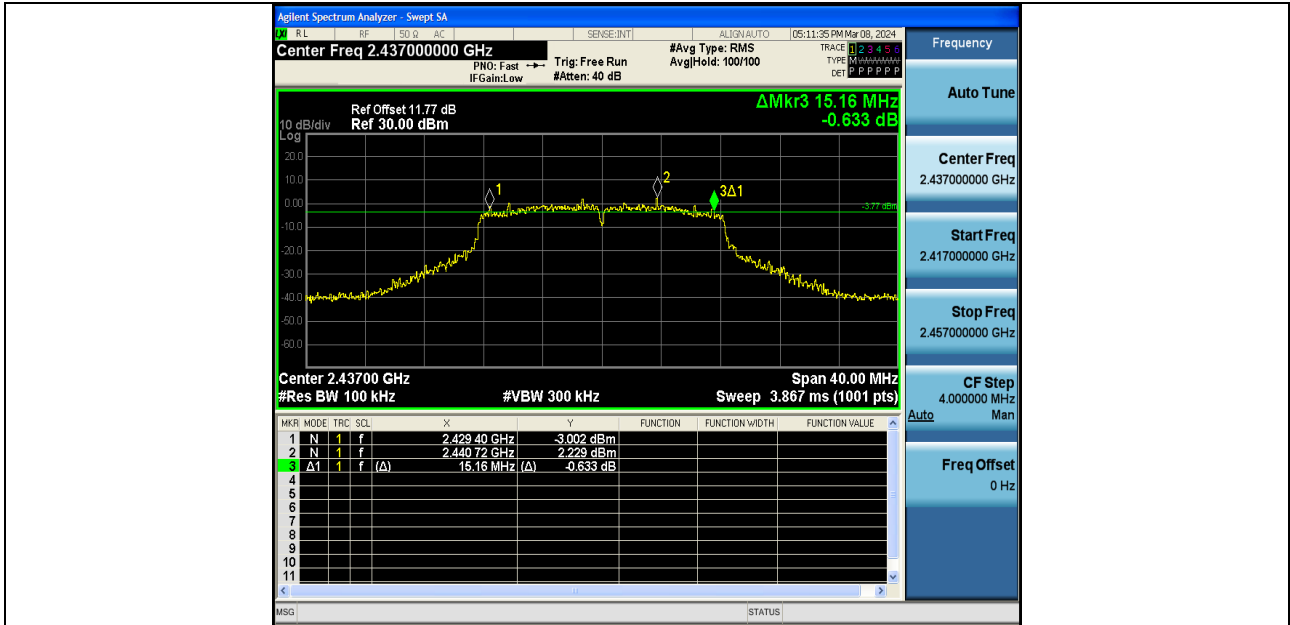


11G-Ant1-2437-PASS

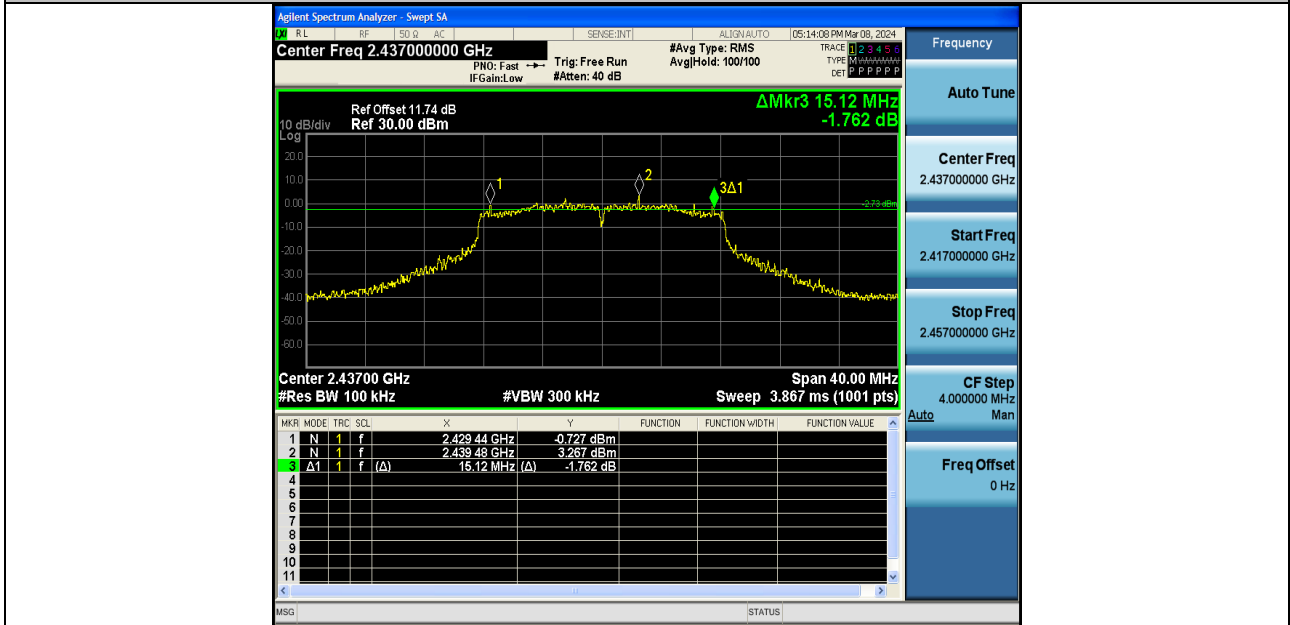

11G-Ant2-2437-PASS




11G-Ant1-2462-PASS

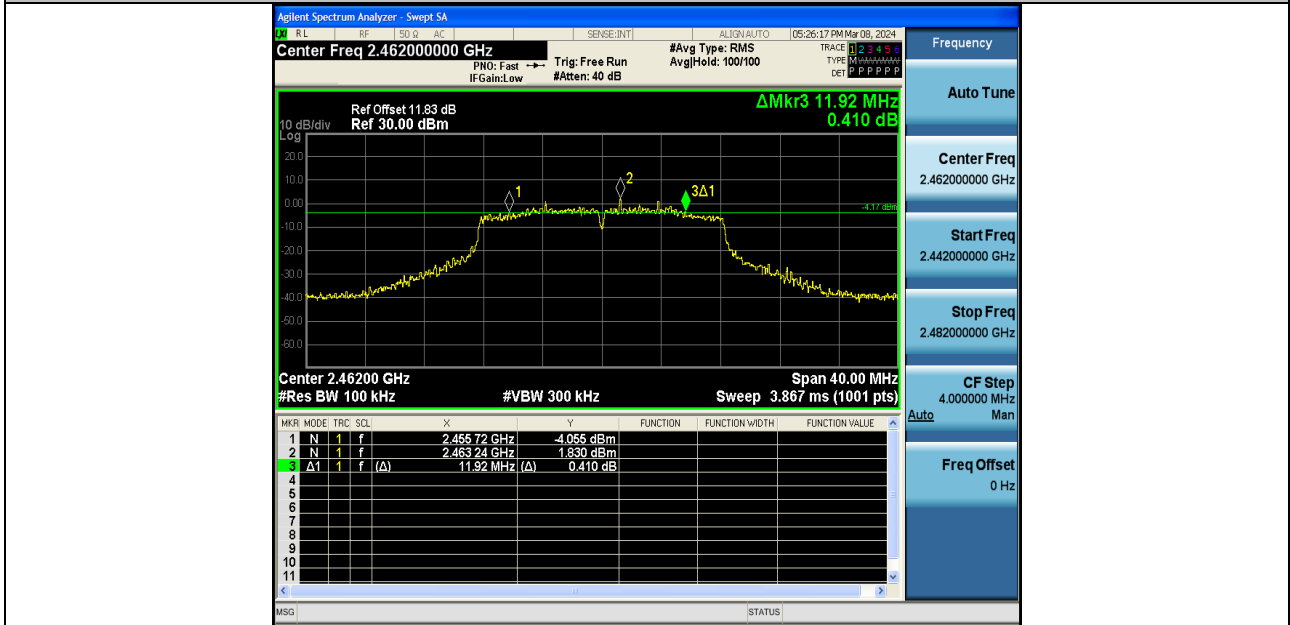


11G-Ant2-2462-PASS




11N20SISO-Ant1-2412-PASS

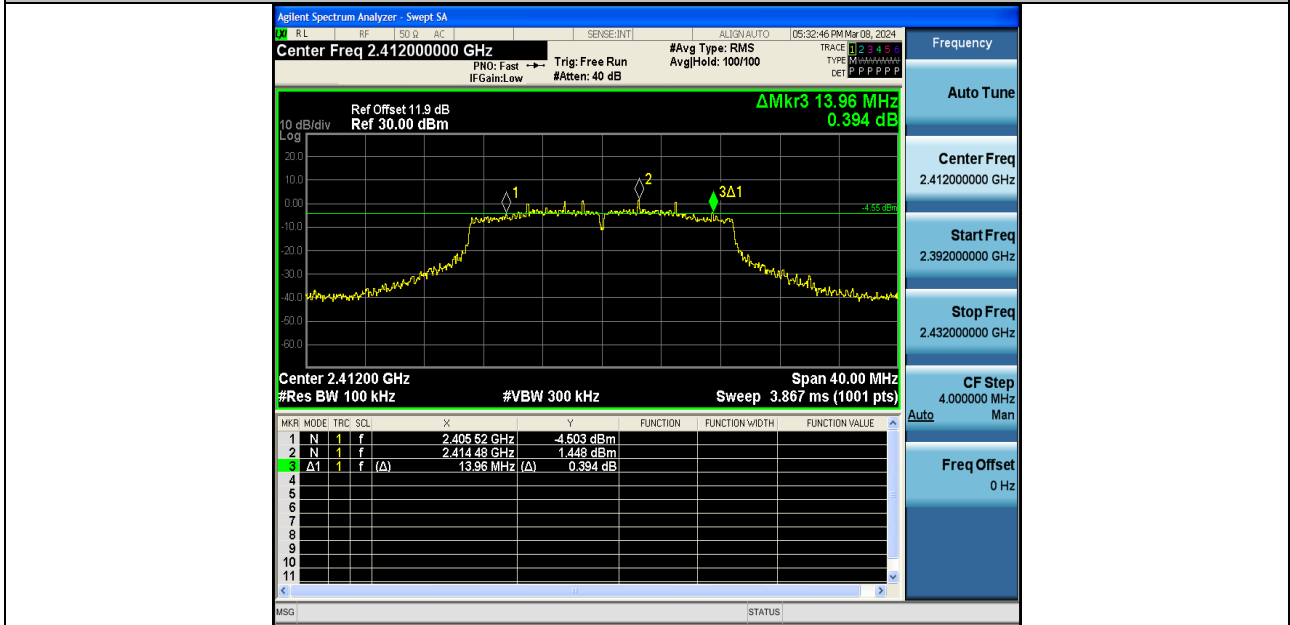


11N20SISO-Ant2-2412-PASS

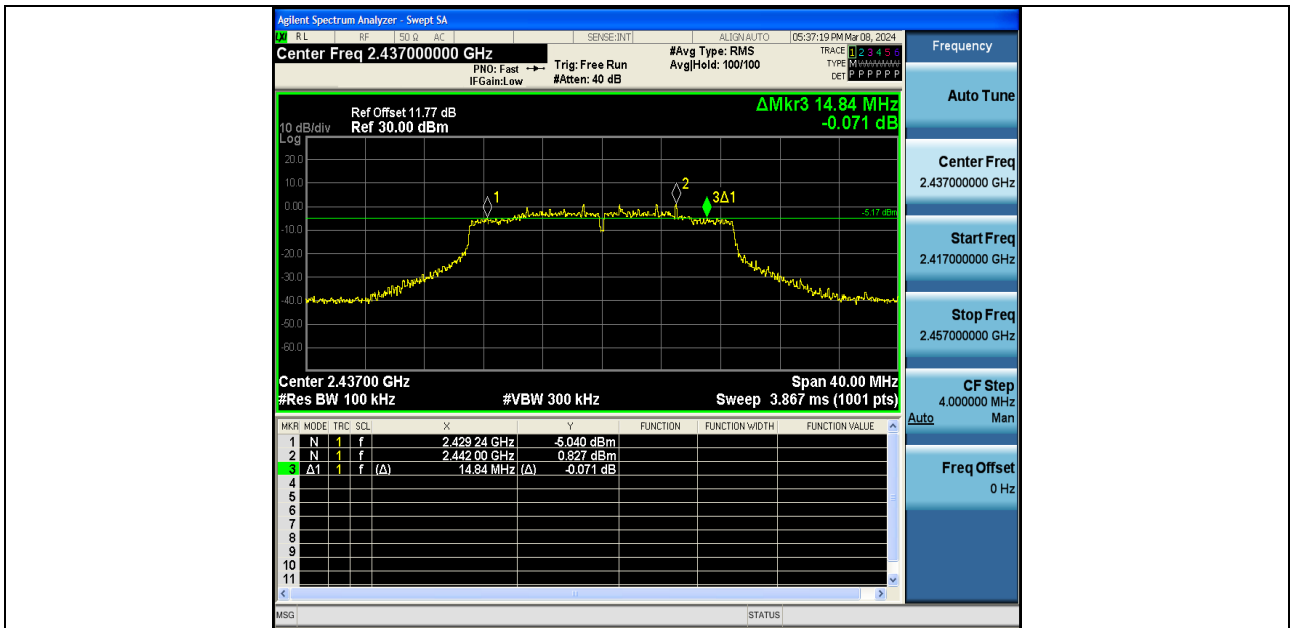


11N20SISO-Ant1-2437-PASS

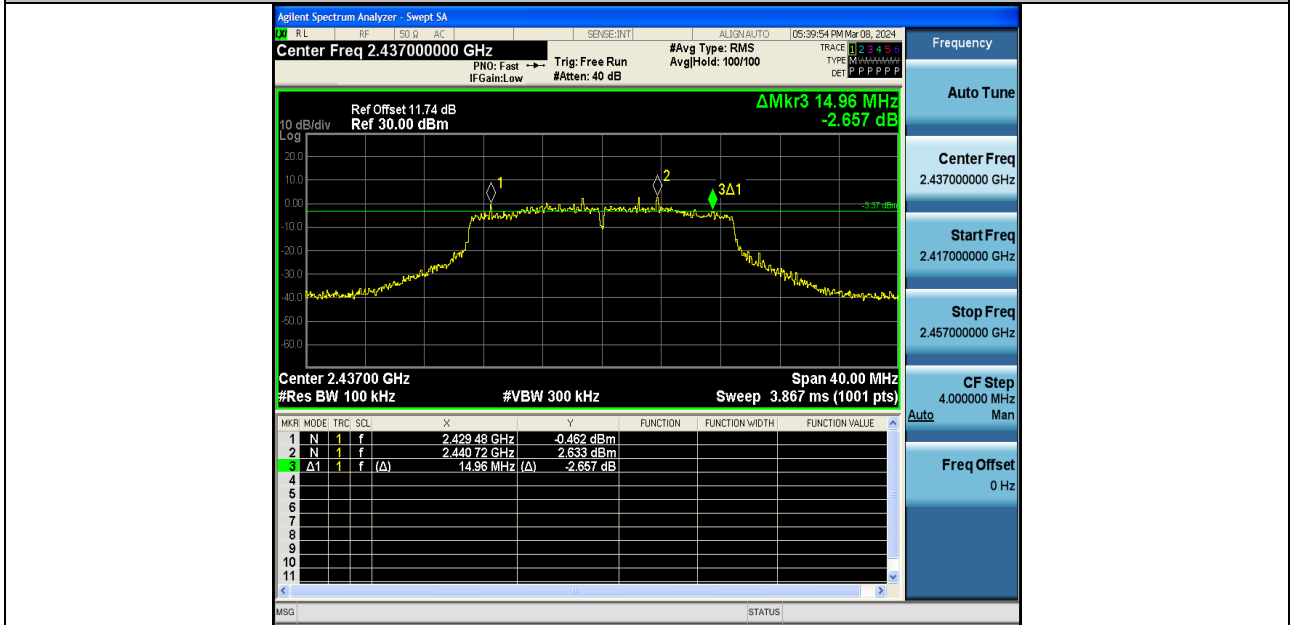


11N20SISO-Ant2-2437-PASS

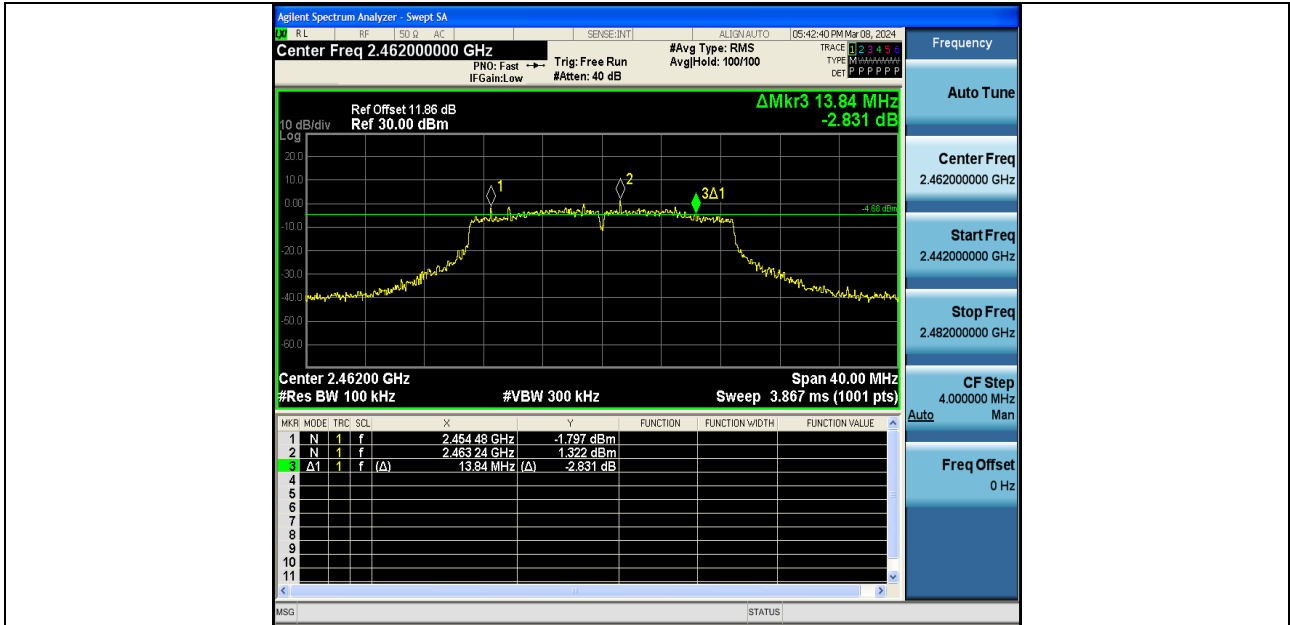


11N20SISO-Ant1-2462-PASS

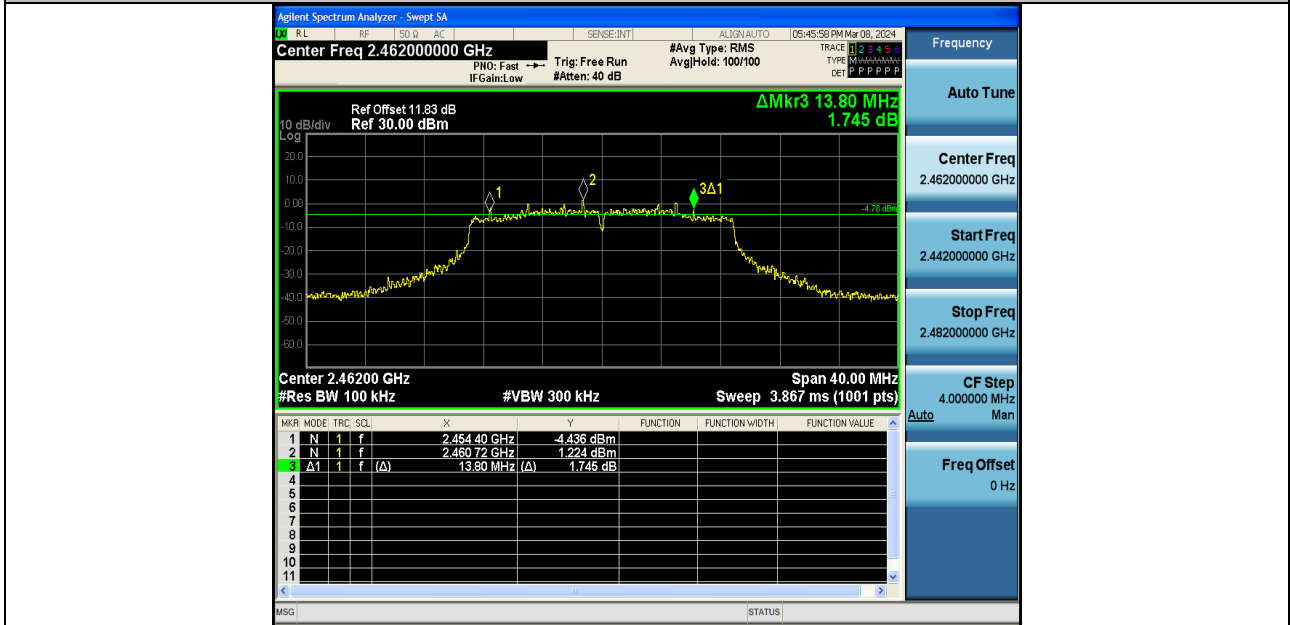

11N20SISO-Ant2-2462-PASS

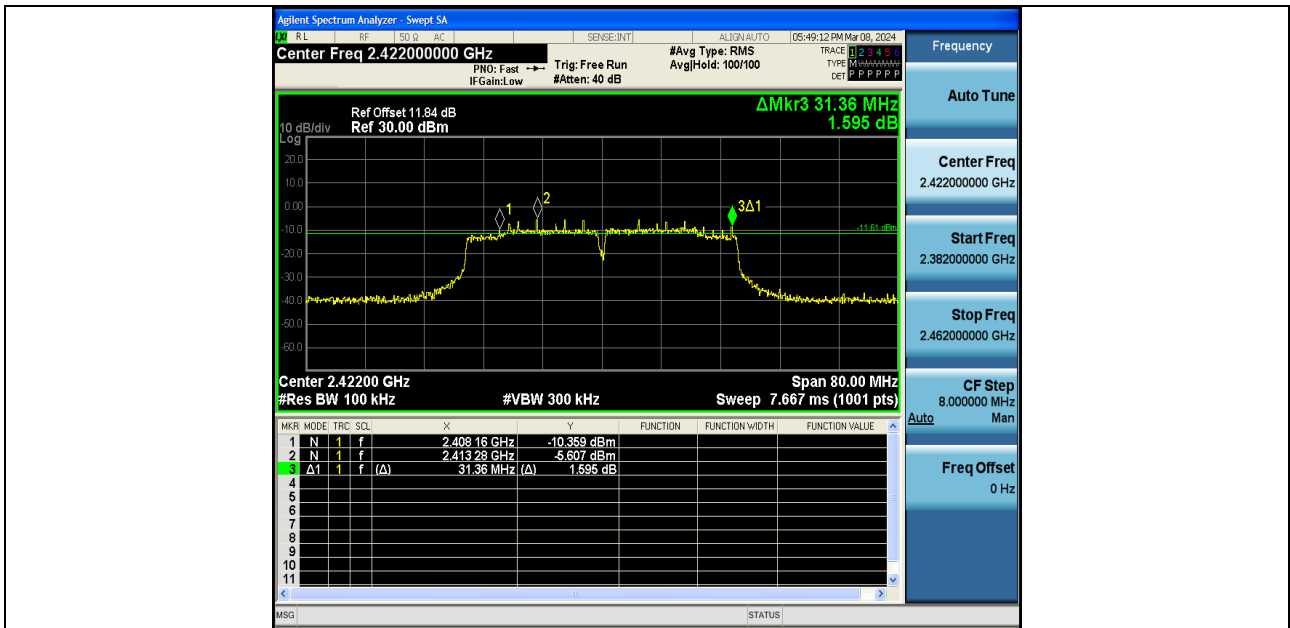

11N40SISO-Ant1-2422-PASS

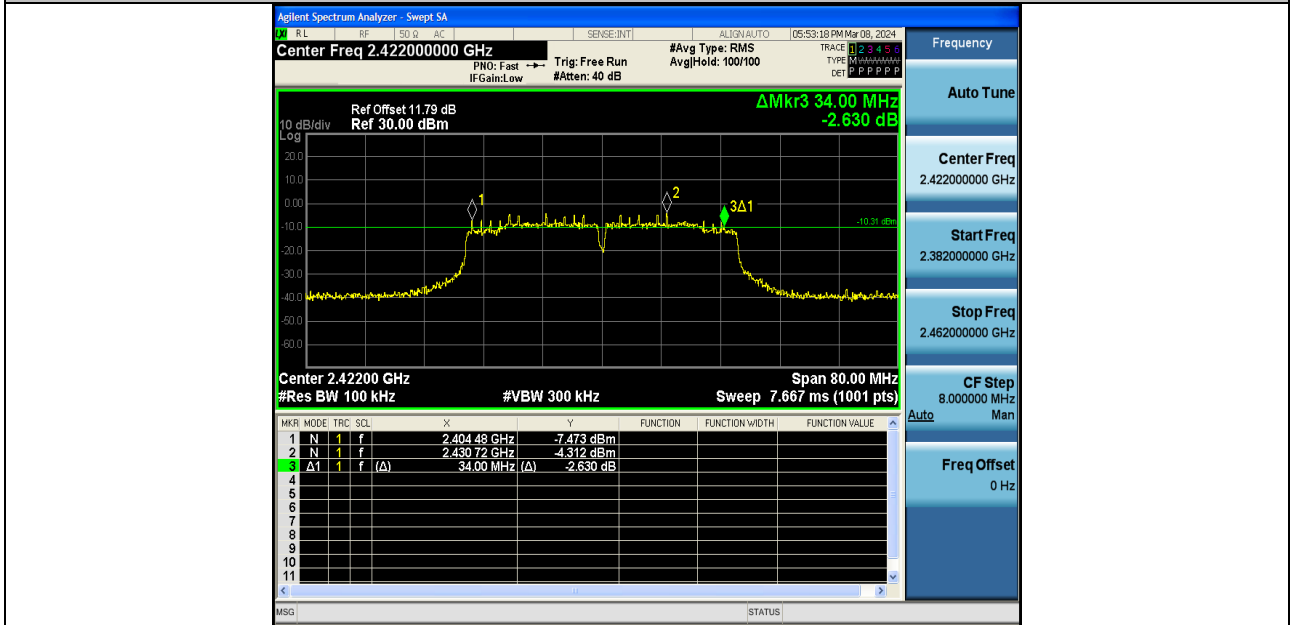

11N40SISO-Ant2-2422-PASS