


Power Tune up Procedure

1. The CBRS CAT-A Indoor CBSD is calibrated follow modulation mode.

LTE B48	QPSK	30± 1dBm
	16QAM	30± 1dBm
	64QAM	30± 1dBm

2. Calibration of module transmission power

Modules within a PA as below:

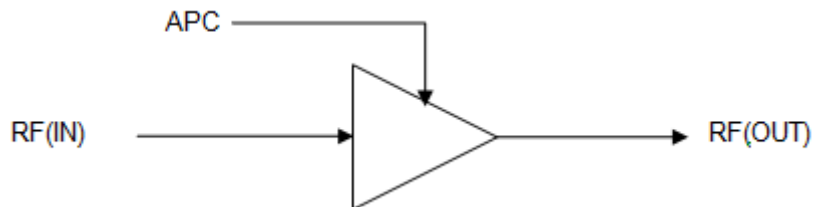

There is a transmission power table about PCLS and APC_DAC, by adjusting the voltage value of the APC, to change the transmission power.

Assume that the initial value to APC is 100, then detect the transmitted power is 20 dBm; you need to reduce the APC, to reduce the transmission power to achieve the predetermined value.