



Free Space

VS	SWR .								
	Bottom metal housing								
BLE	< 2.5								
WIFI_2GHz / 5GHz	< 2.5 / 2.5								
Isolation									
	Bottom metal housing								
BLE to WIFI 2.4GHz	Max 26.3dB								
Average Radiation efficiency									
	Bottom metal housing								
BLE	50%								
WIFI_2GHz / 5GHz	50% / 60%								
Peak gain									
	Bottom metal housing								
BLE	Max 1.9dBi								
WIFI_2GHz / 5GHz	Max 2.6dBi / 4.8dBi								



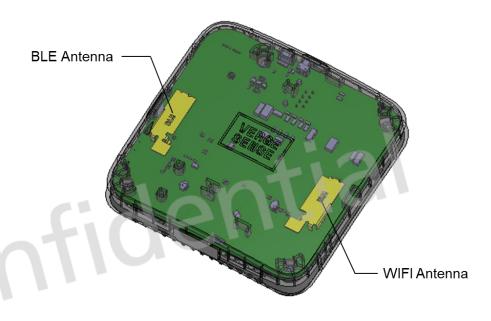



Antenna Placement for Free Space

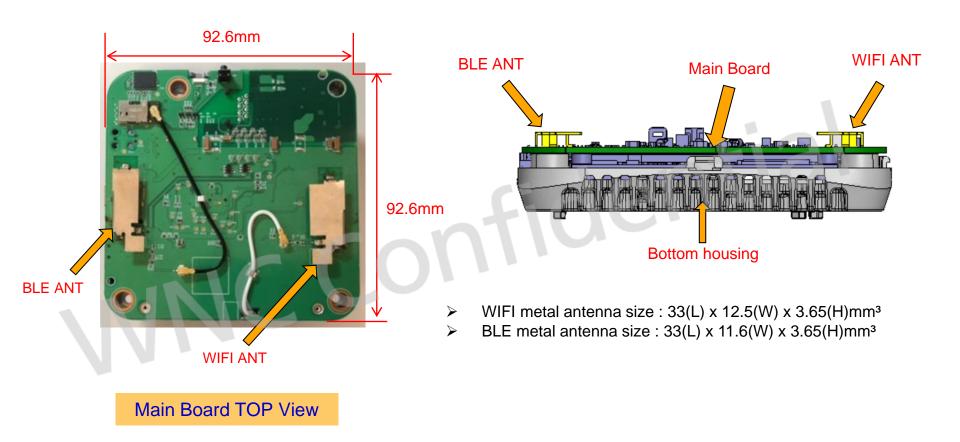





VSWR & Isolation

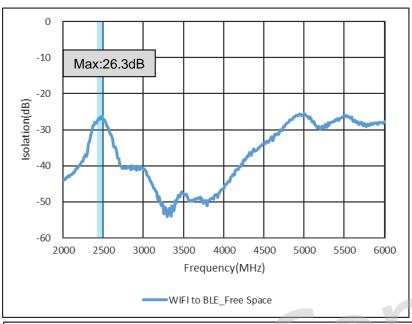

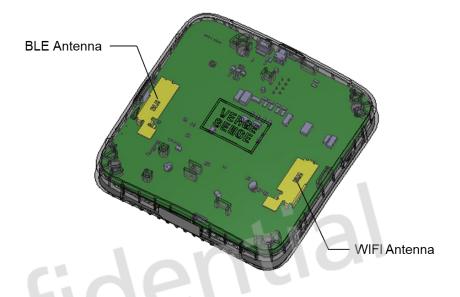


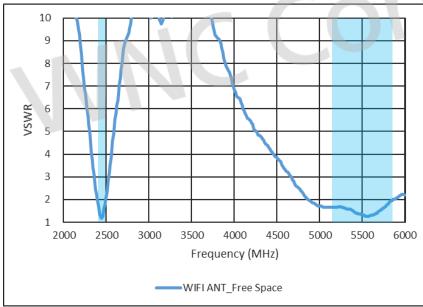

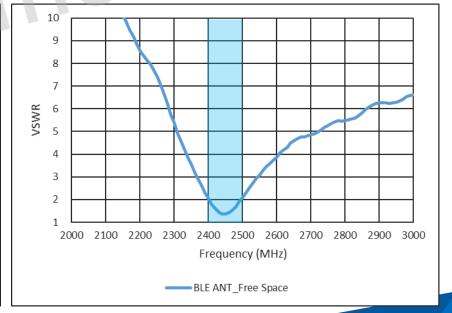




Efficiency

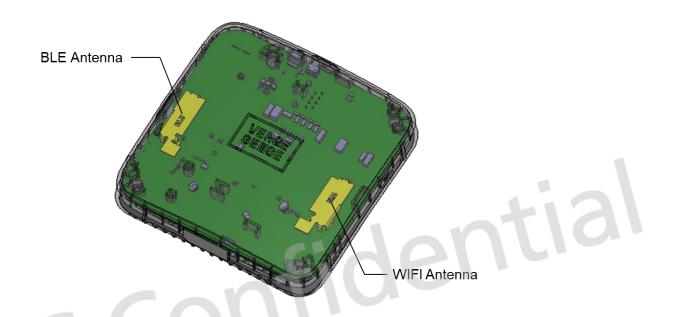


BLE_Free space	2400	2450	2500	avg.					
Eff.	50.0%	56.7%	51.6%	52.8%					
Eff. dB	-3.01	-2.47	-2.87						
Peak Gain	1.19	1.93	1.80						
MIEL Eroo choco	2400	0450	0500			-4-0 -0-0		E450 5050 5550 5750	
WIFI_Free space	2400	2450	2500	avg.	5150	5150 5350	5150 5350 5550	5150 5350 5550 5750	5150 5350 5550 5750 5850
Eff.	51.8%	57.0%	52.5%	avg. 53.7%	5150 63.7%				
						63.7% 65.5%	63.7% 65.5% 66.0%	63.7% 65.5% 66.0% 63.8%	63.7% 65.5% 66.0% 63.8% 60.4%

Radiation Pattern for BLE 2.4GHz

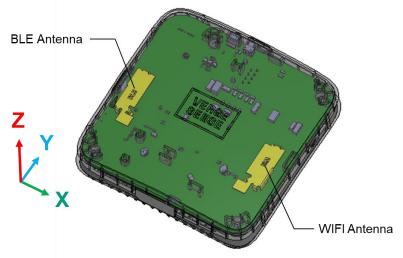


Measured with free space

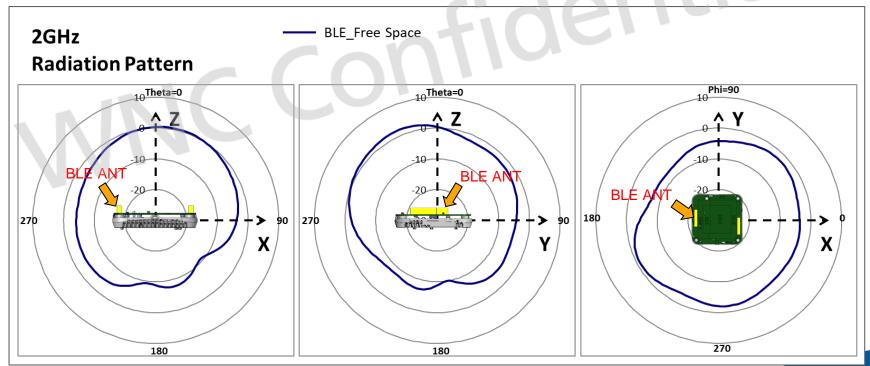




Radiation Pattern for WIFI 2.4GHz

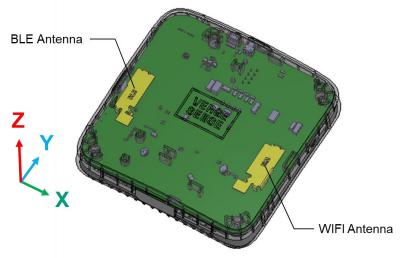


Measured with free space

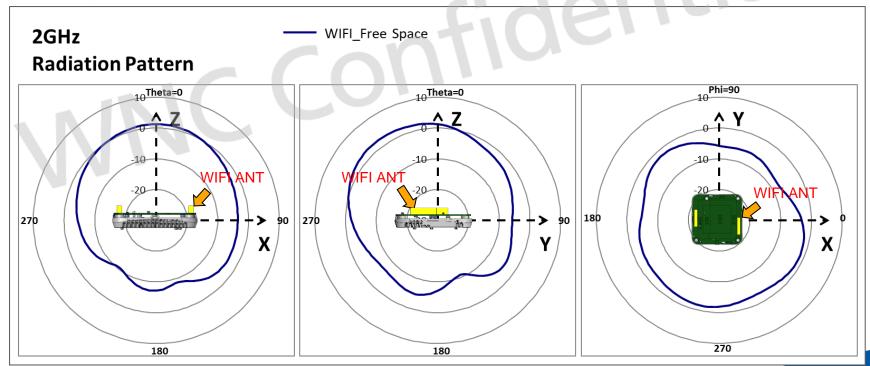



Radiation Pattern for WIFI 5GHz

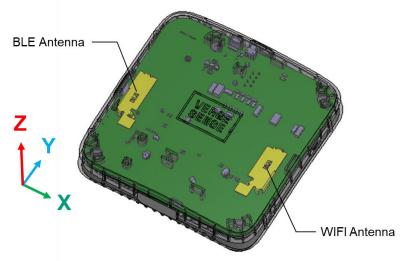

Measured with free space

