



REPORT No.: SZ24040007W01

TEST REPORT

APPLICANT : DoorDash, Inc.

PRODUCT NAME : Smart Scale

MODEL NAME : Smart Scale E

BRAND NAME : DoorDash

FCC ID : 2BFSLS

STANDARD(S) : 47 CFR Part 15 Subpart C

RECEIPT DATE : 2024-04-24

TEST DATE : 2024-05-22 to 2024-05-24

ISSUE DATE : 2024-06-12



Edited by:

Zeng Xiaoying
Zeng Xiaoying (Rapporteur)

Approved by:

Shen Junsheng
Shen Junsheng (Supervisor)

NOTE: This document is issued by Shenzhen Morlab Communications Technology Co., Ltd., the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.

MORLAB

Shenzhen Morlab Communications Technology Co., Ltd.
FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road,
Block67, BaoAn District, ShenZhen, Guangdong Province, P. R. China

Tel: 86-755-36698555
Http://www.morlab.cn

Fax: 86-755-36698525
E-mail: service@morlab.cn





DIRECTORY

1. Summary of Test Result	3
1.1. Testing Applied Standards	4
1.2. Test Equipment List	5
1.3. Measurement Uncertainty	7
1.4. Testing Laboratory	7
2. General Description	8
2.1. Information of Applicant and Manufacturer	8
2.2. Information of EUT	8
2.3. Channel List of EUT	9
2.4. Test Configuration of EUT	10
2.5. Test Conditions	10
2.6. Test Setup Layout Diagram	10
3. Test Results	13
3.1. Conducted Emission	13
3.2. Restricted Frequency Bands	14
3.3. Radiated Emission	15
Annex A Test Data and Result	17

Change History		
Version	Date	Reason for change
1.0	2024-06-12	First edition



1. Summary of Test Result

No.	Section	Description	Test Date	Test Engineer	Result	Method Determination /Remark
1	15.203	Antenna Requirement	N/A	N/A	N/A _{Note1}	No deviation
2	N/A	Duty Cycle of Test Signal	N/A	N/A	N/A _{Note1}	No deviation
3	15.247(b)	Maximum Peak Conducted Output Power	N/A	N/A	N/A _{Note1}	No deviation
4	15.247(b)	Maximum Average Conducted Output Power	N/A	N/A	N/A _{Note1}	No deviation
5	15.247(a)	Bandwidth	N/A	N/A	N/A _{Note1}	No deviation
6	15.247(d)	Conducted Spurious Emission and Band Edge	N/A	N/A	N/A _{Note1}	No deviation
7	15.247(e)	Power Spectral Density	N/A	N/A	N/A _{Note1}	No deviation
8	15.207	Conducted Emission	May 22, 2024	Wang Deyong	PASS	No deviation
9	15.247(d)	Restricted Frequency Bands	May 24, 2024	Gao Jianrou	PASS	No deviation
10	15.209, 15.247(d)	Radiated Emission	May 24, 2024	Gao Jianrou	PASS	No deviation

Note 1: The test results of all conducted test items please refer to the module report (Report No.: FR1N0920A) which issued on Jan. 14, 2022 by Sporton International Inc. (Kunshan).

Note 2: Additions to, deviation, or exclusions from the method shall be judged in the "method determination" column of add, deviate or exclude from the specific method shall be explained in the "Remark" of the above table.

Note 3: When the test result is a critical value, we will use the measurement uncertainty give the judgment result based on the 95% confidence intervals.



1.1. Testing Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- 47 CFR Part 15 Subpart C Radio Frequency Devices



1.2. Test Equipment List

1.2.1 Conducted Emission Test Equipment

Equipment	Serial No.	Type	Manufacturer	Cal. Date	Due Date
Receiver	MY56400093	N9038A	KEYSIGHT	2024.01.25	2025.01.24
LISN	8127449	NSLK 8127	Schwarzbeck	2024.02.02	2025.02.01
Pulse Limiter (10dB)	VTSD 9561 F- B #206	VTSD 9561-F	Schwarzbeck	2023.06.27	2024.06.26
RF Coaxial Cable (DC-100MHz)	BNC	MRE04	Qualwave	N/A	N/A

1.2.2 List of Software Used

Description	Manufacturer	Software Version
Test System	MaiWei	2.0.0.0
Morlab EMCR	Morlab	V1.2
TS+ -[JS32-CE]	Tonscend	V2.5.0.0

1.2.3 Radiated Test Equipment

Equipment	Serial No.	Type	Manufacturer	Cal. Date	Due Date
Receiver	MY54130016	N9038A	Agilent	2023.06.21	2024.06.20
Test Antenna - Bi- Log	9163-519	VULB 9163	Schwarzbeck	2023.07.01	2024.06.30
Test Antenna - Loop	1519-022	FMZB1519	Schwarzbeck	2023.06.26	2024.06.25
Test Antenna – Horn	01774	BBHA 9120D	Schwarzbeck	2023.07.01	2024.06.30
Test Antenna – Horn	BBHA9170 #773	BBHA9170	Schwarzbeck	2023.07.01	2024.06.30
Preamplifier (10MHz-6GHz)	46732	S10M100L38 02	LUCIX CORP.	2023.06.27	2024.06.26
Preamplifier (2GHz-18GHz)	61171/61172	S020180L32 03	LUCIX CORP.	2023.06.27	2024.06.26
Preamplifier (18GHz-40GHz)	DS77209	DCLNA0118- 40C-S	Decentest	2023.07.04	2024.07.03



REPORT No.: SZ24040007W01

RF Coaxial Cable (DC-18GHz)	MRE001	PE330	Pasternack	2023.06.27	2024.06.26
RF Coaxial Cable (DC-18GHz)	MRE002	CLU18	Pasternack	2023.06.27	2024.06.26
RF Coaxial Cable (DC-18GHz)	MRE003	CLU18	Pasternack	2023.06.27	2024.06.26
RF Coaxial Cable (DC-40GHz)	22290045	QA360-40- KK-0.5	Qualwave	2023.07.04	2024.07.03
RF Coaxial Cable (DC-40GHz)	22290046	QA360-40- KKF-2	Qualwave	2023.07.04	2024.07.03
RF Coaxial Cable (DC-18GHz)	22120181	QA500-18- NN-5	Qualwave	2023.07.04	2024.07.03
Notch Filter	N/A	WRCG-2400- 2483.5-60SS	Wainwright	N/A	N/A
Anechoic Chamber	N/A	9m*6m*6m	CRT	2022.05.10	2025.05.09



1.3. Measurement Uncertainty

Test Items	Uncertainty	Remark
Restricted Frequency Bands	±5%	Confidence levels of 95%
Radiated Emission	±2.95dB	Confidence levels of 95%
Conducted Emission	±2.44dB	Confidence levels of 95%

1.4. Testing Laboratory

Laboratory Name	Shenzhen Morlab Communications Technology Co., Ltd.
Laboratory Address	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong Province, P. R. China
Telephone	+86 755 36698555
Facsimile	+86 755 36698525
FCC Designation Number	CN1192
FCC Test Firm Registration Number	226174

2. General Description

2.1. Information of Applicant and Manufacturer

Applicant	DoorDash, Inc.
Applicant Address	303 2nd St South Tower, 8th Floor, San Francisco, CA, United States
Manufacturer	Rhino Mobility LLC
Manufacturer Address	8 The Green, Suite A, Dover, Delaware, 19901, USA

2.2. Information of EUT

Product Name:	Smart Scale
Sample No.:	2#
Hardware Version:	REV 04
Software Version:	0.4.25
Equipment Type:	Bluetooth LE
Bluetooth Version:	5.0
Modulation Type:	GFSK
Data Rate:	1Mbps, 2Mbps
Operating Frequency Range:	2402MHz-2480MHz
Antenna Type:	PCB Antenna
Antenna Gain:	3.26dBi

Note 1: The test results of all conducted test items please refer to the module report (Report No.: FR1N0920A) which issued on Jan. 14, 2022 by Sporton International Inc. (Kunshan). We only recorded the radiated test result in this report.

Note 2: For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or manufacturer.



2.3.Channel List of EUT

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	10	2422	20	2442	30	2462
1	2404	11	2424	21	2444	31	2464
2	2406	12	2426	22	2446	32	2466
3	2408	13	2428	23	2448	33	2468
4	2410	14	2430	24	2450	34	2470
5	2412	15	2432	25	2452	35	2472
6	2414	16	2434	26	2454	36	2474
7	2416	17	2436	27	2456	37	2476
8	2418	18	2438	28	2458	38	2478
9	2420	19	2440	29	2460	39	2480

Note 1: The black bold channels were selected for test.

2.4. Test Configuration of EUT


Test mode is used to control the EUT under the maximum power level during test.

2.5. Test Conditions


Temperature (°C)	15-35
Relative Humidity (%)	30-60
Atmospheric Pressure (kPa)	86-106

2.6. Test Setup Layout Diagram

2.6.1. Conducted Measurement

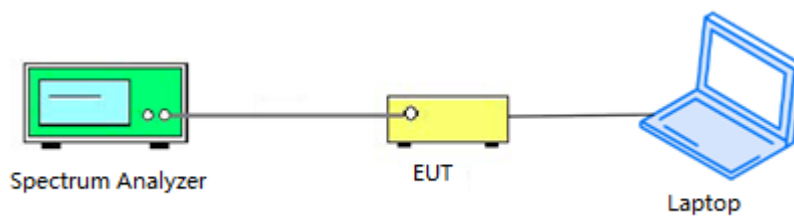


2.6.2. Conducted Emission Measurement

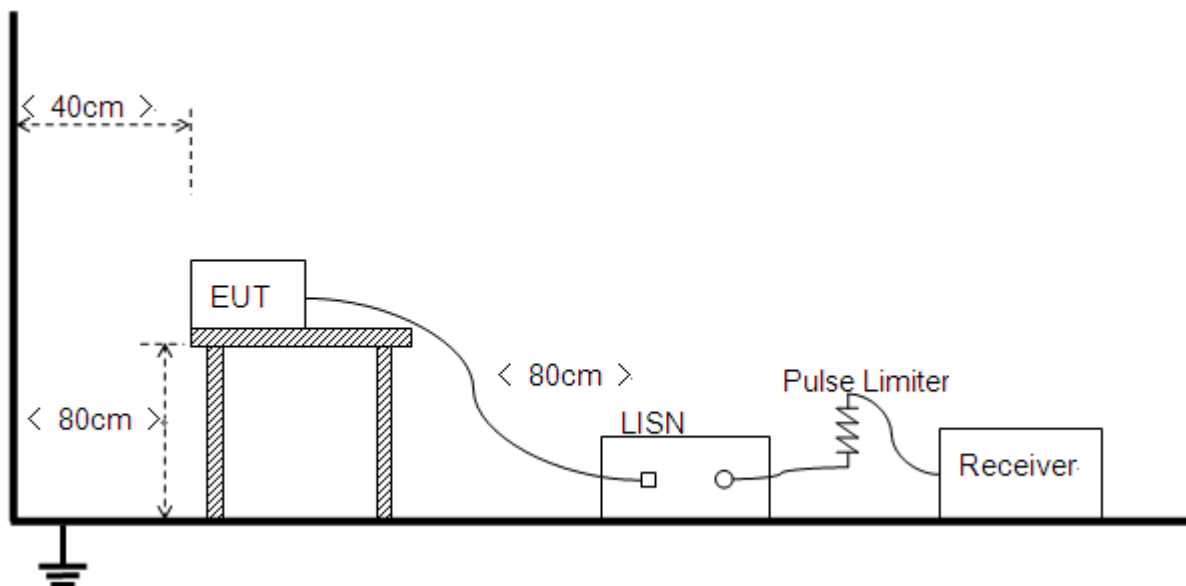


2.6.3.Radiation Measurement


1) For radiated emissions from 9kHz to 30MHz

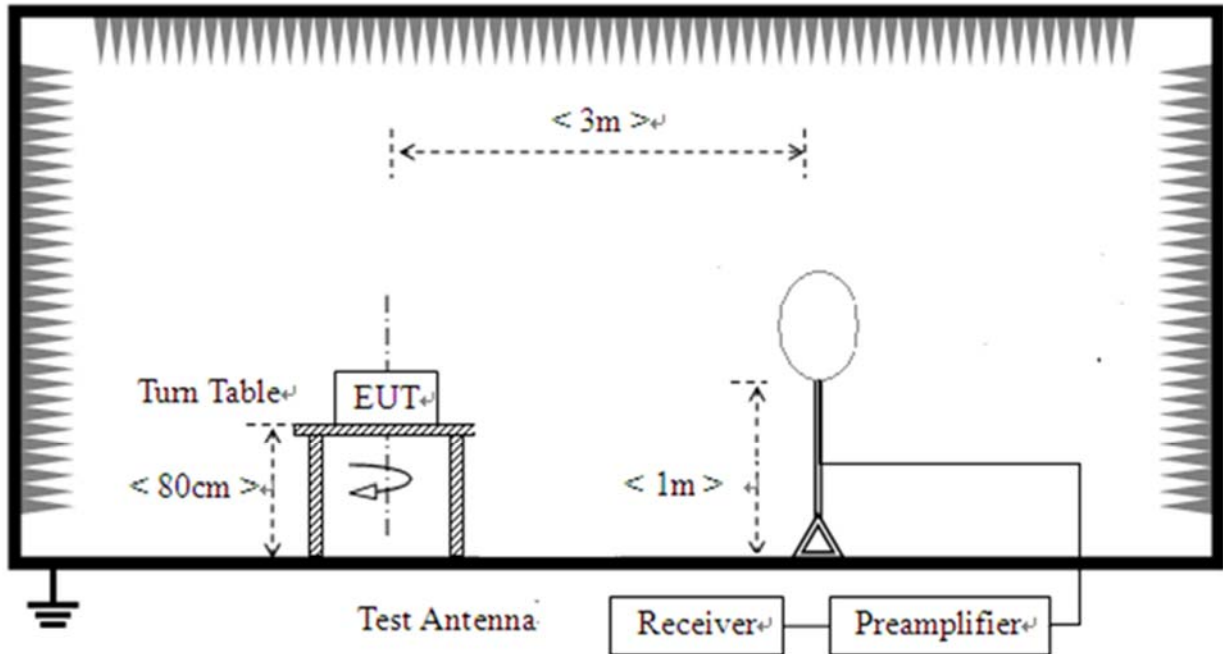

2) For radiated emissions from 30MHz to 1GHz

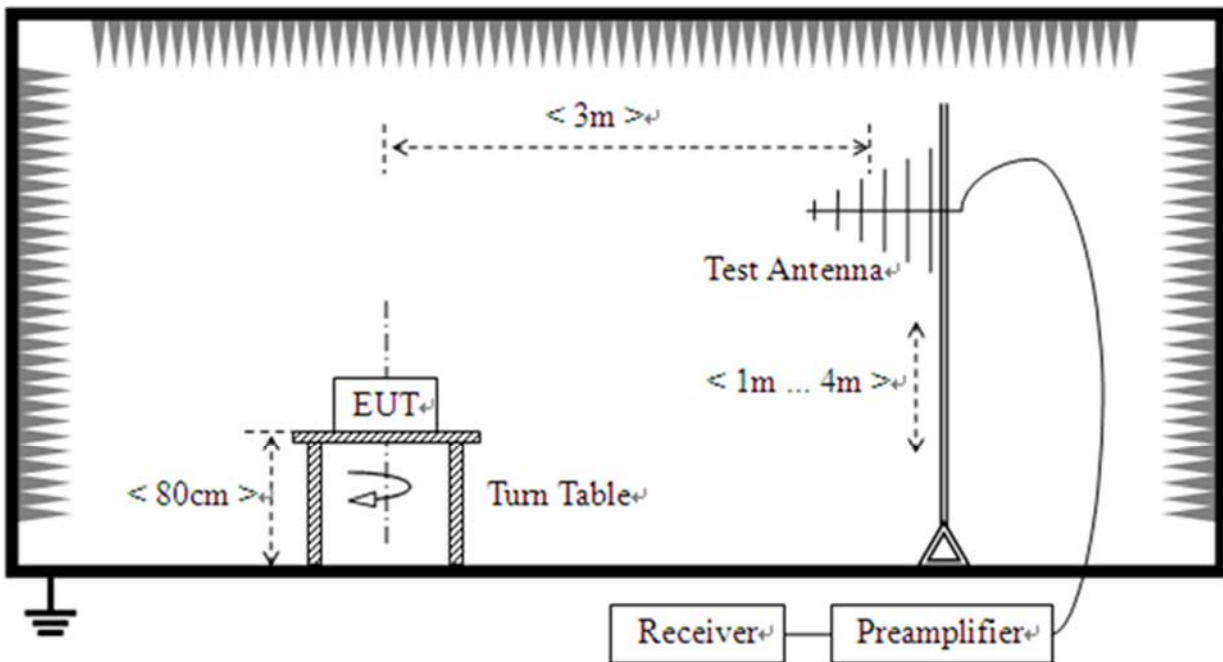

3) For radiated emissions above 1GHz

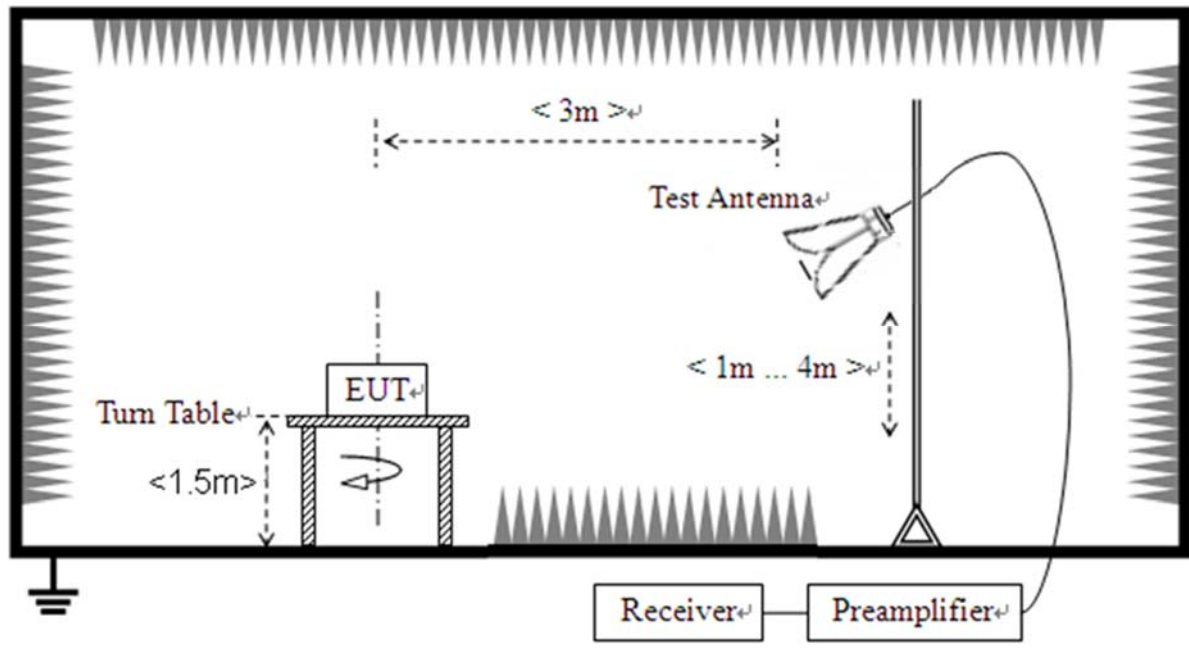

3. Test Results

3.1. Conducted Emission

3.1.1. Requirement

According to FCC section 15.207, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150kHz to 30MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 Ω line impedance stabilization network (LISN).

Frequency Range (MHz)	Conducted Limit (dB μ V)	
	Quai-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
5 - 30	60	50

Note:

- (a) The lower limit shall apply at the band edges.
- (b) The limit decreases linearly with the logarithm of the frequency in the range 0.15 - 0.50MHz.

3.1.2. Test Procedures

The Table-top EUT was placed upon a non-metallic table 0.8m above the horizontal metal reference ground plane. EUT was connected to LISN and LISN was connected to reference Ground Plane. EUT was 80cm from LISN. The set-up and test methods were according to ANSI C63.10: 2013.

3.1.3. Test Setup Layout

Refer to chapter 2.6.2 in this report.

3.1.4. Test Result

Refer to Annex A.1 in this report.

3.2. Restricted Frequency Bands

3.2.1. Requirement

According to FCC section 15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, In addition, radiated emissions which fall in the restricted bands, as defined in 15.205(a), must also comply with the radiated emission limits specified in 15.209(a).

3.2.2. Test Procedures

The EUT is located in a 3m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of the site as factors are calculated to correct the reading.

For the Test Antenna:

Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength.

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1\text{GHz}$, 100 kHz for $f < 1\text{GHz}$

VBW = 3 MHz

Sweep = auto

Detector function = peak/average

Trace = max hold

Allow the trace to stabilize

3.2.3. Test Setup Layout

Refer to chapter 2.6.3 in this report.

3.2.4. Test Result

Refer to Annex A.2 in this report.

3.3. Radiated Emission

3.3.1. Requirement

According to FCC section 15.247(d), radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ($\mu\text{V}/\text{m}$)	Measurement Distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

Note1: For above 1000MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit.

Note2: For above 1000MHz, limit field strength of harmonics: 54dBuV/m@3m (AV) and 74dBuV/m@3m (PK). In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), also should comply with the radiated emission limits specified in Section 15.209(a)(above table).



3.3.2.Test Procedures

The EUT is placed on a non-conducting table 80 cm above the ground plane for measurement below 1GHz; 1.5 m above the ground plane for measurement above 1GHz. The antenna to EUT distance is 3meters. The EUT is configured in accordance with ANSI C63.10. The EUT is set to transmit in a continuous mode.

For measurements below 30MHz, the emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9kHz-90 kHz, 110kHz-490 kHz. Radiated emission limits in these two bands are based on measurements employing an average detector.

For measurements below 1GHz the resolution bandwidth is set to 100kHz for peak detection measurements or 120kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1GHz the resolution bandwidth is set to 1MHz, the video band width is set to 3MHz for peak measurements and as applicable for average measurements.

The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions. For measurements above 1 GHz, keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response.

3.3.3.Test Setup Layout

Refer to chapter 2.6.3 in this report.

3.3.4.Test Result

Refer to Annex A.3 in this report.

Annex A Test Data and Result

A.1. Conducted Emission

The maximum conducted interference is searched using Peak (PK), if the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. Set RBW=9kHz, VBW=30kHz. Refer to recorded points and plots below.

Note: Both of the test voltage AC 120V/60Hz and AC 230V/50Hz were considered and tested respectively, only the results of the worst case AC 120V/60Hz were recorded in this report.

A. Test Setup:

Test Mode: EUT + PC + PC Adapter + BT TX

Test voltage: AC 120V/60Hz


The measurement results are obtained as below:

$E [dB\mu V] = U_R + L_{Cable\ loss} [dB] + A_{Factor}$

U_R : Receiver Reading


A_{Factor} : Voltage division factor of LISN

B. Test Plot:

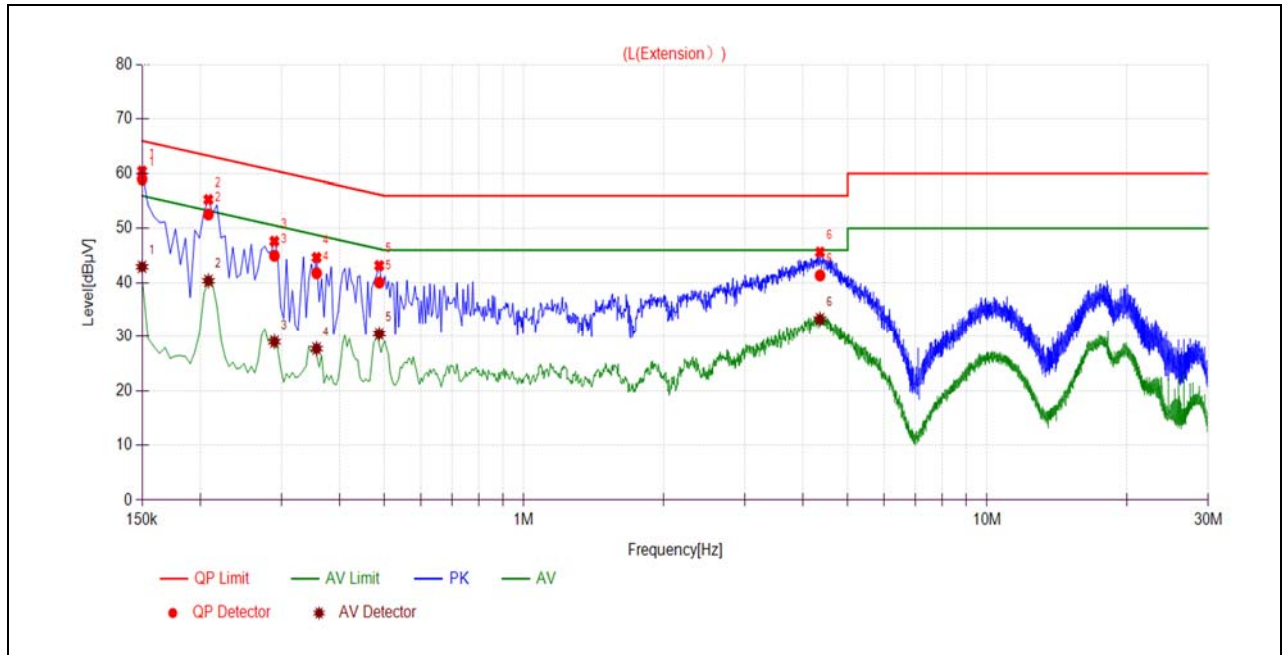

(L Phase)

No.	Fre. (MHz)	Emission Level (dBμV)		Limit (dBμV)		Power-line	Verdict
		Quai-peak	Average	Quai-peak	Average		
1	0.1500	58.98	42.93	66.00	56.00	Line	PASS
2	0.2085	52.58	40.36	63.27	53.27		PASS
3	0.2895	44.97	28.99	60.54	50.54		PASS
4	0.3570	41.75	27.72	58.80	48.80		PASS
5	0.4875	40.03	30.50	56.21	46.21		PASS
6	4.3579	41.34	33.29	56.00	46.00		PASS

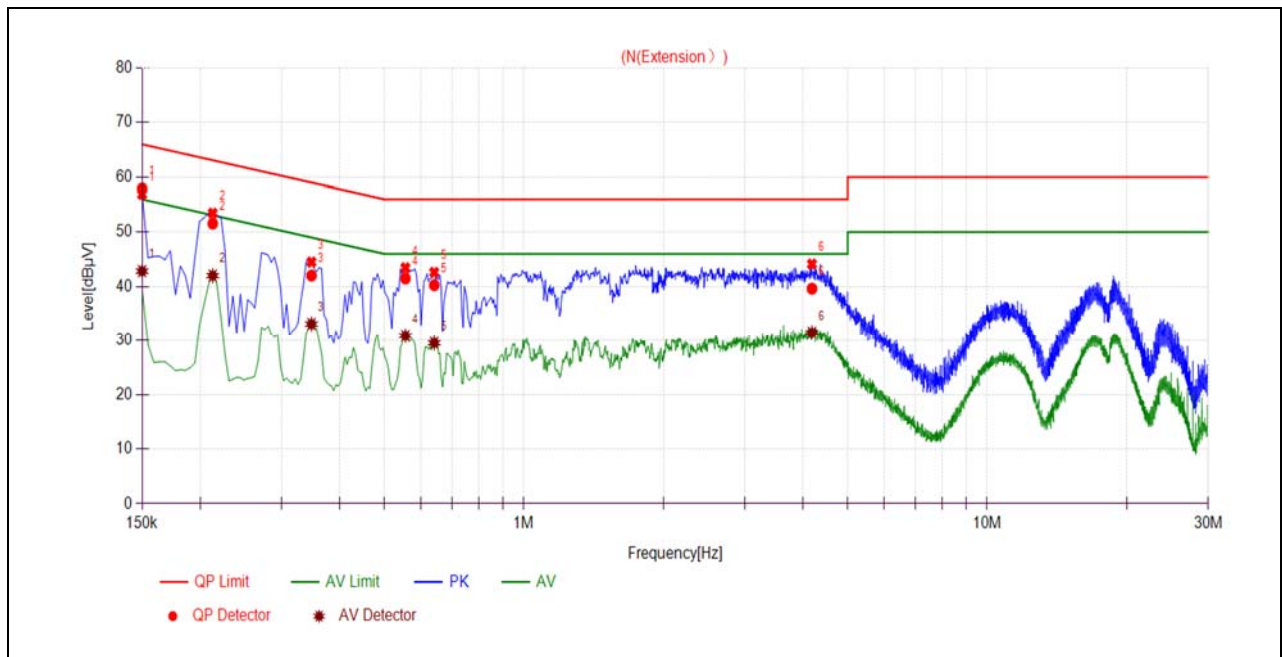

(N Phase)

No.	Fre. (MHz)	Emission Level (dBμV)		Limit (dBμV)		Power-line	Verdict
		Quai-peak	Average	Quai-peak	Average		
1	0.1500	57.92	42.85	66.00	56.00	Neutral	PASS
2	0.2130	51.58	42.02	63.09	53.09		PASS
3	0.3480	42.03	33.12	59.01	49.01		PASS
4	0.5550	41.51	30.90	56.00	46.00		PASS
5	0.6405	40.28	29.51	56.00	46.00		PASS
6	4.1863	39.63	31.48	56.00	46.00		PASS



A.2. Restricted Frequency Bands

The lowest and highest channels are tested to verify the Restricted Frequency Bands.

The measurement results are obtained as below:

$$E \text{ [dB}\mu\text{V/m]} = U_R + A_T + A_{\text{Factor}} \text{ [dB]}; A_T = L_{\text{Cable loss}} \text{ [dB]} - G_{\text{preamp}} \text{ [dB]}$$

A_T : Total correction Factor except Antenna

U_R : Receiver Reading


G_{preamp} : Preamplifier Gain

A_{Factor} : Antenna Factor at 3m


Note: Restricted Frequency Bands were performed when antenna was at vertical and horizontal polarity, and only the worse test condition (vertical) was recorded in this test report.

1Mbps


Channel	Frequency (MHz)	Detector	Receiver Reading U_R (dB μ V)	A_T (dB)	A_{Factor} (dB@3m)	Max. Emission E (dB μ V/m)	Limit (dB μ V/m)	Verdict
		PK/ AV						
0	2367.08	PK	24.44	6.74	27.20	58.38	74	PASS
0	2378.94	AV	12.15	6.74	27.20	46.09	54	PASS
39	2496.04	PK	24.64	6.74	27.20	58.58	74	PASS
39	2483.52	AV	12.74	6.74	27.20	46.68	54	PASS

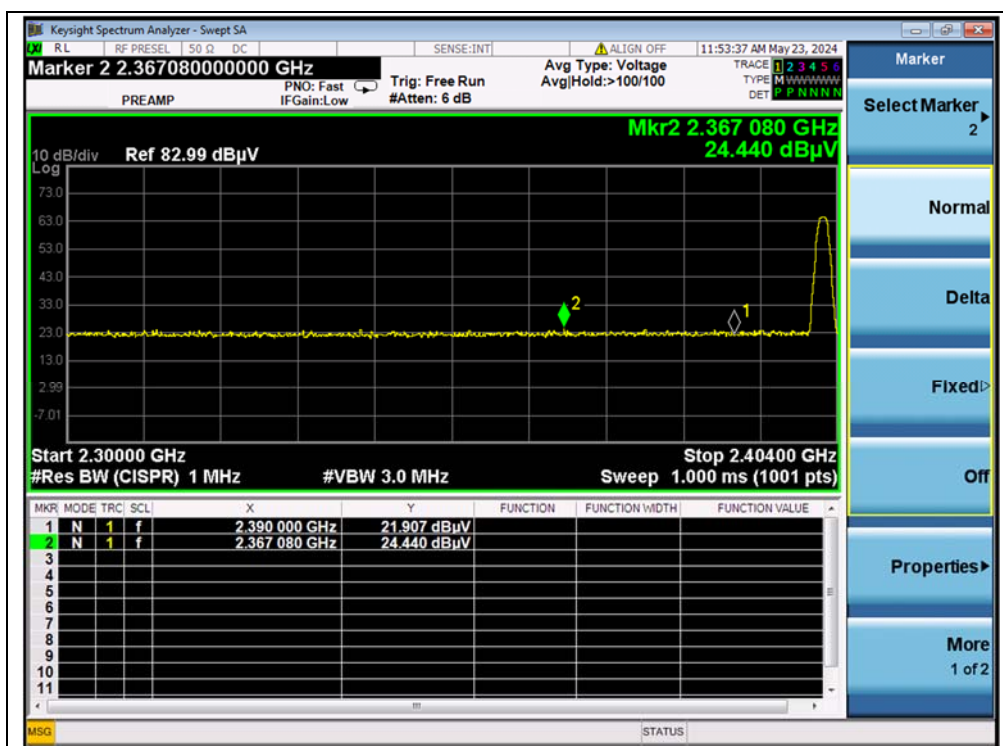


(PEAK, Channel 0)

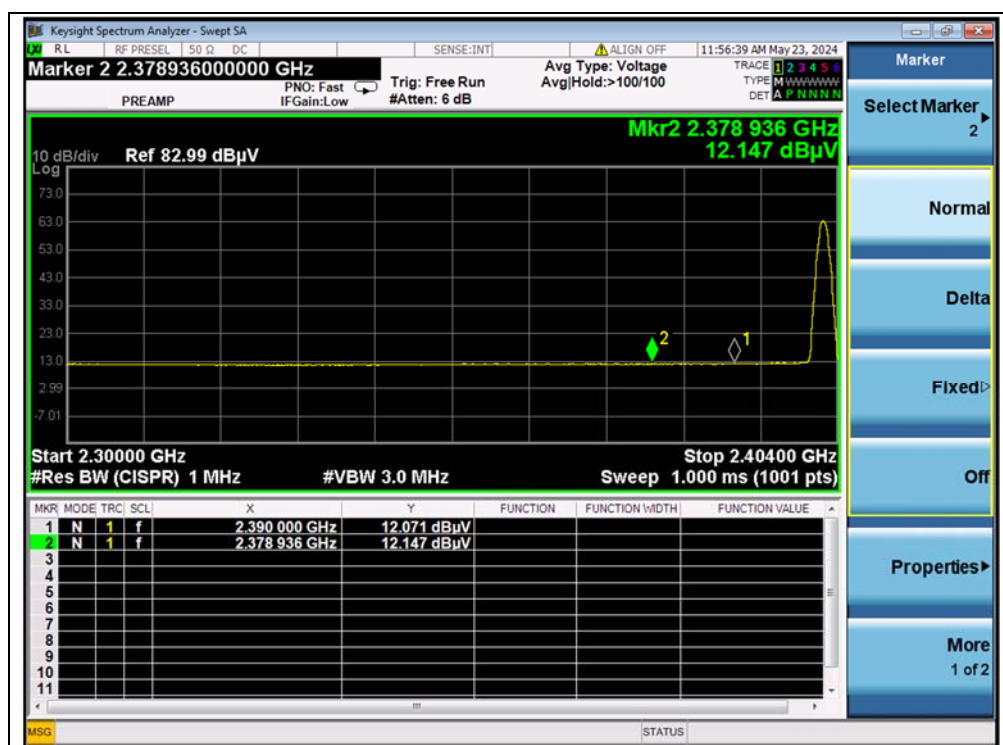

(AVERAGE, Channel 0)

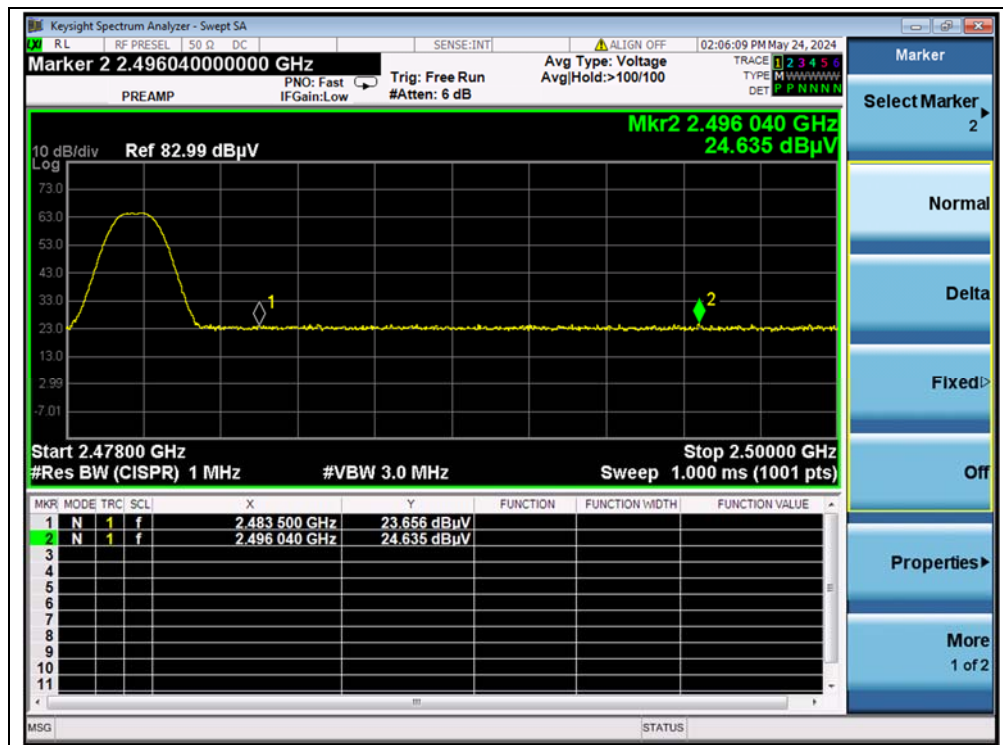

(PEAK, Channel 39)

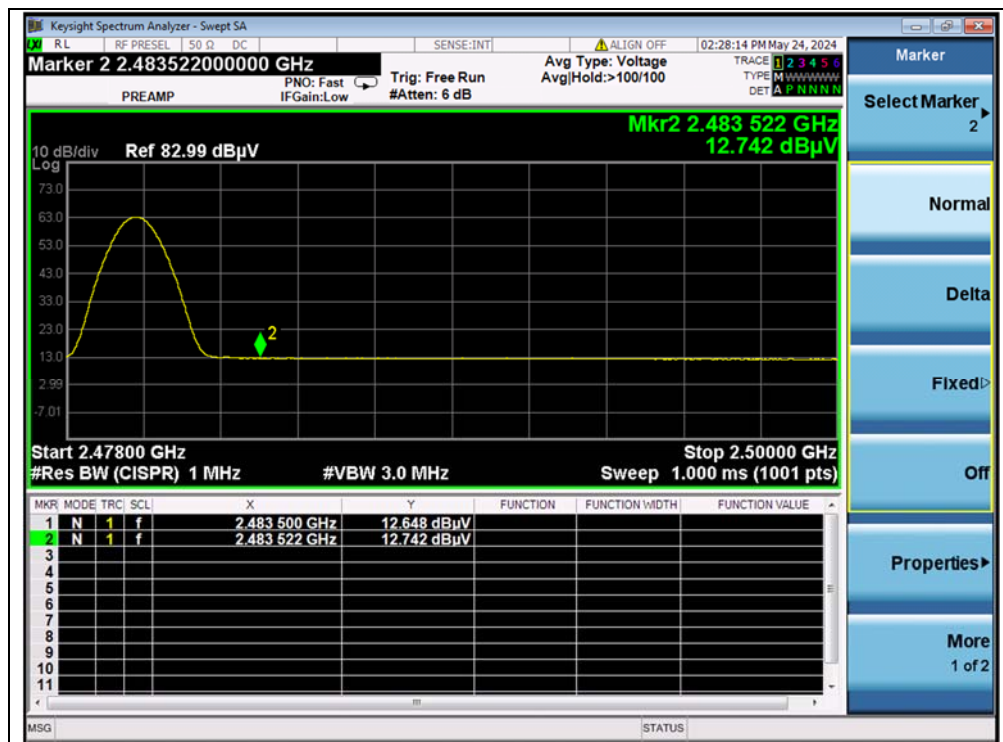


(AVERAGE, Channel 39)




2Mbps

Channel	Frequency (MHz)	Detector	Receiver Reading U_R (dB μ V)	A_T (dB)	A_{Factor} (dB@3m)	Max. Emission E (dB μ V/m)	Limit (dB μ V/m)	Verdict
		PK/ AV						
0	2372.49	PK	24.74	6.74	27.20	58.68	74	PASS
0	2384.76	AV	13.16	6.74	27.20	47.10	54	PASS
39	2485.02	PK	24.91	6.74	27.20	58.85	74	PASS
39	2483.50	AV	13.14	6.74	27.20	47.08	54	PASS

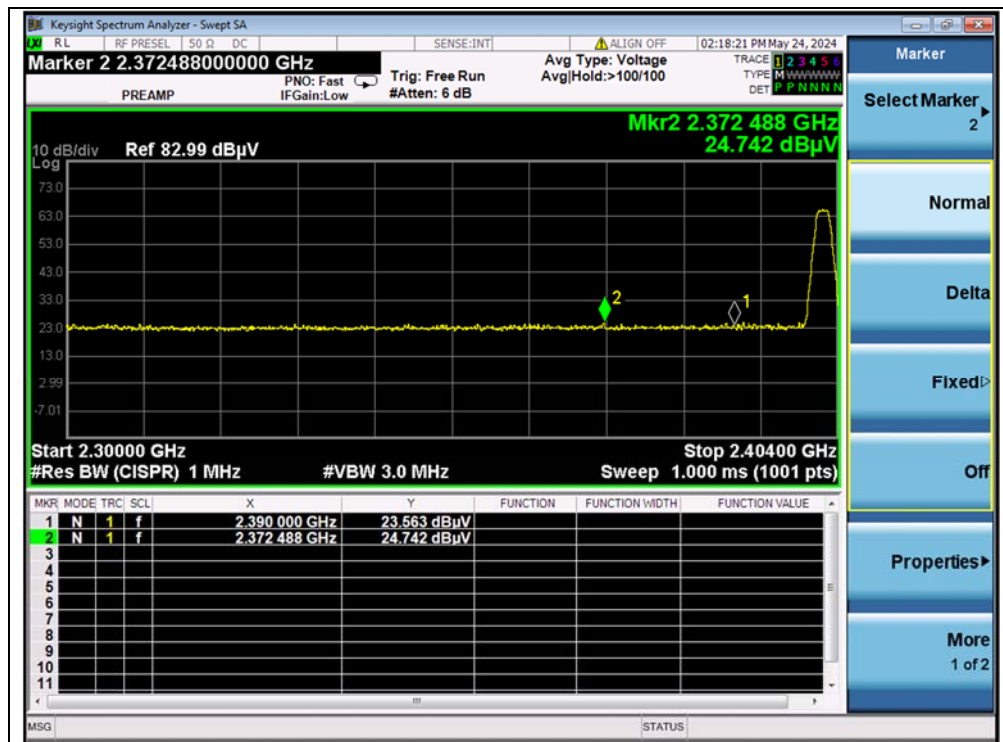


(PEAK, Channel 0)

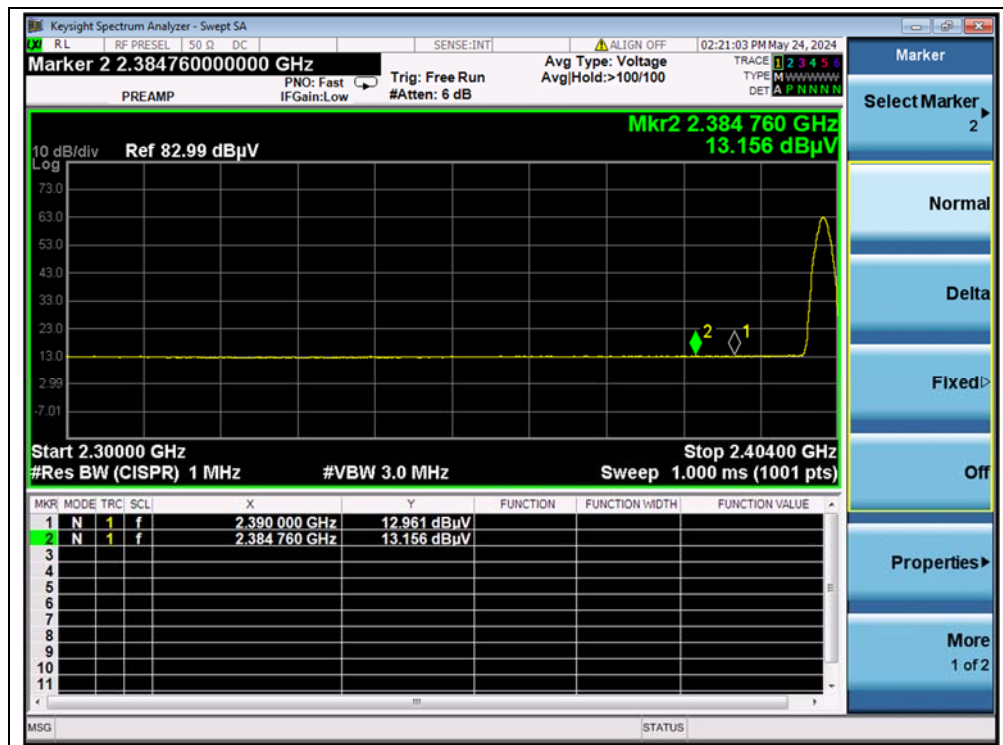

(AVERAGE, Channel 0)



(PEAK, Channel 39)

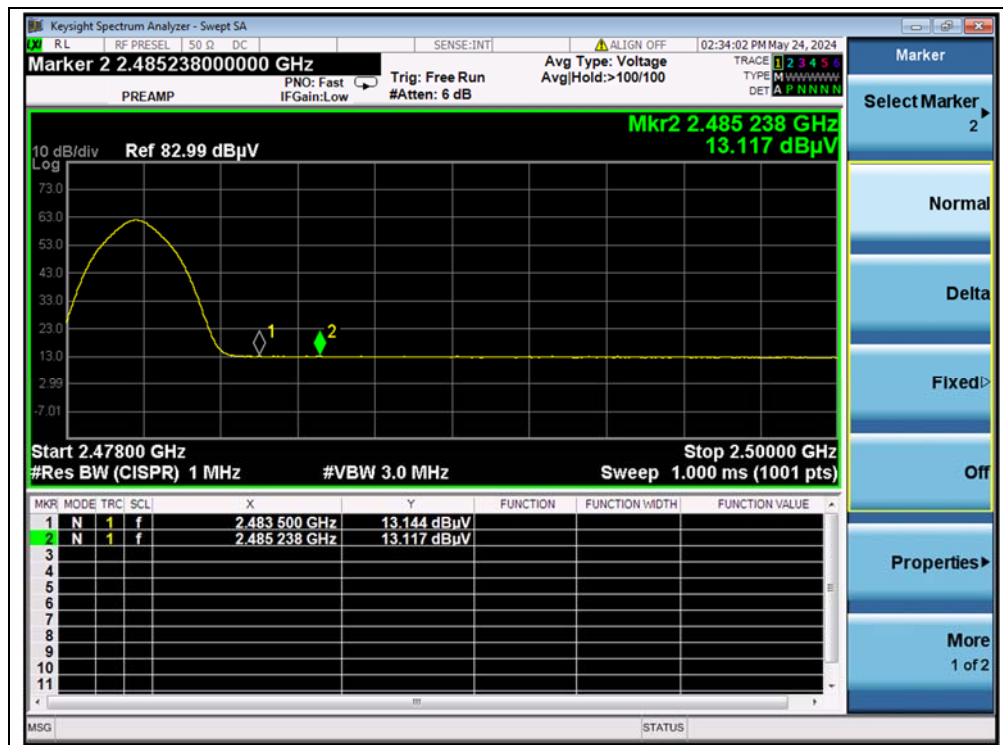

(AVERAGE, Channel 39)



A.3. Radiated Emission

According to ANSI C63.10, because of peak detection will yield amplitudes equal to or greater than amplitudes measured with the quasi-peak (or average) detector, the measurement data from a spectrum analyzer peak detector will represent the worst-case results, if the peak measured value complies with the quasi-peak (or average) limit, it is unnecessary to perform an quasi-peak measurement (or average).

The measurement results are obtained as below:

$$E \text{ [dB}\mu\text{V/m]} = U_R + A_T + A_{\text{Factor}} \text{ [dB]}; A_T = L_{\text{Cable loss}} \text{ [dB]} - G_{\text{preamp}} \text{ [dB]}$$

A_T : Total correction Factor except Antenna

U_R : Receiver Reading

G_{preamp} : Preamplifier Gain

A_{Factor} : Antenna Factor at 3m

During the test, the total correction Factor A_T and A_{Factor} were built in test software.


Note1: All radiated emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

Note2: For the frequency, which started from 9kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit was not recorded.

Note3: For the frequency, which started from 18GHz to 10th harmonic of the highest frequency, was pre-scanned and the result which was 20dB lower than the limit was not recorded.


**1Mbps**

Plot for Channel 0

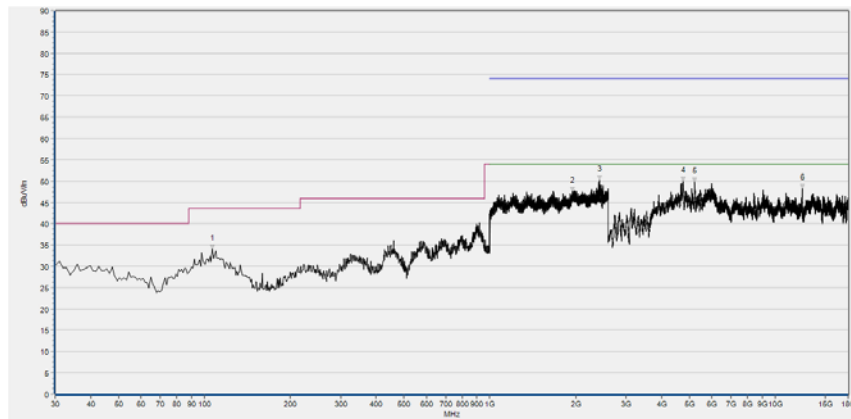

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
106.630	34.04	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
1945.067	47.63	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
2419.733	50.27	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
4756.000	49.90	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5227.240	49.82	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
12412.880	48.27	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 30MHz to 18GHz)

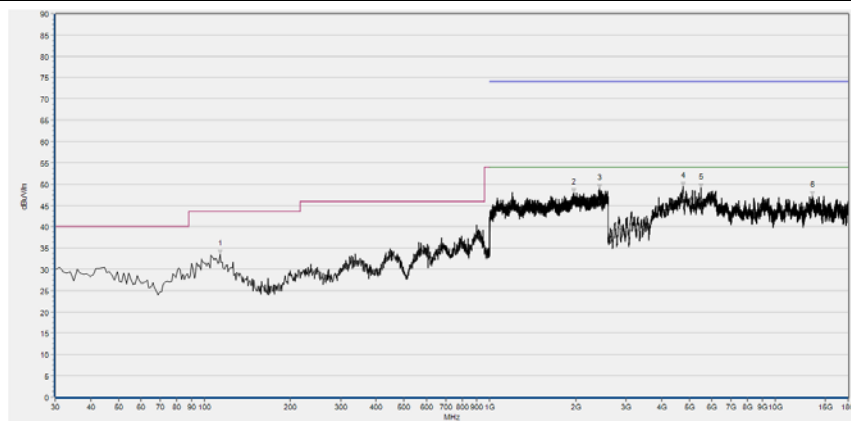


Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
113.420	33.57	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
1966.400	47.99	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
2416.000	49.01	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
4749.840	49.36	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5489.040	49.10	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
13463.160	47.19	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 30MHz to 18GHz)




Plot for Channel 19

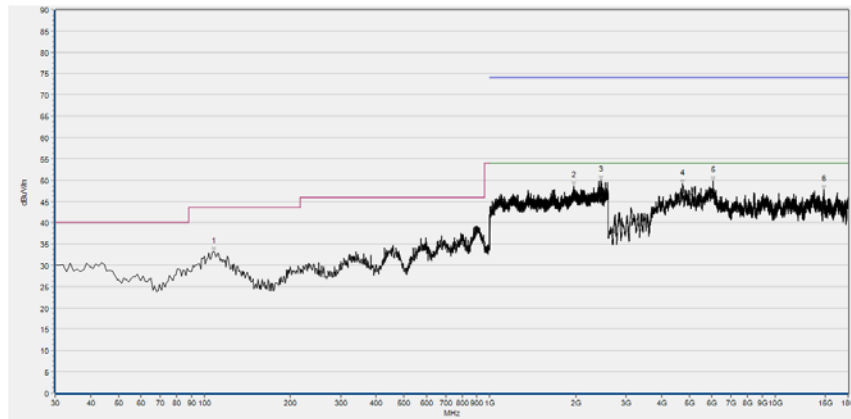

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
107.600	33.12	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
1970.667	48.62	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
2454.400	49.92	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
4740.600	49.11	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
6061.920	49.70	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
14833.760	47.70	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 30MHz to 18GHz)

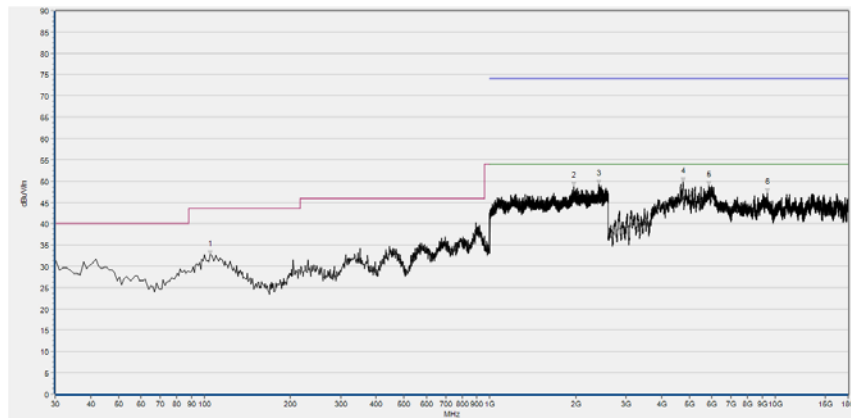


Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
104.690	32.64	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
1969.600	48.71	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
2413.333	49.22	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
4756.000	49.81	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5852.480	48.97	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
9388.320	47.21	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 30MHz to 18GHz)




Plot for Channel 39

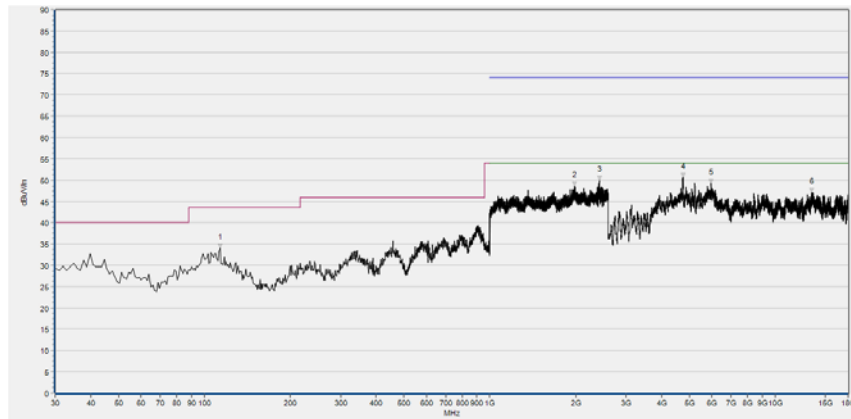

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
113.420	34.07	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
1982.400	48.57	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
2416.000	49.94	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
4746.760	50.59	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5969.520	49.24	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
13407.720	47.04	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 30MHz to 18GHz)

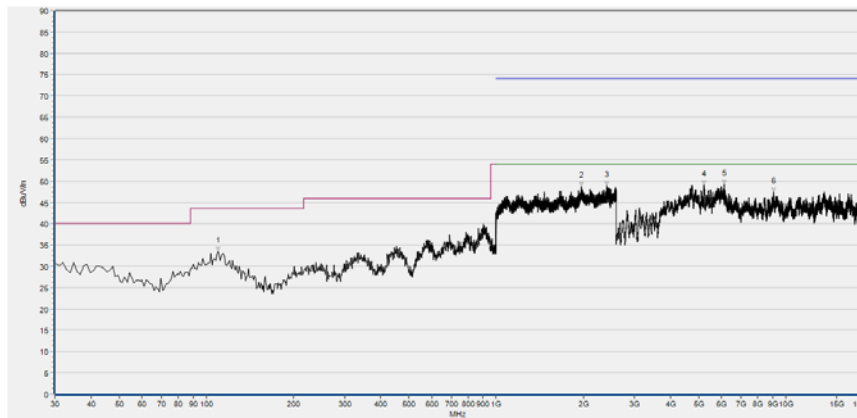


Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
109.540	33.55	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
1964.267	48.73	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
2412.267	48.90	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5224.160	49.12	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
6129.680	49.26	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
9068.000	47.46	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 30MHz to 18GHz)


**2Mbps**

Plot for Channel 0

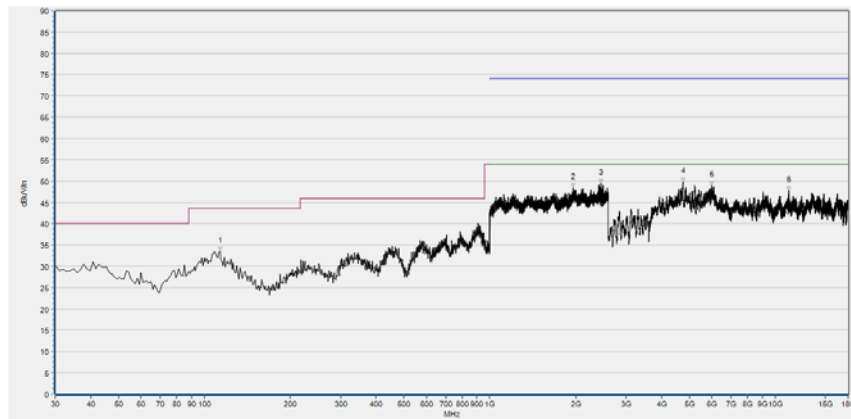

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
113.420	33.50	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
1954.133	48.48	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
2453.333	49.36	N/A	42.82	74.00	N/A	54.00	Horizontal	PASS
4743.680	49.83	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5975.680	48.89	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
11147.000	47.73	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 30MHz to 18GHz)

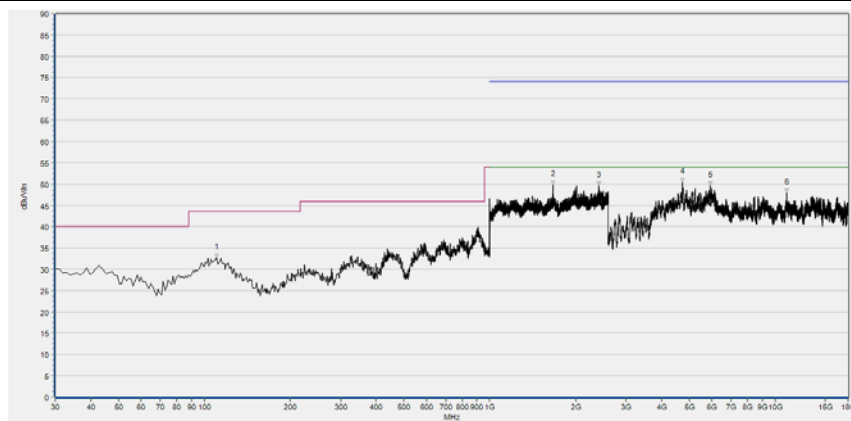


Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
110.510	32.67	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
1661.333	49.75	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
2403.733	49.67	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
4737.520	50.41	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5901.760	49.53	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
10980.680	47.88	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 30MHz to 18GHz)




Plot for Channel 19

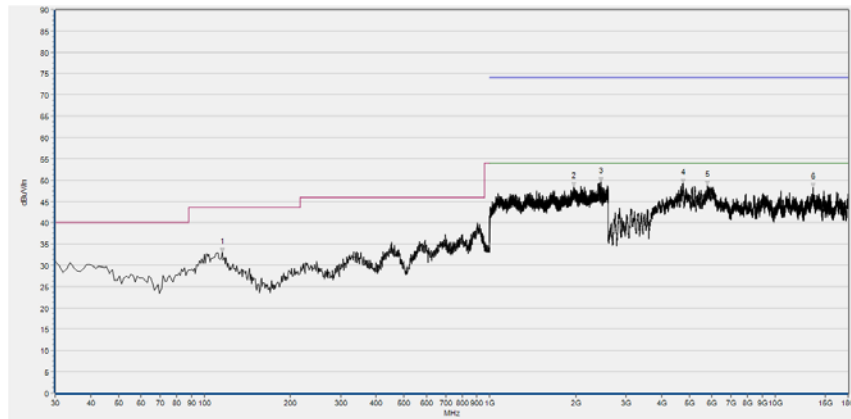

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
115.360	33.01	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
1968.533	48.46	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
2457.067	49.57	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
4746.760	49.34	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5793.960	48.74	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
13567.880	48.34	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 30MHz to 18GHz)

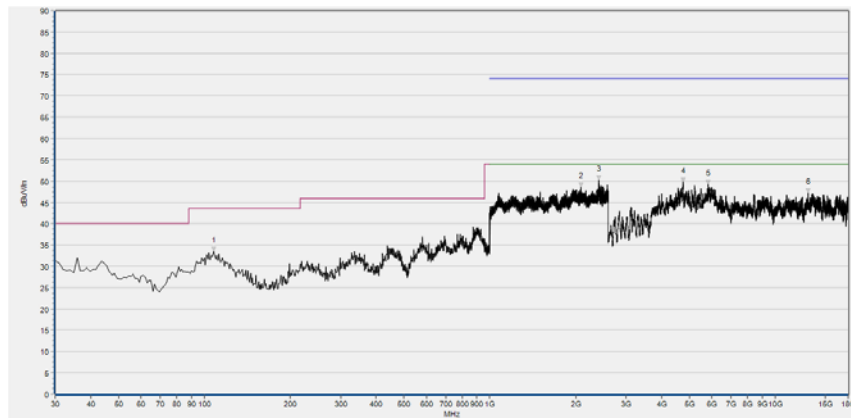


Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
107.600	33.49	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
2086.400	48.55	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
2412.800	50.20	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
4746.760	49.78	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5806.280	49.31	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
13062.760	47.21	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 30MHz to 18GHz)



Plot for Channel 39

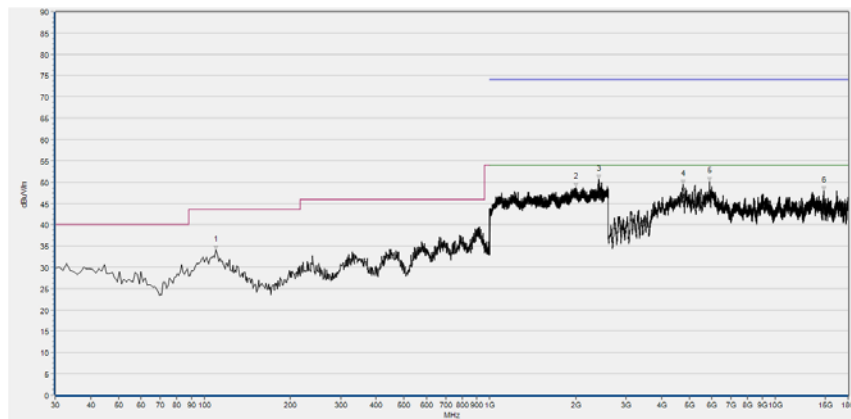

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
109.540	34.02	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
1999.467	48.71	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
2408.000	50.70	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
4749.840	49.37	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5870.960	50.16	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
14802.960	47.94	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 30MHz to 18GHz)



Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
107.600	32.76	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
1973.867	49.69	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
2416.533	50.38	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
4746.760	49.74	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5224.160	49.42	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
13463.160	48.34	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 30MHz to 18GHz)

END OF REPORT