



# TEST REPORT

Product Name: INTERACTIVE DOG FOOD AND TREAT DISPENSER  
FCC ID: 2BFV7-S4  
Trademark: N/A  
Model Number: S4, S4 PLUS  
Prepared For: Alexans Industrial (DongGuan) Co.,LTD  
Address: Room301, No.5 Bldg, No.1438 Taian Road, Chang'an Town, Dongguan City, Guangdong Province, China  
Manufacturer: Alexans Industrial (DongGuan) Co.,LTD  
Address: Room301, No.5 Bldg, No.1438 Taian Road, Chang'an Town, Dongguan City, Guangdong Province, China  
Prepared By: Shenzhen CTB Testing Technology Co., Ltd.  
Address: 1&2/F., Building A, No.26, Xinhe Road, Xinqiao, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, China  
Sample Received Date: Mar. 15, 2024  
Sample tested Date: Mar. 15, 2024 to Mar. 27, 2024  
Issue Date: Mar. 27, 2024  
Report No.: CTB240327005RFX  
Test Standards: FCC Part15.249  
ANSI C63.10:2013  
Test Results: PASS  
Remark: This is 2.4GHz radio test report.

Compiled by:

Zhou kui

Zhou Kui

Reviewed by:

Arron Liu

Arron Liu

Approved by:



Bin Mei / Director

Note: If there is any objection to the inspection results in this report, please submit a written report to the company within 15 days from the date of receiving the report. The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen CTB Testing Technology Co., Ltd. this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client. "\*" indicates the testing items were fulfilled by subcontracted lab. "#" indicates the items are not in CNAS accreditation scope.

**TABLE OF CONTENT**

Test Report Declaration	Page
<b>1. VERSION</b> .....	3
<b>2. TEST SUMMARY</b> .....	4
<b>3. MEASUREMENT UNCERTAINTY</b> .....	5
<b>4. PRODUCT INFORMATION AND TEST SETUP</b> .....	6
4.1 Product Information .....	6
4.2 Test Setup Configuration .....	6
4.3 Support Equipment .....	6
4.4 Channel List .....	7
4.5 Test Mode .....	7
4.6 Test Environment .....	7
<b>5. TEST FACILITY AND TEST INSTRUMENT USED</b> .....	8
5.1 Test Facility .....	8
5.2 Test Instrument Used .....	8
<b>6. AC POWER LINE CONDUCTED EMISSION</b> .....	10
6.1 Block Diagram Of Test Setup .....	10
6.2 Limit .....	10
6.3 Test procedure .....	10
6.4 Test Result .....	12
<b>7. RADIATED SPURIOUS EMISSION</b> .....	14
7.1 Block Diagram Of Test Setup .....	14
7.2 Limit .....	14
7.3 Test procedure .....	15
7.4 Test Result .....	16
<b>8. BAND EDGE AND RF CONDUCTED SPURIOUS EMISSIONS</b> .....	21
8.1 Block Diagram Of Test Setup .....	21
8.2 Limit .....	21
8.3 Test procedure .....	22
8.4 Test Result .....	23
<b>9. BANDWIDTH TEST</b> .....	24
9.1 Block Diagram Of Test Setup .....	24
9.2 Limit .....	24
9.3 Test procedure .....	24
9.4 Test Result .....	24
<b>10. ANTENNA REQUIREMENT</b> .....	26
<b>11. EUT TEST SETUP PHOTOGRAPHS</b> .....	27

*(Note: N/A means not applicable)*

1. VERSION

Report No.	Issue Date	Description	Approved
CTB240327005RFX	Mar. 27, 2024	Original	Valid

## 2. TEST SUMMARY

The Product has been tested according to the following specifications:

Standard Section	Test Item	Judgment	Remark
15.207	Conducted Emission	PASS	
15.215	20dB Bandwidth	PASS	
15.249	Fundamental & Radiated Spurious Emission Measurement	PASS	
15.205	Band Edge Emission	PASS	
15.203	Antenna Requirement	PASS	

Remark:

Test according to ANSI C63.10-2013.

### 3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Item	Uncertainty
Occupancy bandwidth	54.3kHz
Conducted output power Above 1G	0.9dB
Conducted output power below 1G	0.9dB
Power Spectral Density , Conduction	0.9dB
Conduction spurious emissions	2.0dB
Out of band emission	2.0dB
3m chamber Radiated spurious emission(9KHz-30MHz)	4.8dB
3m chamber Radiated spurious emission(30MHz-1GHz)	4.6dB
3m chamber Radiated spurious emission(1GHz-18GHz)	5.1dB
3m chamber Radiated spurious emission(18GHz-40GHz)	3.4dB
humidity uncertainty	5.5%
Temperature uncertainty	0.63°C
frequency	1×10 <sup>-7</sup>
Conducted Emission (150KHz-30MHz)	3.2 dB
Radiated Emission(30MHz ~ 1000MHz)	4.8 dB
Radiated Emission(1GHz ~6GHz)	4.9 dB

**4. PRODUCT INFORMATION AND TEST SETUP**

**4.1 Product Information**

Model(s): S4, S4 PLUS  
 Model Description: All the model are the same circuit and RF module, only for model name. Test sample model: S4  
 Hardware Version: V1.0  
 Software Version: V1.0  
 Operation Frequency: 2420-2465MHz  
 Type of Modulation: GFSK  
 Antenna installation: PCB antenna  
 Antenna Gain: 1.0dBi  
 Ratings: DC 5V charging from adapter  
 DC 3.7V from battery

**4.2 Test Setup Configuration**

See test photographs attached in EUT TEST SETUP PHOTOGRAPHS for the actual connections between Product and support equipment.

**4.3 Support Equipment**

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
1.	Adapter	JIYIN	JY-05100C	/	/

**Notes:**

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer’s requirements and conditions for the intended use.

#### 4.4 Channel List

CH No.	Frequency (MHz)	CH No.	Frequency (MHz)	CH No.	Frequency (MHz)
1	2420	2	2440	3	2465

#### 4.5 Test Mode

All test mode(s) and condition(s) mentioned were considered and evaluated respectively by performing full tests, the worst data were recorded and reported.

Test mode	Low channel	Middle channel	High channel
Transmitting GFSK	2420MHz	2440MHz	2465MHz

#### 4.6 Test Environment

Humidity(%):	54
Atmospheric Pressure(kPa):	101
Normal Voltage(DC):	3.7V
Normal Temperature(°C)	23
Low Temperature(°C)	0
High Temperature(°C)	40

## 5. TEST FACILITY AND TEST INSTRUMENT USED

### 5.1 Test Facility

All measurement facilities used to collect the measurement data are located at 1&2F., Building A, No. 26, Xinh Road, Xinqiao, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards.

### 5.2 Test Instrument Used

No.	Equipment	Manufacturer	Type No.	Serial No.	Firmware Version	Calibrated until
1	Spectrum Analyzer	Agilent	N9020A	MY52090073	A.14.16	2024.07.05
2	Power Sensor	Agilent	U2021XA	MY56120032	/	2024.07.05
3	Power Sensor	Agilent	U2021XA	MY56120034	/	2024.07.05
4	Communication test set	R&S	CMW500	108058	V3.5.80	2024.07.05
5	Spectrum Analyzer	KEYSIGHT	N9020A	MY51289897	A.14.16	2024.07.05
6	Signal Generator	Agilent	N5181A	MY50140365	A.01.60	2024.07.05
7	Vector signal generator	Agilent	N5182A	MY47420195	A.01.87	2024.07.05
8	Communication test set	Agilent	E5515C	MY50102567	B.19.07 (E1962B)	2024.07.06
9	2.4 GHz Filter	Shenxiang	MSF2400-24 83.5MS-1154	20181015001	/	2024.07.05
10	5 GHz Filter	Shenxiang	MSF5150-58 50MS-1155	20181015001	/	2024.07.06
11	Filter	Xingbo	XBLBQ-DZA 120	190821-1-1	/	2024.07.06
12	BT&WI-FI Automatic test software	Microwave	MTS8000	Ver. 2.0.0.0	/	/
13	Rohde & Schwarz SFU Broadcast Test System	R&S	SFU	101017	/	2024.10.30
14	Temperature humidity chamber	Hongjing	TH-80CH	DG-15174	/	2024.07.05
15	234G Automatic test software	Microwave	MTS8200	Ver. 2.0.0.0	/	/
16	966 chamber	C.R.T.	966	/	/	2024.08.11
17	Receiver	R&S	ESPI	100362	RF_ATTEN_7 (104489/003)	2024.07.05
18	Amplifier	HP	8447E	2945A02747	/	2024.07.05
19	Amplifier	Agilent	8449B	3008A01838	/	2024.07.05
20	TRILOG Broadband Antenna	Schwarzbeck	VULB 9168	00869	/	2024.07.08
21	Double Ridged Broadband Horn Antenna	Schwarzbeck	BBHA9120D	01911	/	2024.07.08



22	EMI test software	Fala	EZ-EMC	FA-03A2 RE	/	/
23	Loop Antenna	Schwarzbeck	FMZB 1519B	1519B-224	/	2024.07.08
24	loop antenna	ZHINAN	ZN30900A	GTS534	/	/
25	40G Horn antenna	A/H/System	SAS-574	588	/	2024.10.30
26	Amplifier	AEROFLEX	Aeroflex	097	/	2024.07.05

### Continuous disturbance


No.	Equipment	Manufacturer	Model No.	Serial No.	Firmware Version	Calibrated until
1	LISN	ROHDE&SCHWARZ	ESH3-Z5	100318	/	2024.07.05
2	Pulse limiter	ROHDE&SCHWARZ	ESH3Z2	357881052	/	2024.07.05
3	EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100428/003	V4.42.SP3	2024.07.05
4	Coaxial cable	ZDECL	Z302S-NJ-SM AJ-12M	18091905	/	2024.07.05
5	ISN	Schwarzbeck	NTFM8158	183	/	2024.07.05
6	Communication test set	Agilent	E5515C	MY50102567	B.19.07 (E1962B)	2024.07.05
7	Communication test set	R&S	CMW500	108058	V3.5.80	2024.07.05
8	EZ-EMC	Frad	EMC-con3A1.1	/	/	/

### Radiated emission

No.	Equipment	Manufacturer	Model No.	Serial No.	Firmware Version	Calibrated until
1	Double Ridged Broadband Horn Antenna	Schwarzbeck	BBHA 9120 D	01911	/	2024.07.08
2	TRILOG Broadband Antenna	Schwarzbeck	VULB 9168	00869	/	2024.07.08
3	Amplifier	Agilent	8449B	3008A01838	/	2024.07.05
4	Amplifier	HP	8447E	2945A02747	/	2024.07.05
5	EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100428/003	V4.42.SP3	2024.07.05
6	Coaxial cable	ETS	RFC-SNS-100-N MS-80 NI	/	/	2024.07.05
7	Coaxial cable	ETS	RFC-SNS-100-N MS-20 NI	/	/	2024.07.05
8	Coaxial cable	ETS	RFC-SNS-100-S MS-20 NI	/	/	2024.07.05
9	Coaxial cable	ETS	RFC-NNS-100- NMS-300 NI	/	/	2024.07.05
10	Communication test set	Agilent	E5515C	MY50102567	B.19.07 (E1962B)	2024.07.05
11	Communication test set	R&S	CMW500	108058	V3.5.80	2024.07.05
12	EZ-EMC	Frad	EMC-con3A1.1	/	/	/

## 6. AC POWER LINE CONDUCTED EMISSION

### 6.1 Block Diagram Of Test Setup

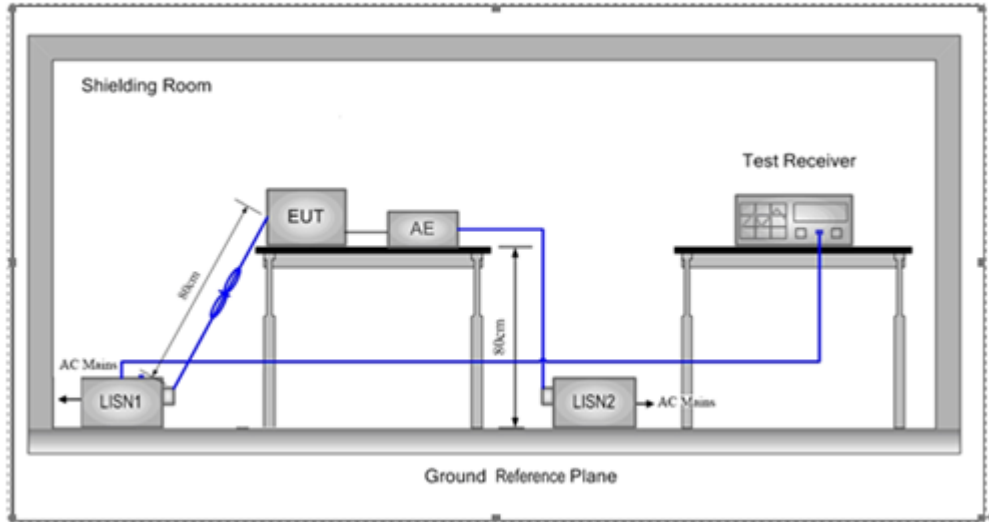

### 6.2 Limit

**Table 4 - AC power-line conducted emissions limits**

Frequency (MHz)	Conducted limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56 <sup>Note 1</sup>	56 to 46 <sup>Note 1</sup>
0.5 - 5	56	46
5 - 30	60	50

**Note 1:** The level decreases linearly with the logarithm of the frequency.

\* Decreasing linearly with the logarithm of the frequency

### 6.3 Test procedure


- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a  $50\Omega/50\mu\text{H} + 5\Omega$  linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0,4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0,8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane.

This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0,8 m from the LISN 2.

- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.
- 6) All modes were tested at AC 120V and 240V, only the worst result of AC 120V 60Hz was reported.
- 7) If a EUT received DC power from the USB Port of Notebook PC, the PC's adapter received AC120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.

## 6.4 Test Result

L: Worst case-GFSK(low channel)

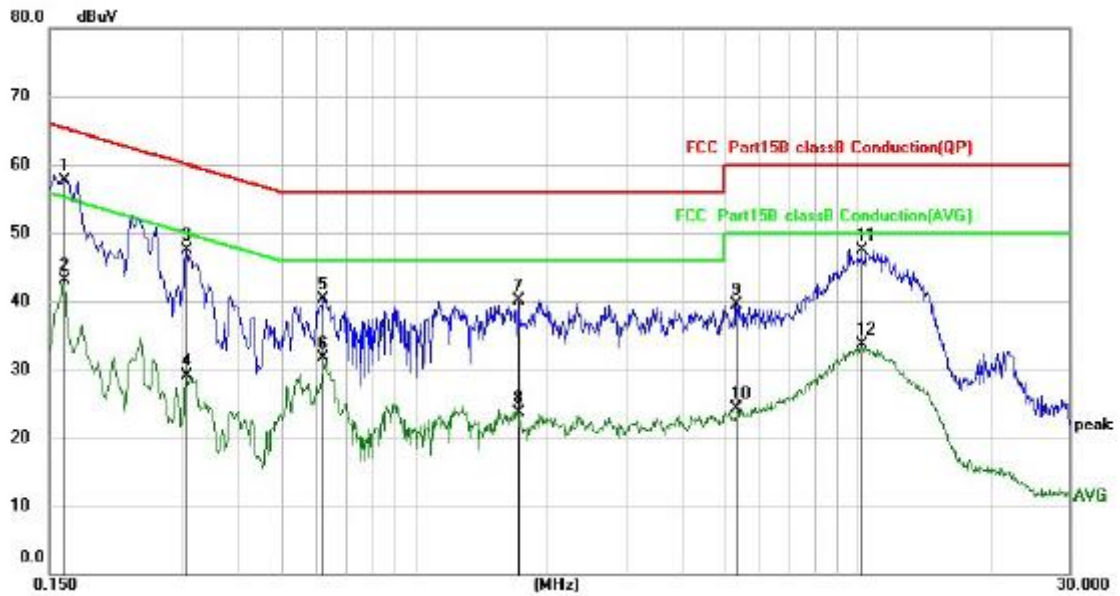


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Over dB	Detector
1	*	0.1620	47.72	9.95	57.67	65.36	-7.69	QP
2		0.1620	33.07	9.95	43.02	55.36	-12.34	AVG
3		0.3060	37.59	9.96	47.55	60.08	-12.53	QP
4		0.3060	19.14	9.96	29.10	50.08	-20.98	AVG
5		0.6220	30.20	10.01	40.21	56.00	-15.79	QP
6		0.6220	21.68	10.01	31.69	46.00	-14.31	AVG
7		1.7220	29.99	10.07	40.06	56.00	-15.94	QP
8		1.7220	13.54	10.07	23.61	46.00	-22.39	AVG
9		5.3060	29.18	10.40	39.58	60.00	-20.42	QP
10		5.3060	13.91	10.40	24.31	50.00	-25.69	AVG
11		10.1580	36.86	10.58	47.44	60.00	-12.56	QP
12		10.1580	23.16	10.58	33.74	50.00	-16.26	AVG

Remark:

Factor = Cable loss + LISN factor, Margin = Measurement – Limit

Measurement=Reading level+correct facto

**N: Worst case-GFSK(low channel)**

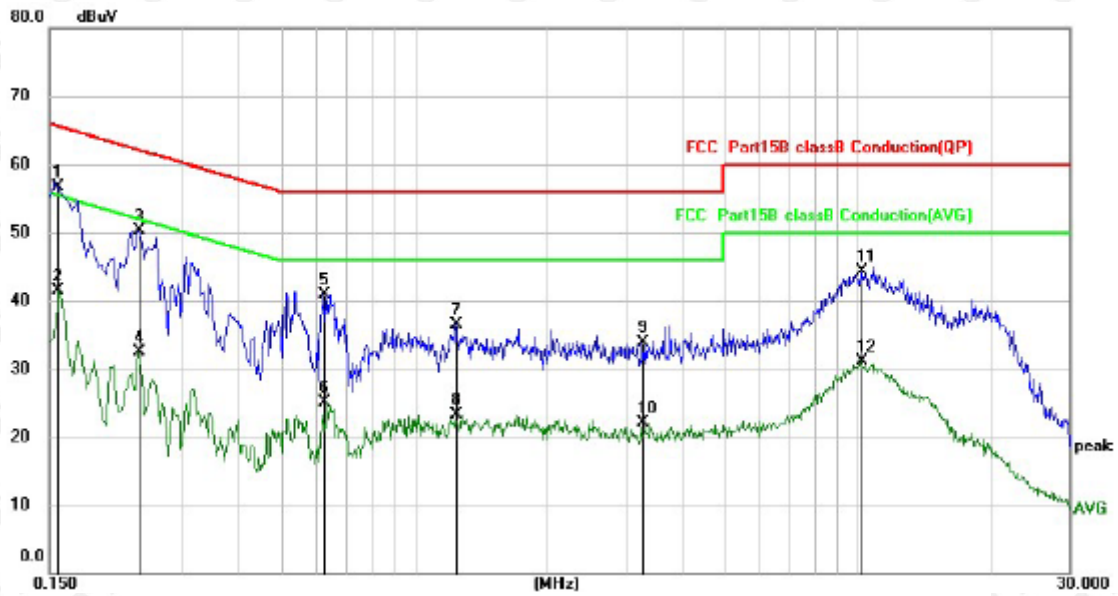

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1	*	0.1565	46.80	9.95	56.75	65.65	-8.90	QP
2		0.1565	31.52	9.95	41.47	55.65	-14.18	AVG
3		0.2380	40.27	9.95	50.22	62.17	-11.95	QP
4		0.2380	22.64	9.95	32.59	52.17	-19.58	AVG
5		0.6260	30.98	10.01	40.99	56.00	-15.01	QP
6		0.6260	15.19	10.01	25.20	46.00	-20.80	AVG
7		1.2420	26.38	10.03	36.41	56.00	-19.59	QP
8		1.2420	13.25	10.03	23.28	46.00	-22.72	AVG
9		3.2620	23.65	10.21	33.86	56.00	-22.14	QP
10		3.2620	11.85	10.21	22.06	46.00	-23.94	AVG
11		10.1420	33.69	10.58	44.27	60.00	-15.73	QP
12		10.1420	20.61	10.58	31.19	50.00	-18.81	AVG

**Remark:**

Factor = Cable loss + LISN factor, Margin = Measurement – Limit

Measurement=Reading level+correct facto

## 7. RADIATED SPURIOUS EMISSION

### 7.1 Block Diagram Of Test Setup

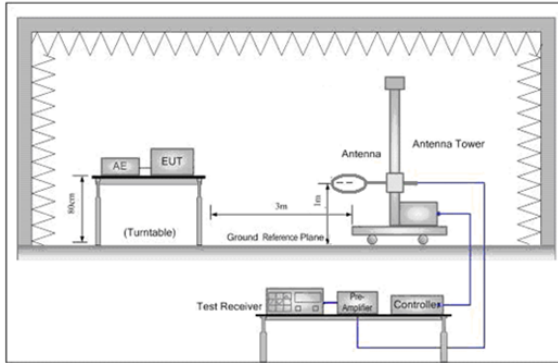


Figure 1. Below 30MHz


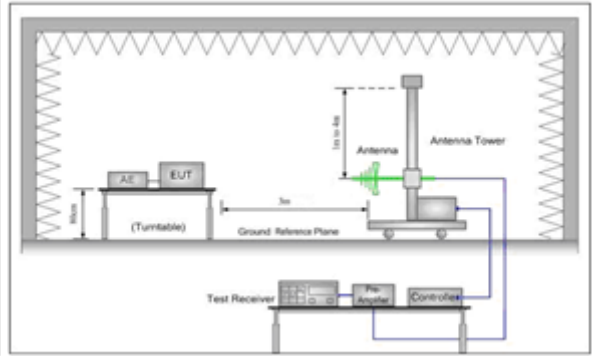


Figure 2. 30MHz to 1GHz

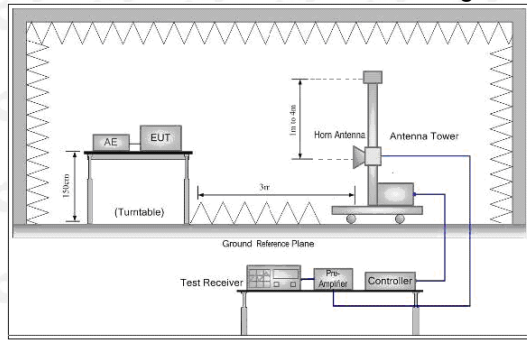

### 7.2 Limit

Spurious Emissions:

Frequency	Field strength (microvolt/meter)	Limit (dB $\mu$ V/m )	Remark	Measurement distance (m)
0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
1.705MHz-30MHz	30	-	-	30
30MHz-88MHz	100	40.0	Quasi-peak	3
88MHz-216MHz	150	43.5	Quasi-peak	3
216MHz-960MHz	200	46.0	Quasi-peak	3
960MHz-1GHz	500	54.0	Quasi-peak	3
Above 1GHz	500	54.0	Average	3

Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

7.3 Test procedure

**Below 1GHz test procedure as below:**

- a.The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b.The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c.The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d.For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rota table table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e.The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f.If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

**Above 1GHz test procedure as below:**


- g.Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 meter to 1.5 meter( Above 18GHz the distance is 1 meter and table is 1.5 meter).
- h.Test the EUT in the lowest channel ,the middle channel ,the Highest channel
- j.Repeat above procedures until all frequencies measured was complete.
- j. Full battery is used during test

Receiver set:

Frequency	Detector	RBW	VBW	Remark
0.009MHz-0.090MHz	Peak	10kHz	30KHz	Peak
0.009MHz-0.090MHz	Average	10kHz	30KHz	Average
0.090MHz-0.110MHz	Quasi-peak	10kHz	30KHz	Quasi-peak
0.110MHz-0.490MHz	Peak	10kHz	30KHz	Peak
0.110MHz-0.490MHz	Average	10kHz	30KHz	Average
0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
30MHz-1GHz	Quasi-peak	120 kHz	300KHz	Quasi-peak
Above 1GHz	Peak	1MHz	3MHz	Peak
	Peak	1MHz	10Hz	Average

### 7.4 Test Result

Below 1GHz Test Results:  
Antenna polarity: H

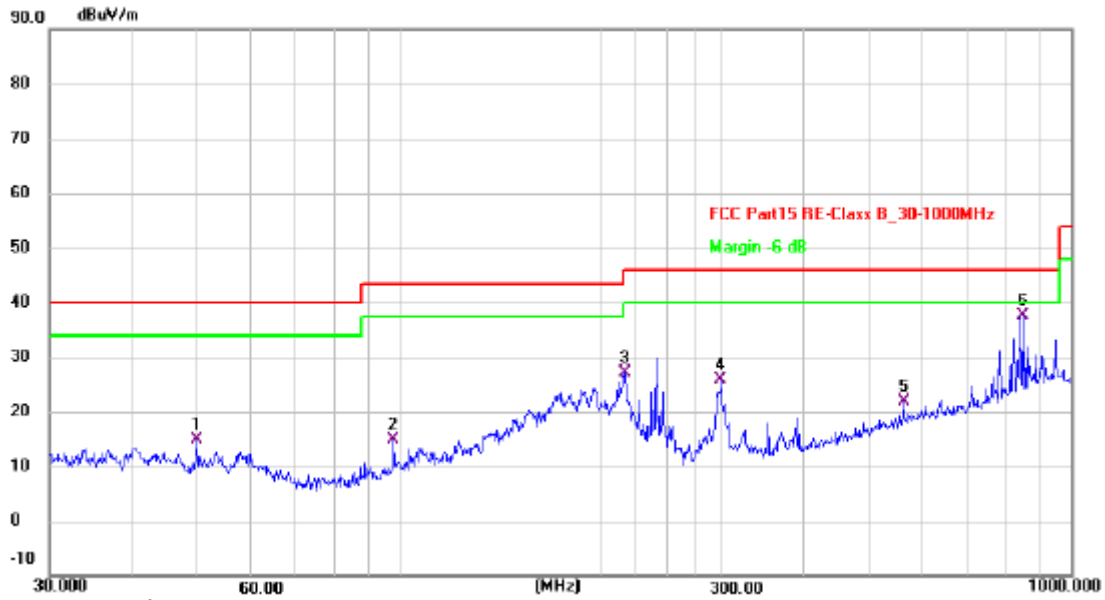


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	49.7068	30.22	-15.32	14.90	40.00	-25.10	QP
2	97.7983	32.53	-17.73	14.80	43.50	-28.70	QP
3	216.0240	43.35	-16.11	27.24	46.00	-18.76	QP
4	300.3672	38.81	-13.00	25.81	46.00	-20.19	QP
5	562.6624	28.25	-6.44	21.81	46.00	-24.19	QP
6 *	845.0878	37.68	-0.06	37.62	46.00	-8.38	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Measurement – Limit



Antenna polarity: V

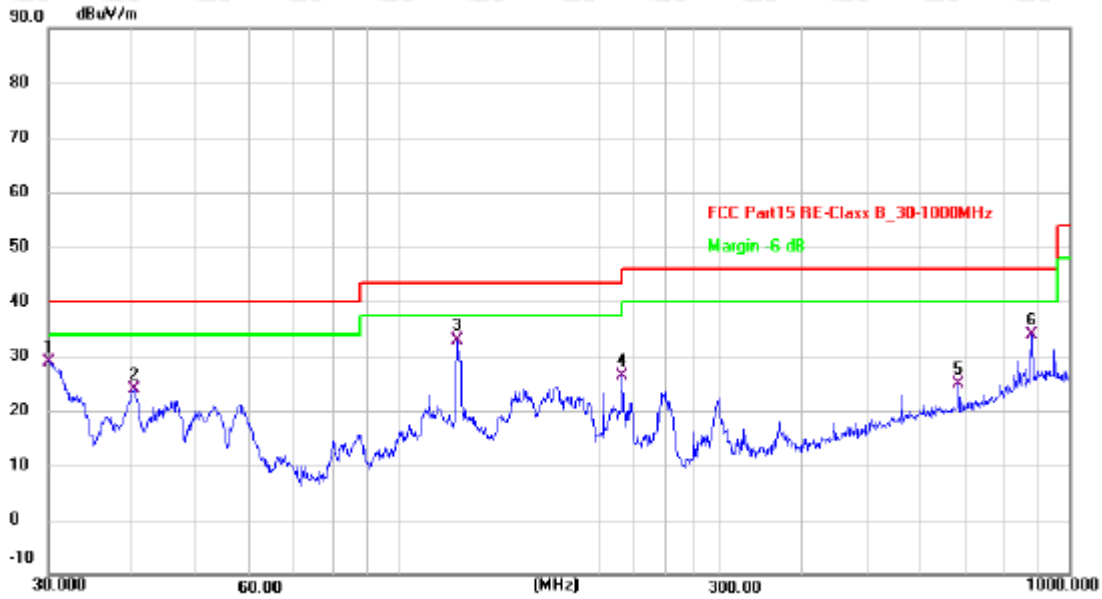

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	30.1054	42.83	-14.00	28.83	40.00	-11.17	QP
2	40.2757	37.47	-13.60	23.87	40.00	-16.13	QP
3 *	122.4040	48.08	-15.19	32.89	43.50	-10.61	QP
4	215.2678	42.56	-16.12	26.44	43.50	-17.06	QP
5	682.3484	29.25	-4.33	24.92	46.00	-21.08	QP
6	878.3214	33.01	0.84	33.85	46.00	-12.15	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Measurement – Limit

CH Low (2420MHz)  
Horizontal:

Frequency (MHz)	Meter Reading (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type
2420	101.51	-5.84	95.67	114	-18.33	peak
2420	93.40	-5.84	87.56	94	-6.44	AVG
4840	56.64	-3.64	53.00	74	-21.00	peak
4840	49.84	-3.64	46.20	54	-7.80	AVG
7260	58.95	-0.95	58.00	74	-16.00	peak
7260	48.47	-0.95	47.52	54	-6.48	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency (MHz)	Meter Reading (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type
2420	101.28	-5.84	95.44	114	-18.56	peak
2420	92.84	-5.84	87.00	94	-7.00	AVG
4840	57.24	-3.64	53.60	74	-20.40	peak
4840	49.66	-3.64	46.02	54	-7.98	AVG
7260	58.77	-0.95	57.82	74	-16.18	peak
7260	48.31	-0.95	47.36	54	-6.64	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

CH Middle (2440MHz)  
Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2440	96.23	-5.71	90.52	114	-23.48	peak
2440	92.22	-5.71	86.51	94	-7.49	AVG
4880	55.38	-3.51	51.87	74	-22.13	peak
4880	46.66	-3.51	43.15	54	-10.85	AVG
7320	57.02	-0.82	56.20	74	-17.80	peak
7320	46.72	-0.82	45.90	54	-8.10	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2440	99.02	-5.71	93.31	114	-20.69	peak
2440	93.14	-5.71	87.43	94	-6.57	AVG
4880	55.68	-3.51	52.17	74	-21.83	peak
4880	45.71	-3.51	42.20	54	-11.80	AVG
7320	57.94	-0.82	57.12	74	-16.88	peak
7320	46.32	-0.82	45.50	54	-8.50	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

CH High (2465MHz)  
Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
2465	97.33	-5.65	91.68	114	-22.32	peak
2465	91.62	-5.65	85.97	94	-8.03	AVG
4930	54.54	-3.43	51.11	74	-22.89	peak
4930	45.91	-3.43	42.48	54	-11.52	AVG
7395	55.76	-0.75	55.01	74	-18.99	peak
7395	46.92	-0.75	46.17	54	-7.83	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
2465	98.91	-5.65	93.26	114	-20.74	peak
2465	91.46	-5.65	85.81	94	-8.19	AVG
4930	54.29	-3.43	50.86	74	-23.14	peak
4930	46.09	-3.43	42.66	54	-11.34	AVG
7395	55.76	-0.75	55.01	74	-18.99	peak
7395	45.57	-0.75	44.82	54	-9.18	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Remark:

- (1) Measuring frequencies from 9KHz to the 25 GHz.
- (2) All modes of GFSK were test at Low, Middle, and High channel, only the worst result of GFSK Low Channel was reported for below 1GHz test.
- (3) For BT above 1GHz test all modes of GFSK were test at Low, Middle, and High channel, only the worst result of GFSK Low Channel was reported.
- (4) By preliminary testing and verifying three axis (X, Y and Z) position of EUT transmitted status, it was found that "Z axis" position was the worst, and test data recorded in this report.
- (5) Radiated emission test from 9kHz to 10th harmonic of fundamental was verified, and no emission found except system noise floor in 9kHz to 30MHz and not recorded in this report.

## 8. BAND EDGE AND RF CONDUCTED SPURIOUS EMISSIONS

### 8.1 Block Diagram Of Test Setup

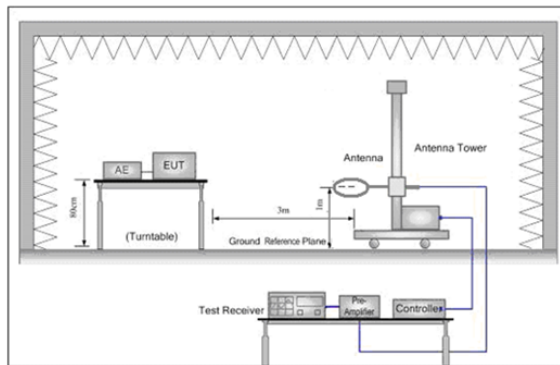


Figure 1. Below 30MHz


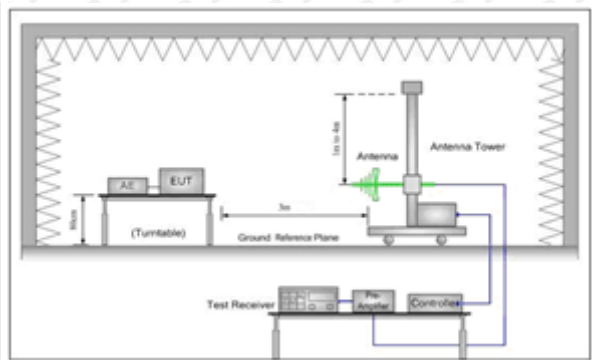


Figure 2. 30MHz to 1GHz

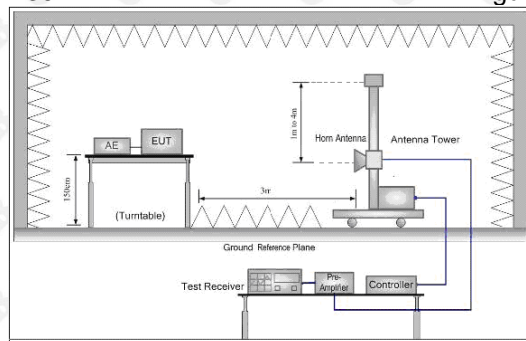

### 8.2 Limit

Spurious Emissions:

Frequency	Field strength (microvolt/meter)	Limit (dB $\mu$ V/m )	Remark	Measurement distance (m)
0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
1.705MHz-30MHz	30	-	-	30
30MHz-88MHz	100	40.0	Quasi-peak	3
88MHz-216MHz	150	43.5	Quasi-peak	3
216MHz-960MHz	200	46.0	Quasi-peak	3
960MHz-1GHz	500	54.0	Quasi-peak	3
Above 1GHz	500	54.0	Average	3

Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

8.3 Test procedure

- a.The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b.The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c.The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d.For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rota table table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e.The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f.If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Frequency	Detector	RBW	VBW	Remark
2310MHz-2400MHz	peak	1MHz	3MHz	peak
2483.5MHz-2500MHz	peak	1MHz	3MHz	peak

## 8.4 Test Result

 CH Low:  
 Horizontal:

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	2310.1436	28.28	-4.35	23.93	54	-30.07	peak
2	2343.9844	28.35	-4.32	24.03	54	-29.97	peak
3	2378.1812	31.46	-4.47	26.99	54	-27.01	peak
4	2390.0275	26.21	-4.94	21.27	54	-32.73	peak
5	2439.7026	27.34	-3.99	23.35	54	-30.65	peak

Vertical:

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	2310.0646	27.12	-4.33	22.80	54	-31.20	peak
2	2343.7898	26.81	-4.26	22.55	54	-31.45	peak
3	2378.0744	27.07	-4.46	22.60	54	-31.40	peak
4	2389.6827	26.05	-4.97	21.08	54	-32.92	peak
5	2440.0323	26.11	-3.91	22.20	54	-31.80	peak

 CH High:  
 Horizontal:


No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	2484.0979	33.27	-4.34	28.93	54	-25.07	peak
2	2488.947	31.27	-4.36	26.92	54	-27.08	peak
3	2490.0772	29.79	-4.47	25.31	54	-28.69	peak
4	2493.4266	32.98	-4.93	28.05	54	-25.95	peak
5	2495.96	26.93	-3.96	22.97	54	-31.03	peak

Vertical:

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	2484.1011	31.55	-4.30	27.25	54	-26.75	peak
2	2488.9514	30.15	-4.30	25.85	54	-28.15	peak
3	2490.4294	32.05	-4.47	27.58	54	-26.42	peak
4	2493.1633	30.34	-4.94	25.41	54	-28.59	peak
5	2496.0167	28.83	-3.98	24.85	54	-29.15	peak

## 9. BANDWIDTH TEST

### 9.1 Block Diagram Of Test Setup

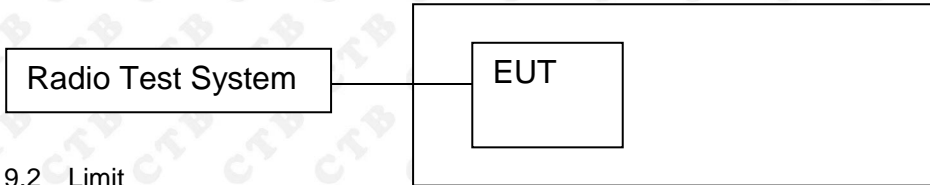

### 9.2 Limit

FCC Part15 (15.249) , Subpart C			
Section	Test Item	Frequency Range (MHz)	Result
15.249	Bandwidth	2402-2483.5	PASS

### 9.3 Test procedure

1. Set resolution bandwidth (RBW) = 1-5% or DTS BW, not to exceed 100 kHz.
2. Set the video bandwidth (VBW)  $\geq 3 \times$  RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 20 dB relative to the maximum level measured in the fundamental emission.

### 9.4 Test Result

Test Mode	Frequency (MHz)	20dB Bandwidth (MHz)	Result
GFSK	Low channel	1.214	PASS
	Mid channel	1.255	PASS
	High channel	1.271	PASS

Note: All modes of operation were Pre-scan and the worst-case emissions are reported.



Test Graph:

<p>GFSK Low channel</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.42000000 GHz</p> <p>Center Freq: 2.420000000 GHz</p> <p>Trig: Free Run</p> <p>Avg Hold: 100/100</p> <p>Radio Std: None</p> <p>#IFGain:Low</p> <p>#Atten: 30 dB</p> <p>Radio Device: BTS</p> <p>Ref Offset 7.03 dB</p> <p>Ref 27.03 dBm</p> <p>Center 2.42 GHz</p> <p>#Res BW 30 kHz</p> <p>#VBW 100 kHz</p> <p>Span 3 MHz</p> <p>Sweep 3.2 ms</p> <p>Occupied Bandwidth 1.1570 MHz</p> <p>Total Power 4.39 dBm</p> <p>Transmit Freq Error 20.027 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 1.214 MHz</p> <p>x dB -20.00 dB</p>
<p>GFSK Mid channel</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.44000000 GHz</p> <p>Center Freq: 2.440000000 GHz</p> <p>Trig: Free Run</p> <p>Avg Hold: 100/100</p> <p>Radio Std: None</p> <p>#IFGain:Low</p> <p>#Atten: 30 dB</p> <p>Radio Device: BTS</p> <p>Ref Offset 7.13 dB</p> <p>Ref 27.13 dBm</p> <p>Center 2.44 GHz</p> <p>#Res BW 30 kHz</p> <p>#VBW 100 kHz</p> <p>Span 3 MHz</p> <p>Sweep 3.2 ms</p> <p>Occupied Bandwidth 1.1555 MHz</p> <p>Total Power 4.49 dBm</p> <p>Transmit Freq Error 10.864 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 1.255 MHz</p> <p>x dB -20.00 dB</p>
<p>GFSK High channel</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.46500000 GHz</p> <p>Center Freq: 2.465000000 GHz</p> <p>Trig: Free Run</p> <p>Avg Hold: 100/100</p> <p>Radio Std: None</p> <p>#IFGain:Low</p> <p>#Atten: 30 dB</p> <p>Radio Device: BTS</p> <p>Ref Offset 7.21 dB</p> <p>Ref 27.21 dBm</p> <p>Center 2.465 GHz</p> <p>#Res BW 30 kHz</p> <p>#VBW 100 kHz</p> <p>Span 3 MHz</p> <p>Sweep 3.2 ms</p> <p>Occupied Bandwidth 1.1752 MHz</p> <p>Total Power 4.12 dBm</p> <p>Transmit Freq Error 22.936 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 1.271 MHz</p> <p>x dB -20.00 dB</p>

**10. ANTENNA REQUIREMENT**

## 15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

## 15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

**EUT Antenna:**

The antenna is internal antenna. The best case gain of the antenna is 1.0dBi.

## 11. EUT TEST SETUP PHOTOGRAPHS

### Radiated Emissions


Below 1G



Above 1G



Conducted emission

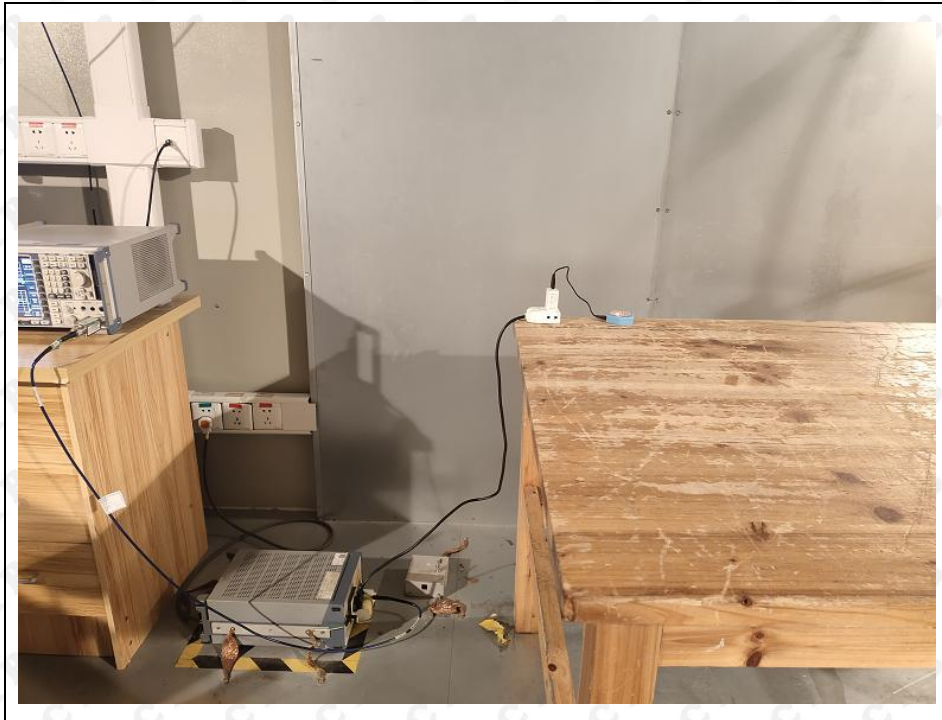

※※※※※ END OF REPORT ※※※※※