


Dimensions

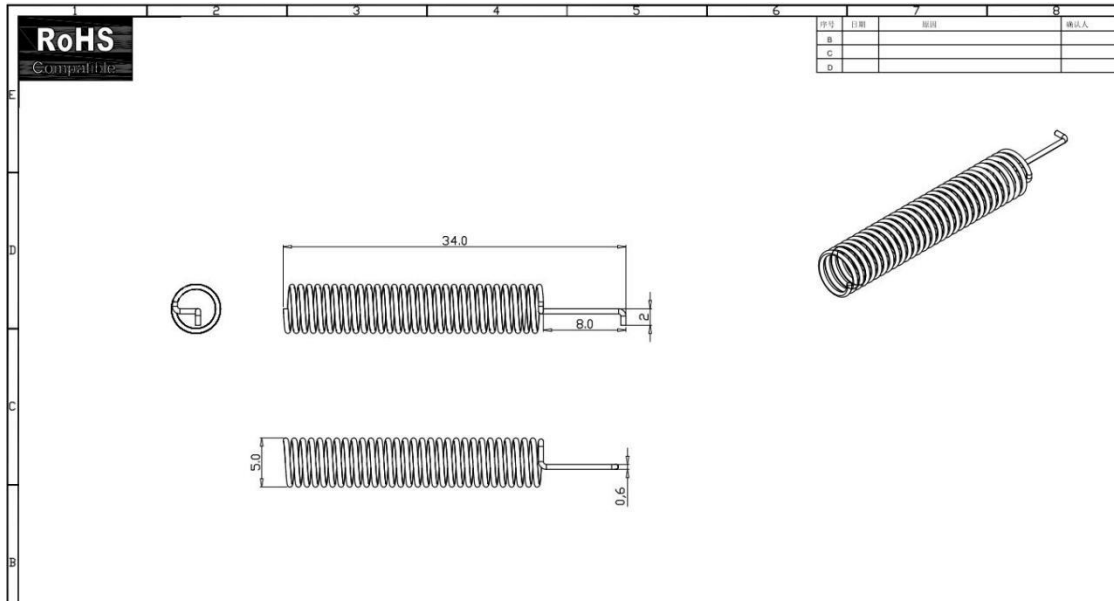

Index:

1. Reliability Testing
2. Specification
3. S Parameter Test Data
4. Antenna Radiation Pattern

=====

1. Reliability Testing

Test Item	Procedure	Requirement
1. Visual inspection and Dimension Check	Applicable methods using x5 magnification	follow specification
2. Rapid Changing of Temperature	-40°C (30minutes) to 80°C (30minutes); 24 cycles	After 2 hours recovery: 1. no visible damage 2. bandwidth tolerance < ±5%
3. Damp Heat	24 hours at 60°C; 90 ~ 95% RH	After 2 hours recovery: 1. no visible damage 2. bandwidth tolerance < ±5%
4. Endurance	24 hours at 80°C	After 2 hours recovery: 1. no visible damage 2. bandwidth tolerance < ±5%
5. Connector Pull Strength Test	>= 1.0 Kg	Hold 2~3S: 1. no visible damage 2. bandwidth tolerance < ±5%

弹簧技术要求 公差:

弹簧材料	磷铜	直径	0.6mm
旋转方向	/	旋转有效圈数	25T
出脚方式	单边	孔距	/
弹簧上部尺寸			
弹簧下部尺寸			
弹簧高度			

4. Antenna Radiation Pattern

Testing Equipment Specification:

Antenna Anechoic Chamber Dimension: 8 x 4 x 4 m


Quiet Zone: 600mm @1 GHz

Isolation: >100dB @ 1 MHz ~ 10 GHz

Testing Equipment: Agilent 5071B

Received Antenna: 0.7 ~ 6.0 GHz for Gain Calibration

Double Ridged Horn Antenna

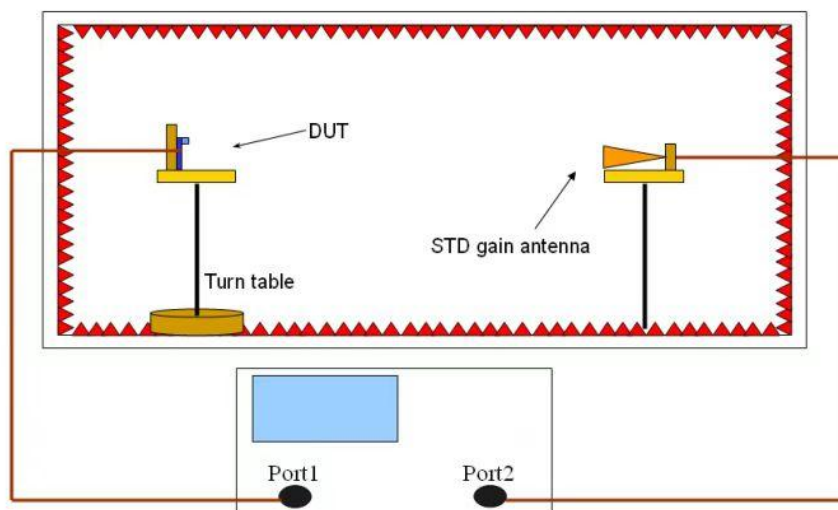

2. Specification

A. Electrical Characteristics	
Operation Frequency	434MHz
Typical Antenna Gain	3dBi
Impedance	50 Ohm
B. Material	
Material of Radiator	CU
Connector Type	N/A
C. Environmental	
Operation Temperature	- 30 °C ~ + 85 °C
Storage Temperature	- 30 °C ~ + 85 °C

3. S.W.R. Testing Result

