

# 承 认 书

## SPECIFICATION FOR APPROVAL

客户名称: \_\_\_\_\_

CUSTOMER NAME: SunSun Electronic Technology Inc.

产品名称:

PRODUCT NAME: Wireless fence

客户料号: \_\_\_\_\_

CUSTOMER P/N: \_\_\_\_\_



电子料号

P/N:


REV: A

	MANUFACTURER SIGNATURE	CUSTOMER SIGNATURE
CHECKED BY :		
AUDITOR BY :		
APPROVED BY:		
DATE:	2023-8-3	


主要技术指标		Main technical specifications	
频率范围 (MHZ)	433-434	Frequency Range (MHZ)	433-434
特性阻抗( $\Omega$ )	10	Impedance( $\Omega$ )	10
增益(dBi)	2.51	Gain(dBi)	2.51
输出电压 驻波比	2	VSWR	2
最大功率	10W	Admitted Power	10W
极化方式	垂直极化	Polarization	Linear, Vertical
方向性	两重性	Radiation	duality
连接方式	SMA	Connector Type	SMA
物理性能		Physical Properties	
天线外套材料	TPEE	Antenna cover	TPEE
工作温度	-20°C~+70°C	Operating Temp	-20°C~+70°C
保存温度	-20°C~+70°C	Storage Temp	-20°C~+70°C

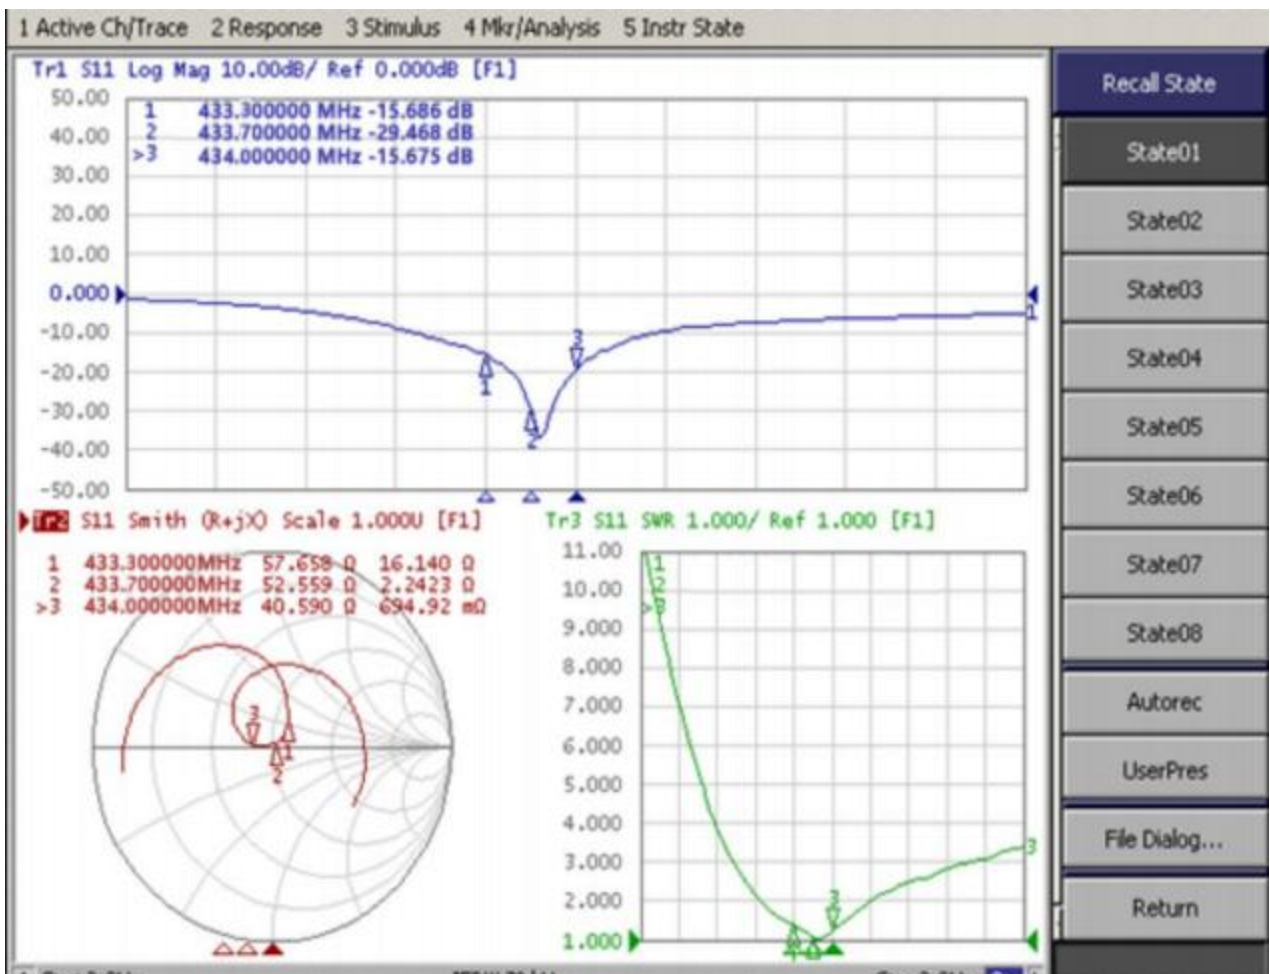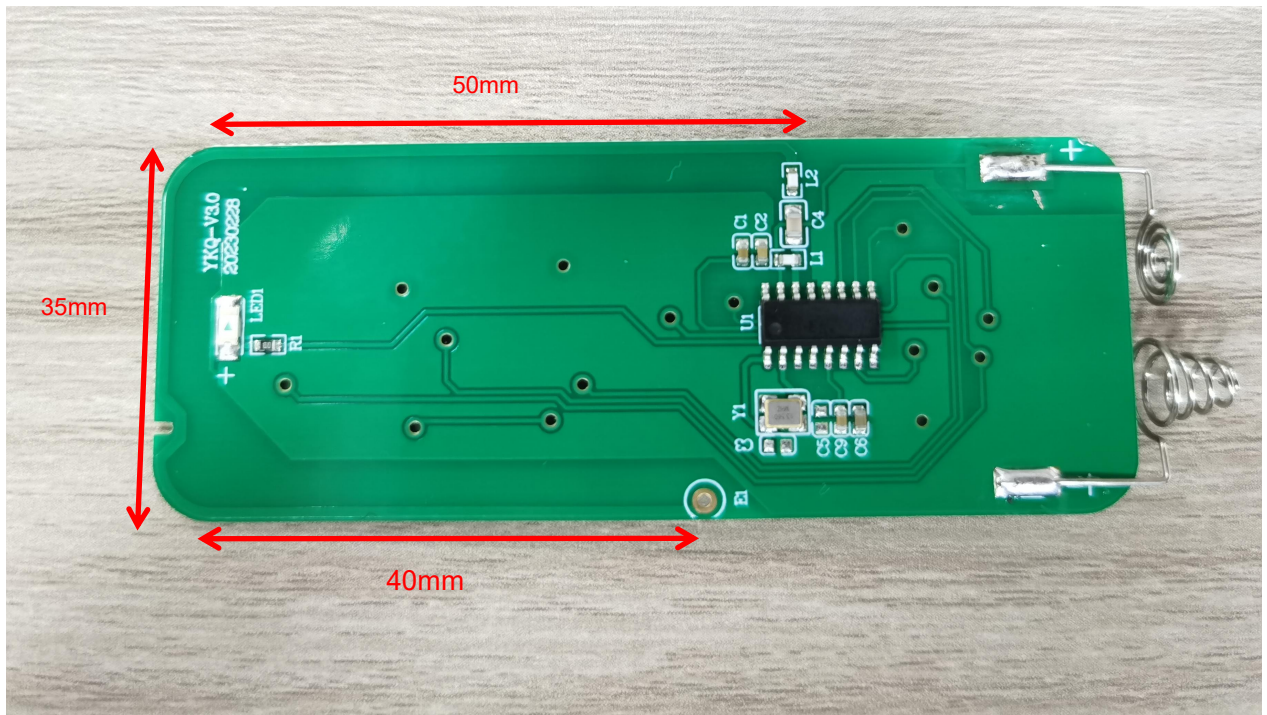


## 2D、3DRaditation Pattern




433.3mHz




Gain: 2.42 dBi




Efficiency: 75.6 1%




433.7mHz



Gain: 2.51dBi




Efficiency: 78.45%



434.0mHz



Gain: 2.47dBi



Efficiency: 79.32%