



FCC TEST REPORT

FCC ID: 2BFZT-TSL02

On Behalf of

Shanghai Jia Chang Industrial Co ., Ltd

Wireless Portable Charger

Model No.: TSL02, 2058793-00-A, 2048596-00-A, 2058795-00-A

Prepared for : Shanghai Jia Chang Industrial Co ., Ltd
Address : No.400, Chuan Qiao Road, Pu dong New District, Shanghai, China

Prepared By : Shenzhen Alpha Product Testing Co., Ltd.
Address : Building i, No.2, Lixin Road, Fuyong Street, Bao'an District,
518103, Shenzhen, Guangdong, China

Report Number	:	A2404074-C01-R03
Date of Receipt	:	April 11, 2024
Date of Test	:	April 11, 2024 – April 17, 2024
Date of Report	:	April 23, 2024
Version Number	:	V0
Test Result	:	Pass

TABLE OF CONTENTS

Description	Page
1. Test Result Summary	5
2. General Information	6
2.1. Description of Device (EUT)	6
2.2. Accessories of Device (EUT).....	7
2.3. Tested Supporting System Details	7
2.4. Block Diagram of Connection between EUT and Simulators.....	7
2.5. Description of Test Modes	7
2.6. Test Conditions	7
2.7. Test Facility.....	8
2.8. Measurement Uncertainty.....	8
2.9. Test Equipment List	9
3. Test Results and Measurement Data	10
3.1. Conducted Emission.....	10
3.1.1. Test Specification	10
3.1.2. Test Data.....	11
3.2. Radiated Spurious Emission Measurement	14
3.2.1. Test Specification	14
3.2.2. Test Data.....	17
3.3. Test Specification	23
3.3.1. Test Data.....	24
4. Photos of Test Setup	25

TEST REPORT DECLARATION

Applicant : Shanghai Jia Chang Industrial Co., Ltd
Address : No.400, Chuan Qiao Road, Pu dong New District, Shanghai, China
Manufacturer : Shanghai Jia Chang Industrial Co., Ltd
Address : No.400, Chuan Qiao Road, Pu dong New District, Shanghai, China
EUT Description : Wireless Portable Charger
(A) Model No. : TSL02, 2058793-00-A, 2048596-00-A, 2058795-00-A
(B) Trademark : Tesla

Measurement Standard Used:

FCC CFR Title 47 Part 15 Subpart C Section 15.209

The device described above is tested by Shenzhen Alpha Product Testing Co., Ltd. to determine the maximum emission levels emanating from the device and the severe levels of the device can endure and its performance criterion. The test results are contained in this test report and Shenzhen Alpha Product Testing Co., Ltd. is assumed full responsibility for the accuracy and completeness of test. Also, this report shows that the EUT is technically compliant with the FCC CFR Title 47 Part 15 Subpart C Section 15.209 requirements.

This report applies to above tested sample only. This report shall not be reproduced in parts without written approval of Shenzhen Alpha Product Testing Co., Ltd.

Tested by (name + signature).....:

Yannis Wen
Project Engineer



Approved by (name + signature).....:

Reak Yang
Project Manager



Date of issue.....

April 23, 2024

Revision History

Revision	Issue Date	Revisions	Revised By
V0	April 23, 2024	Initial released Issue	Yannis Wen

1. Test Result Summary

Requirement	CFR 47 Section	Result
Antenna requirement	§15.203	PASS
AC Power Line Conducted Emission	§15.207	PASS
Spurious Emission	§15.209(a)(f)	PASS
Occupied Bandwidth	§15.215 (c)	PASS

Note:

1. *PASS: Test item meets the requirement.*
2. *Fail: Test item does not meet the requirement.*
3. *N/A: Test case does not apply to the test object.*
4. *The test result judgment is decided by the limit of test standard.*

2. General Information

2.1. Description of Device (EUT)

EUT Name	: Wireless Portable Charger
Model No.	: TSL02, 2058793-00-A, 2048596-00-A, 2058795-00-A
DIFF.	: There is no difference between these models except for the shipping region and color. All tests are made with the TSL02 model.
Power supply	: DC 5V from Type-C port, DC 9V from Type-C port, DC 12V from Type-C port, DC 3.85V from battery.
EUT information	: Input:DC 5V/2.4A, 9V/2A, 12V/1.5A Output: DC 5V/2.4A, 9V/2.22A, 12V/1.67A Wireless Output(Primary): 15W(Max) Wireless Output(Secondary): 5W(Max) Wireless Receiver(RX): 10W(Max) Simultaneous Output: DC 5V/3A(Two Ports Max)
Operation frequency	: 112~205KHz
Modulation	: MSK
Antenna Type	: Coil Antenna, Maximum Gain is 0dBi (This value is supplied by applicant).
Coaxial cable loss	: Max. coaxial cable loss:0.5dB (Cable lossvalue is provided by applicant.)
Software version	: V1.0
Hardware version	: V2.2
Intend use environment	: Residential, commercial and light industrial environment


2.2. Accessories of Device (EUT)

Accessories1 : /
 Manufacturer : /
 Model : /
 Ratings : /

2.3. Tested Supporting System Details

No.	Description	Manufacturer	Model	Serial Number	Certification
1	N/A	N/A	N/A	N/A	N/A

2.4. Block Diagram of Connection between EUT and Simulators

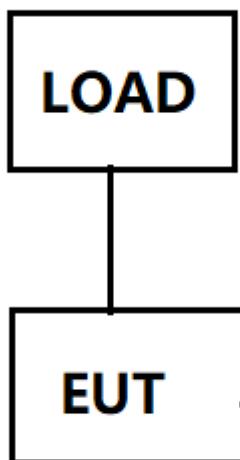

2.5. Description of Test Modes

Channel	Frequency (KHz)
1	147

2.6. Test Conditions

Items	Required	Actual
Temperature range:	15-35°C	24°C
Humidity range:	25-75%	56%
Pressure range:	86-106kPa	98kPa

2.7. Test Facility

Shenzhen Alpha Product Testing Co., Ltd

Building i, No.2, Lixin Road, Fuyong Street, Bao'an District, 518103, Shenzhen, Guangdong, China

June 21, 2018 File on Federal Communication Commission
Registration Number: 293961

July 15, 2019 Certificated by IC
Registration Number: 12135A

2.8. Measurement Uncertainty

(95% confidence levels, k=2)

Item	Uncertainty
Uncertainty for Power point Conducted Emissions Test	1.63dB
Uncertainty for Radiation Emission test in 3m chamber (below 30MHz)	3.5dB
Uncertainty for Radiation Emission test in 3m chamber (30MHz to 1GHz)	3.74dB(Polarize: V) 3.76dB(Polarize: H)
Uncertainty for Radiation Emission test in 3m chamber (1GHz to 25GHz)	3.77dB(Polarize: V) 3.80dB(Polarize: H)
Uncertainty for radio frequency	5.06×10^{-8} GHz
Uncertainty for conducted RF Power	0.40dB
Uncertainty for temperature	0.2°C
Uncertainty for humidity	1%
Uncertainty for DC and low frequency voltages	0.06%

2.9. Test Equipment List

Equipment	Manufacture	Model No.	Firmware version	Serial No.	Last cal.	Cal Interval
9*6*6 anechoic chamber	CHENYU	9*6*6	/	N/A	2022.05.17	3Year
Spectrum analyzer	ROHDE&SCHWARZ	FSV40-N	2.3	102137	2023.08.16	1Year
Spectrum analyzer	Agilent	N9020A	A.14.16	MY499100060	2023.08.16	1Year
Receiver	ROHDE&SCHWARZ	ESR	2.28 SP1	1316.3003K03-10 2082-Wa	2023.08.16	1Year
Receiver	R&S	ESCI	4.42 SP1	101165	2023.08.16	1Year
Bilog Antenna	Schwarzbeck	VULB 9168	/	VULB 9168#627	2023.08.28	1Year
Horn Antenna	SCHWARZBECK	BBHA 9120 D	/	2106	2023.08.19	1Year
Loop Antenna	SCHWARZBECK	FMZB 1519B	/	00128	2023.08.19	1Year
RF Cable	Resenberger	Cable 1	/	RE1	2023.08.16	1Year
RF Cable	Resenberger	Cable 2	/	RE2	2023.08.16	1Year
RF Cable	Resenberger	Cable 3	/	CE1	2023.08.16	1Year
Pre-amplifier	HP	HP8347A	/	2834A00455	2023.08.16	1Year
Pre-amplifier	Agilent	8449B	/	3008A02664	2023.08.16	1Year
L.I.S.N.#1	Schwarzbeck	NSLK8126	/	8126-466	2023.08.16	1Year
L.I.S.N.#2	ROHDE&SCHWARZ	ENV216	/	101043	2023.08.16	1Year
Horn Antenna	SCHWARZBECK	BBHA 9170	/	00946	2023.08.19	1Year
Preamplifier	SKET	LNPA_1840 -50	/	SK2018101801	2023.08.16	1 Year
Power Meter	Agilent	E9300A	/	MY41496628	2023.08.16	1 Year
Power Sensor	DARE	RPR3006W	/	15100041SNO91	2023.08.16	1 Year
Temp. & Humid. Chamber	Teelong	TL-HW408S	/	TL-20191205-01	2023.07.25	1 Year
Switching Mode Power Supply	JUNKE	JK12010S	/	20140927-6	2023.08.16	1 Year
Adjustable attenuator	MWRFtest	N/A	/	N/A	N/A	N/A
10dB Attenuator	Mini-Circuits	DC-6G	/	N/A	N/A	N/A

Software Information			
Test Item	Software Name	Manufacturer	Version
RE	EZ-EMC	EZ	Alpha-3A1
CE	EZ-EMC	EZ	Alpha-3A1
RF-CE	MTS 8310	MW	V2.0.0.0

3. Test Results and Measurement Data

3.1. Conducted Emission


3.1.1. Test Specification

Test Requirement:	FCC Part15 C Section 15.207																
Test Method:	ANSI C63.10:2013																
Frequency Range:	150 kHz to 30 MHz																
Receiver setup:	RBW=9 kHz, VBW=30 kHz, Sweep time=auto																
Limits:	<table border="1"> <thead> <tr> <th rowspan="2">Frequency range (MHz)</th> <th colspan="2">Limit (dBuV)</th> </tr> <tr> <th>Quasi-peak</th> <th>Average</th> </tr> </thead> <tbody> <tr> <td>0.15-0.5</td> <td>66 to 56*</td> <td>56 to 46*</td> </tr> <tr> <td>0.5-5</td> <td>56</td> <td>46</td> </tr> <tr> <td>5-30</td> <td>60</td> <td>50</td> </tr> </tbody> </table>			Frequency range (MHz)	Limit (dBuV)		Quasi-peak	Average	0.15-0.5	66 to 56*	56 to 46*	0.5-5	56	46	5-30	60	50
Frequency range (MHz)	Limit (dBuV)																
	Quasi-peak	Average															
0.15-0.5	66 to 56*	56 to 46*															
0.5-5	56	46															
5-30	60	50															
Test Setup:	<p>Reference Plane</p> <p>40cm</p> <p>80cm</p> <p>E.U.T — Adapter —> LISN — Filter — AC power</p> <p>EMI Receiver</p> <p>Test table/Insulation plane</p> <p>Remark: E.U.T: Equipment Under Test LISN: Line Impedance Stabilization Network Test table height=0.8m</p>																
Test Mode:	Transmitting Mode																
Test Procedure:	<ol style="list-style-type: none"> 1. The E.U.T is connected to an adapter through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment. 2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs). 3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10: 2013 on conducted measurement. 																
Test Result:	PASS																

3.1.2. Test Data

Please refer to following diagram for individual

Test Mode	: Charging+Wireless TX Output 2: 15W(Max)
Test Result	: PASS
<p>Note: The test results are listed in next pages.</p> <p>All test modes has been tested, this report only reflected the worst mode.(Charging+5W)</p> <p>If the limits for the measurement with the average detector are met when using a receiver with a peak detector, the test unit shall be deemed to meet both limits and the measurement with the average detector and quasi-peak detector need not be carried out.</p> <p>If the limits for the measurement with the average detector are met when using a receiver with a quasi-peak detector, the test unit shall be deemed to meet both limits and the measurement with the average detector need not be carried out.</p>	

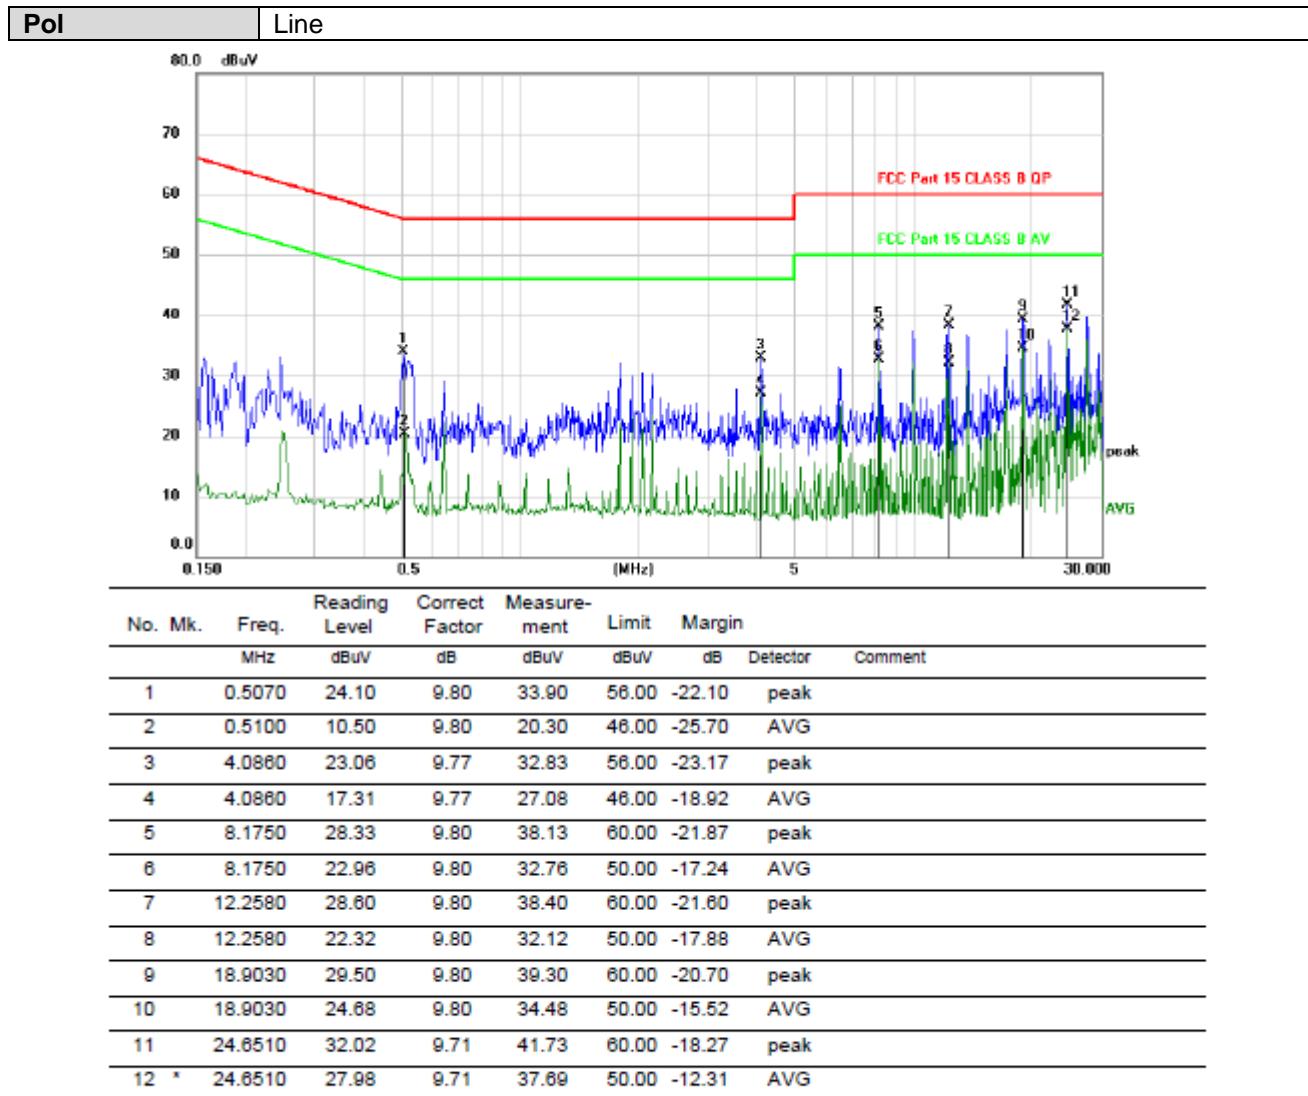

*:Maximum data x:Over limit !:over margin

(Reference Only)

Note: Measurement=Reading Level+Correc Factor. Factor=(LISN or ISN or PLC or Current Probe)Factor+Cable

Pol Neutral

FCC Part 15 CLASS B OP

FCC Part 15 CLASS B AV

peak

AVG

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure-ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.5250	28.79	9.80	38.59	56.00	-17.41	peak	
2		0.5250	9.59	9.80	19.39	46.00	-26.61	AVG	
3		2.3010	28.06	9.71	37.77	56.00	-18.23	peak	
4		2.3010	23.68	9.71	33.39	46.00	-12.61	AVG	
5		12.0060	30.83	9.80	40.63	60.00	-19.37	peak	
6		12.0060	26.60	9.80	36.40	50.00	-13.60	AVG	
7		13.9230	27.27	9.80	37.07	50.00	-12.93	AVG	
8		14.0460	31.45	9.80	41.25	60.00	-18.75	peak	
9		18.5220	32.81	9.80	42.61	60.00	-17.39	peak	
10	*	18.5220	28.81	9.80	38.61	50.00	-11.39	AVG	
11		22.3500	31.53	9.75	41.28	60.00	-18.72	peak	
12		22.3500	26.95	9.75	36.70	50.00	-13.30	AVG	


*:Maximum data x:Over limit !:over margin



Reference Only

Note: Measurement=Reading Level+Correc Factor. Factor=(LISN or ISN or PLC or Current Probe)Factor+Cable

3.2. Radiated Spurious Emission Measurement

3.2.1. Test Specification

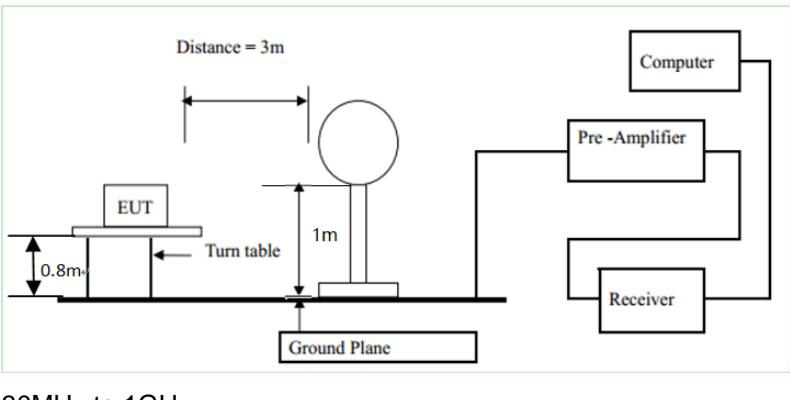Test Requirement:	FCC Part15 C Section 15.209						
Test Method:	ANSI C63.10: 2013						
Frequency Range:	9 kHz to 25 GHz						
Measurement Distance:	3 m						
Antenna Polarization:	Horizontal & Vertical						
Operation mode:	Refer to item 4.1						
Receiver Setup:	Frequency	Detector	RBW	VBW	Remark		
	9kHz-150kHz	Quasi-pea k	200Hz	1kHz	Quasi-peak Value		
	150kHz-30MHz	Quasi-pea k	9kHz	30kHz	Quasi-peak Value		
	30MHz-1GHz	Quasi-pea k	100KH z	300KH z	Quasi-peak Value		
	Above 1GHz	Peak	1MHz	3MHz	Peak Value		
		Peak	1MHz	10Hz	Average Value		
Limit:	Frequency		Field Strength (microvolts/meter)		Measurement Distance (meters)		
	0.009-0.490		2400/F(KHz)		300		
	0.490-1.705		24000/F(KHz)		30		
	1.705-30		30		30		
	30-88		100		3		
	88-216		150		3		
	216-960		200		3		
	Above 960		500		3		
	Frequency		Field Strength (microvolts/meter)		Measureme nt Distance (meters)		
	Above 1GHz		500		3		
	Above 1GHz		5000		3		
Test setup:	For radiated emissions below 30MHz						
							
	30MHz to 1GHz						

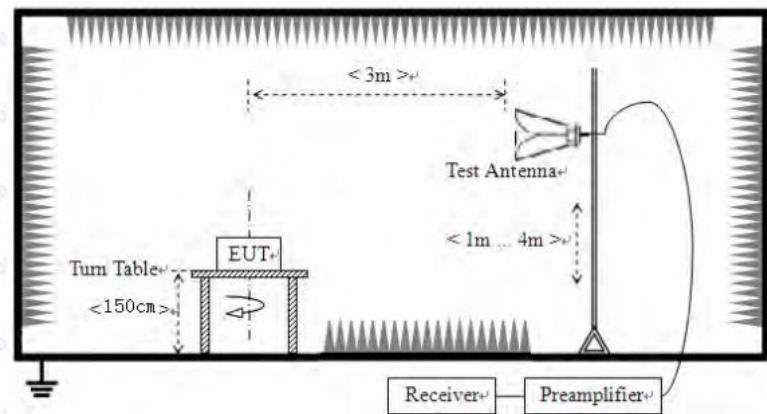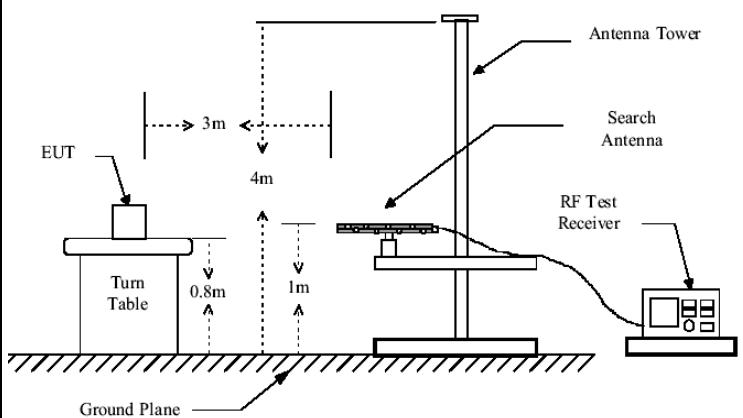

Test Procedure:


1. For the radiated emission test below 1GHz:
The EUT was placed on a turntable with 0.8 meter above ground. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high PASS filter are used for the test in order to get better signal level.
For the radiated emission test above 1GHz:
Place the measurement antenna on a turntable with 1.5 meter above ground, which is away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
2. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
3. For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using

	<p>the quasi-peak detector and reported.</p> <p>4. Use the following spectrum analyzer settings:</p> <ul style="list-style-type: none">(1) Span shall wide enough to fully capture the emission being measured;(2) Set RBW=100 kHz for $f < 1$ GHz; VBW \geq RBW; Sweep = auto; Detector function = peak; Trace = max hold;(3) Set RBW = 1 MHz, VBW= 3MHz for $f \geq 1$ GHz for peak measurement. <p>For average measurement: VBW = 10 Hz, when duty cycle is no less than 98 percent. VBW $\geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.</p>
Test mode:	Refer to section 4.1 for details
Test results:	PASS

3.2.2. Test Data

Please refer to following diagram for individual


Frequency Range	: 9KHz~30MHz
Test Mode	: TX: 147kHz
Test Results	: PASS
Note: 1. The test results are listed in next pages. 2. This mode is worst case mode, so this report only reflected the worst mode. 3. If the limits for the measurement with the average detector are met when using a receiver with a peak detector, the test unit shall be deemed to meet both limits and the measurement with the quasi-peak detector need not be carried out.	

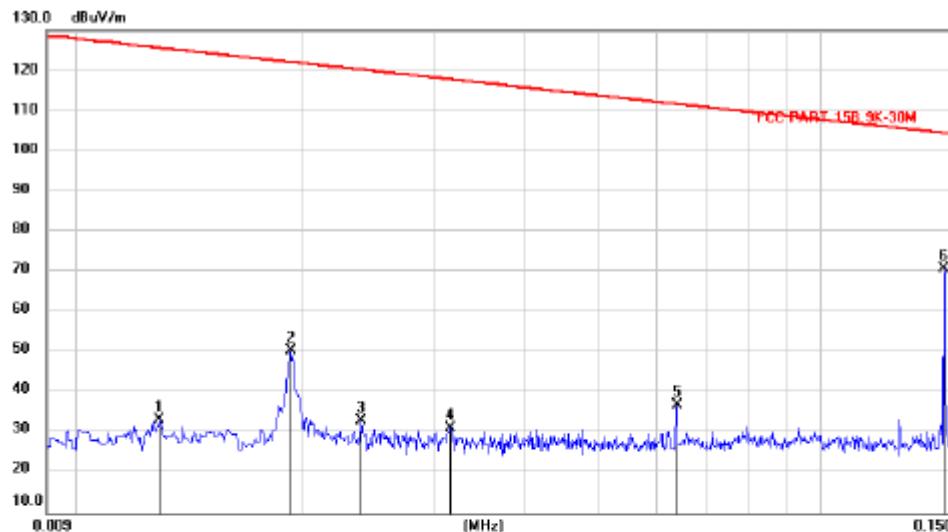

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment		Limit	Margin	Antenna Height	Table Degree		
					MHz	dBuV	dB	dBuV/m	dB	Detector	cm	degree
1		0.0128	11.73	21.43	33.16	125.5	-92.40	peak				
2		0.0192	28.93	21.27	50.20	122.0	-71.85	peak				
3		0.0239	11.94	21.15	33.09	120.1	-87.06	peak				
4		0.0316	10.38	20.90	31.28	117.7	-88.45	peak				
5		0.0638	16.67	20.11	36.78	111.6	-74.87	peak				
6	*	0.1466	50.53	20.15	70.68	104.4	-33.77	peak				

Note: 1. *:Maximum data; x:Over limit; !:over margin.

2. Measurement=Reading Level+Correct Factor; Correct Factor=Antenna Factor+Cable Loss.

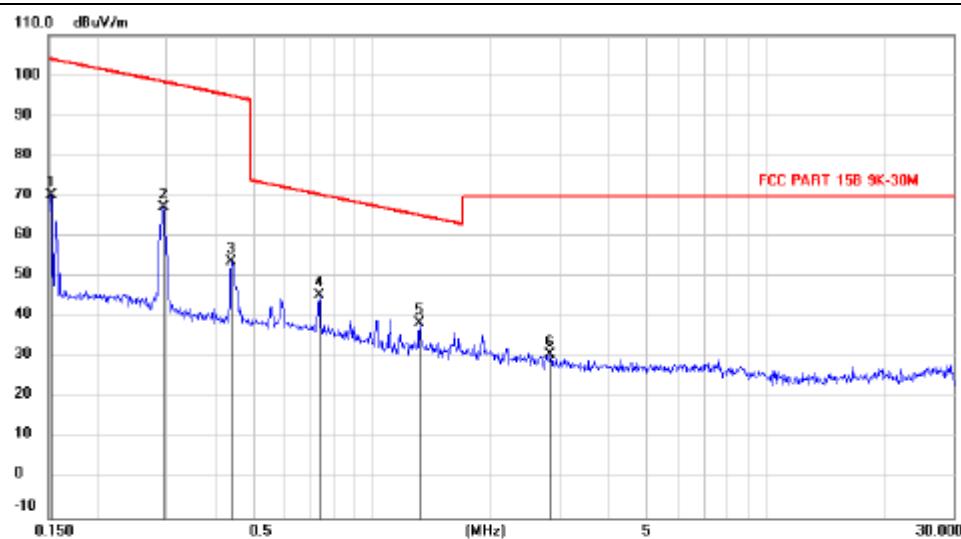

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Antenna Height cm		Table Degree degree	Comment
								Detector	Table Degree degree		
1		0.1527	49.99	20.20	70.19	104.0	-33.90	peak			
2		0.2941	47.38	19.99	67.37	98.42	-31.05	peak			
3		0.4304	33.88	19.79	53.67	94.94	-41.27	peak			
4	*	0.7338	25.53	19.84	45.37	70.44	-25.07	peak			
5		1.3202	18.28	20.08	38.36	65.26	-26.90	peak			
6		2.8389	10.26	20.46	30.72	70.00	-39.28	peak			


Note: 1. *:Maximum data; x:Over limit; !:over margin.

2. Measurement=Reading Level+Correct Factor; Correct Factor=Antenna Factor+Cable Loss.

Frequency Range	:	30MHz~1000MHz
Test Mode	:	Charging+Wireless TX Output 2: 15W(Max)
Test Results	:	PASS
Note: 1. The test results are listed in next pages. 2. All test modes has been tested, this report only reflected the worst mode. (Charging+5W) 3. If the limits for the measurement with the average detector are met when using a receiver with a peak detector, the test unit shall be deemed to meet both limits and the measurement with the quasi-peak detector need not be carried out.		


Frequency Range	:	Above 1GHz
EUT	:	/
M/N	:	/
Test Engineer	:	/
Test Mode	:	/
Test Results	:	N/A
Note: 1. The highest frequency of the internal sources of the EUT is less than 108 MHz, the measurement shall only be made up to 1 GHz. So the frequency rang above 1GHz radiation test not applicable.		

30MHz-1GHz

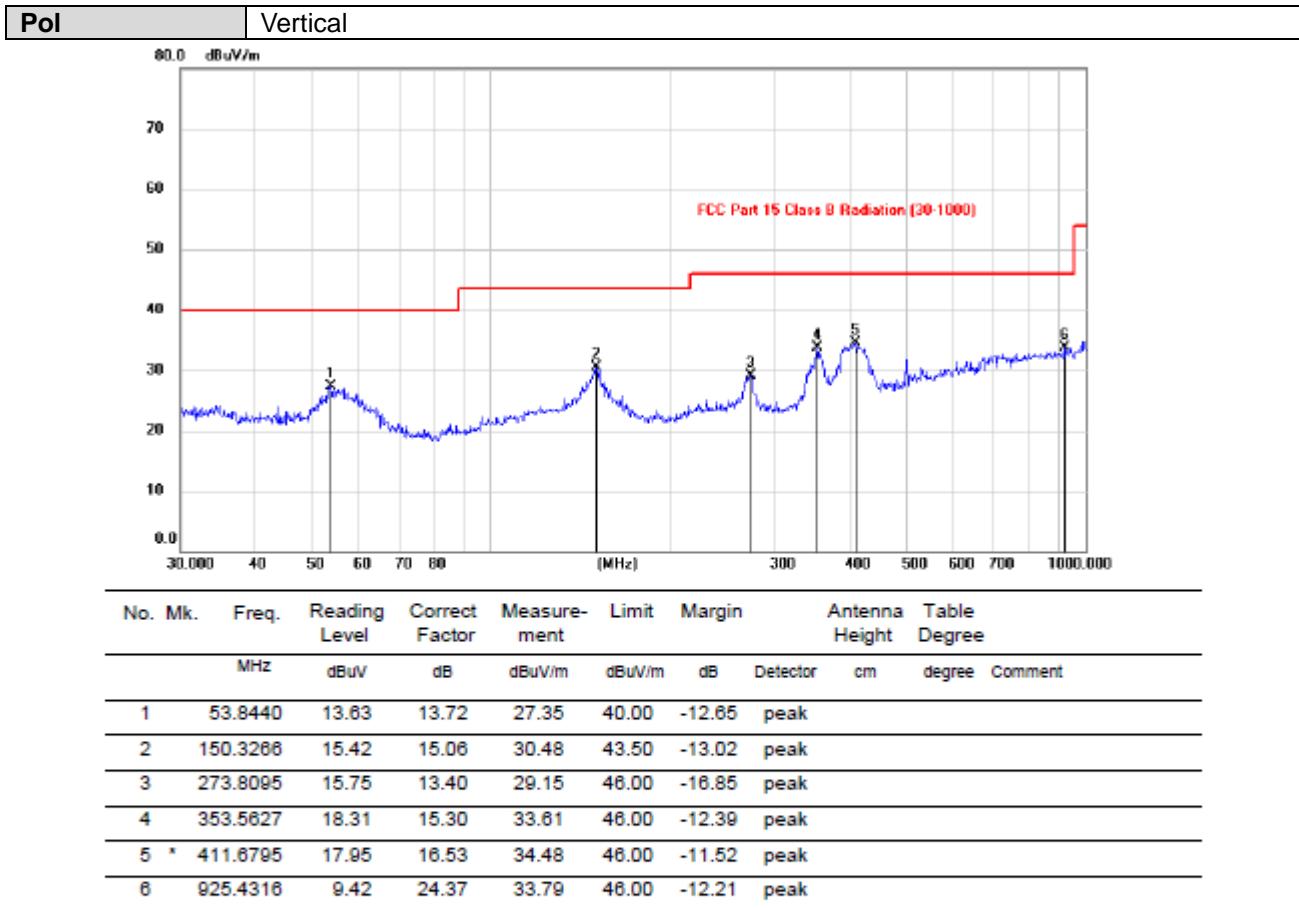

Note: 1. *:Maximum data; x:Over limit; !:over margin.


2. Measurement=Reading Level+Correct Factor; Correct Factor=Antenna Factor+Cable Loss.

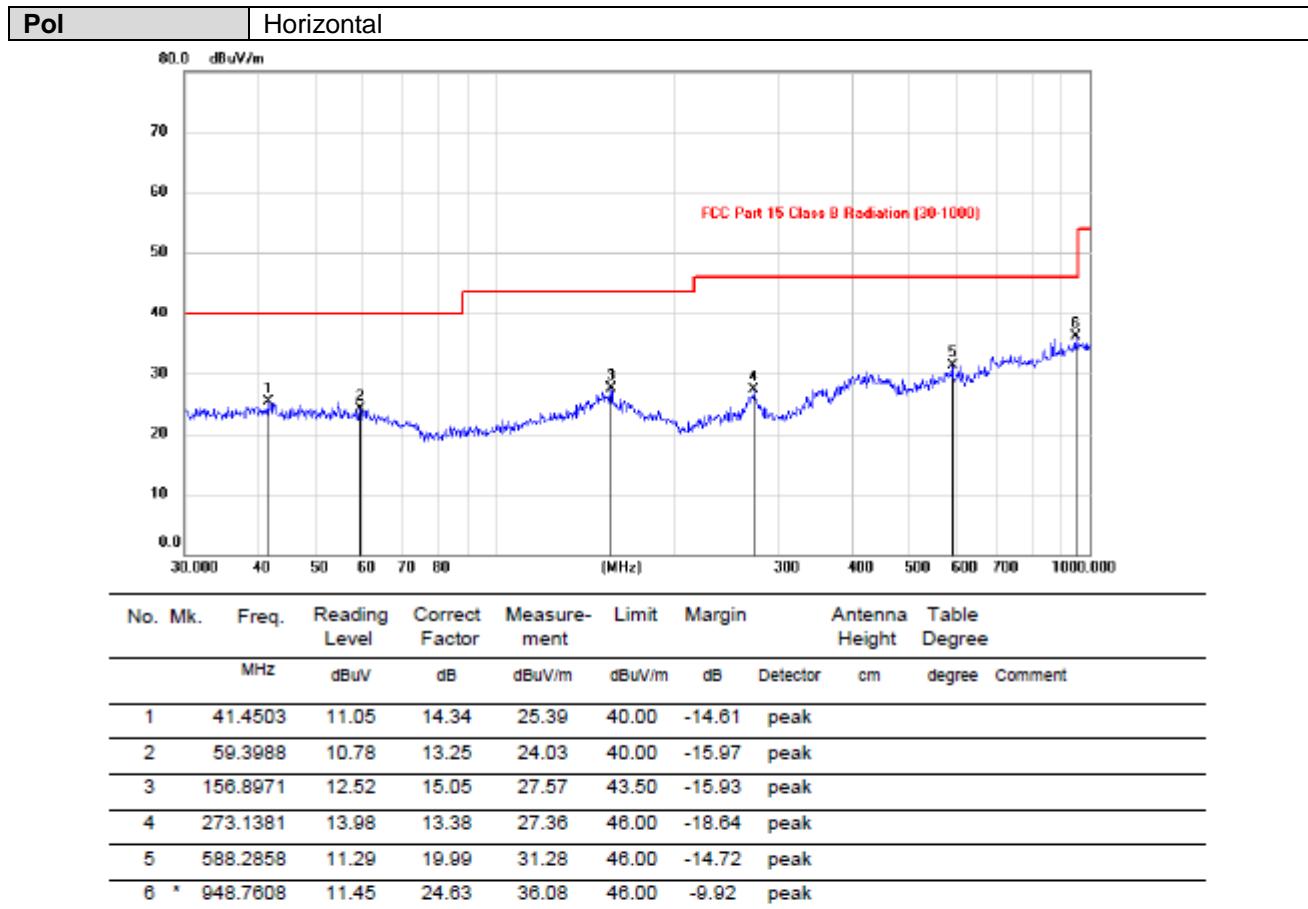

Note: 1. *:Maximum data; x:Over limit; l:over margin.

2. Measurement=Reading Level+Correct Factor; Correct Factor=Antenna Factor+Cable Loss.


3.3. Test Specification

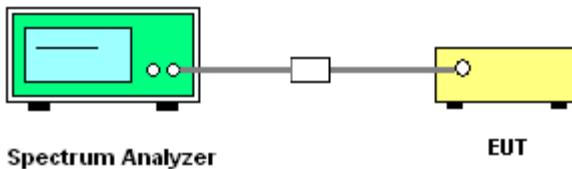Test Requirement:	FCC Part15 C Section 15.215(c)
Test Method:	ANSI C63.10: 2013
Limit:	N/A
Test Procedure:	<ol style="list-style-type: none"> 1. According to the follow Test-setup, keep the relative position between the artificial antenna and the EUT. 2. Set to the maximum power setting and enable the EUT transmit continuously. 3. Use the following spectrum analyzer settings for 20dB Bandwidth measurement. Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel; RBW\geq1% of the 20 dB bandwidth; VBW\geqRBW; Sweep = auto; Detector function = peak; Trace = max hold. 4. Measure and record the results in the test report.
Test setup:	 <p>Spectrum Analyzer EUT</p>
Test Mode:	Refer to section 4.1 for details
Test results:	PASS

3.3.1. Test Data

Frequency(KHz)	20dB Occupy Bandwidth (kHz)	Limit (kHz)	Conclusion
148	0.279	---	PASS


Test plots as follows:

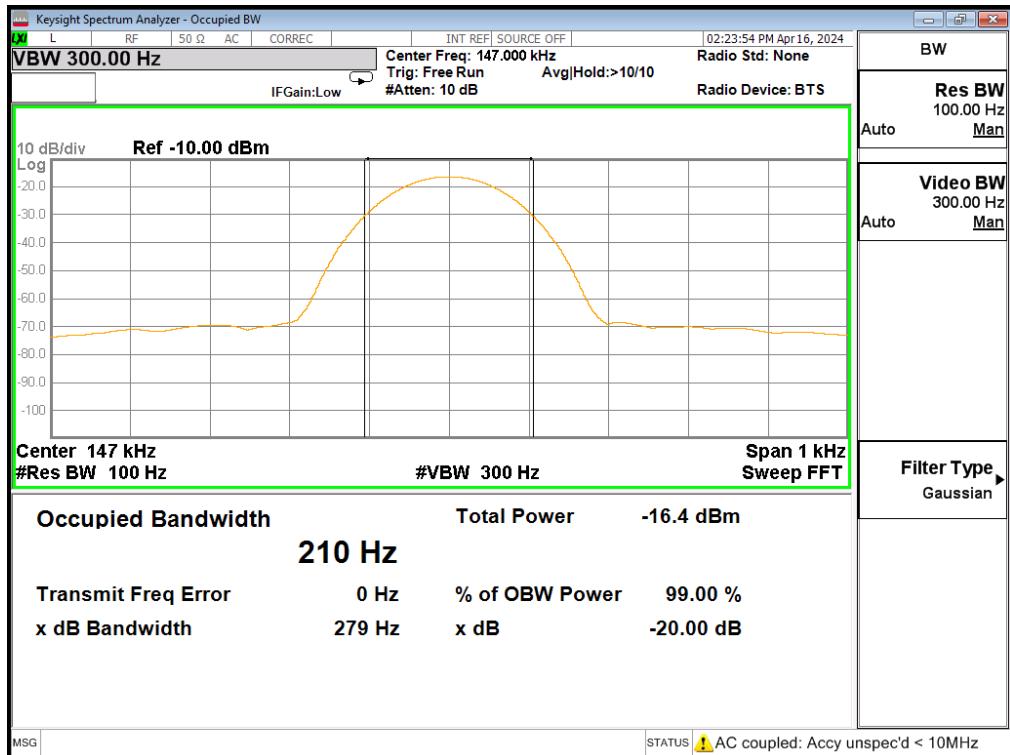


4. Photos of Test Setup

Radiated Emission



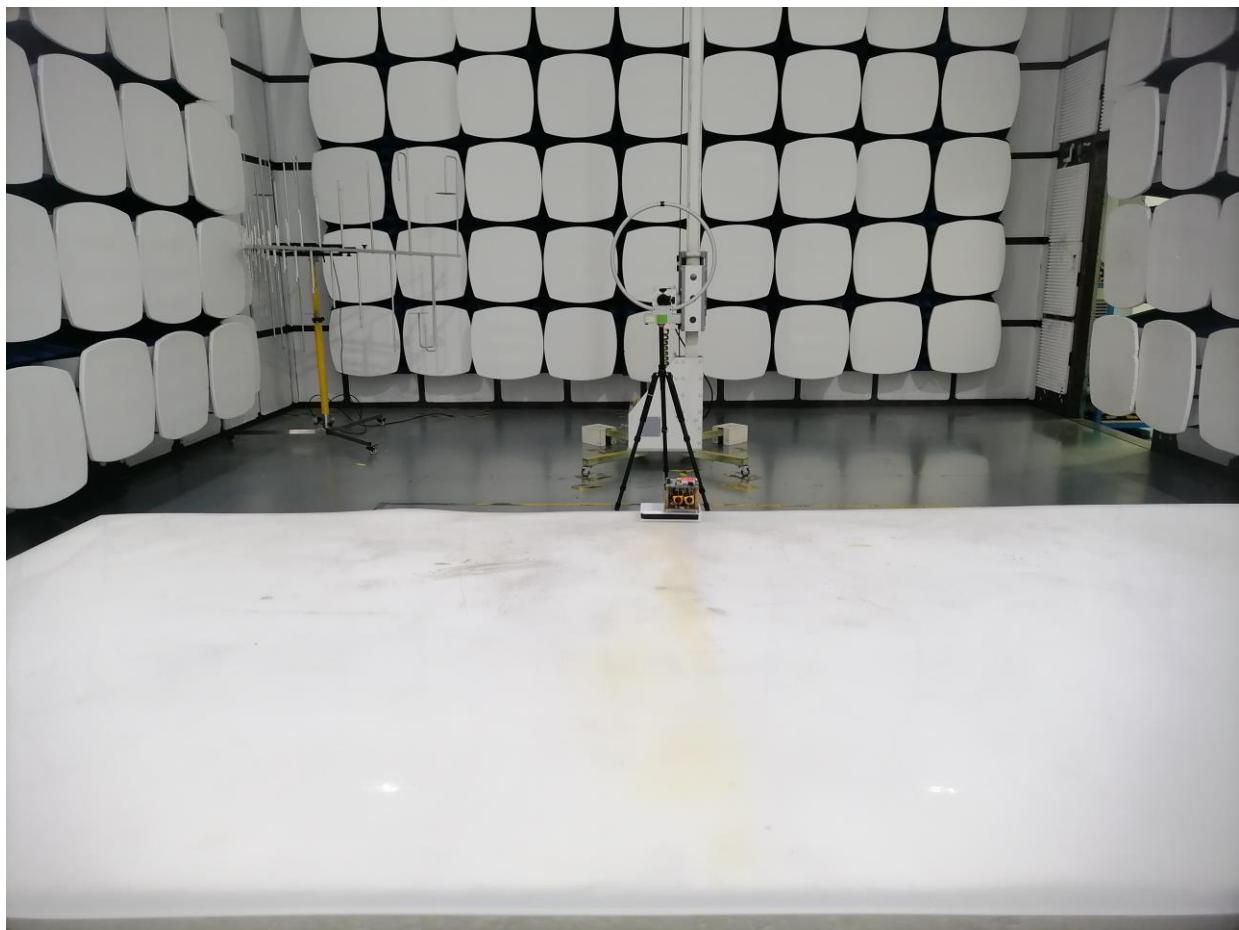

Conducted Emission

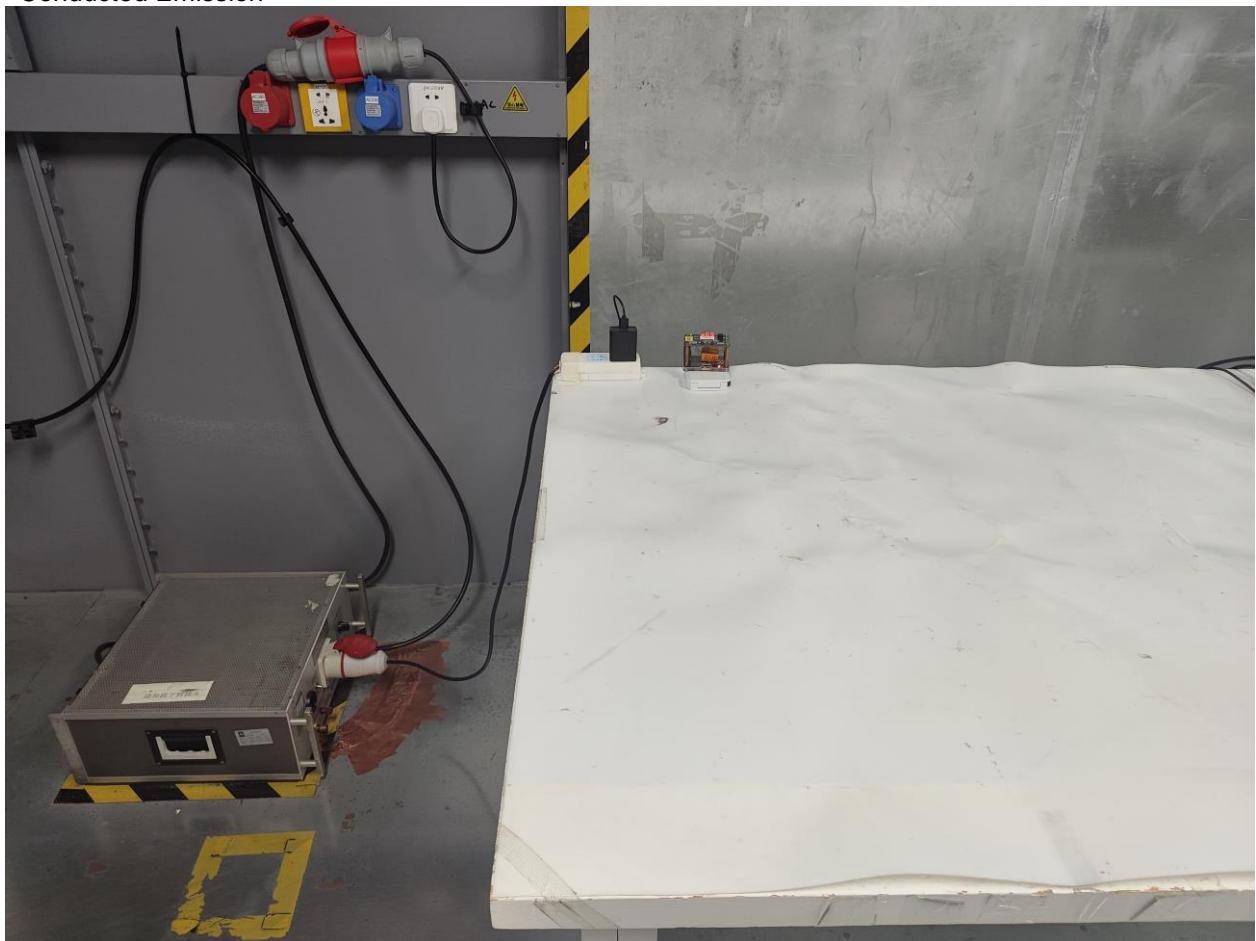

----- END OF REPORT -----