

specification

SPECIFICATION FOR APPROVAL

CUSTOMER:

CUST P/N:

FINE P/N:

DESC:

DATE:

Version:

A11-50-6.5UH 0.08*105P*10TS**Φ50MMX5.0MMX0.8MM PC40****2023/3/15****A.0.05**

PREPARED BY	CHECKED BY	APPROVED BY	CUSTOMER APPROVE
chenxi aoyi ng	chenxi aoyi ng	zhouwentao	

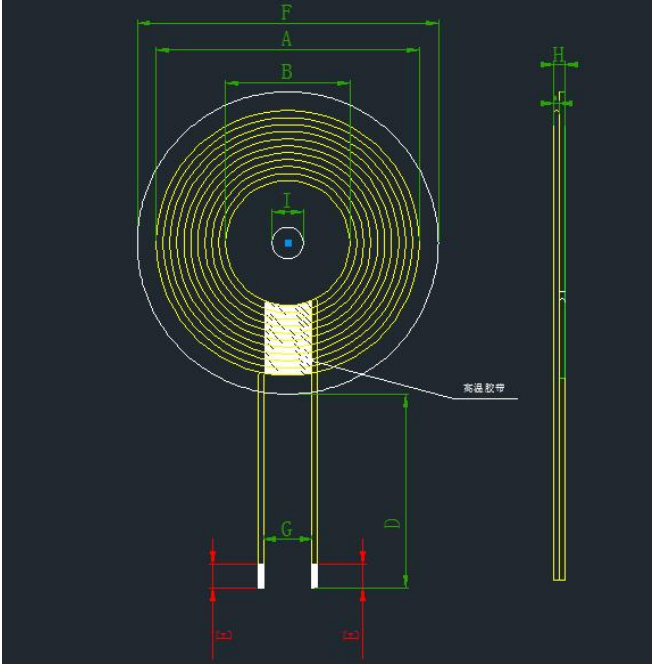
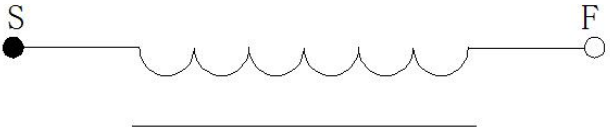
Dongguan Haohui electronic technology Co., LTD

Factory address: Sukeng village, Changping
Town, Dongguan City

TEL: 0769-36820766

FAX: 0769-84526500

E-mail: 281749556@qq.com

DESC	Rev: A.0	CUST P/N:																											
mm) 	A	40.0±1.5																											
	B	20.5±0.5																											
	C	1.25 Max																											
	D	15±2																											
	E	4±2																											
	F	49±1																											
	G	10.0 ref																											
	H	2.2 Max																											
	I	5.3 ref																											
	<p>Note:</p> <ol style="list-style-type: none"> Cross out wire; Wrap 8mm(ref) width high-temperature adhesive paper 1-2Ts around the outlet position; The coil is attached to the circular hard magnetic disc with groove, the magnetic disc size is 49±1mm, the inner hole is 5.3mm, and the thickness is 0.95±0.2mm. Antenna gain: 0dbi 																												
<p>二、SCHEMATIC DIAGRAM:</p> 																													
<p>三、 Winding Specification:</p> <table border="1"> <thead> <tr> <th>NO.</th> <th colspan="2">TERMINAL</th> <th>WIRE</th> <th>Turns</th> <th>Winding Direction</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>S</td> <td>F</td> <td>0.08*105P</td> <td>10Ts</td> <td>CCW</td> </tr> </tbody> </table>			NO.	TERMINAL		WIRE	Turns	Winding Direction	1	S	F	0.08*105P	10Ts	CCW															
NO.	TERMINAL		WIRE	Turns	Winding Direction																								
1	S	F	0.08*105P	10Ts	CCW																								
<p>四、 ELECTRICAL CHARACTERISTICS:</p> <p>TEMPERATURE:25±10°C, RELATIVE HUMIDITY:65±20%</p> <table border="1"> <thead> <tr> <th>NO.</th> <th>ITEM</th> <th>TERMINAL</th> <th>SPECIFICATION</th> <th>TEST FREQUENCY</th> <th>TEST EQUIPMENTS</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>IND.</td> <td>S-F</td> <td>3.8uH ±20%</td> <td>100KHz/1.0V</td> <td>LCZ METER 1062B</td> </tr> <tr> <td>2</td> <td>IND.</td> <td>S-F</td> <td>6.5uH ±10%</td> <td>100KHz/1.0V</td> <td>LCZ METER 1062B</td> </tr> <tr> <td>3</td> <td>DCR</td> <td>S-F</td> <td>≤50mΩ</td> <td></td> <td>LCZ METER 502B</td> </tr> </tbody> </table>			NO.	ITEM	TERMINAL	SPECIFICATION	TEST FREQUENCY	TEST EQUIPMENTS	1	IND.	S-F	3.8uH ±20%	100KHz/1.0V	LCZ METER 1062B	2	IND.	S-F	6.5uH ±10%	100KHz/1.0V	LCZ METER 1062B	3	DCR	S-F	≤50mΩ		LCZ METER 502B			
NO.	ITEM	TERMINAL	SPECIFICATION	TEST FREQUENCY	TEST EQUIPMENTS																								
1	IND.	S-F	3.8uH ±20%	100KHz/1.0V	LCZ METER 1062B																								
2	IND.	S-F	6.5uH ±10%	100KHz/1.0V	LCZ METER 1062B																								
3	DCR	S-F	≤50mΩ		LCZ METER 502B																								
<p>PREPARED BY/DATE</p> <p>chenxi aoyi ng2023/3/15</p>			<p>CHECKED BY/DATE</p> <p>zhouwentao2023/3/15</p>																										