



SHENZHEN Xingyuanchuang TECHNOLOGY CO., LTD

Antenna Test Report

MN: B80R

MP: 13005478517

Date: 2024. 4. 15
REV :V1. 0

Test information

WIFI ANT Test information

Frequency


2. 4G (2402~2483) Mhz

5G (5150~5850) Mhz

Module
information




Driver version
information



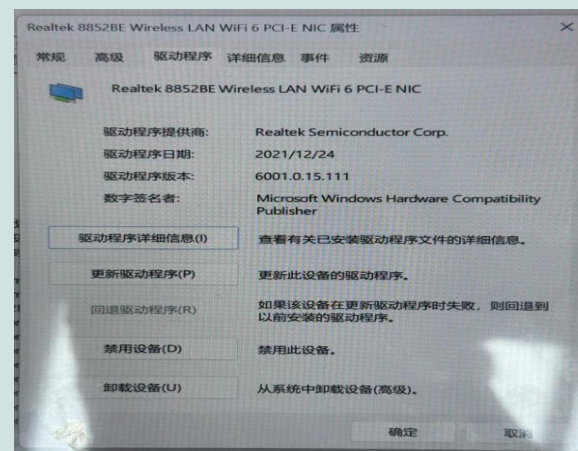


Test environment

S-parameter)	1. (VSWR) 2. (Rrtun Loss)	: Agilent8753ES
2. (Active)	1. (TRP) 2. (TIS) 3.	1.: 5*3*3m (3D) Chamber 2.: Agilent8960 CMW500
3 (Passive)	1. (Gain) 2. (Efficiency)	1.: 5*3*3m (3D) Chamber 2.: Agilent 8753ES

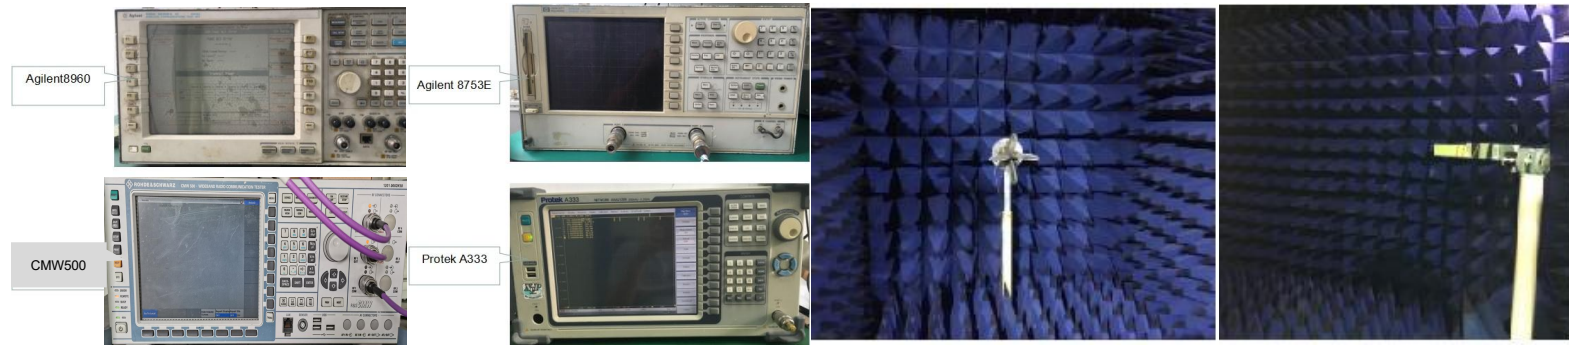

Antenna position

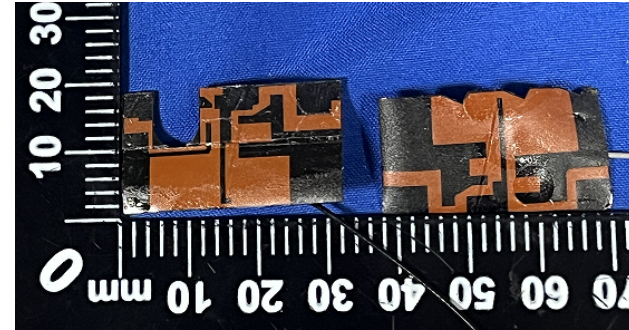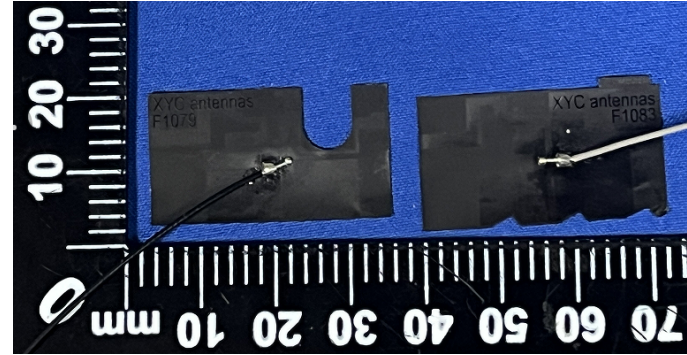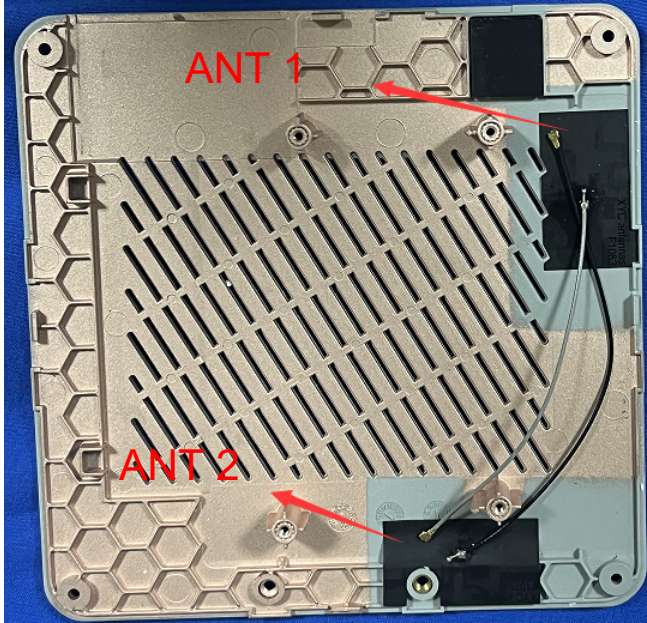




ANTENNA

SHENZHEN Xingyuanchuang TECHNOLOGY CO., LTD

Matching circuit

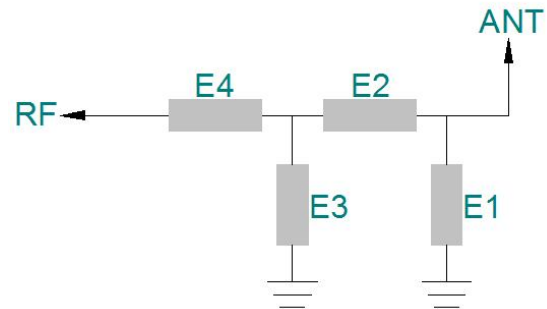

	(PF)	(NH)
E1(0402)		
E2(0402)		
E3(0402)		
E4(0402)		




ANTENNA

SHENZHEN Xingyuanchuang TECHNOLOGY CO., LTD

Passive test data

ANT1 S11-VSWR&Return Loss

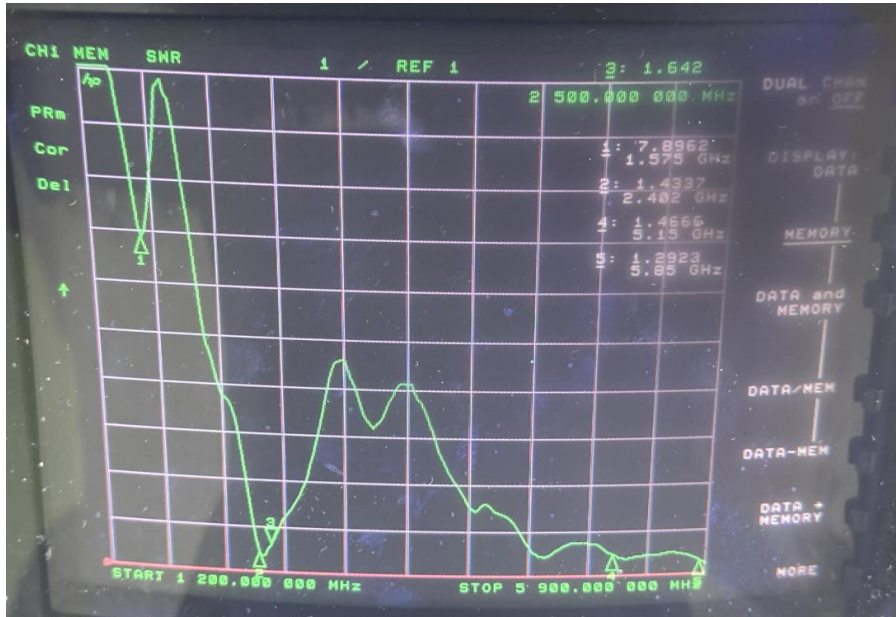

Frequency (MHZ)	2400	2500	5150	5850
VSWR	1.43	1.64	1.46	1.29
Return Loss (DB)	-15.02	-12.32	-14.46	-17.89



ANTENNA

SHENZHEN Xingyuanchuang TECHNOLOGY CO.,LTD


Passive test data

ANT1 GAIN&Efficiency-WIFI2.4G/BT

Passive Test For WIFI2.4								
Freq (MHz)	Effi (%)	Effi (dB)	Gain (dBi)	Gain (dBd)	UHS (%)	DHS (%)	Max (dB)	Min (dB)
2400	36.23	-4.41	0.54	-1.61	23.512	12.715	0.54	-29.62
2410	36.33	-4.4	0.74	-1.41	23.719	12.606	0.74	-26.23
2420	39.11	-4.08	1.09	-1.06	25.785	13.327	1.09	-24.18
2430	39.46	-4.04	1.26	-0.89	26.263	13.193	1.26	-23.51
2440	40.46	-3.93	1.35	-0.8	27.009	13.454	1.35	-23.17
2450	41.97	-3.77	1.6	-0.55	28.123	13.848	1.6	-24.34
2460	43.98	-3.57	1.73	-0.42	29.478	14.501	1.73	-25.97
2470	45.67	-3.4	1.64	-0.51	30.612	15.053	1.64	-26.89
2480	46.57	-3.32	1.54	-0.61	31.151	15.422	1.54	-25.53
2490	46.15	-3.36	1.26	-0.89	30.709	15.439	1.26	-23.01
2500	46.28	-3.35	1.28	-0.87	30.856	15.421	1.28	-21.06

ANT1 Direction of figure(2.4/BT)

Passive test data

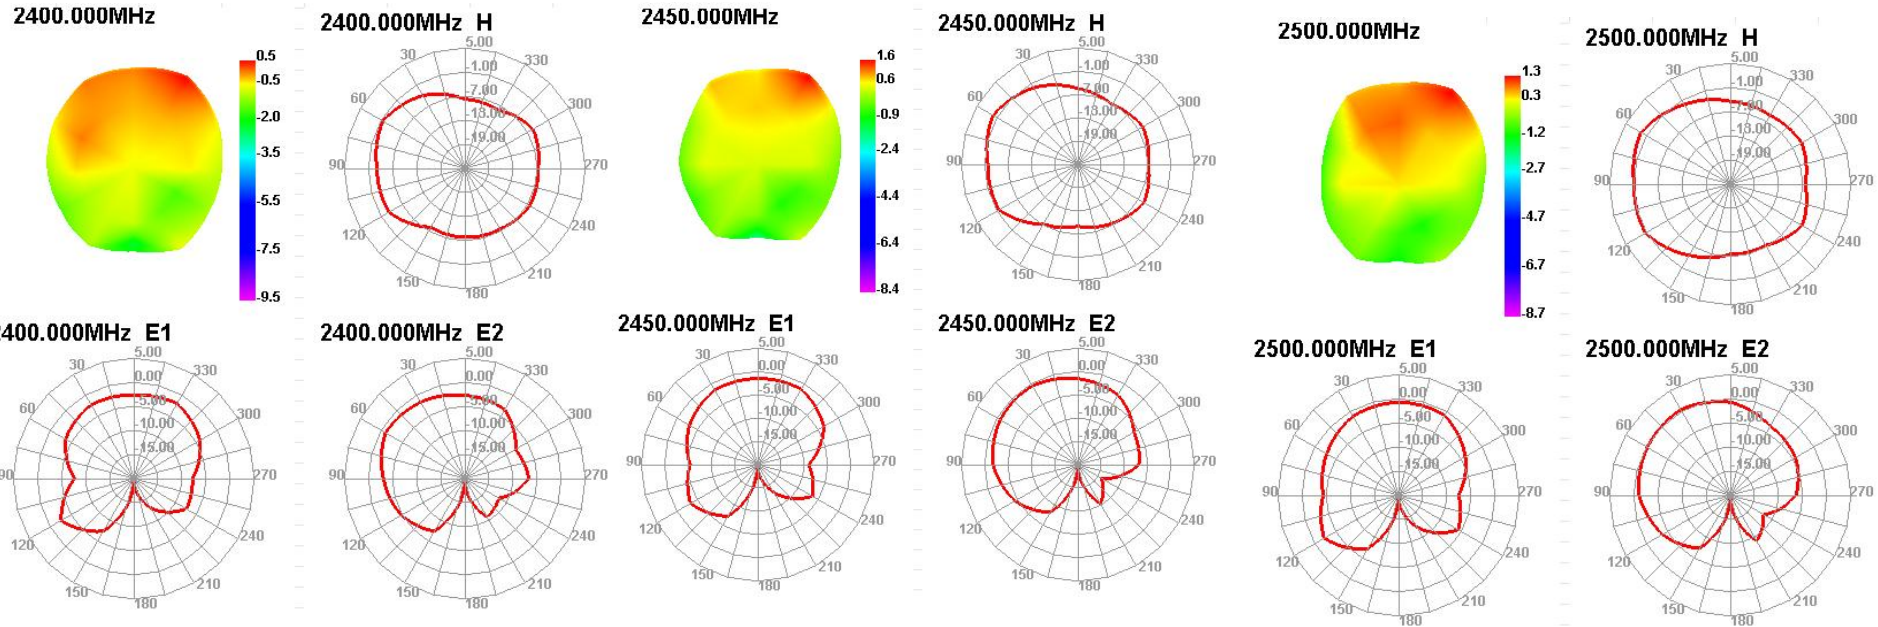


Passive test data

ANT1 GAIN&Efficiency-WIFI 5G

Passive Test For WIFI5G								
Freq (MHz)	Effi (%)	Effi (dB)	Gain (dBi)	Gain (dBd)	UHS (%)	DHS (%)	Max (dB)	Min (dB)
5150	31.93	-5.03	2.03	-0.12	26.563	4.863	2.03	-23.81
5170	35.28	-4.52	2.51	0.36	29.952	5.329	2.51	-24.44
5190	34.24	-4.65	2.45	0.3	29.034	5.209	2.45	-22.09
5210	40.43	-3.93	3.25	1.1	34.27	6.159	3.25	-19.91
5230	36.91	-4.33	2.73	0.58	31.495	5.416	2.73	-22.07
5250	42.9	-3.68	3.36	1.21	36.751	6.152	3.36	-19.91
5270	41.84	-3.78	3.31	1.16	35.9	5.944	3.31	-22.98
5290	46.83	-3.3	3.84	1.69	40.1	6.725	3.84	-21.39
5310	41.59	-3.81	3.36	1.21	35.759	5.833	3.36	-21.51
5330	43.81	-3.58	3.59	1.44	37.847	5.966	3.59	-23.88
5350	43.38	-3.63	3.49	1.34	37.49	5.895	3.49	-22.62
5370	43.85	-3.58	3.58	1.43	37.864	5.989	3.58	-20.68
5390	39.63	-4.02	3.12	0.97	34.201	5.425	3.12	-22.98
5410	49	-3.1	3.96	1.81	42.28	6.717	3.96	-23.51
5430	42.78	-3.69	3.25	1.1	36.854	5.929	3.25	-21.64
5450	46.92	-3.29	3.55	1.4	40.345	6.579	3.55	-21.86
5470	43.31	-3.63	3.17	1.02	37.258	6.05	3.17	-23.71
5490	43.43	-3.62	3.4	1.25	37.374	6.056	3.4	-24.45
5510	46.19	-3.35	3.58	1.43	39.597	6.593	3.58	-21.96
5530	46.31	-3.34	3.6	1.45	39.584	6.727	3.6	-21.69
5550	51.37	-2.89	4.1	1.95	43.904	7.466	4.1	-21.12
5570	44.95	-3.47	3.59	1.44	38.381	6.566	3.59	-21.59
5590	48.62	-3.13	3.79	1.64	41.426	7.196	3.79	-21.5
5610	42.63	-3.7	2.93	0.78	36.291	6.342	2.93	-23.63
5630	49.06	-3.09	3.63	1.48	41.806	7.249	3.63	-24.53
5650	44.08	-3.56	3.27	1.12	37.539	6.539	3.27	-23.02
5670	47.37	-3.24	3.71	1.56	40.354	7.017	3.71	-21.47
5690	45.33	-3.44	3.25	1.1	38.556	6.777	3.25	-21.58
5710	43.95	-3.57	3.13	0.98	37.441	6.512	3.13	-22.77
5730	49.39	-3.06	3.73	1.58	42.054	7.338	3.73	-21.97
5750	43.27	-3.64	3.2	1.05	36.854	6.417	3.2	-20.71
5770	48.78	-3.12	3.52	1.37	41.393	7.389	3.52	-17.48
5790	43.87	-3.58	2.96	0.81	37.125	6.75	2.96	-19.16
5810	47.8	-3.21	3.23	1.08	40.431	7.367	3.23	-17.75
5830	47.22	-3.26	3.34	1.19	40.043	7.178	3.34	-20.71
5850	51.92	-2.85	3.7	1.55	43.83	8.088	3.7	-19.94

Passive test data

ANT1 Direction of figure(5G)

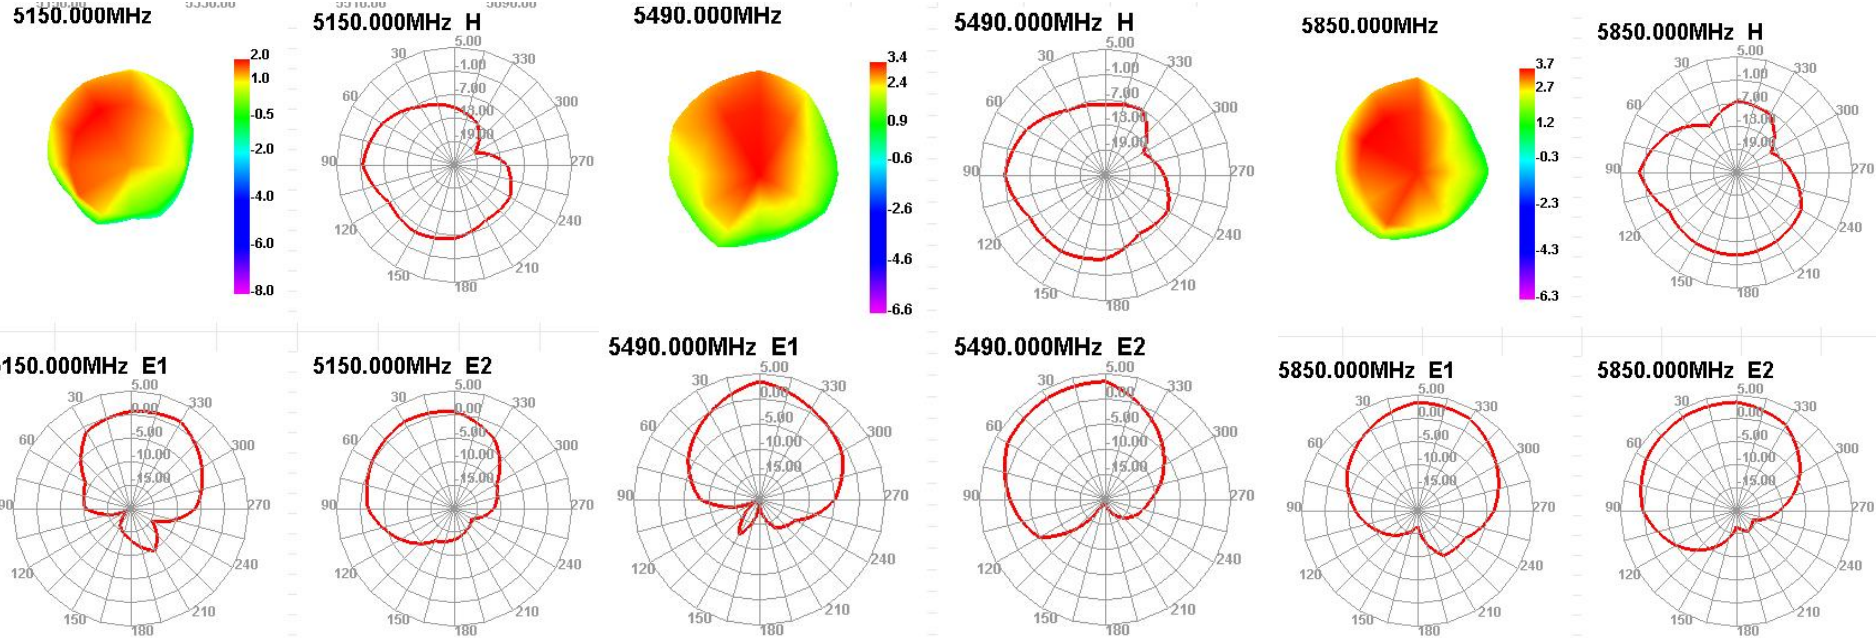




ANTENNA

SHENZHEN Xingyuanchuang TECHNOLOGY CO., LTD

Passive test data

ANT2 S11-VSWR&Return Loss

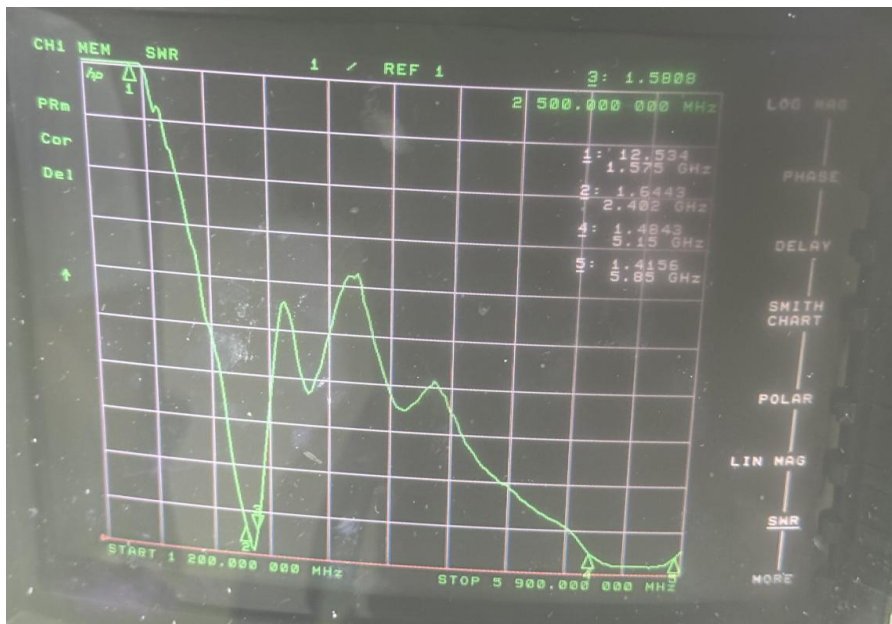

Frequency (MHZ)	2400	2500	5150	5850
VSWR	1.64	1.58	1.48	1.41
Return Loss (DB)	-12.37	-13.45	-14.2	-15.29



ANTENNA

SHENZHEN Xingyuanchuang TECHNOLOGY CO.,LTD

Passive test data

ANT2 GAIN&Efficiency-WIFI2.4G/BT

Passive Test For WIFI2.4								
Freq (MHz)	Effi (%)	Effi (dB)	Gain (dBi)	Gain (dBd)	UHS (%)	DHS (%)	Max (dB)	Min (dB)
2400	33.49	-4.75	-0.45	-2.6	16.583	16.903	-0.45	-15.08
2410	33.62	-4.73	-0.31	-2.46	16.383	17.233	-0.31	-16.52
2420	35.84	-4.46	0.11	-2.04	17.291	18.548	0.11	-18.85
2430	36	-4.44	0.25	-1.9	17.293	18.707	0.25	-21.32
2440	36.92	-4.33	0.53	-1.62	17.562	19.355	0.53	-22.09
2450	38.41	-4.16	0.76	-1.39	18.041	20.373	0.76	-20.16
2460	40.58	-3.92	1.16	-0.99	18.824	21.761	1.16	-17.8
2470	42	-3.77	1.38	-0.77	19.282	22.719	1.38	-15.76
2480	43.51	-3.61	1.47	-0.68	19.831	23.683	1.47	-14.45
2490	45.02	-3.47	1.58	-0.57	20.401	24.623	1.58	-13.53
2500	44.82	-3.48	1.58	-0.57	20.262	24.562	1.58	-13.73




ANTENNA

SHENZHEN Xingyuanchuang TECHNOLOGY CO.,LTD

Passive test data

ANT2 Direction of figure(2.4/BT)

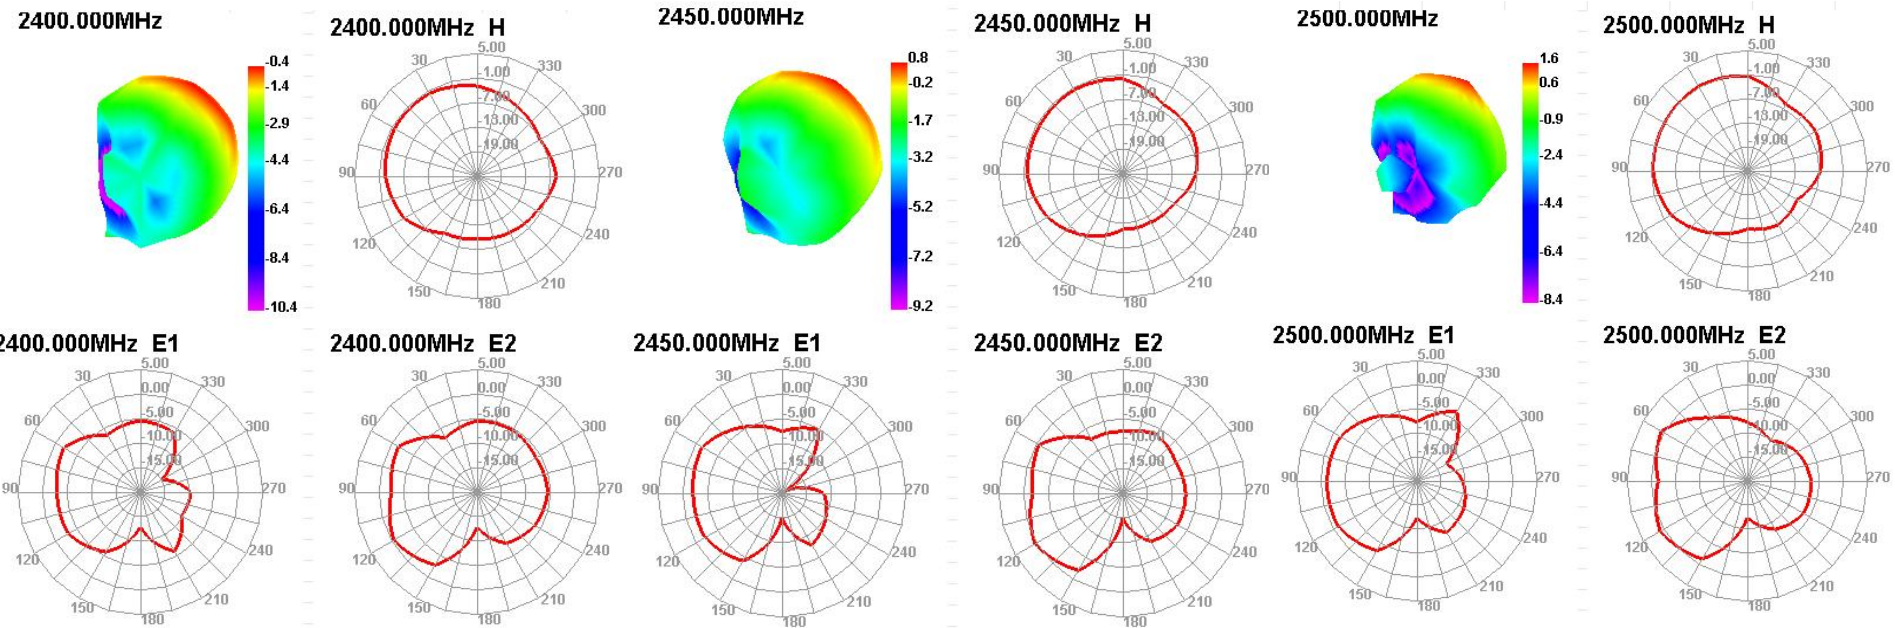

Passive test data

ANT2 GAIN&Efficiency-WIFI 5G

Passive Test For WIFI5G								
Freq (MHz)	Effi (%)	Effi (dB)	Gain (dBi)	Gain (dBd)	UHS (%)	DHS (%)	Max (dB)	Min (dB)
5150	36.36	-4.39	0.87	-1.28	17.798	18.563	0.87	-23.25
5170	39.08	-4.08	1.29	-0.86	19.219	19.862	1.29	-22.52
5190	39.62	-4.02	1.52	-0.63	19.481	20.138	1.52	-27
5210	44.78	-3.49	2.18	0.03	21.953	22.822	2.18	-24.38
5230	41.68	-3.8	1.89	-0.26	20.575	21.107	1.89	-23.08
5250	48.53	-3.14	2.64	0.49	23.978	24.549	2.64	-23.48
5270	46.89	-3.29	2.72	0.57	23.242	23.647	2.72	-24.03
5290	52.57	-2.79	3.22	1.07	26.128	26.437	3.22	-21.74
5310	46.21	-3.35	2.68	0.53	22.961	23.245	2.68	-22.33
5330	48.73	-3.12	2.97	0.82	24.348	24.378	2.97	-21.55
5350	47.23	-3.26	2.97	0.82	23.561	23.665	2.97	-22.19
5370	47.41	-3.24	3.09	0.94	23.746	23.659	3.09	-19.69
5390	42.52	-3.71	2.49	0.34	21.414	21.11	2.49	-19.91
5410	52.43	-2.8	3.45	1.3	26.694	25.731	3.45	-18.02
5430	44.63	-3.5	2.88	0.73	22.644	21.987	2.88	-21.34
5450	49.03	-3.1	3.39	1.24	24.734	24.3	3.39	-23.71
5470	45.08	-3.46	2.97	0.82	22.587	22.494	2.97	-20.57
5490	46.41	-3.33	3.12	0.97	23.303	23.107	3.12	-21.2
5510	48.38	-3.15	3.54	1.39	24.209	24.173	3.54	-20.4
5530	49.26	-3.07	3.71	1.56	24.097	25.167	3.71	-21.99
5550	53.08	-2.75	4.02	1.87	25.611	27.473	4.02	-25.32
5570	48.98	-3.1	3.68	1.53	23.696	25.286	3.68	-22.13
5590	53.19	-2.74	4.16	2.01	25.712	27.483	4.16	-30.21
5610	47.01	-3.28	3.6	1.45	22.602	24.409	3.6	-21.68
5630	52.3	-2.82	3.98	1.83	25.14	27.158	3.98	-18.91
5650	48.33	-3.16	3.47	1.32	23.423	24.907	3.47	-21.16
5670	52.42	-2.81	3.9	1.75	25.67	26.748	3.9	-22.99
5690	49.75	-3.03	3.61	1.46	24.369	25.384	3.61	-25.12
5710	48.81	-3.11	3.39	1.24	23.951	24.861	3.39	-22.34
5730	53.47	-2.72	3.85	1.7	26.17	27.299	3.85	-20.12
5750	47.97	-3.19	3.49	1.34	23.681	24.286	3.49	-22.86
5770	51.51	-2.88	3.76	1.61	25.484	26.023	3.76	-28.32
5790	46.74	-3.3	3.33	1.18	23.077	23.664	3.33	-25.32
5810	49.47	-3.06	3.56	1.41	24.466	25.008	3.56	-24.18
5830	48.3	-3.16	3.53	1.38	24.17	24.126	3.53	-22.18
5850	50.97	-2.93	3.72	1.57	25.835	25.133	3.72	-21.21




ANTENNA

SHENZHEN Xingyuanchuang TECHNOLOGY CO., LTD


Passive test data

ANT2 Direction of figure(5G)


5150.000MHz




5150.000MHz H




5490.000MHz




5490.000MHz H




5850.000MHz




5850.000MHz H




5150.000MHz E1




5150.000MHz E2




5490.000MHz E1




5490.000MHz E2



5850.000MHz E1





5850.000MHz E2




OAT Direction of figure(5G)



Wifi 36 TIS




Wifi 36 TIS H





Wifi 60 TIS




Wifi 60 TIS H




Wifi 161 TIS




Wifi 161 TIS H




Wifi 36 TIS E1




Wifi 36 TIS E2




Wifi 60 TIS E1




Wifi 60 TIS E2



Wifi 161 TIS E1



Wifi 161 TIS E2





ANTENNA

SHENZHEN Xingyuanchuang TECHNOLOGY CO.,LTD

Active test data

802.11b	Frequency	TRP		TIS	
	2412	CH1 11Mbps	17.66	CH1 11Mbps	-85.35
	2437	CH6 11Mbps	17.76	CH6 11Mbps	-79.62
	2467	CH11 11Mbps	16.95	CH11 11Mbps	-81.23
802.11g		TRP		TIS	
	2412	CH1 6Mbps	17.47	CH1 6Mbps	-80.41
	2437	CH6 6Mbps	17.74	CH6 6Mbps	-83.5
	2467	CH11 6Mbps	16.01	CH11 6Mbps	-83.38
802.11a		TRP		TIS	
	5180	CH36 6Mbps	17.3	CH36 6Mbps	-83.25
	5300	CH60 6Mbps	16.65	CH60 6Mbps	-84.69
	5805	CH161 6Mbps	18.21	CH161 6Mbps	-83.66
802.11g/n		TRP		TIS	
	2412	CH1 MCS0	15.95	CH1 MCS0	-83.65
	2437	CH6 MCS0	17.02	CH6 MCS0	-84.46
	2467	CH11 MCS0	15.52	CH11 MCS0	-85.32



ANTENNA

SHENZHEN Xingyuanchuang TECHNOLOGY CO.,LTD

Environmental treatment



Environmental treatment

