

TEST REPORT

of

FCC Part 15 Subpart C §15.247

FCC ID: 2BG62-PABLOXF40

Equipment Under Test : Drone

Model Name : PabloX F40

Variant Model Name(s) : -

Applicant : PABLO AIR Co., Ltd.

Manufacturer : PABLO AIR Co., Ltd.

Date of Receipt : 2024.06.14

Date of Test(s) : 2024.06.18 ~ 2024.07.04

Date of Issue : 2024.07.04

In the configuration tested, the EUT complied with the standards specified above.
This test report does not assure KOLAS accreditation.

- 1) The results of this test report are effective only to the items tested.
- 2) The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received.
- 3) This test report cannot be reproduced, except in full, without prior written permission of the Company.
- 4) The data marked ~~※~~ in this report was provided by the customer and may affect the validity of the test results.


We are responsible for all the information of this test report except for the data(~~※~~) provided by the customer

Tested by:



Demian Kim

Technical Manager:



Jinyoung Cho

SGS Korea Co., Ltd. Gunpo Laboratory

INDEX

Table of Contents

1. General Information -----	3
2. Transmitter Radiated Spurious Emissions -----	10
3. Maximum Peak Conducted Output Power -----	32
4. Antenna Requirement -----	35

1. General Information

1.1. Testing Laboratory

SGS Korea Co., Ltd. (Gunpo Laboratory)

- 10-2, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807
- 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807
- Designation number: KR0150

All SGS services are rendered in accordance with the applicable SGS conditions of service available on request and accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx>.

Phone No. : +82 31 688 0901

Fax No. : +82 31 688 0921

1.2. Details of Applicant

Applicant : PABLO AIR Co., Ltd.

Address : 5F, 82, Venture-ro, Yeonsu-gu, Incheon, Republic of Korea, 22013

Contact Person : Yoon, Jun-han

Phone No. : +82 70 5222 6968

1.3. Details of Manufacturer

Company : PABLO AIR Co., Ltd.

Address : 5F, 82, Venture-ro, Yeonsu-gu, Incheon, Republic of Korea, 22013

1.4. Description of EUT

Kind of Product	Drone
Model Name	PabloX F40
Approved Module	FCC ID: 2AD56HLK-RM58S
Variant Model Names	-
Serial Number	001
Power Supply	DC 14.8 V
Frequency Range	2 412 MHz ~ 2 462 MHz (11b/11g/11n_HT20) 2 422 MHz ~ 2 452 MHz (11n_HT40)
Modulation Technique	DSSS, OFDM
Number of Channels	11 channels (11b/11g/11n_HT20) 7 channels (11n_HT40)
Antenna Type	Wire Antenna
Antenna Gain *	-3.25 dB i
H/W Version	4.0.1
S/W Version	1.0.1
FVIN	N/A

1.5. Test Equipment List

Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Interval	Cal. Due
Signal Generator	R&S	SMA100B	106887	Oct. 06, 2023	Annual	Oct. 06, 2024
Spectrum Analyzer	R&S	FSW8	101659	May 28, 2024	Annual	May 28, 2025
Spectrum Analyzer	Agilent	N9020A	MY53421758	Sep. 01, 2023	Annual	Sep. 01, 2024
Attenuator	AEROFLEX / INMET	40AH2W-6	3	Mar. 18, 2024	Annual	Mar. 18, 2025
High Pass Filter	Wainwright Instrument GmbH	WHKX3.0/18G-10SS	21	Jun. 07, 2024	Annual	Jun. 07, 2025
High Pass Filter	Wainwright Instrument GmbH	WHNX7.5/26.5G-6SS	15	Jun. 07, 2024	Annual	Jun. 07, 2025
Low Pass Filter	Mini-Circuits	NLP-1200+	V 8979400903-1	May 17, 2024	Annual	May 17, 2025
Power Sensor	R&S	NRP-Z81	100669	May 17, 2024	Annual	May 17, 2025
DC Power Supply	R&S	HMP2020	022802107	Oct. 31, 2023	Annual	Oct. 31, 2024
Preamplifier	H.P.	8447F	2944A03909	Aug. 04, 2023	Annual	Aug. 04, 2024
Signal Conditioning Unit	R&S	SCU-18F	101058	Dec. 07, 2023	Annual	Dec. 07, 2024
Pre Amplifier	MITEQ Inc.	JS44-18004000-35-8P	1546891	Oct. 06, 2023	Annual	Oct. 06, 2024
Loop Antenna	Schwarzbeck Mess-Elektronik	FMZB 1519	1519-039	Aug. 21, 2023	Biennial	Aug. 21, 2025
Bilog Antenna	Schwarzbeck Mess-Elektronik	VULB 9163	9163-396	Apr. 02, 2024	Biennial	Apr. 02, 2026
Horn Antenna	R&S	HF906	100326	Feb. 19, 2024	Annual	Feb. 19, 2025
Horn Antenna	Schwarzbeck Mess-Elektronik	BBHA 9170	BBHA9170223	Oct. 10, 2023	Annual	Oct. 10, 2024
EMI Test Receiver	R&S	ESU26	100109	Jan. 16, 2024	Annual	Jan. 16, 2025
Turn Table	Innco systems GmbH	DS 1200 S	N/A	N.C.R.	N/A	N.C.R.
Controller	Innco systems GmbH	CONTROLLER CO3000-4P	CO3000/963/383 30516/L	N.C.R.	N/A	N.C.R.
Antenna Mast	Innco systems GmbH	MA4640-XP-ET	MA4640/536/383 30516/L	N.C.R.	N/A	N.C.R.
Anechoic Chamber	SY Corporation	L × W × H (9.6 m × 6.4 m × 6.6 m)	N/A	N.C.R.	N/A	N.C.R.
Coaxial Cable	SENSORVIEW	NMST-13A26-NMST-5 m	TPC2402190004	Apr. 03, 2024	Semi-Annual	Oct. 03, 2024
Coaxial Cable	SENSORVIEW	NMST-13A26-NMST-10 m	TPC2402190001	Apr. 03, 2024	Semi-Annual	Oct. 03, 2024
Coaxial Cable	RFONE	PL360P-292M292M-1.5M-A	20200324002	Apr. 12, 2024	Semi-Annual	Oct. 12, 2024

1.6. Summary of Test Results

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC Part 15 Subpart C		
Section in FCC	Test Item(s)	Result
15.205(a) 15.209 15.247(d)	Transmitter Radiated Spurious Emissions and Conducted Spurious Emission	Complied ¹⁾
15.247(a)(2)	6 dB Bandwidth	Complied ¹⁾
15.247(b)(3)	Maximum Peak Conducted Output Power	Complied
15.247(e)	Power Spectral Density	Complied ¹⁾
15.207	AC Power Line Conducted Emission	N/A ²⁾

Note:

- 1) The EUT uses the approved module. Other test items were complied with module test report.
 - Module FCC ID: 2AD56HLK-RM58S
 - Test Laboratory: Waltek Testing Group (Shenzhen) Co., Ltd.
 - Test report number: WTX19X10074455W-3
- 2) The AC power line test was not performed because the EUT use battery power for operation and which do not operate from the AC power lines.

1.7. Test Procedure(s)

The measurement procedures described in the American National Standard of Procedure for Compliance Testing of unlicensed Wireless Devices (ANSI C63.10-2013) and the guidance provided in KDB 558074 D01 15.247 Meas Guidance v05r02 were used in the measurement of the DUT.

1.8. Sample Calculation

Where relevant, the following sample calculation is provided:

1.8.1. Conducted Test

Offset value (dB) = Attenuator (dB) + Cable loss (dB)

1.8.2. Radiation Test

Field strength level (dB μ V/m)
= Measured level (dB μ V) + Antenna factor (dB/m) + Cable loss (dB) - Amplifier gain (dB) + Duty factor (dB)

1.9. Information of software for test

- Using the software of QATool 0.0.1.58 to test for the WLAN.

1.10. Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Parameter	Uncertainty	
Maximum Peak Conducted Output Power	0.34 dB	
Radiated Emission, 9 kHz to 30 MHz	H	3.60 dB
	V	3.60 dB
Radiated Emission, below 1 GHz	H	4.60 dB
	V	4.90 dB
Radiated Emission, above 1 GHz	H	3.90 dB
	V	3.80 dB

All measurement uncertainty values are shown with a coverage factor $k = 2$ to indicate a 95 % level of confidence.

1.11. Test Report Revision

Revision	Report Number	Date of Issue	Description
0	F690501-RF-RTL005233	2024.07.04	Initial

1.12. Test Mode

Mode	Bandwidth (MHz)	Data rate with highest output power
11b	20	11 Mbps
11g	20	54 Mbps
11n HT20	20	MCS7
11n HT40	40	MCS7

Radiated emission below 1 GHz was performed with the EUT set to transmit at the channel with highest output power as worst-case scenario.

Radiated emission above 1 GHz was performed with the EUT set to transmit Low/Middle/High Channels.

1.13. Duty Cycle of EUT



Regarding to KDB 558074 D01 15.247 Meas Guidance v05r02, 6, the maximum duty cycles of all modes were investigated and set the spectrum analyzer as below;


Set RBW \geq OBW if possible; otherwise, set RBW to the largest available value. Set detector = peak or average. The zero-span measurement method shall not be used unless both RBW and VBW are $> 50/T$ and the number of sweep points across duration T exceeds 100.

Mode	Data Rate	Duty Cycle (%)	Correction Factor (dB)
11b	11 Mbps	100	-
11g	54 Mbps	100	-
11n_HT20	MCS7	100	-
11n_HT40	MCS7	100	-

Remark;

1. As measured duty cycles of EUT, all of mode and data rate keeps constant period and are converted to log scale (power averaging) to compensate correction factor to result of average test items.
2. Duty Cycle (%) = $(\text{Tx on time} / (\text{Tx on time} + \text{Tx off time})) \times 100$
3. Correction Factor (dB) = $10 \log (1 / \text{Duty Cycle})$

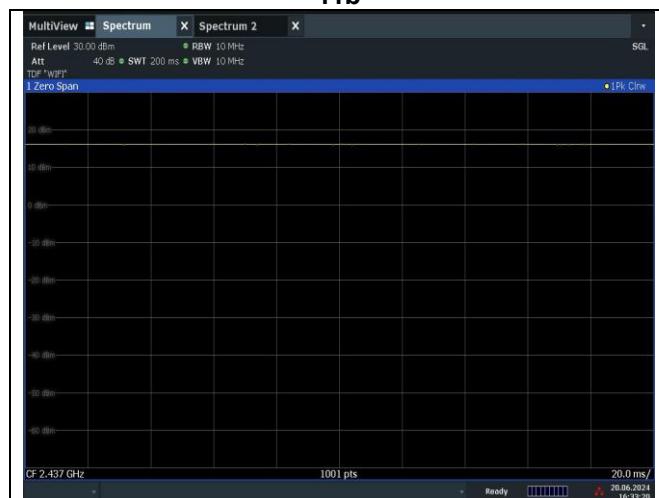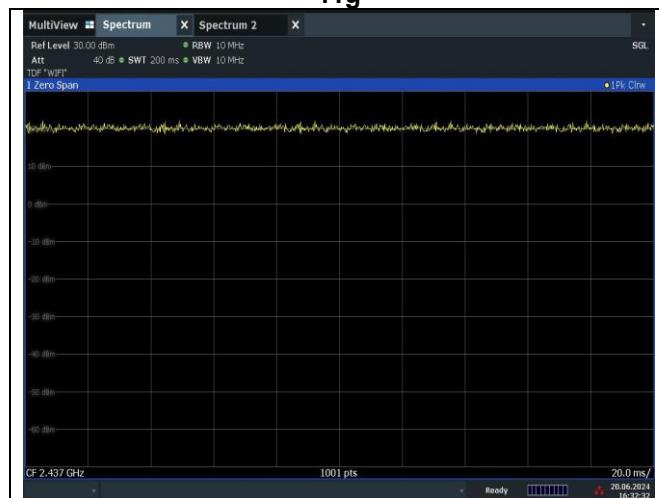- Test plots**11b****11g****11n-HT20**

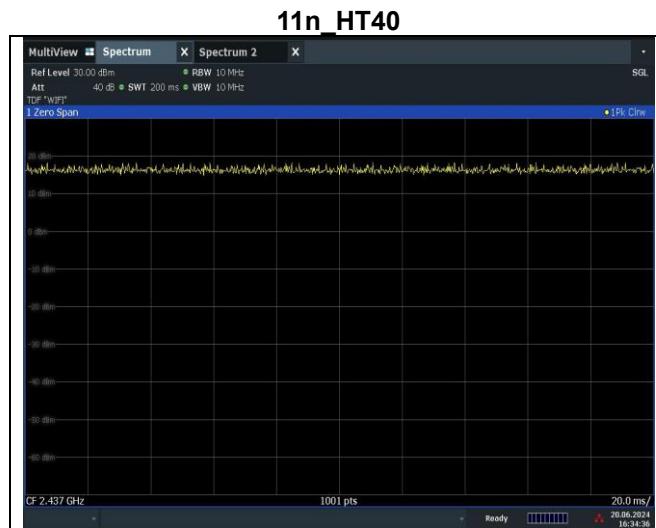


2. Transmitter Radiated Spurious


2.1. Test Setup

2.1.1. Transmitter Radiated Spurious Emissions


The diagram below shows the test setup that is utilized to make the measurements for emission from 9 kHz to 30 MHz emissions.

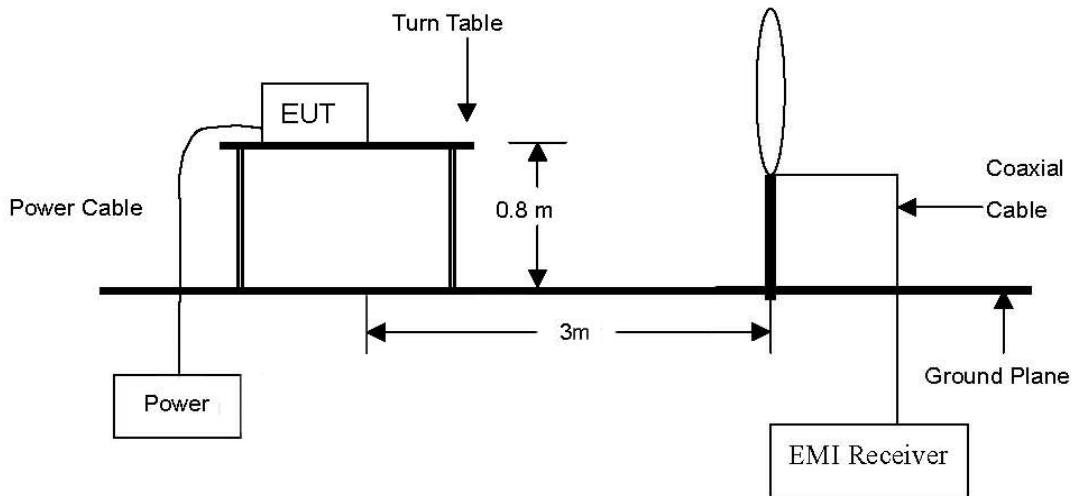

The diagram below shows the test setup that is utilized to make the measurements for emission from 30 MHz to 1 GHz emissions.

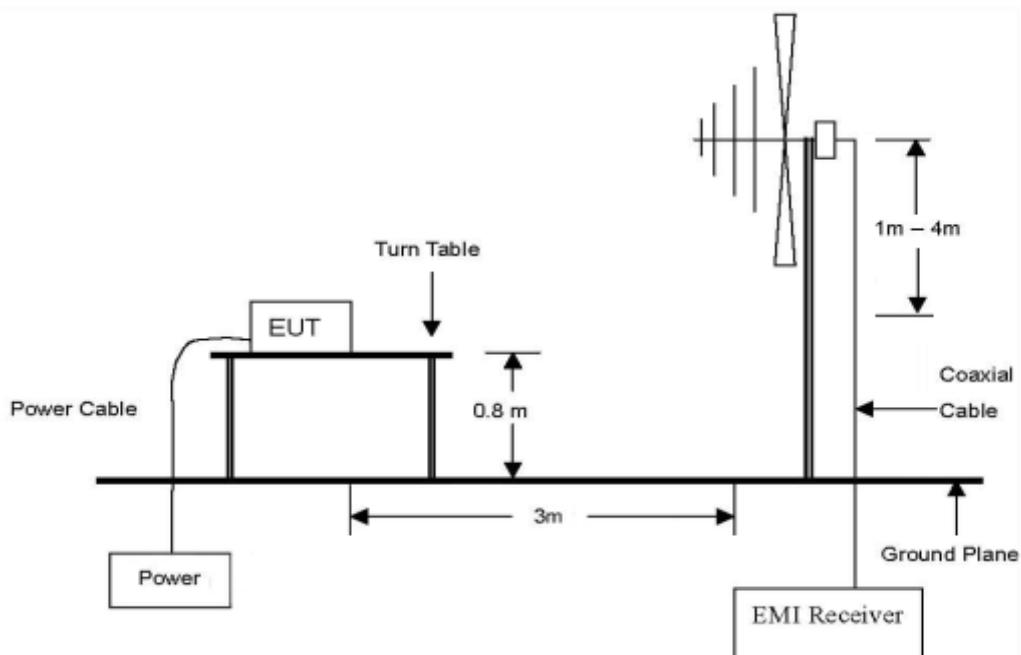

The diagram below shows the test setup that is utilized to make the measurements for emission. The spurious emissions were investigated from 1 GHz to the 10th harmonic of the highest fundamental frequency or 40 GHz, whichever is lower.

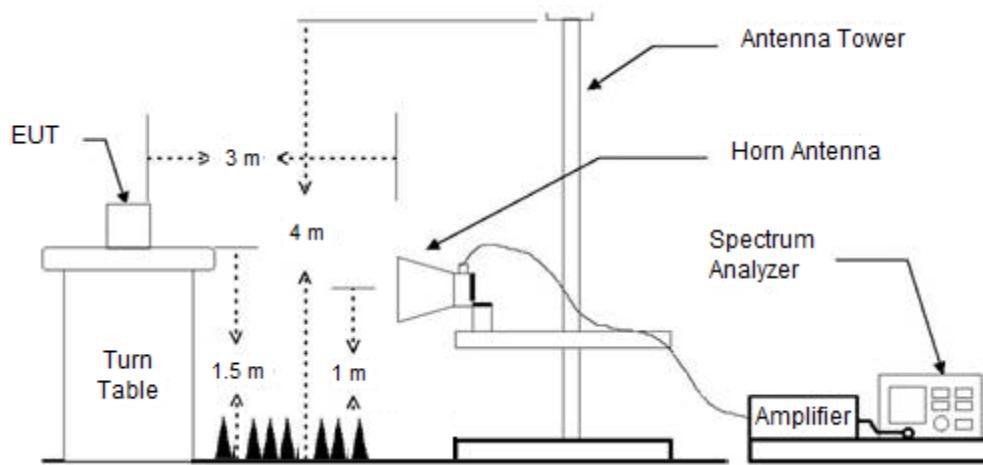

2.2. Limit

According to §15.247(d), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emission which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

According to §15.209(a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (μ V/m)	Measurement Distance (Meters)
0.009-0.490	2 400/F(kHz)	300
0.490-1.705	24 000/F(kHz)	30
1.705-30.0	30	30
30-88	100**	3
88-216	150**	3
216-960	200**	3
Above 960	500	3

** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§15.231 and 15.241.

2.3. Test Procedures

Radiated emissions from the EUT were measured according to the dictates in section 11.11 & 11.12 of ANSI C63.10-2013.

2.3.1. Test Procedures for emission below 30 MHz

1. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter anechoic chamber test site. The table was rotated 360 degrees to determine the position of the highest radiation.
2. Then antenna is a loop antenna is fixed at one meter above the ground to determine the maximum value of the field strength. Both parallel and perpendicular of the antenna are set to make the measurement.
3. For each suspected emission, the EUT was arranged to its worst case and then the table was turned from 0 degrees to 360 degrees to find the maximum reading.
4. The test-receiver system was set to average or quasi peak detect function and Specified Bandwidth with Maximum Hold Mode.

2.3.2. Test Procedures for emission from above 30 MHz

1. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter anechoic chamber test site below 1 GHz and 1.5 meters above the ground at a 3 meter anechoic chamber test site above 1 GHz. The table was rotated 360 degrees to determine the position of the highest radiation.
2. During performing radiated emission below 1 GHz, the EUT was set 3 meters away from the interference receiving antenna, which was mounted on the top of a variable-height antenna tower. During performing radiated emission above 1 GHz, the EUT was set 3 meter away from the interference-receiving antenna.
3. The antenna is a bi-log antenna, a horn antenna and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the table was turned from 0 degrees to 360 degrees to find the maximum reading.
5. For measurements below 1 GHz resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.
6. For measurements Above 1 GHz resolution bandwidth is set to 1 MHz, the video bandwidth is set to 3 MHz for peak measurements and as applicable for average measurements.

1. Unwanted Emissions into Non-Restricted Frequency Bands

- The Reference Level Measurement refer to section 11.11.2

Set analyzer center frequency to DTS channel center frequency, SPAN \geq 1.5 times the DTS bandwidth, the RBW = 100 kHz and VBW \geq 3 x RBW, Detector = Peak, Sweep time = Auto couple, Trace = Max hold.

- Unwanted Emissions Level Measurement refer to section 11.11.3

Set the center frequency and span to encompass frequency range to be measured, the RBW = 100 kHz and VBW \geq 3 x RBW, Detector = Peak, Sweep time = Auto couple, Trace = Max hold.

2. Unwanted Emissions into Restricted Frequency Bands

- Peak Power measurement procedure refer to section 11.12.2.4

Set RBW = as specified in Table 9, VBW \geq 3 x RBW, Detector = Peak, Sweep time = auto, Trace = Max hold.

Table 9 – RBW as a function of frequency

Frequency	RBW
9 kHz to 150 kHz	200 Hz to 300 Hz
0.15 MHz to 30 MHz	9 kHz to 10 kHz
30 MHz to 1 000 MHz	100 kHz to 120 kHz
> 1 000 MHz	1 MHz

If the peak – detected amplitude can be shown to comply with the average limit, then it is not necessary to perform a separate average measurement.

- Average Power measurements procedure refer to section 11.12.2.5.2

The EUT shall be configured to operate at the maximum achievable duty cycle.

Measure the duty cycle D of the transmitter output signal as described in section 11.6.

Set RBW = 1 MHz, VBW \geq 3 x RBW, Detector = RMS, if span / (# of points in sweep) \leq (RBW/2).

Satisfying this condition may require increasing the number of points in the sweep or reducing the span. If this condition cannot be satisfied then the detector mode shall be set to peak.

Averaging type = power (i.e., RMS).

As an alternative the detector and averaging type may be set for linear voltage averaging.

Some instruments require linear display mode in order to use linear voltage averaging. Log or dB averaging shall not be used. Sweep time = auto, Perform a trace average of at least 100 traces.

A correction factor shall be added to the measurement results prior to comparing to the emission limit in order to compute the emission level that would have been measured had the test been performed at 100 percent duty cycle. The correction factor is computed as follows:

- 1) If power averaging (rms) mode was used in step f), then the applicable correction factor is $[10 \log (1 / D)]$, where D is the duty cycle.
- 2) If a specific emission is demonstrated to be continuous ($D \geq 98\%$) rather than turning ON and OFF with the transmit cycle, then no duty cycled correction is required for that emission.

3. Definition of DUT Axis.

The radiation test of the EUT was investigated in three orthogonal orientations X, Y, and Z described in the test setup photo. All radiated testing of EUT was performed with worst case axis.

2.4. Test Results

Ambient temperature : $(23 \pm 1)^\circ\text{C}$

Relative humidity : 47 % R.H.

2.4.1. Radiated Spurious Emission below 1 000 MHz


The frequency spectrum from 9 kHz to 1 000 MHz was investigated. All reading values are peak values.

Radiated Emissions			Ant	Correction (dB/m)	Total	Limit	
Frequency (MHz)	Reading (dB μ V)	Detect Mode				Actual (dB μ V/m)	Limit (dB μ V/m)
33.23	36.16	Quasi Peak	V	-11.60	24.56	40.00	15.44
33.98	36.78	Quasi Peak	V	-11.22	25.56	40.00	14.44
886.32	26.49	Quasi Peak	H	2.69	29.18	46.00	16.82
951.60	26.67	Quasi Peak	H	3.15	29.82	46.00	16.18

Remark;

1. Spurious emissions for all channels and modes were investigated and almost the same below 1 GHz.
2. Test from 30 MHz to 1 000 MHz was performed using the software of ELEKTRA(V5.02) from Rohde & Schwarz GmbH & Co. KG.
3. Reported spurious emissions are in 11n HT20 / MCS7 / Low channel as worst case among other modes.
4. Radiated spurious emission measurement as below.
(Actual = Reading + Correction)
(Correction = Antenna Factor + AMP Factor + Cable Loss)
5. According to §15.31(o), emission levels are not report much lower than the limits by over 20 dB.

- Test plot

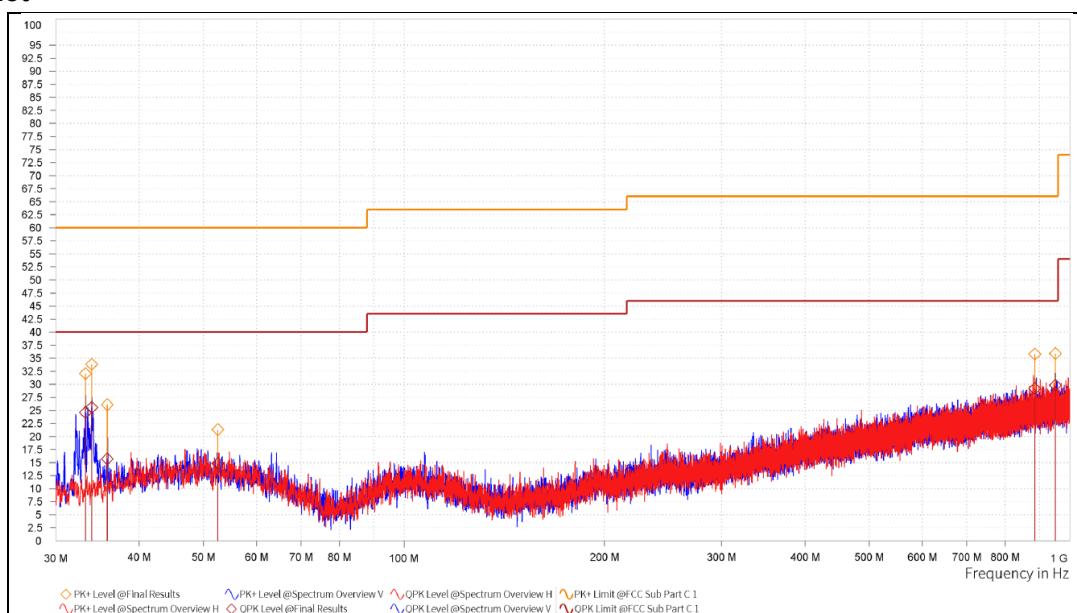

2.4.2. Radiated Spurious Emission above 1 000 MHz

The frequency spectrum above 1 000 MHz was investigated. All reading values are peak and average values.

11b

Low Channel (2 412 MHz)

Radiated Emissions			Ant.	Correction Factors		Total	Limit	
Frequency (MHz)	Reading (dB μ V)	Detect Mode	Pol.	AF (dB/m)	CL (dB)	Actual (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
*2 310.00	17.68	Peak	V	27.96	6.01	51.65	74.00	22.35
*2 310.00	7.78	Average	V	27.96	6.01	41.75	54.00	12.25
*2 350.87	20.07	Peak	V	28.20	6.06	54.33	74.00	19.67
*2 377.59	8.04	Average	V	28.14	6.10	42.28	54.00	11.72
*2 390.00	18.35	Peak	V	28.12	6.12	52.59	74.00	21.41
*2 390.00	7.95	Average	V	28.12	6.12	42.19	54.00	11.81

Radiated Emissions			Ant.	Correction Factors		Total	Limit	
Frequency (MHz)	Reading (dB μ V)	Detect Mode	Pol.	AF (dB/m)	AMP+CL (dB)	Actual (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
*4 824.00	43.53	Peak	H	32.80	-30.89	45.44	74.00	28.56
Above 4 900.00	Not detected	-	-	-	-	-	-	-

Middle Channel (2 437 MHz)

Radiated Emissions			Ant.	Correction Factors		Total	Limit	
Frequency (MHz)	Reading (dB μ V)	Detect Mode	Pol.	AF (dB/m)	AMP+CL (dB)	Actual (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
*4 874.00	49.89	Peak	H	33.00	-30.76	52.13	74.00	21.87
Above 4 900.00	Not detected	-	-	-	-	-	-	-

High Channel (2 462 MHz)

Radiated Emissions			Ant.	Correction Factors		Total	Limit	
Frequency (MHz)	Reading (dB μ V)	Detect Mode	Pol.	AF (dB/m)	CL (dB)	Actual (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
*2 483.50	18.81	Peak	V	28.33	6.24	53.38	74.00	20.62
*2 483.50	8.29	Average	V	28.33	6.24	42.86	54.00	11.14
*2 498.53	19.81	Peak	V	28.39	6.26	54.46	74.00	19.54
*2 483.79	8.31	Average	V	28.34	6.24	42.89	54.00	11.11
*2 500.00	17.49	Peak	V	28.40	6.26	52.15	74.00	21.85
*2 500.00	8.21	Average	V	28.40	6.26	42.87	54.00	11.13

Radiated Emissions			Ant.	Correction Factors		Total	Limit	
Frequency (MHz)	Reading (dB μ V)	Detect Mode	Pol.	AF (dB/m)	AMP+CL (dB)	Actual (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
*4 923.95	50.69	Peak	H	33.20	-30.63	53.26	74.00	20.74
Above 5 000.00	Not detected	-	-	-	-	-	-	-

11g

Low Channel (2 412 MHz)

Radiated Emissions			Ant.	Correction Factors		Total	Limit	
Frequency (MHz)	Reading (dB μ V)	Detect Mode	Pol.	AF (dB/m)	CL (dB)	Actual (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
*2 310.00	17.63	Peak	V	27.96	6.01	51.60	74.00	22.40
*2 310.00	7.93	Average	V	27.96	6.01	41.90	54.00	12.10
*2 389.55	22.56	Peak	V	28.12	6.12	56.80	74.00	17.20
*2 389.43	10.48	Average	V	28.12	6.12	44.72	54.00	9.28
*2 390.00	20.47	Peak	V	28.12	6.12	54.71	74.00	19.29
*2 390.00	10.78	Average	V	28.12	6.12	45.02	54.00	8.98

Radiated Emissions			Ant.	Correction Factors		Total	Limit	
Frequency (MHz)	Reading (dB μ V)	Detect Mode	Pol.	AF (dB/m)	AMP+CL (dB)	Actual (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
*4 827.20	48.97	Peak	H	32.81	-30.88	50.90	74.00	23.10
Above 4 900.00	Not detected	-	-	-	-	-	-	-

Middle Channel (2 437 MHz)

Radiated Emissions			Ant.	Correction Factors		Total	Limit	
Frequency (MHz)	Reading (dB μ V)	Detect Mode	Pol.	AF (dB/m)	AMP+CL (dB)	Actual (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
*4 876.10	54.25	Peak	H	33.00	-30.76	56.49	74.00	17.51
*4 874.65	40.42	Average	H	33.00	-30.76	42.66	54.00	11.34
Above 4 900.00	Not detected	-	-	-	-	-	-	-

High Channel (2 462 MHz)

Radiated Emissions			Ant.	Correction Factors		Total	Limit	
Frequency (MHz)	Reading (dB μ V)	Detect Mode	Pol.	AF (dB/m)	CL (dB)	Actual (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
*2 483.50	21.35	Peak	V	28.33	6.24	55.92	74.00	18.08
*2 483.50	9.21	Average	V	28.33	6.24	43.78	54.00	10.22
*2 485.42	21.83	Peak	V	28.34	6.24	56.41	74.00	17.59
*2 484.32	9.62	Average	V	28.34	6.24	44.20	54.00	9.80
*2 500.00	20.20	Peak	V	28.40	6.26	54.86	74.00	19.14
*2 500.00	8.33	Average	V	28.40	6.26	42.99	54.00	11.01

Radiated Emissions			Ant.	Correction Factors		Total	Limit	
Frequency (MHz)	Reading (dB μ V)	Detect Mode	Pol.	AF (dB/m)	AMP+CL (dB)	Actual (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
*4 923.85	58.15	Peak	H	33.20	-30.63	60.72	74.00	13.28
*4 925.70	44.68	Average	H	33.20	-30.63	47.25	54.00	6.75
Above 5 000.00	Not detected	-	-	-	-	-	-	-

11n_HT20

Low Channel (2 412 MHz)

Radiated Emissions			Ant.	Correction Factors		Total	Limit	
Frequency (MHz)	Reading (dB μ V)	Detect Mode	Pol.	AF (dB/m)	CL (dB)	Actual (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
*2 310.00	18.23	Peak	H	27.96	6.01	52.20	74.00	21.80
*2 310.00	7.80	Average	H	27.96	6.01	41.77	54.00	12.23
*2 388.21	22.65	Peak	H	28.12	6.11	56.88	74.00	17.12
*2 389.79	11.19	Average	H	28.12	6.12	45.43	54.00	8.57
*2 390.00	21.08	Peak	H	28.12	6.12	55.32	74.00	18.68
*2 390.00	10.92	Average	H	28.12	6.12	45.16	54.00	8.84

Radiated Emissions			Ant.	Correction Factors		Total	Limit	
Frequency (MHz)	Reading (dB μ V)	Detect Mode	Pol.	AF (dB/m)	AMP+CL (dB)	Actual (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
*4 824.95	52.46	Peak	H	32.80	-30.89	54.37	74.00	19.63
*4 826.10	39.86	Average	H	32.80	-30.89	41.77	54.00	12.23
Above 4 900.00	Not detected	-	-	-	-	-	-	-

Middle Channel (2 437 MHz)

Radiated Emissions			Ant.	Correction Factors		Total	Limit	
Frequency (MHz)	Reading (dB μ V)	Detect Mode	Pol.	AF (dB/m)	AMP+CL (dB)	Actual (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
*4 873.10	53.76	Peak	H	32.99	-30.76	55.99	74.00	18.01
*4 873.95	40.07	Average	H	33.00	-30.76	42.31	54.00	11.69
Above 4 900.00	Not detected	-	-	-	-	-	-	-

High Channel (2 462 MHz)

Radiated Emissions			Ant.	Correction Factors		Total	Limit	
Frequency (MHz)	Reading (dB μ V)	Detect Mode	Pol.	AF (dB/m)	CL (dB)	Actual (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
*2 483.50	19.59	Peak	V	28.33	6.24	54.16	74.00	19.84
*2 483.50	8.96	Average	V	28.33	6.24	43.53	54.00	10.47
*2 483.74	21.25	Peak	V	28.33	6.24	55.82	74.00	18.18
*2 484.78	8.96	Average	V	28.34	6.24	43.54	54.00	10.46
*2 500.00	18.71	Peak	V	28.40	6.26	53.37	74.00	20.63
*2 500.00	8.32	Average	V	28.40	6.26	42.98	54.00	11.02

Radiated Emissions			Ant.	Correction Factors		Total	Limit	
Frequency (MHz)	Reading (dB μ V)	Detect Mode	Pol.	AF (dB/m)	AMP+CL (dB)	Actual (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
*4 926.45	57.59	Peak	H	33.21	-30.63	60.17	74.00	13.83
*4 925.90	43.87	Average	H	33.20	-30.63	46.44	54.00	7.56
Above 5 000.00	Not detected	-	-	-	-	-	-	-

11n_HT40

Low Channel (2 422 MHz)

Radiated Emissions			Ant.	Correction Factors		Total	Limit	
Frequency (MHz)	Reading (dBμV)	Detect Mode	Pol.	AF (dB/m)	CL (dB)	Actual (dBμV/m)	Limit (dBμV/m)	Margin (dB)
*2 310.00	17.44	Peak	V	27.96	6.01	51.41	74.00	22.59
*2 310.00	7.72	Average	V	27.96	6.01	41.69	54.00	12.31
*2 354.52	19.75	Peak	V	28.19	6.07	54.01	74.00	19.99
*2 380.26	8.66	Average	V	28.14	6.10	42.90	54.00	11.10
*2 390.00	18.49	Peak	V	28.12	6.12	52.73	74.00	21.27
*2 390.00	8.12	Average	V	28.12	6.12	42.36	54.00	11.64

Radiated Emissions			Ant.	Correction Factors		Total	Limit	
Frequency (MHz)	Reading (dBμV)	Detect Mode	Pol.	AF (dB/m)	AMP+CL (dB)	Actual (dBμV/m)	Limit (dBμV/m)	Margin (dB)
*4 835.80	44.51	Peak	H	32.84	-30.85	46.50	74.00	27.50
Above 4 900.00	Not detected	-	-	-	-	-	-	-

Middle Channel (2 437 MHz)


Radiated Emissions			Ant.	Correction Factors		Total	Limit	
Frequency (MHz)	Reading (dBμV)	Detect Mode	Pol.	AF (dB/m)	AMP+CL (dB)	Actual (dBμV/m)	Limit (dBμV/m)	Margin (dB)
*4 870.70	44.00	Peak	H	32.98	-30.77	46.21	74.00	27.79
Above 4 900.00	Not detected	-	-	-	-	-	-	-


High Channel (2 452 MHz)

Radiated Emissions			Ant.	Correction Factors		Total	Limit	
Frequency (MHz)	Reading (dB μ V)	Detect Mode	Pol.	AF (dB/m)	CL (dB)	Actual (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
*2 483.50	20.69	Peak	H	28.33	6.24	55.26	74.00	18.74
*2 483.50	8.70	Average	H	28.33	6.24	43.27	54.00	10.73
*2 484.03	20.24	Peak	H	28.34	6.24	54.82	74.00	19.18
*2 484.03	8.91	Average	H	28.34	6.24	43.49	54.00	10.51
*2 500.00	18.46	Peak	H	28.40	6.26	53.12	74.00	20.88
*2 500.00	8.22	Average	H	28.40	6.26	42.88	54.00	11.12


Radiated Emissions			Ant.	Correction Factors		Total	Limit	
Frequency (MHz)	Reading (dB μ V)	Detect Mode	Pol.	AF (dB/m)	AMP+CL (dB)	Actual (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
*4 904.10	46.62	Peak	H	33.12	-30.67	49.07	74.00	24.93
Above 5 000.00	Not detected	-	-	-	-	-	-	-

- “*” means the restricted band.
- Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- Radiated emissions measured in frequency above 1 000 MHz were made with an instrument using peak/average detector mode.
- Actual = Reading + AF + CL or Reading + AF + AMP + CL.
- According to § 15.31(o), emission levels are not reported much lower than the limits by over 20 dB.
- The maximized peak measured value complies with the average limit, to perform an average measurement is unnecessary.

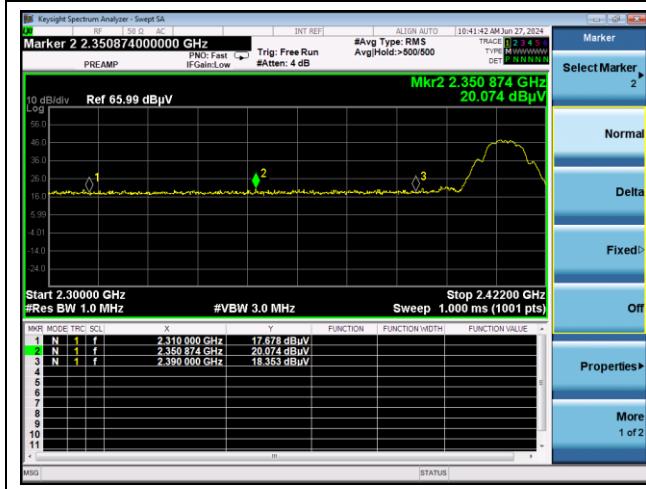- Test plots
11b
Low channel band edge (Peak)

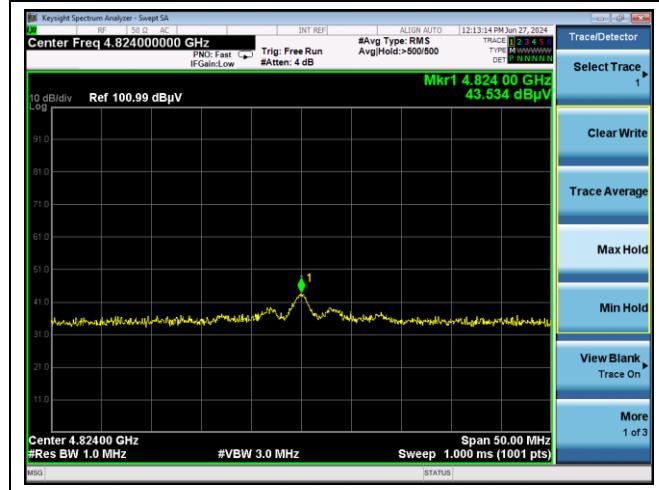Low channel band edge (Average)

Low channel 2nd Harmonic (Peak)

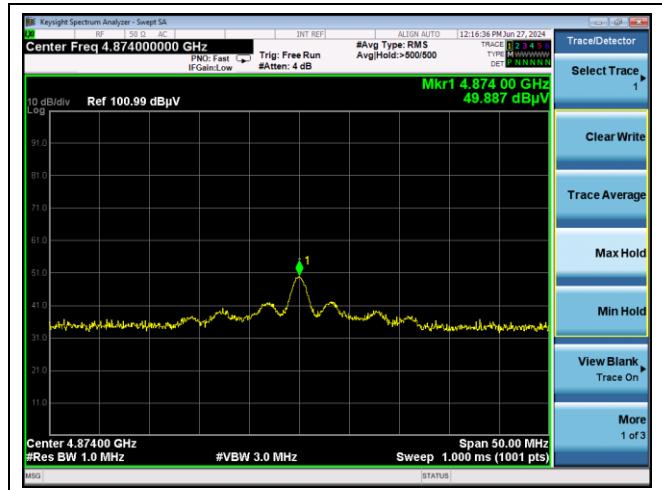
Middle channel 2nd Harmonic (Peak)



High channel band edge (Peak)



High channel band edge (Average)




High channel 2nd Harmonic (Peak)







11g

Low channel band edge (Peak)

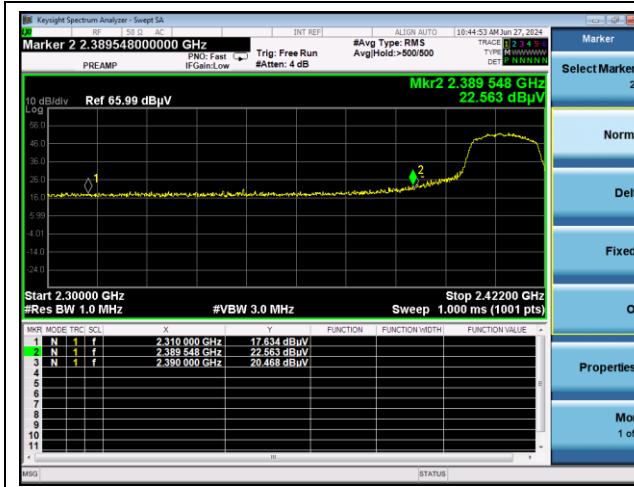

Low channel band edge (Average)

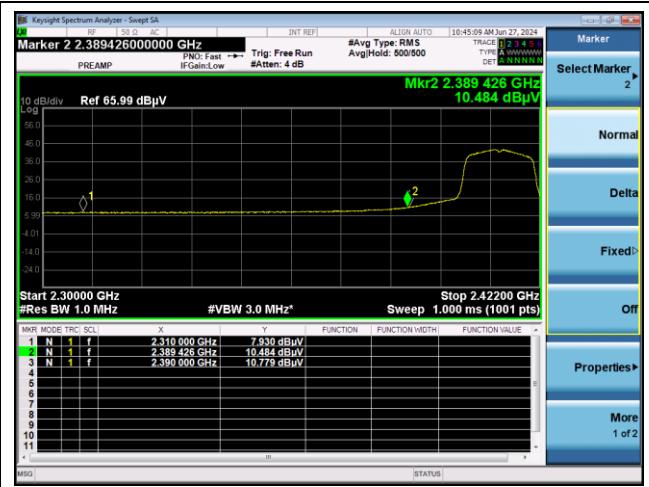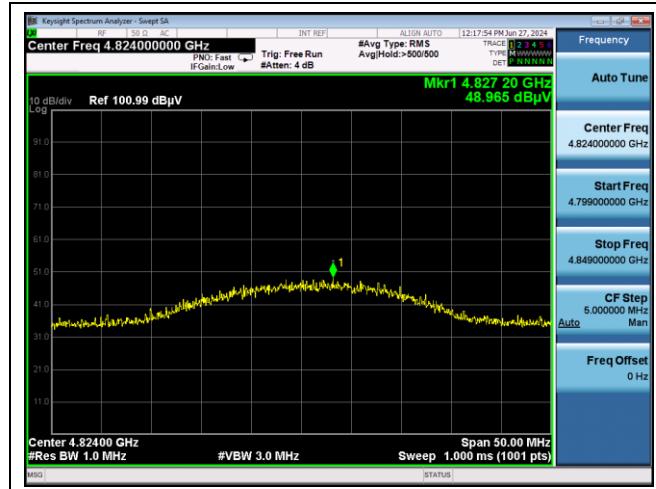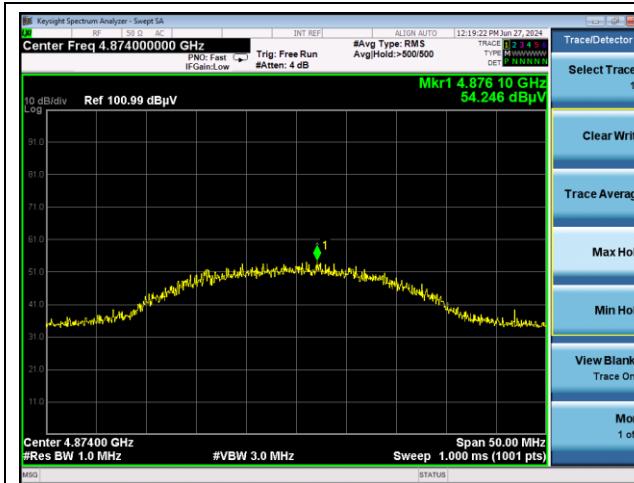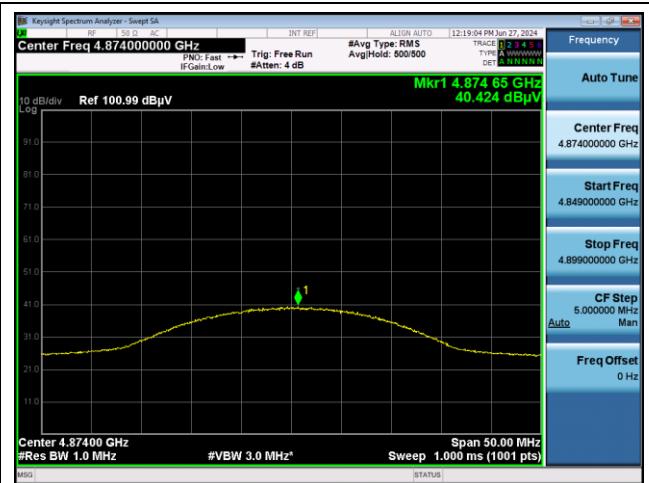
 Low channel 2nd Harmonic (Peak)

 Middle channel 2nd Harmonic (Peak)

 Middle channel 2nd Harmonic (Average)


High channel band edge (Peak)




High channel band edge (Average)


 High channel 2nd Harmonic (Peak)


 High channel 2nd Harmonic (Average)


11n_HT20


Low channel band edge (Peak)

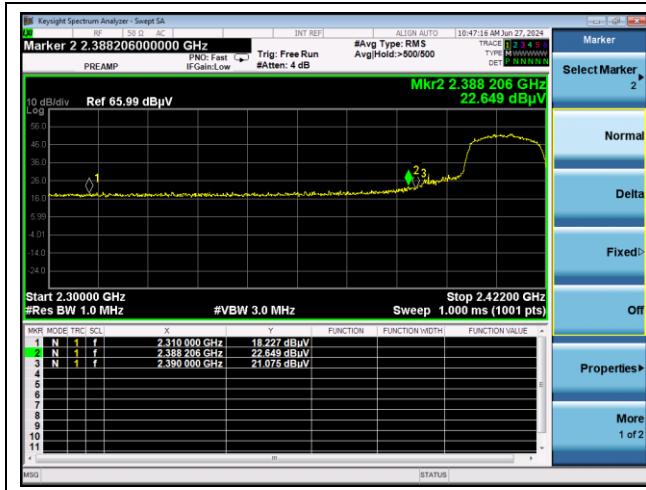


Low channel band edge (Average)

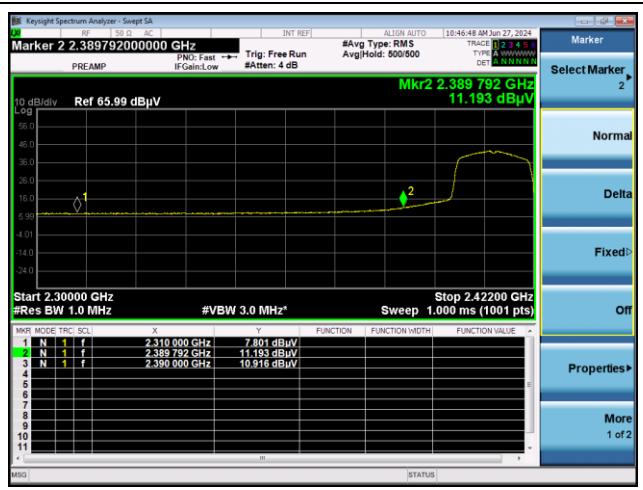
 Low channel 2nd Harmonic (Peak)


 Low channel 2nd Harmonic (Average)

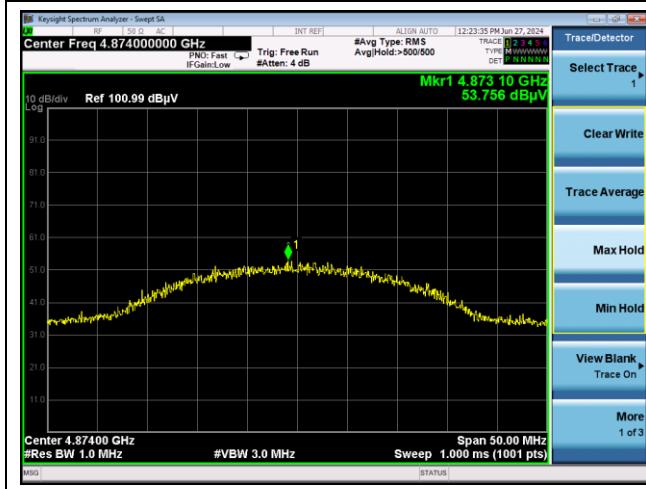 Middle channel 2nd Harmonic (Peak)

 Middle channel 2nd Harmonic (Average)

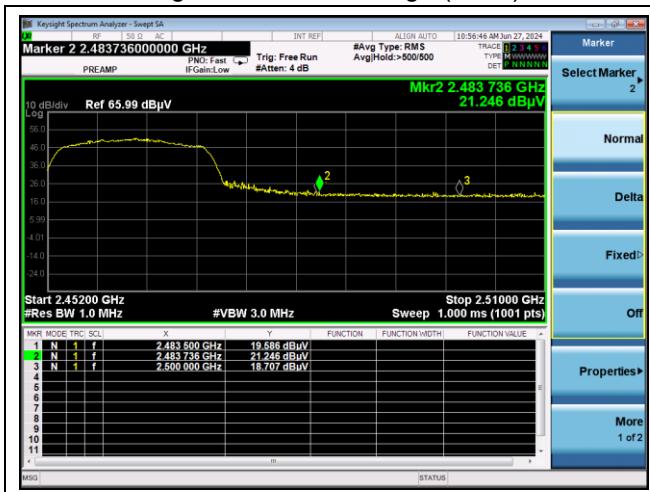

High channel band edge (Peak)

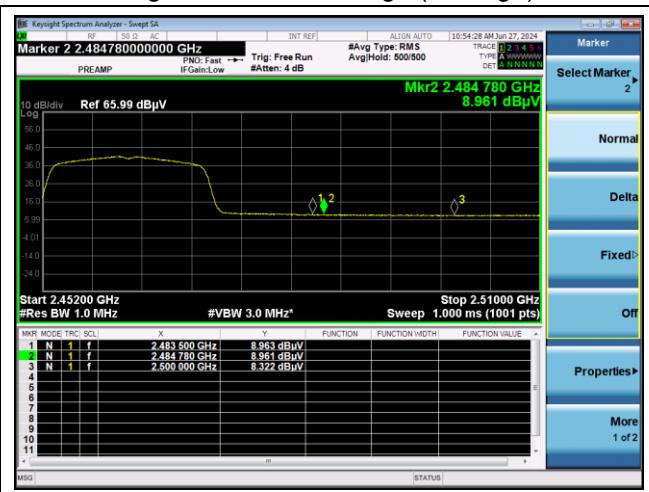

High channel band edge (Average)



High channel 2nd Harmonic (Peak)

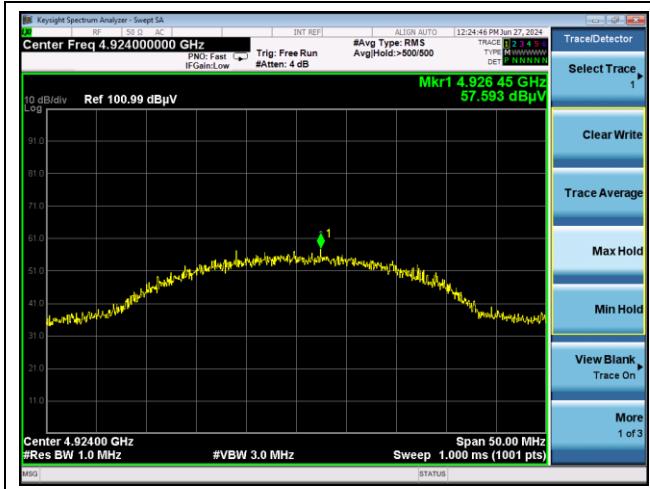


High channel 2nd Harmonic (Average)



11n_HT40


Low channel band edge (Peak)

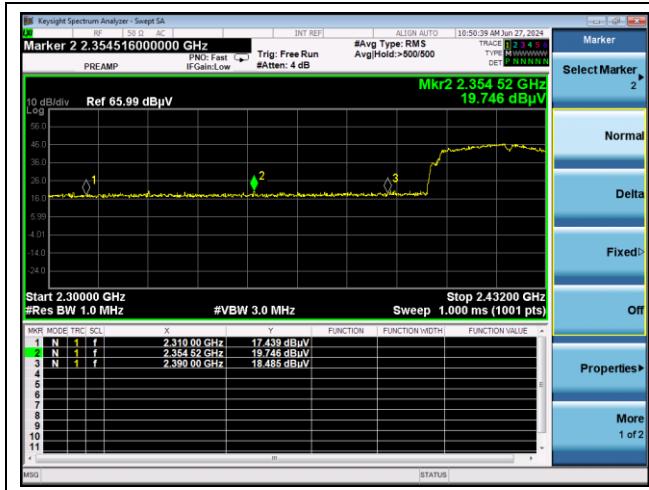


Low channel band edge (Average)



Low channel 2nd Harmonic (Peak)

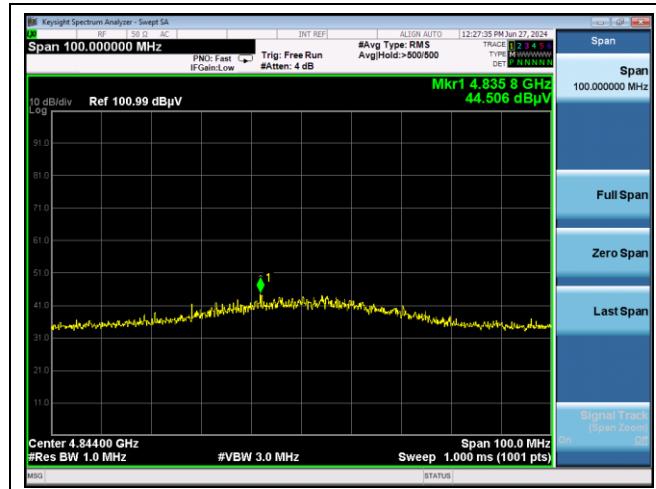


Middle channel 2nd Harmonic (Peak)

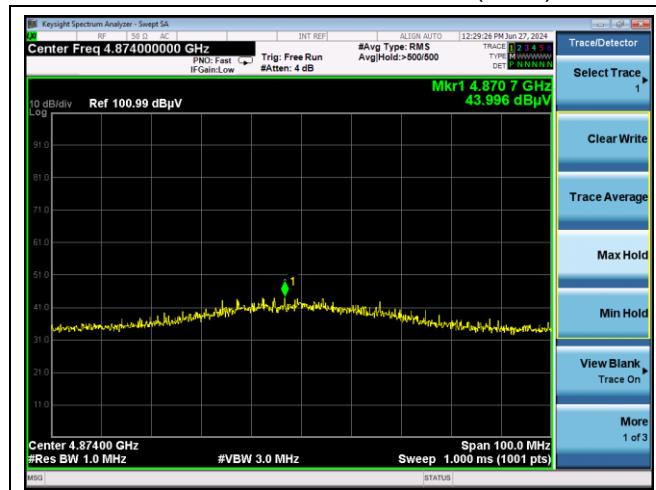


High channel band edge (Peak)



High channel band edge (Average)

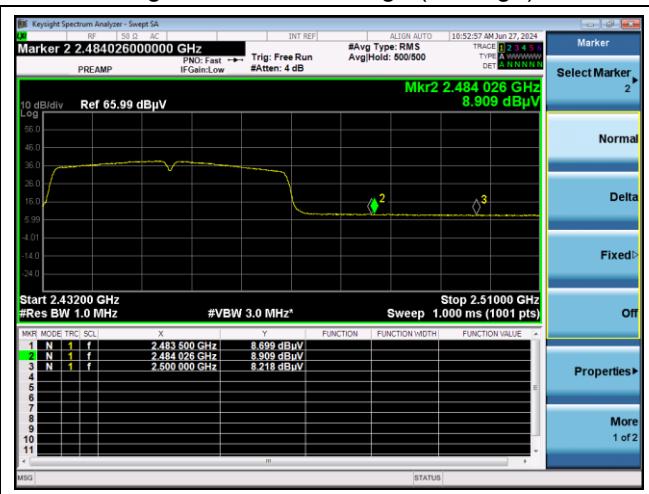


High channel 2nd Harmonic (Peak)

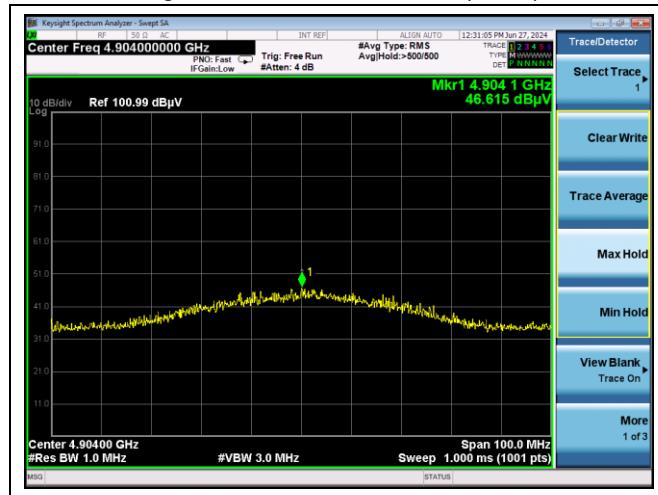

3. Maximum Peak Conducted Output Power

3.1. Test Setup

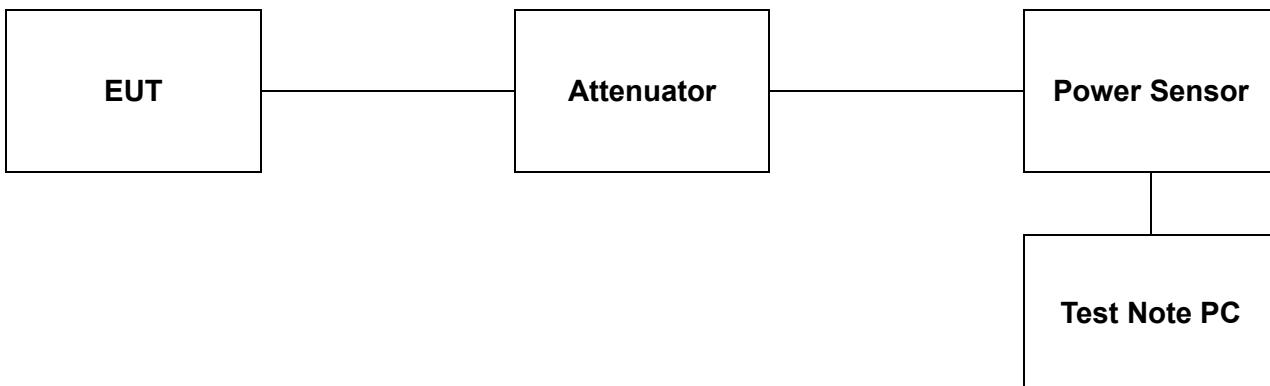

3.2. Limit

According to §15.247(b)(3), for systems using digital modulation in the 902-928 MHz, 2 400-2 483.5 MHz, and 5 725-5 850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

According to §15.247(b)(4), the conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dB i. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dB i are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraph (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dB i.

3.3. Test Procedure

The test follows section 11.9.1.3 of ANSI C63.10-2013.

PKPM1 Peak-reading power meter method

- The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall utilize a fast-responding diode detector.

The test follows section 11.9.2.3.2 of ANSI C63.10-2013.

Method AVGPM-G (Measurement using a gated RF average-reading power meter)

- Alternatively, measurements may be performed using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since this measurement is made only during the ON time of the transmitter, no duty cycle correction is required.

Multiple outputs of a transmitter or from multiple transmitters

- According to KDB 662911 D01 Multiple Transmitter Output v02r01, the measure-and-sum technique shall be used for measuring in-band transmit power of a device. Total power is the sum of the conducted power levels measured at the various output ports.

Test program: (S/W name: R&S Power Viewer, Version: 3.2.0)

1. Initially overall offset for attenuator and cable loss is measured per frequency.
2. Measured offset is inserted in test program in advance of measurement for output power.
3. Power for each frequency (channel) of device is investigated as final result.
4. Final result reported on this section from R&S power viewer program includes with several factors and test program shows only final result.

3.4. Test Results

Ambient temperature : $(23 \pm 1)^\circ\text{C}$

Relative humidity : 47 % R.H.

Mode	Channel	Frequency (MHz)	Average Power Result (dB m)	Peak Power Result (dB m)	Limit (dB m)
11b	Low	2 412	<u>15.10</u>	<u>17.10</u>	30
	Middle	2 437	14.47	16.49	
	High	2 462	14.12	16.13	
11g	Low	2 412	<u>13.35</u>	<u>23.92</u>	30
	Middle	2 437	12.94	23.81	
	High	2 462	12.84	23.91	
11n_HT20	Low	2 412	<u>12.89</u>	<u>24.41</u>	30
	Middle	2 437	12.48	23.91	
	High	2 462	12.09	23.76	
11n_HT40	Low	2 422	12.14	22.96	30
	Middle	2 437	12.12	22.92	
	High	2 452	<u>12.80</u>	<u>23.45</u>	

4. Antenna Requirement

4.1. Standard Applicable

For intentional device, according to FCC 47 CFR Section §15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. And according to FCC 47 CFR Section §15.247(b) if transmitting antennas of directional gain greater than 6 dB i are used, the conducted output power shall be reduced appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dB i.

4.2. Antenna Connected Construction

Antenna used in this product is Wire Antenna with gain of -3.25 dB i.

- End of the Test Report -