

FCC SAR Test Report

Applicant : Shenzhen Donghuaxing Technology Co., Ltd

Address : 6A016 Building C, No. 164 Pingxin North
Road, Hehua Community, Pinghu Street,
Longgang District, Shenzhen, Guangdong,
518000, China

Product Name : Mini smartphone

Report Date : Jun. 17, 2024



Shenzhen Anbotech Compliance Laboratory Limited

Shenzhen Anbotech Compliance Laboratory Limited

Address: 1/F., Building D, Sogood Science and Technology Park, Sanwei Community,
Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.
Tel: (86) 0755-26066440 Fax: (86) 0755-26014772 Email: service@anbotech.com

Code: AB-RF-05-b



Hotline

400-003-0500

www.anbotech.com.cn



Contents

1. Statement of Compliance	6
2. General Information	7
2.1. Client Information	7
2.2. Description of Equipment Under Test (EUT)	7
2.3. Device Category and SAR Limits	8
2.4. Applied Standard	8
2.5. Environment of Test Site	8
2.6. Test Configuration	9
3. Specific Absorption Rate (SAR)	10
3.1. Introduction	10
3.2. SAR Definition	10
4. SAR Measurement System	11
4.1. E-Field Probe	12
4.2. Data Acquisition Electronics (DAE)	12
4.3. Robot	13
4.4. Measurement Server	14
4.5. Phantom	14
4.6. Device Holder	15
4.7. Data Storage and Evaluation	16
5. Test Equipment List	18
6. Tissue Simulating Liquids	19
7. System Verification Procedures	21
8. EUT Testing Position	23
8.1. Head Position	23
8.2. Body Position	24
9. Measurement Procedures	25
9.1. Spatial Peak SAR Evaluation	25
9.2. Power Reference Measurement	26
9.3. Area Scan Procedures	26
9.4. Zoom Scan Procedures	27
9.5. Volume Scan Procedures	28
9.6. Power Drift Monitoring	28
10. Conducted Power	29
11. Antenna Location	45
12. SAR Test Results Summary	47
12.1. Head SAR Results	48
12.2. Body-worn SAR Results	53
13. Simultaneous Transmission Analysis	59



14. Measurement Uncertainty	62
Appendix A. EUT Photos and Test Setup Photos	64
Appendix B. Plots of SAR System Check	66
Appendix C. Plots of SAR Test Data	72
Appendix D. DASY System Calibration Certificate	94



TEST REPORT

Applicant : Shenzhen Donghuaxing Technology Co., Ltd
Manufacturer : Shenzhen Donghuaxing Technology Co., Ltd
Product Name : Mini smartphone
Model No. : KING 9000
Reference Model No. : KING 1000, KING 2000, KING 3000, KING 4000, KING 5000, KING 6000,
KING 7000, KING 8000, S23 Ultra, S24 mini, S24 Ultra, S25 mini,
S25 Ultra, P60 PRO, P70 PRO, 15 SE, 15 PRO, 15 MAX, 16 SE, 16 PRO,
16 MAX, 17 SE, 17 PRO, 17 MAX
Trade Mark : SERVO
Rating(s) : Input: 5V= 1A(with DC 3.85V, 2000mAh battery inside)
Test Standard(s) : IEC/IEEE 62209-1528:2020; FCC 47 CFR Part 2.1093;
IEEE Std C95.1-2019; Reference FCC KDB 447498; KDB 248227;
KDB 616217; KDB 941225; KDB 865664

The device described above is tested by Shenzhen Anbotek Compliance Laboratory Limited to determine the maximum emission levels emanating from the device and the severe levels of the device can endure and its performance criterion. The measurement results are contained in this test report and Shenzhen Anbotek Compliance Laboratory Limited is assumed full of responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT (Equipment Under Test) is technically compliant with the IEC/IEEE 62209-1528:2020, FCC 47 CFR Part 2.1093, IEEE Std C95.1-2019 requirements.

This report applies to above tested sample only and shall not be reproduced in part without written approval of Shenzhen Anbotek Compliance Laboratory Limited.

Date of Receipt

May. 09, 2024

Date of Test

May 10, 2024 to Jun 01, 2024

Prepared By

Ella Liang

(Ella Liang)

Approved & Authorized Signer

Edward Pan

(Edward Pan)



Version

Version No.	Date	Description
R00	Jun. 17, 2024	Original



1. Statement of Compliance

<Highest SAR Summary>

This device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg) specified in FCC 47 CFR part 2.1093 and IEEE Std C95.1-2019, and had been tested in accordance with the measurement methods and procedures specified in IEC/IEEE 62209-1528:2020. The maximum results of Specific Absorption Rate (SAR) found during testing are as follows.

<Highest SAR Summary>

Frequency Band	Highest Reported 1g-SAR(W/Kg)		SAR Test Limit (W/Kg)
	Head	Body-worn (5mm)	
GSM 850	0.712	0.785	1.6
GSM1900	0.583	0.571	
WCDMA Band II	0.467	0.447	
WCDMA Band V	0.512	0.482	
LTE Band 5	0.459	0.448	
LTE Band 7	0.338	0.327	
LTE Band 38	0.571	0.579	
LTE Band 41	0.526	0.530	
WLAN2.4G	0.205	0.278	
WLAN5.2G	0.272	0.321	
WLAN5.8G	0.267	0.315	
Simultaneous Reported SAR (W/Kg)	0.979	1.106	
Test Result	PASS		

This device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg) specified in FCC 47 CFR part 2.1093 and IEEE Std C95.1-2019, and had been tested in accordance with the measurement methods and procedures specified in IEC/IEEE 62209-1528:2020.



2. General Information

2.1. Client Information

Applicant	:	Shenzhen Donghuaxing Technology Co., Ltd
Address	:	6A016 Building C, No. 164 Pingxin North Road, Hehua Community, Pinghu Street, Longgang District, Shenzhen, Guangdong, 518000, China
Manufacturer	:	Shenzhen Donghuaxing Technology Co., Ltd
Address	:	6A016 Building C, No. 164 Pingxin North Road, Hehua Community, Pinghu Street, Longgang District, Shenzhen, Guangdong, 518000, China
Factory	:	Shenzhen Donghuaxing Technology Co., Ltd
Address	:	6A016 Building C, No. 164 Pingxin North Road, Hehua Community, Pinghu Street, Longgang District, Shenzhen, Guangdong, 518000, China

2.2. Description of Equipment Under Test (EUT)

Product Name	:	Mini smartphone
Model No.	:	KING 9000
Reference Model No.	:	KING 1000, KING 2000, KING 3000, KING 4000, KING 5000, KING 6000, KING 7000, KING 8000, S23 Ultra, S24 mini, S24 Ultra, S25 mini, S25 Ultra, P60 PRO, P70 PRO, 15 SE, 15 PRO, 15 MAX, 16 SE, 16 PRO, 16 MAX, 17 SE, 17 PRO, 17 MAX (Note: All samples are the same except the model number, so we prepare "KING 9000" for test only.)
Trade Mark	:	SERVO
Test Power Supply	:	DC 5V from Adapter input AC 120V/60Hz/ DC 3.85V Battery inside
Test Sample No.	:	1-2-1(Engineering Sample)
Tx Frequency	:	BT:2402-2480MHz 2.4G WIFI: 2412-2462MHz GSM 850: TX: 824.2~848.8 MHz PCS 1900: TX: 1850.2~1909.8 MHz UMTS Band 2: TX: 1852.4~1907.6 MHz UMTS Band 5: TX: 826.4 ~ 846.6 MHz FDD Band 5: TX: 824.7 MHz – 848.3 MHz FDD Band 7: TX: 2502.5 MHz – 2567.5 MHz TDD Band 38: TX: 2572.5 MHz~2617.5MHz TDD Band 41: TX: 2537.5 MHz – 2652.5 MHz
Type of Modulation	:	GSM: GMSK, 8PSK WCDMA: QPSK LTE: QPSK, 16QAM



	BT: GFSK, $\pi/4$ DQPSK, 8DPSK 2.4G WIFI: DSSS, OFDM 5G WIFI: OFDM
Category of device	: Portable device
Remark: The above DUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.	

2.3. Device Category and SAR Limits

This device belongs to portable device category because its radiating structure is allowed to be used within 20 centimeters of the body of the user. Limit for General Population/Uncontrolled exposure should be applied for this device, it is 1.6 W/kg as averaged over any 1 gram of tissue.

2.4. Applied Standard

The Specific Absorption Rate (SAR) testing specification, method, and procedure for this device is in accordance with the following standards:

- FCC 47 CFR Part 2.1093
- IEEE Std C95.1-2019
- IEC/IEEE 62209-1528:2020
- KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04
- KDB 865664 D02 RF Exposure Reporting v01r02
- KDB 447498 D01 General RF Exposure Guidance v06
- KDB 248227 D01 802.11 Wi-Fi SAR v02r02
- KDB 941225 D01 3G SAR Procedures v03r01
- KDB 941225 D05 SAR for LTE Devices v02r05

2.5. Environment of Test Site

Items	Required	Actual
Temperature (°C)	18-25	22~23
Humidity (%RH)	30-70	55~65



2.6. Test Configuration

The device was controlled by using a base station emulator. Communication between the device and the emulator was established by air link. The distance between the EUT and the antenna of the emulator is larger than 50 cm and the output power radiated from the emulator antenna is at least 30 dB smaller than the output power of EUT. The EUT was set from the emulator to radiate maximum output power during all tests. For WLAN SAR testing, WLAN engineering testing software installed on the EUT can provide continuous transmitting RF signal.



3. Specific Absorption Rate (SAR)

3.1. Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

3.2. SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$SAR = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$

SAR is expressed in units of Watts per kilogram (W/kg)

SAR measurement can be either related to the temperature elevation in tissue by

$$SAR = C \left(\frac{\delta T}{\delta t} \right)$$

Where: C is the specific heat capacity, δT is the temperature rise and δt is the exposure duration, or related to the electrical field in the tissue by


$$SAR = \frac{\sigma |E|^2}{\rho}$$

Where: σ is the conductivity of the tissue, ρ is the mass density of the tissue and E is the RMS electrical field strength.

However for evaluating SAR of low power transmitter, electrical field measurement is typically applied.



4. SAR Measurement System

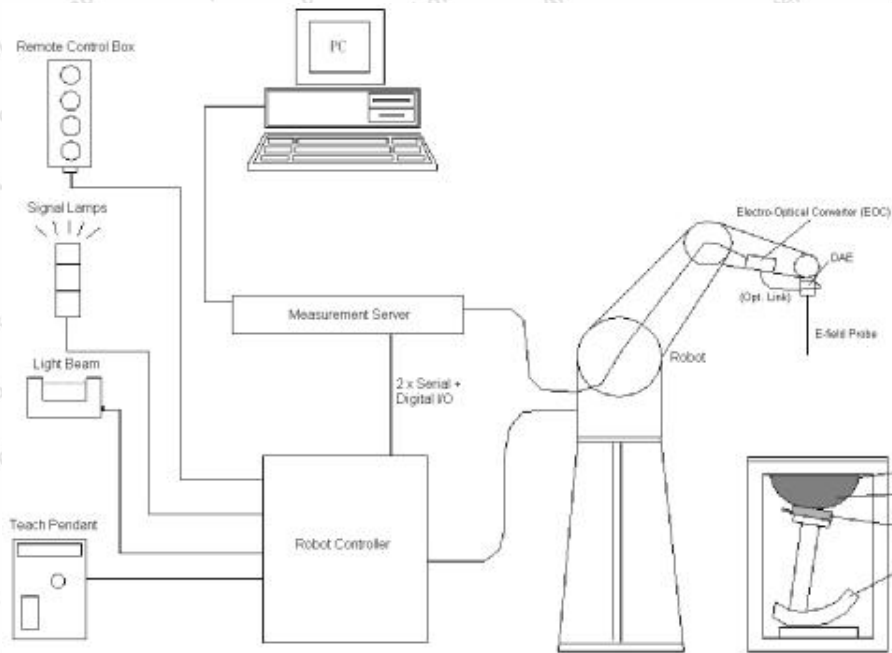

DASYS System Configurations

The DASYS system for performance compliance tests is illustrated above graphically. This system consists of the following items:

- A standard high precision 6-axis robot with controller, a teach pendant and software
- A data acquisition electronic (DAE) attached to the robot arm extension
- A dosimetric probe equipped with an optical surface detector system
- The electro-optical converter (EOC) performs the conversion between optical and electrical signals
- A measurement server performs the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- A probe alignment unit which improves the accuracy of the probe positioning
- A computer operating Windows XP
- DASYS software
- Remote control with teach pendant and additional circuitry for robot safety such as warning lamps, etc.
- The SAM twin phantom
- A device holder
- Tissue simulating liquid
- Dipole for evaluating the proper functioning of the system

components are described in details in the following sub-sections.



4.1. E-Field Probe

The SAR measurement is conducted with the dosimetric probe (manufactured by SPEAG). The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency. This probe has a built in optical surface detection system to prevent from collision with phantom.

➤ E-Field Probe Specification

<EX3DV4 Probe>

Construction	Symmetrical design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Frequency	10 MHz to 6 GHz; Linearity: ± 0.2 dB	
Directivity	± 0.3 dB in HSL (rotation around probe axis) ± 0.5 dB in tissue material (rotation normal to probe axis)	
Dynamic Range	10 μ W/g to 100 W/kg; Linearity: ± 0.2 dB (noise: typically < 1 μ W/g)	
Dimensions	Overall length: 330 mm (Tip: 20 mm) Tip diameter: 2.5 mm (Body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm	

Photo of EX3DV4

➤ E-Field Probe Calibration

Each probe needs to be calibrated according to a dosimetric assessment procedure with accuracy better than $\pm 10\%$. The spherical isotropy shall be evaluated and within ± 0.25 dB. The sensitivity parameters (NormX, NormY, and NormZ), the diode compression parameter (DCP) and the conversion factor (ConvF) of the probe are tested. The calibration data can be referred to appendix C of this report.

4.2. Data Acquisition Electronics (DAE)

The data acquisition electronics (DAE) consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock.

The input impedance of the DAE is 200M Ω ; the inputs are symmetrical and floating. Common mode rejection is above 80dB.



**Photo of DAE**

4.3. Robot

The SPEAG DASY system uses the high precision robots (DASY5: TX60XL) type from Stäubli SA (France). For the 6-axis controllersystem, the robot controller version (DASY5: CS8c) from Stäubli is used. The Stäublirobot series have many features that are important for our application:

- High precision (repeatability ± 0.035 mm)
- High reliability (industrial design)
- Jerk-free straight movements
- Low ELF interference (the closed metallic construction shields against motor control fields)

**Photo of DASY5**

4.4. Measurement Server

The measurement server is based on a PC/104 CPU board with CPU (DASY5: 400 MHz, Intel Celeron), chipdisk (DASY5: 128 MB), RAM (DASY5: 128 MB). The necessary circuits for communication with the DAE electronic box, as well as the 16 bit AD converter system for optical detection and digital I/O interface are contained on the DASY I/O board, which is directly connected to the PC/104 bus of the CPU board.

The measurement server performs all the real-time data evaluation for field measurements and surface detection, controls robot movements and handles safety operations.



Photo of Server for DASY5

4.5. Phantom

<SAM Twin Phantom>

Shell Thickness	2 ± 0.2 mm; Center ear point: 6 ± 0.2 mm	
Filling Volume	Approx. 25 liters	
Dimensions	Length: 1000 mm; Width: 500 mm; Height: adjustable feet	
Measurement Areas	Left Hand, Right Hand, Flat Phantom	

Photo of SAM Phantom

The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. A white cover is provided to tap the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. On the phantom top, three reference markers are provided to identify the phantom position with respect to the robot.



<ELI4 Phantom>

Shell Thickness	2 ± 0.2 mm (sagging: <1%)	
Filling Volume	Approx. 30 liters	
Dimensions	Major ellipse axis: 600 mm Minor axis: 400 mm	

Photo of ELI4 Phantom

The ELI4 phantom is intended for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI4 is fully compatible with standard and all known tissue simulating liquids.

4.6. Device Holder

The SAR in the phantom is approximately inversely proportional to the square of the distance between the source and the liquid surface. For a source at 5 mm distance, a positioning uncertainty of ±0.5mm would produce a SAR uncertainty of ± 20%. Accurate device positioning is therefore crucial for accurate and repeatable measurements. The positions in which the devices must be measured are defined by the standards.

The DASY device holder is designed to cope with different positions given in the standard. It has two scales for the device rotation (with respect to the body axis) and the device inclination (with respect to the line between the ear reference points). The rotation center for both scales is the ear reference point (ERP). Thus the device needs no repositioning when changing the angles.

The DASY device holder is constructed of low-loss POM material having the following dielectric parameters: relative permittivity $\epsilon = 3$ and loss tangent $\delta = 0.02$. The amount of dielectric material has been reduced in the closest vicinity of the device, since measurements have suggested that the influence of the clamp on the test results could thus be lowered.



Device Holder



4.7. Data Storage and Evaluation

➤ Data Storage

The DASY software stores the assessed data from the data acquisition electronics as raw data (in microvolt readings from the probe sensors), together with all the necessary software parameters for the data evaluation (probe calibration data, liquid parameters and device frequency and modulation data) in measurement files. The post-processing software evaluates the desired unit and format for output each time the data is visualized or exported. This allows verification of the complete software setup even after the measurement and allows correction of erroneous parameter settings. For example, if a measurement has been performed with an incorrect crest factor parameter in the device setup, the parameter can be corrected afterwards and the data can be reevaluated.

The measured data can be visualized or exported in different units or formats, depending on the selected probe type (e.g., [V/m], [A/m], [W/kg]). Some of these units are not available in certain situations or give meaningless results, e.g., a SAR-output in a non-lose media, will always be zero. Raw data can also be exported to perform the evaluation with other software packages.

➤ Data Evaluation

The DASY post-processing software (SEMCAD) automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software:

Probe parameters:	- Sensitivity	Norm _i , a _{i0} , a _{i1} , a _{i2}
	- Conversion factor	ConvF _i
	- Diode compression point dcp _i	
Device parameters:	- Frequency	f
	- Crest factor	cf
Media parameters:	- Conductivity	σ
	- Density	ρ

These parameters must be set correctly in the software. They can be found in the component documents or they can be imported into the software from the configuration files issued for the DASY components. In the direct measuring mode of the multi-meter option, the parameters of the actual system setup are used. In the scan visualization and export modes, the parameters stored in the corresponding document files are used.

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics. If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power.



The formula for each channel can be given as:

$$V_i = U_i + U_i^2 \cdot \frac{cf}{dcp_i}$$

with V_i = compensated signal of channel i, (i = x, y, z)

U_i = input signal of channel i, (i = x, y, z)

cf = crest factor of exciting field (DASY parameter)

dcp_i = diode compression point (DASY parameter)

From the compensated input signals, the primary field data for each channel can be evaluated:

$$\text{E-field Probes: } E_i = \sqrt{\frac{V_i}{\text{Norm}_i \cdot \text{ConvF}}}$$

$$\text{H-field Probes: } H_i = \sqrt{V_i} \cdot \frac{a_{i0} + a_{i1}f + a_{i2}f^2}{f}$$

with V_i = compensated signal of channel i, (i = x, y, z)

Norm_i = sensor sensitivity of channel i, (i = x, y, z), $\mu\text{V}/(\text{V/m})^2$ for E-field Probes

ConvF = sensitivity enhancement in solution

a_{ij} = sensor sensitivity factors for H-field probes

f = carrier frequency [GHz]

E_i = electric field strength of channel i in V/m

H_i = magnetic field strength of channel i in A/m

The RSS value of the field components gives the total field strength (Hermitian magnitude):

$$E_{\text{tot}} = \sqrt{E_x^2 + E_y^2 + E_z^2}$$

The primary field data are used to calculate the derived field units.

$$\text{SAR} = E_{\text{tot}}^2 \cdot \frac{\sigma}{\rho \cdot 1000}$$

with SAR = local specific absorption rate in W/kg

E_{tot} = total field strength in V/m

σ = conductivity in [mho/m] or [Siemens/m]

ρ = equivalent tissue density in g/cm^3

Note that the density is set to 1, to account for actual head tissue density rather than the density of the tissue simulating liquid.



5. Test Equipment List

Manufacturer	Name of Equipment	Type/Model	Serial Number	Calibration	
				Last Cal.	Due Date
SPEAG	835MHz System Validation Kit	D835V2	4d154	Jun. 16,2021	Jun. 15,2024
SPEAG	1900MHz System Validation Kit	D1900V2	5d175	Jun. 15,2022	Jun. 14,2025
SPEAG	2450MHz System Validation Kit	D2450V2	910	Jun. 15,2021	Jun. 14,2024
SPEAG	2600MHz System Validation Kit	D2600V2	1058	Jun. 19,2021	Jun. 18,2024
Rohde & Schwarz	UNIVERSAL RADIO COMMUNICATION TESTER	CMW500	1201.0002K50-104209-JC	Nov.10, 2023	Nov.09, 2024
SPEAG	Data Acquisition Electronics	DAE4	387	Sept.06,2023	Sept.05,2024
SPEAG	Dosimetric E-Field Probe	EX3DV4	7396	May 06,2024	May 05,2025
Agilent	ENA Series Network Analyzer	E5071C	MY46317418	Oct.26, 2023	Oct.25, 2024
SPEAG	DAK	DAK-3.5	1226	NCR	NCR
SPEAG	SAM Twin Phantom	QD000P40CD	1802	NCR	NCR
SPEAG	ELI Phantom	QDOVA004AA	2058	NCR	NCR
AR	Amplifier	ZHL-42W	QA1118004	NCR	NCR
Agilent	Spectrum Analyzer	N9020A	MY51170037	Oct.26, 2023	Oct.25, 2024
Agilent	Signal Generation	N5182A	MY48180656	Oct.26, 2023	Oct.25, 2024
Worken	Directional Coupler	0110A05601O-10	COM5BNW1A2	Oct.26, 2023	Oct.25, 2024

Note:

1. The calibration certificate of DASY can be referred to appendix C of this report.
2. The dipole calibration interval can be extended to 3 years with justification. The dipoles are also not physically damaged, or repaired during the interval.
3. The Insertion Loss calibration of Dual Directional Coupler and Attenuator were characterized via the network analyzer and compensated during system check.
4. The dielectric probe kit was calibrated via the network analyzer, with the specified procedure (calibrated in pure water) and calibration kit (standard) short circuit, before the dielectric measurement. The specific procedure and calibration kit are provided by Agilent.
5. In system check we need to monitor the level on the power meter, and adjust the power amplifier level to have precise power level to the dipole; the measured SAR will be normalized to 1W input power according to the ratio of 1W to the input power to the dipole. For system check, the calibration of the power amplifier is deemed not critically required for correct measurement; the power meter is critical and we do have calibration for it.



6. Tissue Simulating Liquids

For the measurement of the field distribution inside the SAM phantom with DASY, the phantom must be filled with around 25 liters of homogeneous body tissue simulating liquid. For head SAR testing, the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 6.1. For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15 cm, which is shown as followed:



Photo of Liquid Height for Head SAR Photo of Liquid Height for Body SAR

The following table gives the recipes for tissue simulating liquid.

Frequency (MHz)	Water (%)	Sugar (%)	Cellulose (%)	Salt (%)	Preventol (%)	DGBE (%)	Conductivity (σ)	Permittivity (ϵ_r)
For Body								
835	50.8	48.2	0	0.9	0.1	0	0.97	55.2
1800,1900,2000	70.2	0	0	0.4	0	29.4	1.52	53.3
2450	68.6	0	0	0	0	31.4	1.95	52.7
2600	65.5	0	0	0	0	31.5	2.16	52.5
5200	78.6	0	10.7	0	10.7	0	5.27	49.0
5800	78.5	0	10.8	0	10.7	0	6.00	48.2
For Head								
835	40.3	57.9	0.2	1.4	0.2	0	0.90	41.5
1800,1900,2000	55.2	0	0	0.3	0	44.5	1.40	40.0
2450	55.0	0	0	0	0	45.0	1.80	39.2
2600	54.8	0	0	0.1	0	45.1	1.96	39.0
5200	65.5	0	17.2	0	17.3	0	4.66	36.0
5800	65.4	0	17.3	0	17.3	0	5.27	35.3



The following table shows the measuring results for simulating liquid.

Measured Frequency (MHz)	Target Tissue		Measured Tissue				Liquid Temp.	Test Data
	ϵ_r	σ	ϵ_r	Dev. (%)	σ	Dev. (%)		
835	41.5	0.90	41.62	0.29	0.92	2.22	22.7	05/27/2024
1900	40.0	1.40	40.12	0.30	1.46	4.29	22.8	05/28/2024
2450	39.2	1.80	39.08	-0.31	1.85	2.78	22.7	05/29/2024
2600	39.0	1.96	39.35	0.90	2.03	3.57	22.8	05/30/2024
5200	49.00	5.27	48.23	-1.60	5.20	-1.35	22.6	05/31/2024
5800	48.20	6.00	48.45	0.52	5.85	-2.56	22.4	06/01/2024



7. System Verification Procedures


Each DASY system is equipped with one or more system validation kits. These units, together with the predefined measurement procedures within the DASY software, enable the user to conduct the system performance check and system validation. System validation kit includes a dipole, tripod holder to fix it underneath the flat phantom and a corresponding distance holder.

➤ Purpose of System Performance check

The system performance check verifies that the system operates within its specifications. System and operator errors can be detected and corrected. It is recommended that the system performance check be performed prior to any usage of the system in order to guarantee reproducible results. The system performance check uses normal SAR measurements in a simplified setup with a well characterized source. This setup was selected to give a high sensitivity to all parameters that might fail or vary over time. The system check does not intend to replace the calibration of the components, but indicates situations where the system uncertainty is exceeded due to drift or failure.

➤ System Setup

In the simplified setup for system evaluation, the EUT is replaced by a calibrated dipole and the power source is replaced by a continuous wave that comes from a signal generator. The calibrated dipole must be placed beneath the flat phantom section of the SAM twin phantom with the correct distance holder. The distance holder should touch the phantom surface with a light pressure at the reference marking and be oriented parallel to the long side of the phantom. The equipment setup is shown below:

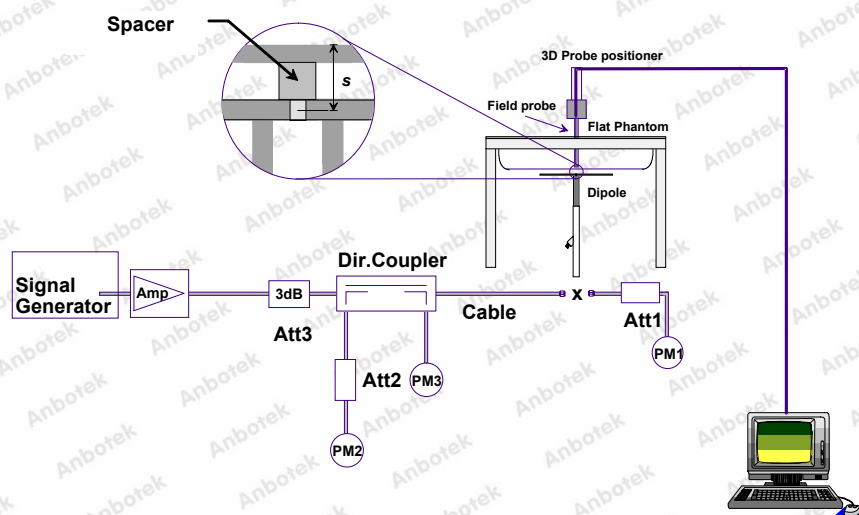

System Setup for System Evaluation



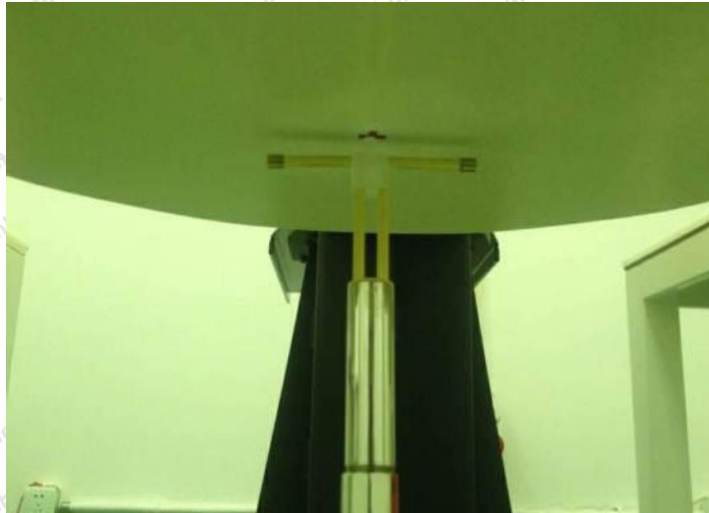


Photo of Dipole Setup

➤ Validation Results

Comparing to the original SAR value provided by SPEAG, the verification data should be within its specification of 10%. The table below shows the target SAR and measured SAR after normalized to 1W input power. It indicates that the system performance check can meet the variation criterion and the plots can be referred to Appendix A of this report.

Date	Frequency (MHz)	Power fed onto reference dipole (mW)	Targeted SAR (W/kg)	Measured SAR (W/kg)	Normalized SAR (W/kg)	Deviation (%)
05/27/2024	835	250	9.24	2.33	9.32	0.87
05/28/2024	1900	250	40.4	10.18	40.72	0.79
05/29/2024	2450	250	52.4	12.95	51.8	-1.15
05/30/2024	2600	250	57.2	13.91	55.64	-2.73
05/31/2024	5200	100	77.8	7.63	76.30	-1.93
06/01/2024	5800	100	78.3	7.95	79.50	1.53

Target and Measurement SAR after Normalized



8. EUT Testing Position


8.1. Head Position

The wireless device define two imaginary lines on the handset, the vertical centreline and the horizontal line, for the handset in vertical orientation as shown in Figures 5a and 5b.


The vertical centreline passes through two points on the front side of the handset: the midpoint of the width W_t of the handset at the level of the acoustic output (point A in Figures 5a and 5b), and the midpoint of the width W_b of the bottom of the handset (point B).

The horizontal line is perpendicular to the vertical centreline and passes through the centre of the acoustic output (see Figures 5a and 5b). The two lines intersect at point A.

Note that for many handsets, point A coincides with the centre of the acoustic output. However, the acoustic output may be located elsewhere on the horizontal line. Also note that the vertical centreline is not necessarily parallel to the front face of the handset (see Figure 5b), especially for clam-shell handsets, handsets with flip cover pieces, and other irregularly shaped handsets.

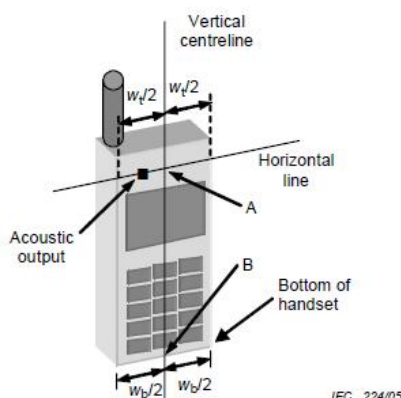


Figures 5a

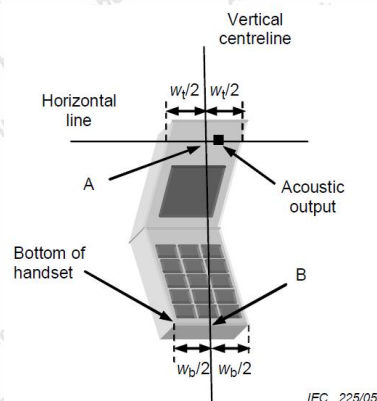


Figures 5b

- W_t Width of the handset at the level of the acoustic
- W_b Width of the bottom of the handset
- A Midpoint of the width w_t of the handset at the level of the acoustic output
- B Midpoint of the width w_b of the bottom of the handset

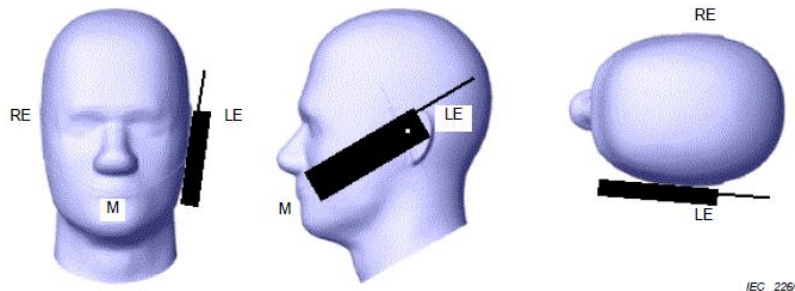

Cheek position

Picture 2 Cheek position of the wireless device on the left side of SAM

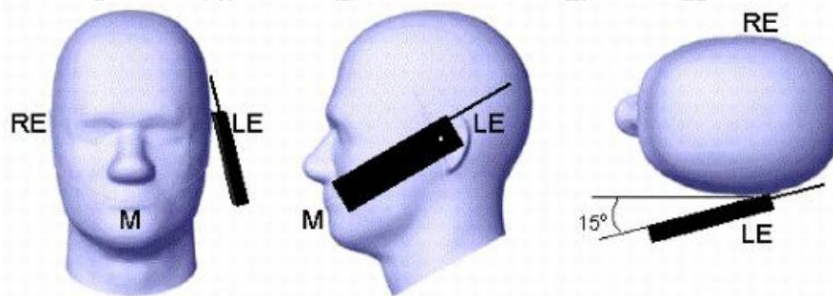
Tilt position

Picture 3 Tilt position of the wireless device on the left side of SAM

8.2. Body Position

Devices that support transmission while used with body-worn accessories must be tested for body-worn accessory SAR compliance, typically according to the smallest test separation distance required for the group of body-worn accessories with similar operating and exposure characteristics.

Devices that are designed to operate on the body of users using lanyards and straps or without requiring additional body-worn accessories must be tested for SAR compliance using a conservative minimum test separation distance $\leq 5\text{mm}$ to support compliance.

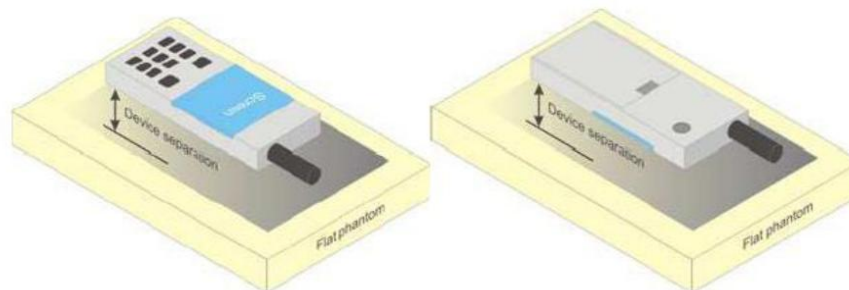

Picture 4 Test positions for body-worn devices



9. Measurement Procedures

The measurement procedures are as follows:

- (a) Use base station simulator (if applicable) or engineering software to transmit RF power continuously (continuous Tx) in the middle channel.
- (b) Keep EUT to radiate maximum output power or 100% duty factor (if applicable)
- (c) Measure output power through RF cable and power meter.
- (d) Place the EUT in the positions as setup photos demonstrates.
- (e) Set scan area, grid size and other setting on the DASY software.
- (f) Measure SAR transmitting at the middle channel for all applicable exposure positions.
- (g) Identify the exposure position and device configuration resulting the highest SAR
- (h) Measure SAR at the lowest and highest channels at the worst exposure position and device configuration if applicable.

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

9.1. Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values from the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g



9.2. Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

9.3. Area Scan Procedures

The area scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum found in the scanned area, within a range of the global maximum. The range (in dB) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan), if only one zoom scan follows the area scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of zoom scans has to be increased accordingly.

Area scan parameters extracted from FCC KDB 865664 D01 SAR measurement 100 MHz to 6 GHz.

	≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	$5 \pm 1 \text{ mm}$	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5 \text{ mm}$
Maximum probe angle from probe axis to phantom surface normal at the measurement location	$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
Maximum area scan spatial resolution: $\Delta x_{\text{Area}}, \Delta y_{\text{Area}}$	$\leq 2 \text{ GHz}: \leq 15 \text{ mm}$ $2 - 3 \text{ GHz}: \leq 12 \text{ mm}$	$3 - 4 \text{ GHz}: \leq 12 \text{ mm}$ $4 - 6 \text{ GHz}: \leq 10 \text{ mm}$
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be ≤ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	



9.4. Zoom Scan Procedures

Zoom scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 gram and 10gram of simulated tissue. The zoom scan measures points (refer to table below) within a cube whose base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the zoom scan evaluates the averaged SAR for 1 gram and 10 gram and displays these values next to the job's label.

Zoom scan parameters extracted from FCC KDB 865664 D01 SAR measurement 100 MHz to 6 GHz.

			≤ 3 GHz	> 3 GHz
Maximum zoom scan spatial resolution: $\Delta x_{Zoom}, \Delta y_{Zoom}$			≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm *	3 – 4 GHz: ≤ 5 mm * 4 – 6 GHz: ≤ 4 mm *
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{Zoom}(n)$		≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm
	graded grid	$\Delta z_{Zoom}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		$\Delta z_{Zoom}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{Zoom}(n-1)$	
Minimum zoom scan volume	x, y, z		≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.				
* When zoom scan is required and the <u>reported</u> SAR from the <i>area scan based 1-g SAR estimation</i> procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				



9.5. Volume Scan Procedures

The volume scan is used for assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing. When all volume scan were completed, the software, SEMCAD postprocessor can combine and subsequently superpose these measurement data to calculating the multiband SAR.

9.6. Power Drift Monitoring

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In DASY measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drift more than 5%, the SAR will be retested.



10. Conducted Power

<GSM Conducted power>

Band GSM850	Burst Average Power (dBm)				Frame-Average Power (dBm)			
TX Channel	Tune-up	128	190	251	128	190	251	Tune-up
Frequency (MHz)	power	824.2	836.6	848.8	824.2	836.6	848.6	power
GSM (GMSK, 1 Tx slot)	34.00	33.96	33.52	33.18	24.93	24.49	24.15	25.00
GPRS (GMSK, 1 Tx slot)	34.00	33.92	33.52	33.20	24.89	24.49	24.17	25.00
GPRS (GMSK, 2 Tx slots)	34.00	33.73	33.36	33.04	27.71	27.34	27.02	28.00
GPRS (GMSK, 3 Tx slots)	33.00	32.55	32.28	31.93	28.29	28.02	27.67	28.50
GPRS (GMSK, 4 Tx slots)	32.00	31.63	31.47	31.11	28.62	28.46	28.10	29.00
EGPRS (8PSK, 1 Tx slot)	28.00	27.62	27.49	27.27	18.59	18.46	18.24	19.00
EGPRS (8PSK, 2 Tx slots)	28.00	27.49	27.38	27.19	21.47	21.36	21.17	21.50
EGPRS (8PSK, 3 Tx slots)	26.00	25.82	25.83	25.69	21.56	21.57	21.43	22.00
EGPRS (8PSK, 4 Tx slots)	25.00	24.73	24.81	24.55	21.72	21.80	21.54	22.00
Band PCS1900	Burst Average Power (dBm)				Frame-Average Power (dBm)			
TX Channel	Tune-up	512	661	810	512	661	810	Tune-up
Frequency (MHz)	power	1850.2	1880.0	1909.8	1850.2	1880.0	1909.8	power
GSM (GMSK, 1 Tx slot)	31.00	30.90	30.85	30.95	21.87	21.82	21.92	22.00
GPRS (GMSK, 1 Tx slot)	32.00	31.60	31.41	31.58	22.57	22.38	22.55	23.00
GPRS (GMSK, 2 Tx slots)	31.50	31.17	30.91	31.06	25.15	24.89	25.04	25.50
GPRS (GMSK, 3 Tx slots)	30.00	29.95	29.58	29.68	25.69	25.32	25.42	26.00
GPRS (GMSK, 4 Tx slots)	29.50	29.12	28.69	28.76	26.11	25.68	25.75	26.50
EGPRS (8PSK, 1 Tx slot)	27.00	26.57	26.16	25.45	17.54	17.13	16.42	18.00
EGPRS (8PSK, 2 Tx slots)	26.00	25.56	25.10	24.40	19.54	19.08	18.38	20.00
EGPRS (8PSK, 3 Tx slots)	24.00	23.62	23.12	22.41	19.36	18.86	18.15	19.50
EGPRS (8PSK, 4 Tx slots)	23.00	22.57	22.11	21.36	19.56	19.10	18.35	20.00

Remark: The frame-averaged power is linearly scaled the maximum burst averaged power over 8 time slots.

The calculated method are shown as below:

Frame-averaged power = Maximum burst averaged power (1 Tx Slot) – 9.03 dB

Frame-averaged power = Maximum burst averaged power (2 Tx Slots) – 6.02 dB

Frame-averaged power = Maximum burst averaged power (3 Tx Slots) - 4.26 dB

Frame-averaged power = Maximum burst averaged power (4 Tx Slots) – 3.01 dB

Note:

1. Per KDB 447498 D01, the maximum output power channel is used for SAR testing and for further SAR test reduction

For Hotspot mode SAR testing, GPRS should be evaluated, therefore the EUT was set in GPRS 4 Tx slots and

GPRS 4 Tx slots for GSM850 and PCS1900 due to its highest frame-average power.



<WCDMA Conducted Power>

The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification. A summary of these settings are illustrated below:

HSDPA Setup Configuration:

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting:
 - i. Set Gain Factors (β_c and β_d) and parameters were set according to each
 - ii. Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
 - iii. Set RMC 12.2Kbps + HSDPA mode.
 - iv. Set Cell Power = -86 dBm
 - v. Set HS-DSCH Configuration Type to FRC (H-set 1, QPSK)
 - vi. Select HSDPA Uplink Parameters
 - vii. Set Delta ACK, Delta NACK and Delta CQI = 8
 - viii. Set Ack-Nack Repetition Factor to 3
 - ix. Set CQI Feedback Cycle (k) to 4 ms
 - x. Set CQI Repetition Factor to 2
 - xi. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

Table C.10.1.4: β values for transmitter characteristics tests with HS-DPCCH

Sub-test	β_c	β_d	β_d (SF)	β_d/β_d	β_{hs} (Note 1, Note 2)	CM (dB) (Note 3)	MPR (dB) (Note 3)
1	2/15	15/15	64	2/15	4/15	0.0	0.0
2	12/15 (Note 4)	15/15 (Note 4)	64	12/15 (Note 4)	24/15	1.0	0.0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5
Note 1: Δ_{ACK}, Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$. Note 2: For the HS-DPCCH power mask requirement test in clause 5.2C, 5.7A, and the Error Vector Magnitude (EVM) with HS-DPCCH test in clause 5.13.1A, and HSDPA EVM with phase discontinuity in clause 5.13.1AA, Δ_{ACK} and $\Delta_{NACK} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$, and $\Delta_{CQI} = 24/15$ with $\beta_{hs} = 24/15 * \beta_c$. Note 3: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCCH, DPCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases. Note 4: For subtest 2 the β_c/β_d ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 11/15$ and $\beta_d = 15/15$.							

Setup Configuration

HSUPA Setup Configuration:

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting * :
 - i. Call Configs = 5.2B, 5.9B, 5.10B, and 5.13.2B with QPSK
 - ii. Set the Gain Factors (β_c and β_d) and parameters (AG Index) were set according to each specific sub-test in the following table, C11.1.3, quoted from the TS 34.121
 - iii. Set Cell Power = -86 dBm
 - iv. Set Channel Type = 12.2k + HSPA
 - v. Set UE Target Power
 - vi. Power Ctrl Mode= Alternating bits
 - vii. Set and observe the E-TFCI
 - viii. Confirm that E-TFCI is equal to the target E-TFCI of 75 for sub-test 1, and other subtest's E-TFCI
- d. The transmitted maximum output power was recorded.

Table C.11.1.3: β values for transmitter characteristics tests with HS-DPCCH and E-DCH

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{HS} (Note 1)	β_{ec}	β_{ed} (Note 5) (Note 6)	β_{ed} (SF)	β_{ed} (Codes)	CM (dB) (Note 2)	MPR (dB) (Note 2)	AG Index (Note 6)	E-TFCI
1	11/15 (Note 3)	15/15 (Note 3)	64	11/15 (Note 3)	22/15	209/25	1309/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	β_{ed1} : 47/15 β_{ed2} : 47/15	4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15 (Note 4)	15/15 (Note 4)	64	15/15 (Note 4)	30/15	24/15	134/15	4	1	1.0	0.0	21	81
Note 1: Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{HS} = 30/15 * \beta_c$. Note 2: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{HS}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference. Note 3: For subtest 1 the β_c/β_d ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 10/15$ and $\beta_d = 15/15$. Note 4: For subtest 5 the β_c/β_d ratio of 15/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 14/15$ and $\beta_d = 15/15$. Note 5: In case of testing by UE using E-DPDCH Physical Layer category 1, Sub-test 3 is omitted according to TS25.306 Table 5.1g. Note 6: β_{ed} can not be set directly, it is set by Absolute Grant Value.													

Setup Configuration

<WCDMA Conducted Power>

WCDMA	Band II (dBm)				Band V (dBm)			
TX Channel	Tune-up	9262	9400	9538	Tune-up	4132	4183	4233
Frequency (MHz)	power	1852.4	1880.0	1907.6	power	826.4	836.6	846.6
RMC 12.2Kbps	22.50	21.78	21.92	22.20	23.00	22.86	22.59	22.75
HSDPA Subtest-1	21.50	20.77	20.96	21.11	22.00	21.53	21.21	21.77
HSDPA Subtest-2	21.00	20.30	20.42	20.67	21.50	21.42	20.73	21.19
HSDPA Subtest-3	21.00	20.31	20.48	20.72	21.50	21.36	21.07	21.14
HSDPA Subtest-4	21.00	20.31	20.43	20.66	21.50	21.45	21.17	21.26
HSUPA Subtest-1	19.50	18.96	19.09	19.41	20.50	19.42	19.19	20.04
HSUPA Subtest-2	19.50	18.96	19.05	19.28	20.50	19.84	19.59	20.08
HSUPA Subtest-3	20.50	19.90	20.05	20.23	21.50	20.88	20.61	21.11
HSUPA Subtest-4	19.00	18.45	18.60	18.89	20.00	19.35	19.17	19.61
HSUPA Subtest-5	21.50	21.30	21.07	21.27	22.50	22.10	21.64	22.15

General Note

- 1.Per KDB 941225 D01 v02, RMC 12.2kbps setting is used to evaluate SAR. If AMR 12.2kbps power is < 0.25dB higher than RMC 12.2kbps, SAR tests with AMR 12.2kbps can be excluded.
- 2.By design, AMR and HSDPA/HSUPA RF power will not be larger than RMC 12.2kbps, detailed information is included in Tune-up Procure exhibit.
- 3.It is expected by the manufacturer that MPR for some HSDPA/HSUPA subtests may differ from the specification of 3GPP, according to the chipset implementation in this model. The implementation and expected deviation are detailed in tune-up procedure exhibit.



<LTE Conducted Power>

Condition	Band	Channel Bandwidth	Channel	RB Configure	Result (dBm)		Tune-Up	
					QPSK	16QAM	QPSK	16QAM
NTNV	Band5	1.4MHz	20407	1RB#0	21.98	21.03	21.5±1.0	20.5±1.0
NTNV	Band5	1.4MHz	20407	1RB#2	22.02	21.13	21.5±1.0	20.5±1.0
NTNV	Band5	1.4MHz	20407	1RB#5	21.96	21.01	21.5±1.0	20.5±1.0
NTNV	Band5	1.4MHz	20407	3RB#0	22.01	20.87	21.5±1.0	20.5±1.0
NTNV	Band5	1.4MHz	20407	3RB#1	21.99	20.89	21.5±1.0	20.5±1.0
NTNV	Band5	1.4MHz	20407	3RB#3	21.97	20.86	21.5±1.0	20.5±1.0
NTNV	Band5	1.4MHz	20407	6RB#0	20.99	20.06	21.5±1.0	20.5±1.0
NTNV	Band5	1.4MHz	20525	1RB#0	21.58	20.61	21.5±1.0	20.5±1.0
NTNV	Band5	1.4MHz	20525	1RB#2	21.53	20.61	21.5±1.0	20.5±1.0
NTNV	Band5	1.4MHz	20525	1RB#5	21.53	20.58	21.5±1.0	20.5±1.0
NTNV	Band5	1.4MHz	20525	3RB#0	21.57	20.43	21.5±1.0	20.5±1.0
NTNV	Band5	1.4MHz	20525	3RB#1	21.56	20.42	21.5±1.0	20.5±1.0
NTNV	Band5	1.4MHz	20525	3RB#3	21.54	20.38	21.5±1.0	20.5±1.0
NTNV	Band5	1.4MHz	20525	6RB#0	20.58	19.63	21.5±1.0	20.5±1.0
NTNV	Band5	1.4MHz	20643	1RB#0	21.65	20.72	21.5±1.0	20.5±1.0
NTNV	Band5	1.4MHz	20643	1RB#2	21.65	20.77	21.5±1.0	20.5±1.0
NTNV	Band5	1.4MHz	20643	1RB#5	21.67	20.71	21.5±1.0	20.5±1.0
NTNV	Band5	1.4MHz	20643	3RB#0	21.68	20.55	21.5±1.0	20.5±1.0
NTNV	Band5	1.4MHz	20643	3RB#1	21.69	20.55	21.5±1.0	20.5±1.0
NTNV	Band5	1.4MHz	20643	3RB#3	21.65	20.51	21.5±1.0	20.5±1.0
NTNV	Band5	1.4MHz	20643	6RB#0	20.71	19.77	21.5±1.0	20.5±1.0
NTNV	Band5	3MHz	20415	1RB#0	21.92	21.06	21.5±1.0	20.5±1.0
NTNV	Band5	3MHz	20415	1RB#8	21.96	21.09	21.5±1.0	20.5±1.0
NTNV	Band5	3MHz	20415	1RB#14	21.89	21.03	21.5±1.0	20.5±1.0
NTNV	Band5	3MHz	20415	8RB#0	21.06	20.10	21.5±1.0	20.5±1.0
NTNV	Band5	3MHz	20415	8RB#4	21.05	20.10	21.5±1.0	20.5±1.0
NTNV	Band5	3MHz	20415	8RB#7	21.02	20.09	21.5±1.0	20.5±1.0
NTNV	Band5	3MHz	20415	15RB#0	20.99	20.04	21.5±1.0	20.5±1.0
NTNV	Band5	3MHz	20525	1RB#0	21.58	20.72	21.5±1.0	20.5±1.0
NTNV	Band5	3MHz	20525	1RB#8	21.56	20.68	21.5±1.0	20.5±1.0
NTNV	Band5	3MHz	20525	1RB#14	21.48	20.60	21.5±1.0	20.5±1.0
NTNV	Band5	3MHz	20525	8RB#0	20.66	19.72	21.5±1.0	20.5±1.0
NTNV	Band5	3MHz	20525	8RB#4	20.65	19.72	21.5±1.0	20.5±1.0
NTNV	Band5	3MHz	20525	8RB#7	20.62	19.67	21.5±1.0	20.5±1.0
NTNV	Band5	3MHz	20525	15RB#0	20.61	19.61	21.5±1.0	20.5±1.0



Report No.:18220WC40091007

FCC ID:2BGA8-KING9000

Page 34 of 158

NTNV	Band5	3MHz	20635	1RB#0	21.66	20.75	21.5±1.0	20.5±1.0
NTNV	Band5	3MHz	20635	1RB#8	21.70	20.81	21.5±1.0	20.5±1.0
NTNV	Band5	3MHz	20635	1RB#14	21.71	20.76	21.5±1.0	20.5±1.0
NTNV	Band5	3MHz	20635	8RB#0	20.71	19.73	21.5±1.0	20.5±1.0
NTNV	Band5	3MHz	20635	8RB#4	20.70	19.74	21.5±1.0	20.5±1.0
NTNV	Band5	3MHz	20635	8RB#7	20.74	19.78	21.5±1.0	20.5±1.0
NTNV	Band5	3MHz	20635	15RB#0	20.69	19.66	21.5±1.0	20.5±1.0
NTNV	Band5	5MHz	20425	1RB#0	22.08	21.03	21.5±1.0	20.5±1.0
NTNV	Band5	5MHz	20425	1RB#12	22.05	21.03	21.5±1.0	20.5±1.0
NTNV	Band5	5MHz	20425	1RB#24	21.94	20.94	21.5±1.0	20.5±1.0
NTNV	Band5	5MHz	20425	12RB#0	21.05	20.09	21.5±1.0	20.5±1.0
NTNV	Band5	5MHz	20425	12RB#6	21.05	20.07	21.5±1.0	20.5±1.0
NTNV	Band5	5MHz	20425	12RB#13	20.97	20.02	21.5±1.0	20.5±1.0
NTNV	Band5	5MHz	20425	25RB#0	20.97	20.01	21.5±1.0	20.5±1.0
NTNV	Band5	5MHz	20525	1RB#0	21.80	20.76	21.5±1.0	20.5±1.0
NTNV	Band5	5MHz	20525	1RB#12	21.70	20.65	21.5±1.0	20.5±1.0
NTNV	Band5	5MHz	20525	1RB#24	21.62	20.59	21.5±1.0	20.5±1.0
NTNV	Band5	5MHz	20525	12RB#0	20.70	19.75	21.5±1.0	20.5±1.0
NTNV	Band5	5MHz	20525	12RB#6	20.71	19.74	21.5±1.0	20.5±1.0
NTNV	Band5	5MHz	20525	12RB#13	20.66	19.68	21.5±1.0	20.5±1.0
NTNV	Band5	5MHz	20525	25RB#0	20.62	19.66	21.5±1.0	20.5±1.0
NTNV	Band5	5MHz	20625	1RB#0	21.73	20.89	21.5±1.0	20.5±1.0
NTNV	Band5	5MHz	20625	1RB#12	21.79	20.96	21.5±1.0	20.5±1.0
NTNV	Band5	5MHz	20625	1RB#24	21.80	20.96	21.5±1.0	20.5±1.0
NTNV	Band5	5MHz	20625	12RB#0	20.71	19.80	21.5±1.0	20.5±1.0
NTNV	Band5	5MHz	20625	12RB#6	20.71	19.80	21.5±1.0	20.5±1.0
NTNV	Band5	5MHz	20625	12RB#13	20.77	19.84	21.5±1.0	20.5±1.0
NTNV	Band5	5MHz	20625	25RB#0	20.71	19.72	21.5±1.0	20.5±1.0
NTNV	Band5	10MHz	20450	1RB#0	22.21	21.31	21.5±1.0	20.5±1.0
NTNV	Band5	10MHz	20450	1RB#24	22.08	21.24	21.5±1.0	20.5±1.0
NTNV	Band5	10MHz	20450	1RB#49	21.92	21.03	21.5±1.0	20.5±1.0
NTNV	Band5	10MHz	20450	25RB#0	21.11	20.18	21.5±1.0	20.5±1.0
NTNV	Band5	10MHz	20450	25RB#12	21.13	20.20	21.5±1.0	20.5±1.0
NTNV	Band5	10MHz	20450	25RB#25	21.02	20.06	21.5±1.0	20.5±1.0
NTNV	Band5	10MHz	20450	50RB#0	21.07	20.12	21.5±1.0	20.5±1.0
NTNV	Band5	10MHz	20525	1RB#0	21.97	20.87	21.5±1.0	20.5±1.0
NTNV	Band5	10MHz	20525	1RB#24	21.85	20.73	21.5±1.0	20.5±1.0
NTNV	Band5	10MHz	20525	1RB#49	21.80	20.67	21.5±1.0	20.5±1.0
NTNV	Band5	10MHz	20525	25RB#0	20.88	19.94	21.5±1.0	20.5±1.0



Report No.:18220WC40091007

FCC ID:2BGA8-KING9000

Page 35 of 158

NTNV	Band5	10MHz	20525	25RB#12	20.89	19.95	21.5±1.0	20.5±1.0
NTNV	Band5	10MHz	20525	25RB#25	20.79	19.85	21.5±1.0	20.5±1.0
NTNV	Band5	10MHz	20525	50RB#0	20.85	19.88	21.5±1.0	20.5±1.0
NTNV	Band5	10MHz	20600	1RB#0	21.73	20.87	21.5±1.0	20.5±1.0
NTNV	Band5	10MHz	20600	1RB#24	21.82	20.99	21.5±1.0	20.5±1.0
NTNV	Band5	10MHz	20600	1RB#49	21.91	21.03	21.5±1.0	20.5±1.0
NTNV	Band5	10MHz	20600	25RB#0	20.78	19.81	21.5±1.0	20.5±1.0
NTNV	Band5	10MHz	20600	25RB#12	20.78	19.82	21.5±1.0	20.5±1.0
NTNV	Band5	10MHz	20600	25RB#25	20.87	19.93	21.5±1.0	20.5±1.0
NTNV	Band5	10MHz	20600	50RB#0	20.84	19.86	21.5±1.0	20.5±1.0

Condition	Band	Channel Bandwidth	Channel	RB Configure	Result (dBm)		Tune-Up	
					QPSK	16QAM	QPSK	16QAM
NTNV	Band7	5MHz	20775	1RB#0	19.29	18.36	19.5±1.0	18.0±1.0
NTNV	Band7	5MHz	20775	1RB#12	18.75	17.77	19.5±1.0	18.0±1.0
NTNV	Band7	5MHz	20775	1RB#24	18.99	18.12	19.5±1.0	18.0±1.0
NTNV	Band7	5MHz	20775	12RB#0	18.86	17.90	19.5±1.0	18.0±1.0
NTNV	Band7	5MHz	20775	12RB#6	18.87	17.90	19.5±1.0	18.0±1.0
NTNV	Band7	5MHz	20775	12RB#13	18.83	17.51	19.5±1.0	18.0±1.0
NTNV	Band7	5MHz	20775	25RB#0	19.38	17.87	19.5±1.0	18.0±1.0
NTNV	Band7	5MHz	21100	1RB#0	22.10	21.12	21.5±1.0	19.5±1.0
NTNV	Band7	5MHz	21100	1RB#12	21.42	20.46	20.5±1.0	19.5±1.0
NTNV	Band7	5MHz	21100	1RB#24	21.75	20.84	21.0±1.0	19.5±1.0
NTNV	Band7	5MHz	21100	12RB#0	20.36	19.18	19.5±1.0	19.5±1.0
NTNV	Band7	5MHz	21100	12RB#6	20.22	19.20	19.5±1.0	19.5±1.0
NTNV	Band7	5MHz	21100	12RB#13	20.20	19.28	19.5±1.0	19.5±1.0
NTNV	Band7	5MHz	21100	25RB#0	20.23	19.21	19.5±1.0	19.5±1.0
NTNV	Band7	5MHz	21425	1RB#0	21.46	20.63	20.5±1.0	19.5±1.0
NTNV	Band7	5MHz	21425	1RB#12	20.70	19.87	20.5±1.0	19.5±1.0
NTNV	Band7	5MHz	21425	1RB#24	20.86	20.04	20.5±1.0	19.5±1.0
NTNV	Band7	5MHz	21425	12RB#0	21.06	19.84	20.5±1.0	19.5±1.0
NTNV	Band7	5MHz	21425	12RB#6	20.77	19.83	20.5±1.0	19.5±1.0
NTNV	Band7	5MHz	21425	12RB#13	20.53	19.87	20.5±1.0	19.5±1.0
NTNV	Band7	5MHz	21425	25RB#0	20.73	19.77	20.5±1.0	19.5±1.0
NTNV	Band7	10MHz	20800	1RB#0	18.86	17.90	19.5±1.0	18.0±1.0
NTNV	Band7	10MHz	20800	1RB#24	18.69	17.78	19.5±1.0	18.0±1.0
NTNV	Band7	10MHz	20800	1RB#49	18.98	18.17	19.5±1.0	18.0±1.0
NTNV	Band7	10MHz	20800	25RB#0	18.63	17.83	19.5±1.0	18.0±1.0



Report No.:18220WC40091007

FCC ID:2BGA8-KING9000

Page 36 of 158

NTNV	Band7	10MHz	20800	25RB#12	18.76	17.73	19.5±1.0	18.0±1.0
NTNV	Band7	10MHz	20800	25RB#25	20.39	17.95	19.5±1.0	18.0±1.0
NTNV	Band7	10MHz	20800	50RB#0	18.75	17.89	19.5±1.0	18.0±1.0
NTNV	Band7	10MHz	21100	1RB#0	20.70	19.62	19.5±1.0	19.5±1.0
NTNV	Band7	10MHz	21100	1RB#24	20.15	19.13	19.5±1.0	19.5±1.0
NTNV	Band7	10MHz	21100	1RB#49	20.15	19.13	19.5±1.0	19.5±1.0
NTNV	Band7	10MHz	21100	25RB#0	20.48	19.15	19.5±1.0	19.5±1.0
NTNV	Band7	10MHz	21100	25RB#12	20.16	19.13	19.5±1.0	19.5±1.0
NTNV	Band7	10MHz	21100	25RB#25	19.98	19.34	19.5±1.0	19.5±1.0
NTNV	Band7	10MHz	21100	50RB#0	20.26	19.22	19.5±1.0	19.5±1.0
NTNV	Band7	10MHz	21400	1RB#0	21.36	20.55	20.5±1.0	19.5±1.0
NTNV	Band7	10MHz	21400	1RB#24	20.80	20.05	19.5±1.0	19.5±1.0
NTNV	Band7	10MHz	21400	1RB#49	20.16	19.39	19.5±1.0	19.5±1.0
NTNV	Band7	10MHz	21400	25RB#0	21.31	19.71	20.5±1.0	19.5±1.0
NTNV	Band7	10MHz	21400	25RB#12	20.74	19.70	20.5±1.0	19.5±1.0
NTNV	Band7	10MHz	21400	25RB#25	20.14	19.80	20.5±1.0	19.5±1.0
NTNV	Band7	10MHz	21400	50RB#0	20.73	19.75	20.5±1.0	19.5±1.0
NTNV	Band7	15MHz	20825	1RB#0	19.09	18.25	19.5±1.0	18.0±1.0
NTNV	Band7	15MHz	20825	1RB#38	18.96	18.15	19.5±1.0	19.5±1.0
NTNV	Band7	15MHz	20825	1RB#74	20.27	19.48	19.5±1.0	19.5±1.0
NTNV	Band7	15MHz	20825	38RB#0	17.89	17.90	18.5±1.0	18.0±1.0
NTNV	Band7	15MHz	20825	38RB#18	17.97	18.89	18.5±1.0	19.5±1.0
NTNV	Band7	15MHz	20825	38RB#37	20.52	20.46	20.5±1.0	19.5±1.0
NTNV	Band7	15MHz	20825	75RB#0	18.99	18.11	19.5±1.0	18.0±1.0
NTNV	Band7	15MHz	21100	1RB#0	20.53	19.49	20.5±1.0	19.5±1.0
NTNV	Band7	15MHz	21100	1RB#38	19.51	18.58	19.5±1.0	19.5±1.0
NTNV	Band7	15MHz	21100	1RB#74	19.79	18.72	19.5±1.0	19.5±1.0
NTNV	Band7	15MHz	21100	38RB#0	19.34	19.34	19.5±1.0	19.5±1.0
NTNV	Band7	15MHz	21100	38RB#18	18.48	18.47	19.0±1.0	18.0±1.0
NTNV	Band7	15MHz	21100	38RB#37	18.67	18.64	19.5±1.0	19.5±1.0
NTNV	Band7	15MHz	21100	75RB#0	20.33	19.36	19.5±1.0	19.5±1.0
NTNV	Band7	15MHz	21375	1RB#0	21.30	20.41	20.5±1.0	19.5±1.0
NTNV	Band7	15MHz	21375	1RB#38	20.70	19.89	20.5±1.0	19.5±1.0
NTNV	Band7	15MHz	21375	1RB#74	19.81	19.03	19.5±1.0	19.5±1.0
NTNV	Band7	15MHz	21375	38RB#0	20.38	20.36	19.5±1.0	19.5±1.0
NTNV	Band7	15MHz	21375	38RB#18	19.85	19.86	19.5±1.0	19.5±1.0
NTNV	Band7	15MHz	21375	38RB#37	19.00	19.00	19.5±1.0	19.5±1.0
NTNV	Band7	15MHz	21375	75RB#0	20.85	19.88	20.5±1.0	19.5±1.0
NTNV	Band7	20MHz	20850	1RB#0	18.36	17.40	19.0±1.0	18.0±1.0



Report No.:18220WC40091007

FCC ID:2BGA8-KING9000

Page 37 of 158

NTNV	Band7	20MHz	20850	1RB#49	19.10	18.25	19.5±1.0	18.0±1.0
NTNV	Band7	20MHz	20850	1RB#99	21.48	20.63	20.5±1.0	19.5±1.0
NTNV	Band7	20MHz	20850	50RB#0	16.92	17.24	17.5±1.0	18.0±1.0
NTNV	Band7	20MHz	20850	50RB#25	18.14	17.24	19.0±1.0	18.0±1.0
NTNV	Band7	20MHz	20850	50RB#50	19.83	17.81	19.5±1.0	18.0±1.0
NTNV	Band7	20MHz	20850	100RB#0	18.43	17.54	19.0±1.0	18.0±1.0
NTNV	Band7	20MHz	21100	1RB#0	20.03	19.14	19.5±1.0	19.0±1.0
NTNV	Band7	20MHz	21100	1RB#49	18.87	18.10	19.5±1.0	19.0±1.0
NTNV	Band7	20MHz	21100	1RB#99	19.37	18.44	19.5±1.0	19.0±1.0
NTNV	Band7	20MHz	21100	50RB#0	20.23	18.66	19.5±1.0	19.0±1.0
NTNV	Band7	20MHz	21100	50RB#25	19.65	18.69	19.5±1.0	19.0±1.0
NTNV	Band7	20MHz	21100	50RB#50	19.21	19.04	19.5±1.0	19.0±1.0
NTNV	Band7	20MHz	21100	100RB#0	19.74	18.83	19.5±1.0	19.0±1.0
NTNV	Band7	20MHz	21350	1RB#0	20.67	19.55	20.5±1.0	19.0±1.0
NTNV	Band7	20MHz	21350	1RB#49	20.64	19.86	20.5±1.0	19.0±1.0
NTNV	Band7	20MHz	21350	1RB#99	19.58	18.67	19.5±1.0	19.0±1.0
NTNV	Band7	20MHz	21350	50RB#0	20.56	18.82	20.5±1.0	19.0±1.0
NTNV	Band7	20MHz	21350	50RB#25	19.80	18.86	19.5±1.0	19.0±1.0
NTNV	Band7	20MHz	21350	50RB#50	19.50	18.92	19.5±1.0	19.0±1.0
NTNV	Band7	20MHz	21350	100RB#0	19.93	18.93	19.5±1.0	19.0±1.0

Condition	Band	Channel Bandwidth	Channel	RB Configure	Result (dBm)		Tune-Up	
					QPSK	16QAM	QPSK	16QAM
NTNV	Band38	5MHz	37775	1RB#0	22.77	22.19	22.0±1.0	22.0±1.0
NTNV	Band38	5MHz	37775	1RB#12	22.18	21.67	22.0±1.0	21.0±1.0
NTNV	Band38	5MHz	37775	1RB#24	22.33	21.79	22.0±1.0	21.0±1.0
NTNV	Band38	5MHz	37775	12RB#0	21.81	20.87	22.0±1.0	21.0±1.0
NTNV	Band38	5MHz	37775	12RB#6	21.79	20.85	22.0±1.0	21.0±1.0
NTNV	Band38	5MHz	37775	12RB#13	21.64	20.73	22.0±1.0	21.0±1.0
NTNV	Band38	5MHz	37775	25RB#0	21.68	20.73	22.0±1.0	21.0±1.0
NTNV	Band38	5MHz	38000	1RB#0	22.27	21.42	22.0±1.0	21.0±1.0
NTNV	Band38	5MHz	38000	1RB#12	21.77	21.08	22.0±1.0	21.0±1.0
NTNV	Band38	5MHz	38000	1RB#24	22.23	21.38	22.0±1.0	21.0±1.0
NTNV	Band38	5MHz	38000	12RB#0	21.33	20.40	22.0±1.0	21.0±1.0
NTNV	Band38	5MHz	38000	12RB#6	21.33	20.39	22.0±1.0	21.0±1.0
NTNV	Band38	5MHz	38000	12RB#13	21.37	20.42	22.0±1.0	21.0±1.0
NTNV	Band38	5MHz	38000	25RB#0	21.32	20.36	22.0±1.0	21.0±1.0
NTNV	Band38	5MHz	38225	1RB#0	22.18	21.45	22.0±1.0	21.0±1.0
NTNV	Band38	5MHz	38225	1RB#12	21.68	21.13	22.0±1.0	21.0±1.0



Report No.:18220WC40091007

FCC ID:2BGA8-KING9000

Page 38 of 158

NTNV	Band38	5MHz	38225	1RB#24	22.12	21.44	22.0±1.0	21.0±1.0
NTNV	Band38	5MHz	38225	12RB#0	21.05	20.01	22.0±1.0	21.0±1.0
NTNV	Band38	5MHz	38225	12RB#6	21.05	20.03	22.0±1.0	21.0±1.0
NTNV	Band38	5MHz	38225	12RB#13	21.12	20.13	22.0±1.0	21.0±1.0
NTNV	Band38	5MHz	38225	25RB#0	21.06	20.07	22.0±1.0	21.0±1.0
NTNV	Band38	10MHz	37800	1RB#0	22.29	21.61	22.0±1.0	21.0±1.0
NTNV	Band38	10MHz	37800	1RB#24	22.00	21.48	22.0±1.0	21.0±1.0
NTNV	Band38	10MHz	37800	1RB#49	21.74	21.18	22.0±1.0	21.0±1.0
NTNV	Band38	10MHz	37800	25RB#0	21.80	20.84	22.0±1.0	21.0±1.0
NTNV	Band38	10MHz	37800	25RB#12	21.81	20.84	22.0±1.0	21.0±1.0
NTNV	Band38	10MHz	37800	25RB#25	21.53	20.60	22.0±1.0	21.0±1.0
NTNV	Band38	10MHz	37800	50RB#0	21.68	20.67	22.0±1.0	21.0±1.0
NTNV	Band38	10MHz	38000	1RB#0	22.44	21.38	22.0±1.0	21.0±1.0
NTNV	Band38	10MHz	38000	1RB#24	22.41	21.40	22.0±1.0	21.0±1.0
NTNV	Band38	10MHz	38000	1RB#49	22.49	21.48	22.0±1.0	21.0±1.0
NTNV	Band38	10MHz	38000	25RB#0	21.86	20.98	22.0±1.0	21.0±1.0
NTNV	Band38	10MHz	38000	25RB#12	21.86	20.97	22.0±1.0	21.0±1.0
NTNV	Band38	10MHz	38000	25RB#25	21.95	21.07	22.0±1.0	21.0±1.0
NTNV	Band38	10MHz	38000	50RB#0	21.92	21.04	22.0±1.0	21.0±1.0
NTNV	Band38	10MHz	38200	1RB#0	22.21	21.26	22.0±1.0	21.0±1.0
NTNV	Band38	10MHz	38200	1RB#24	22.24	21.40	22.0±1.0	21.0±1.0
NTNV	Band38	10MHz	38200	1RB#49	22.34	21.43	22.0±1.0	21.0±1.0
NTNV	Band38	10MHz	38200	25RB#0	21.68	20.79	22.0±1.0	21.0±1.0
NTNV	Band38	10MHz	38200	25RB#12	21.68	20.78	22.0±1.0	21.0±1.0
NTNV	Band38	10MHz	38200	25RB#25	21.71	20.82	22.0±1.0	21.0±1.0
NTNV	Band38	10MHz	38200	50RB#0	21.70	20.78	22.0±1.0	21.0±1.0
NTNV	Band38	15MHz	37825	1RB#0	22.21	21.58	22.0±1.0	21.0±1.0
NTNV	Band38	15MHz	37825	1RB#38	21.77	21.20	22.0±1.0	21.0±1.0
NTNV	Band38	15MHz	37825	1RB#74	21.52	20.94	22.0±1.0	21.0±1.0
NTNV	Band38	15MHz	37825	38RB#0	21.34	21.34	22.0±1.0	21.0±1.0
NTNV	Band38	15MHz	37825	38RB#18	21.34	21.34	22.0±1.0	21.0±1.0
NTNV	Band38	15MHz	37825	38RB#37	21.32	21.34	22.0±1.0	21.0±1.0
NTNV	Band38	15MHz	37825	75RB#0	21.34	20.36	22.0±1.0	21.0±1.0
NTNV	Band38	15MHz	38000	1RB#0	22.57	21.50	22.0±1.0	21.0±1.0
NTNV	Band38	15MHz	38000	1RB#38	22.45	21.45	22.0±1.0	21.0±1.0
NTNV	Band38	15MHz	38000	1RB#74	22.74	21.61	22.0±1.0	21.0±1.0
NTNV	Band38	15MHz	38000	38RB#0	21.85	21.85	22.0±1.0	21.0±1.0
NTNV	Band38	15MHz	38000	38RB#18	21.84	21.84	22.0±1.0	21.0±1.0
NTNV	Band38	15MHz	38000	38RB#37	21.84	21.84	22.0±1.0	21.0±1.0



Report No.:18220WC40091007

FCC ID:2BGA8-KING9000

Page 39 of 158

NTNV	Band38	15MHz	38000	75RB#0	21.84	20.99	22.0±1.0	21.0±1.0
NTNV	Band38	15MHz	38175	1RB#0	22.23	21.33	22.0±1.0	21.0±1.0
NTNV	Band38	15MHz	38175	1RB#38	22.36	21.51	22.0±1.0	21.0±1.0
NTNV	Band38	15MHz	38175	1RB#74	22.58	21.74	22.0±1.0	21.0±1.0
NTNV	Band38	15MHz	38175	38RB#0	21.75	21.72	22.0±1.0	21.0±1.0
NTNV	Band38	15MHz	38175	38RB#18	21.73	21.73	22.0±1.0	21.0±1.0
NTNV	Band38	15MHz	38175	38RB#37	21.73	21.72	22.0±1.0	21.0±1.0
NTNV	Band38	15MHz	38175	75RB#0	21.72	20.82	22.0±1.0	21.0±1.0
NTNV	Band38	20MHz	37850	1RB#0	22.35	21.51	22.0±1.0	21.0±1.0
NTNV	Band38	20MHz	37850	1RB#49	21.73	21.01	22.0±1.0	21.0±1.0
NTNV	Band38	20MHz	37850	1RB#99	21.55	20.70	22.0±1.0	21.0±1.0
NTNV	Band38	20MHz	37850	50RB#0	21.52	20.65	22.0±1.0	21.0±1.0
NTNV	Band38	20MHz	37850	50RB#25	21.53	20.65	22.0±1.0	21.0±1.0
NTNV	Band38	20MHz	37850	50RB#50	21.10	20.15	22.0±1.0	21.0±1.0
NTNV	Band38	20MHz	37850	100RB#0	21.32	20.41	22.0±1.0	21.0±1.0
NTNV	Band38	20MHz	38000	1RB#0	22.49	21.23	22.0±1.0	21.0±1.0
NTNV	Band38	20MHz	38000	1RB#49	22.31	21.05	22.0±1.0	21.0±1.0
NTNV	Band38	20MHz	38000	1RB#99	22.70	21.45	22.0±1.0	21.0±1.0
NTNV	Band38	20MHz	38000	50RB#0	21.78	20.83	22.0±1.0	21.0±1.0
NTNV	Band38	20MHz	38000	50RB#25	21.78	20.83	22.0±1.0	21.0±1.0
NTNV	Band38	20MHz	38000	50RB#50	21.95	21.00	22.0±1.0	21.0±1.0
NTNV	Band38	20MHz	38000	100RB#0	21.86	20.88	22.0±1.0	21.0±1.0
NTNV	Band38	20MHz	38150	1RB#0	22.44	21.37	22.0±1.0	21.0±1.0
NTNV	Band38	20MHz	38150	1RB#49	22.70	21.59	22.0±1.0	21.0±1.0
NTNV	Band38	20MHz	38150	1RB#99	23.04	21.99	22.5±1.0	21.0±1.0
NTNV	Band38	20MHz	38150	50RB#0	21.90	20.89	22.0±1.0	21.0±1.0
NTNV	Band38	20MHz	38150	50RB#25	21.90	20.88	22.0±1.0	21.0±1.0
NTNV	Band38	20MHz	38150	50RB#50	22.25	21.24	22.0±1.0	21.0±1.0
NTNV	Band38	20MHz	38150	100RB#0	22.06	21.07	22.0±1.0	21.0±1.0

Condition	Band	Channel Bandwidth	Channel	RB Configure	Result (dBm)		Tune-Up	
					QPSK	16QAM	QPSK	16QAM
NTNV	Band41	5MHz	40065	1RB#0	21.91	21.21	21.0±1.0	20.5±1.0
NTNV	Band41	5MHz	40065	1RB#12	21.59	20.98	21.0±1.0	20.5±1.0
NTNV	Band41	5MHz	40065	1RB#24	22.00	21.34	21.5±1.0	20.5±1.0
NTNV	Band41	5MHz	40065	12RB#0	20.91	19.83	21.0±1.0	19.5±1.0
NTNV	Band41	5MHz	40065	12RB#6	20.90	19.82	21.0±1.0	19.5±1.0
NTNV	Band41	5MHz	40065	12RB#13	21.11	19.99	21.0±1.0	19.5±1.0
NTNV	Band41	5MHz	40065	25RB#0	21.00	19.87	21.0±1.0	19.5±1.0



Report No.:18220WC40091007

FCC ID:2BGA8-KING9000

Page 40 of 158

NTNV	Band41	5MHz	40590	1RB#0	21.76	21.09	21.0±1.0	20.5±1.0
NTNV	Band41	5MHz	40590	1RB#12	21.44	20.72	21.0±1.0	20.5±1.0
NTNV	Band41	5MHz	40590	1RB#24	21.75	21.16	21.0±1.0	20.5±1.0
NTNV	Band41	5MHz	40590	12RB#0	20.95	19.86	21.0±1.0	19.5±1.0
NTNV	Band41	5MHz	40590	12RB#6	20.95	19.86	21.0±1.0	19.5±1.0
NTNV	Band41	5MHz	40590	12RB#13	21.00	19.95	21.0±1.0	19.5±1.0
NTNV	Band41	5MHz	40590	25RB#0	20.96	19.91	21.0±1.0	19.5±1.0
NTNV	Band41	5MHz	41215	1RB#0	21.12	20.41	21.0±1.0	20.5±1.0
NTNV	Band41	5MHz	41215	1RB#12	20.60	19.93	21.0±1.0	20.5±1.0
NTNV	Band41	5MHz	41215	1RB#24	20.97	20.32	21.0±1.0	20.5±1.0
NTNV	Band41	5MHz	41215	12RB#0	20.11	19.14	21.0±1.0	19.5±1.0
NTNV	Band41	5MHz	41215	12RB#6	20.11	19.14	21.0±1.0	19.5±1.0
NTNV	Band41	5MHz	41215	12RB#13	20.12	19.16	21.0±1.0	19.5±1.0
NTNV	Band41	5MHz	41215	25RB#0	20.05	19.10	21.0±1.0	19.5±1.0
NTNV	Band41	10MHz	40090	1RB#0	21.46	20.73	21.0±1.0	20.5±1.0
NTNV	Band41	10MHz	40090	1RB#24	21.61	20.94	21.0±1.0	20.5±1.0
NTNV	Band41	10MHz	40090	1RB#49	21.56	20.76	21.0±1.0	20.5±1.0
NTNV	Band41	10MHz	40090	25RB#0	21.11	20.18	21.0±1.0	20.5±1.0
NTNV	Band41	10MHz	40090	25RB#12	21.10	20.18	21.0±1.0	20.5±1.0
NTNV	Band41	10MHz	40090	25RB#25	21.21	20.37	21.0±1.0	20.5±1.0
NTNV	Band41	10MHz	40090	50RB#0	21.15	20.27	21.0±1.0	20.5±1.0
NTNV	Band41	10MHz	40590	1RB#0	21.18	20.11	21.0±1.0	20.5±1.0
NTNV	Band41	10MHz	40590	1RB#24	21.16	20.05	21.0±1.0	20.5±1.0
NTNV	Band41	10MHz	40590	1RB#49	21.06	20.05	21.0±1.0	20.5±1.0
NTNV	Band41	10MHz	40590	25RB#0	20.71	19.70	21.0±1.0	19.5±1.0
NTNV	Band41	10MHz	40590	25RB#12	20.71	19.70	21.0±1.0	19.5±1.0
NTNV	Band41	10MHz	40590	25RB#25	20.73	19.71	21.0±1.0	19.5±1.0
NTNV	Band41	10MHz	40590	50RB#0	20.72	19.72	21.0±1.0	19.5±1.0
NTNV	Band41	10MHz	41190	1RB#0	21.15	20.24	21.0±1.0	20.5±1.0
NTNV	Band41	10MHz	41190	1RB#24	20.95	20.14	21.5±1.0	20.5±1.0
NTNV	Band41	10MHz	41190	1RB#49	20.78	19.93	21.0±1.0	19.5±1.0
NTNV	Band41	10MHz	41190	25RB#0	20.47	19.62	21.0±1.0	19.5±1.0
NTNV	Band41	10MHz	41190	25RB#12	20.47	19.62	21.0±1.0	19.5±1.0
NTNV	Band41	10MHz	41190	25RB#25	20.31	19.49	21.0±1.0	19.5±1.0
NTNV	Band41	10MHz	41190	50RB#0	20.37	19.53	21.0±1.0	19.5±1.0
NTNV	Band41	15MHz	40115	1RB#0	22.02	21.31	21.5±1.0	20.5±1.0
NTNV	Band41	15MHz	40115	1RB#38	22.11	21.46	21.5±1.0	20.5±1.0
NTNV	Band41	15MHz	40115	1RB#74	22.46	21.76	21.5±1.0	21.0±1.0
NTNV	Band41	15MHz	40115	38RB#0	21.56	21.56	21.0±1.0	21.0±1.0



Report No.:18220WC40091007

FCC ID:2BGA8-KING9000

Page 41 of 158

NTNV	Band41	15MHz	40115	38RB#18	21.56	21.56	21.0±1.0	21.0±1.0
NTNV	Band41	15MHz	40115	38RB#37	21.56	21.56	21.0±1.0	21.0±1.0
NTNV	Band41	15MHz	40115	75RB#0	21.56	20.66	21.0±1.0	20.5±1.0
NTNV	Band41	15MHz	40590	1RB#0	21.88	20.90	21.0±1.0	20.5±1.0
NTNV	Band41	15MHz	40590	1RB#38	21.71	20.66	21.0±1.0	20.5±1.0
NTNV	Band41	15MHz	40590	1RB#74	21.79	20.80	21.0±1.0	20.5±1.0
NTNV	Band41	15MHz	40590	38RB#0	21.00	21.00	21.0±1.0	20.5±1.0
NTNV	Band41	15MHz	40590	38RB#18	21.00	21.00	21.0±1.0	20.5±1.0
NTNV	Band41	15MHz	40590	38RB#37	21.00	21.00	21.0±1.0	20.5±1.0
NTNV	Band41	15MHz	40590	75RB#0	21.00	19.96	21.0±1.0	20.0±1.0
NTNV	Band41	15MHz	41165	1RB#0	21.69	20.75	21.0±1.0	20.5±1.0
NTNV	Band41	15MHz	41165	1RB#38	21.51	20.65	21.0±1.0	20.5±1.0
NTNV	Band41	15MHz	41165	1RB#74	21.43	20.53	21.0±1.0	20.5±1.0
NTNV	Band41	15MHz	41165	38RB#0	20.85	20.83	21.0±1.0	20.5±1.0
NTNV	Band41	15MHz	41165	38RB#18	20.84	20.83	21.0±1.0	20.5±1.0
NTNV	Band41	15MHz	41165	38RB#37	20.83	20.83	21.0±1.0	20.5±1.0
NTNV	Band41	15MHz	41165	75RB#0	20.82	19.84	21.0±1.0	20.5±1.0
NTNV	Band41	20MHz	40140	1RB#0	22.15	21.24	21.0±1.0	20.5±1.0
NTNV	Band41	20MHz	40140	1RB#49	22.06	21.33	21.0±1.0	20.5±1.0
NTNV	Band41	20MHz	40140	1RB#99	22.79	21.93	22.0±1.0	20.5±1.0
NTNV	Band41	20MHz	40140	50RB#0	21.44	20.54	21.0±1.0	20.5±1.0
NTNV	Band41	20MHz	40140	50RB#25	21.45	20.54	21.0±1.0	20.5±1.0
NTNV	Band41	20MHz	40140	50RB#50	21.82	20.88	21.0±1.0	20.5±1.0
NTNV	Band41	20MHz	40140	100RB#0	21.60	20.67	21.0±1.0	20.5±1.0
NTNV	Band41	20MHz	40590	1RB#0	21.96	20.66	21.0±1.0	20.5±1.0
NTNV	Band41	20MHz	40590	1RB#49	21.57	20.30	21.0±1.0	20.5±1.0
NTNV	Band41	20MHz	40590	1RB#99	21.81	20.47	21.0±1.0	20.5±1.0
NTNV	Band41	20MHz	40590	50RB#0	21.09	20.08	21.0±1.0	20.0±1.0
NTNV	Band41	20MHz	40590	50RB#25	21.10	20.08	21.0±1.0	20.0±1.0
NTNV	Band41	20MHz	40590	50RB#50	21.02	20.00	21.0±1.0	20.0±1.0
NTNV	Band41	20MHz	40590	100RB#0	21.05	20.02	21.0±1.0	20.0±1.0
NTNV	Band41	20MHz	41140	1RB#0	21.98	20.88	21.0±1.0	20.5±1.0
NTNV	Band41	20MHz	41140	1RB#49	21.73	20.69	21.0±1.0	20.5±1.0
NTNV	Band41	20MHz	41140	1RB#99	21.63	20.54	21.0±1.0	20.5±1.0
NTNV	Band41	20MHz	41140	50RB#0	20.98	19.96	21.0±1.0	20.5±1.0
NTNV	Band41	20MHz	41140	50RB#25	20.99	19.96	21.0±1.0	20.5±1.0
NTNV	Band41	20MHz	41140	50RB#50	20.93	19.85	21.0±1.0	20.5±1.0
NTNV	Band41	20MHz	41140	100RB#0	20.91	19.94	21.0±1.0	20.5±1.0



Mode	Channel	Frequency (MHz)	Conducted Average Output Power(dBm)	Tune-up power(dBm)
802.11b	1	2412	14.84	15.00
	6	2437	14.79	15.00
	11	2462	14.93	15.00
802.11g	1	2412	14.96	15.00
	6	2437	14.96	15.00
	11	2462	14.86	15.00
802.11n(HT20)	1	2412	15.04	15.50
	6	2437	14.92	15.50
	11	2462	15.24	15.50
802.11n(HT40)	3	2422	15.14	16.00
	6	2437	15.57	16.00
	9	2452	15.54	16.00

Note:

1. Per KDB 447498 D01, the 1-g SAR test exclusion thresholds for 100 MHz to 6 GHz at *test separation distances* ≤ 50 mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$ for 1-g SAR, where

$f(\text{GHz})$ is the RF channel transmit frequency in GHz

Power and distance are rounded to the nearest mW and mm before calculation

The result is rounded to one decimal place for comparison

2. Base on the result of note1, RF exposure evaluation of 2.4G WIFI mode is required.

3. Per KDB 248227 D01, choose the highest output power channel to test SAR and determine further SAR exclusion.

4. Per KDB 248227 D01, In the 2.4 GHz band, separate SAR procedures are applied to DSSS and OFDM configurations to simplify DSSS test requirements. SAR is not required for the following 2.4 GHz OFDM conditions:

1) When KDB Publication 447498 SAR test exclusion applies to the OFDM configuration.

2) When the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.



<WLAN 5GHz Conducted Power>

Band 1:

Mode	Channel Frequency (MHz)	Average Power output (dBm)	Tune-up power(dBm)
802.11a	5180	15.18	15.50
	5200	15.11	15.50
	5240	15.16	15.50
802.11n (HT20)	5180	14.79	15.00
	5200	14.49	15.00
	5240	14.48	15.00
802.11n (HT40)	5190	15.97	16.50
	5230	15.68	16.50

Band 4:

Mode	Channel Frequency (MHz)	Average Power output (dBm)	Tune-up power(dBm)
802.11a	5745	14.91	16.50
	5785	15.05	16.50
	5825	15.94	16.50
802.11n (HT20)	5745	13.31	14.50
	5785	13.56	14.50
	5825	14.06	14.50
802.11n (HT40)	5755	13.56	14.00
	5795	13.81	14.00

Note:

1. Per KDB 447498 D01, the 1-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$$
 for 1-g SAR, where

$f(\text{GHz})$ is the RF channel transmit frequency in GHz

Power and distance are rounded to the nearest mW and mm before calculation

The result is rounded to one decimal place for comparison

2. Base on the result of note1, RF exposure evaluation of 2.4G/5.2G/5.8G WIFI mode is required.

3. Per KDB 248227 D01, choose the highest output power channel to test SAR and determine further SAR exclusion.

4. Per KDB 248227 D01, In the 2.4 GHz band, separate SAR procedures are applied to DSSS and OFDM configurations to simplify DSSS test requirements. SAR is not required for the following 2.4 GHz OFDM conditions:

1) When KDB Publication 447498 SAR test exclusion applies to the OFDM configuration.



2) When the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.

<Bluetooth Conducted Power>

Mode	Channel	Frequency (MHz)	Conducted Peak Power (dBm)	Conducted Average Power (dBm)	Tune-up power(dBm)
BT BDR (GFSK)	00	2402	2.48	2.35	2.50
	39	2441	2.26	2.04	2.50
	78	2480	1.92	1.71	2.50
BT EDR (PI/4DQPSK)	00	2402	1.87	1.65	2.50
	39	2441	1.66	1.48	2.50
	78	2480	1.31	1.15	2.50
BT EDR (8DPSK)	00	2402	2.00	1.79	2.50
	39	2441	1.77	1.55	2.50
	78	2480	1.36	1.18	2.50

Note:

Per KDB 447498 D01v05r02, the 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$$[(\text{max. power of channel, including tune-up tolerance, mW})/(\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}]$$

≤ 3.0 for 1-g SAR and ≤ 7.5 for 10-g extremity SAR

f(GHz) is the RF channel transmit frequency in GHz

Power and distance are rounded to the nearest mW and mm before calculation


The result is rounded to one decimal place for comparison

Bluetooth Max. Power (dBm)	Separation Distance (mm)	Frequency (GHz)	exclusion thresholds
2.50	5	2.402	0.55

Per KDB 447498 D01, when the minimum test separation distance is <10 mm, a distance of 10 mm is applied to determine SAR test exclusion. The test exclusion threshold is 0.55 which is ≤ 3 , SAR testing is not required.



11. Antenna Location

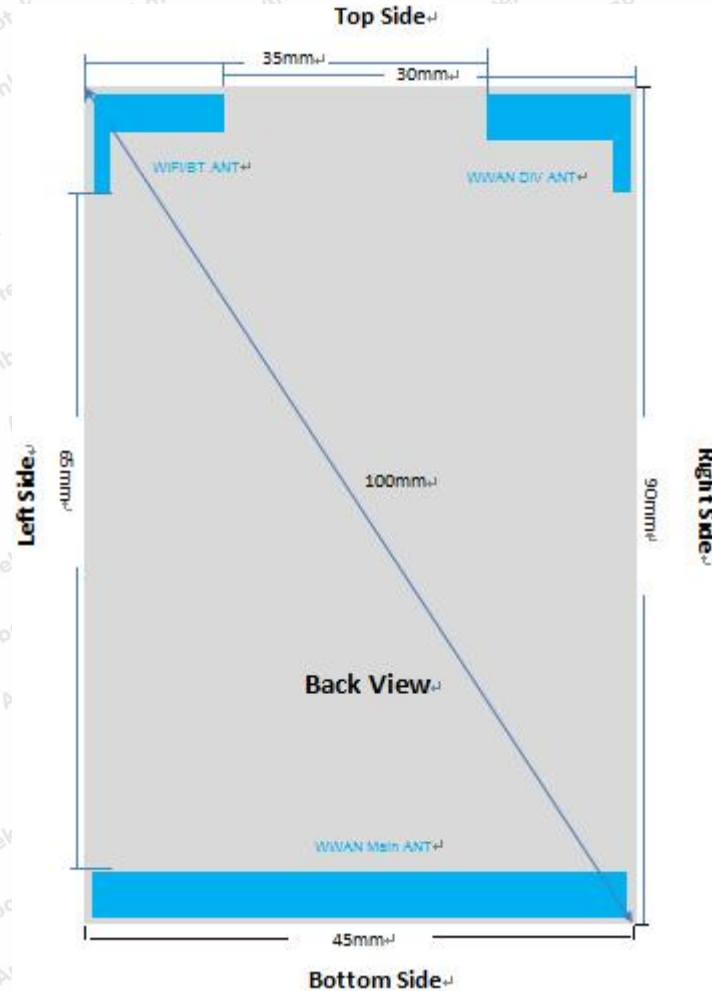

Distance of The Antenna to the EUT surface and edge

Antennas	Front	Back	Top Side	Bottom Side	Left Side	Right Side
WIFI/BT ANT	<25mm	<25mm	<25mm	>25mm	<25mm	>25mm
WWAN Main ANT	<25mm	<25mm	>25mm	<25mm	<25mm	<25mm

Positions for SAR tests; Body mode

Antennas	Front	Back	Top Side	Bottom Side	Left Side	Right Side
WIFI/BT ANT	Yes	Yes	Yes	No	Yes	No
WWAN Main ANT	Yes	Yes	No	Yes	Yes	Yes



Report No.:18220WC40091007

FCC ID:2BGA8-KING9000

Page 46 of 158

General Note: According with FCC KDB 447498 D01, appendix A, <SAR test exclusion thresholds for 100MHz~6GHz and≤50mm> table, this device SAR test configurations considerations are shown in the table above.

Per KDB 447498 D01, for larger devices, the test separation distance of adjacent edge configuration is determined by the closest separation between the antenna and the user.



12. SAR Test Results Summary

General Note:

1.Per KDB 447498 D01v05r01, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.

Scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.

Reported SAR(W/kg)= Measured SAR(W/kg) Scaling Factor*

2.Per KDB 447498 D01v05r01, for each exposure position, if the highest output channel reported $SAR \leq 0.8W/kg$, other channels SAR testing are not necessary

3.Per KDB 941225 D05, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.

4.Per KDB 941225 D05, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.

5.Per KDB 941225 D05, For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are $\leq 0.8 W/kg$. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is $> 1.45 W/kg$, the remaining required test channels must also be tested.

6.Per KDB 941225 D05, 16QAM output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is $\leq 1.45 W/kg$; Per KDB 941225 D05, 16QAM SAR testing is not required.

7.Per KDB 941225 D05, Smaller bandwidth output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is $\leq 1.45 W/kg$; Per KDB 941225 D05, smaller bandwidth SAR testing is not required.

8.Per KDB865664 D01, for each frequency band, repeated SAR measurement is required only when the measured SAR is $\geq 0.8W/Kg$; if the deviation among the repeated measurement is $\leq 20\%$, and the measured SAR $< 1.45W/Kg$, only one repeated measurement is required.

9.When the user enables the personal Wireless router functions for the handsets, actual operations include simultaneous transmission of both the Wi-Fi transmitting frequency and thus cannot be evaluated for SAR under actual use conditions. The "Portable Hotspot" feature on the handset was NOT activated, to ensure the SAR measurements were evaluated for a single transmission frequency RF signal.



12.1. Head SAR Results

<GSM>

Plot No.	Band	Mode	Test Position	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR _{1g} (W/kg)	Reported SAR _{1g} (W/kg)
	GSM850	GPRS(4 Tx slots)	Right Cheek	128	824.2	28.62	29.00	1.091	-0.12	0.631	0.689
	GSM850	GPRS(4 Tx slots)	Right Tilt	128	824.2	28.62	29.00	1.091	-0.06	0.322	0.351
#1	GSM850	GPRS(4 Tx slots)	Left Cheek	128	824.2	28.62	29.00	1.091	0.08	0.652	0.712
	GSM850	GPRS(4 Tx slots)	Left Tilt	128	824.2	28.62	29.00	1.091	-0.06	0.345	0.377
	PCS1900	GPRS(4 Tx slots)	Right Cheek	512	1850.2	26.11	26.50	1.094	0.07	0.498	0.545
	PCS1900	GPRS(4 Tx slots)	Right Tilt	512	1850.2	26.11	26.50	1.094	-0.14	0.214	0.234
#2	PCS1900	GPRS(4 Tx slots)	Left Cheek	512	1850.2	26.11	26.50	1.094	-0.09	0.533	0.583
	PCS1900	GPRS(4 Tx slots)	Left Tilt	512	1850.2	26.11	26.50	1.094	-0.11	0.236	0.258



<WCDMA>

Plot No.	Band	Mode	Test Position	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR _{1g} (W/kg)	Reported SAR _{1g} (W/kg)
	WCDMA Band II	RMC 12.2K	Right Cheek	9538	1907.6	22.20	22.50	1.072	-0.03	0.415	0.445
	WCDMA Band II	RMC 12.2K	Right Tilt	9538	1907.6	22.20	22.50	1.072	0.08	0.211	0.226
#3	WCDMA Band II	RMC 12.2K	Left Cheek	9538	1907.6	22.20	22.50	1.072	0.11	0.436	0.467
	WCDMA Band II	RMC 12.2K	Left Tilt	9538	1907.6	22.20	22.50	1.072	0.05	0.223	0.239
	WCDMA Band V	RMC 12.2K	Right Cheek	4132	826.4	22.86	23.00	1.033	0.10	0.474	0.490
	WCDMA Band V	RMC 12.2K	Right Tilt	4132	826.4	22.86	23.00	1.033	-0.03	0.245	0.253
#4	WCDMA Band V	RMC 12.2K	Left Cheek	4132	826.4	22.86	23.00	1.033	-0.14	0.496	0.512
	WCDMA Band V	RMC 12.2K	Left Tilt	4132	826.4	22.86	23.00	1.033	0.11	0.256	0.264



<LTE>

Plot No.	Band	Mode	Test Position	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR _{1g} (W/kg)	Reported SAR _{1g} (W/kg)
	LTE Band 5	10MHz/1RB	Right Cheek	20450	829	22.21	22.5	1.069	0.11	0.417	0.446
	LTE Band 5	10MHz/50RB	Right Cheek	20450	829	21.07	21.5	1.104	0.09	0.225	0.248
	LTE Band 5	10MHz/1RB	Right Tilt	20450	829	22.21	22.5	1.069	-0.09	0.287	0.307
	LTE Band 5	10MHz/50RB	Right Tilt	20450	829	21.07	21.5	1.104	0.14	0.196	0.216
#5	LTE Band 5	10MHz/1RB	Left Cheek	20450	829	22.21	22.5	1.069	-0.08	0.429	0.459
	LTE Band 5	10MHz/50RB	Left Cheek	20450	829	21.07	21.5	1.104	-0.04	0.234	0.258
	LTE Band 5	10MHz/1RB	Left Tilt	20450	829	22.21	22.5	1.069	0.02	0.304	0.325
	LTE Band 5	10MHz/50RB	Left Tilt	20450	829	21.07	21.5	1.104	0.06	0.225	0.248
	LTE Band 7	20MHz/1RB	Right Cheek	20850	2510	21.48	21.5	1.005	0.10	0.325	0.327
	LTE Band 7	20MHz/100RB	Right Cheek	20850	2510	18.43	18.5	1.016	0.10	0.148	0.150
	LTE Band 7	20MHz/1RB	Right Tilt	20850	2510	21.48	21.5	1.005	-0.10	0.201	0.202
	LTE Band 7	20MHz/100RB	Right Tilt	20850	2510	18.43	18.5	1.016	0.15	0.147	0.149
#6	LTE Band 7	20MHz/1RB	Left Cheek	20850	2510	21.48	21.5	1.005	-0.09	0.336	0.338
	LTE Band 7	20MHz/100RB	Left Cheek	20850	2510	18.43	18.5	1.016	-0.03	0.158	0.161
	LTE Band 7	20MHz/1RB	Left Tilt	20850	2510	21.48	21.5	1.005	0.01	0.236	0.237
	LTE Band 7	20MHz/100RB	Left Tilt	20850	2510	18.43	18.5	1.016	0.07	0.168	0.171
	LTE Band 38	20MHz/1RB	Right Cheek	38150	2610	23.04	23.5	1.112	0.10	0.502	0.558
	LTE Band 38	20MHz/100RB	Right Cheek	38150	2610	22.06	22.5	1.107	-0.14	0.312	0.345
	LTE Band 38	20MHz/1RB	Right Tilt	37850	2610	23.04	23.5	1.112	-0.13	0.375	0.417
	LTE Band 38	20MHz/100RB	Right Tilt	37850	2610	22.06	22.5	1.107	-0.12	0.287	0.318
#7	LTE Band 38	20MHz/1RB	Left Cheek	37850	2610	23.04	23.5	1.112	0.11	0.514	0.571
	LTE Band 38	20MHz/100RB	Left Cheek	37850	2610	22.06	22.5	1.107	0.06	0.341	0.377



Report No.:18220WC40091007

FCC ID:2BGA8-KING9000

Page 51 of 158

	LTE Band 38	20MHz/1RB	Left Tilt	37850	2610	23.04	23.5	1.112	-0.09	0.416	0.462
	LTE Band 38	20MHz/100RB	Left Tilt	37850	2610	22.06	22.5	1.107	-0.06	0.326	0.361
	LTE Band 41	20MHz/1RB	Right Cheek	40140	2545	22.79	23.0	1.050	-0.13	0.477	0.501
	LTE Band 41	20MHz/100RB	Right Cheek	40140	2545	21.60	22.0	1.096	-0.15	0.262	0.287
	LTE Band 41	20MHz/1RB	Right Tilt	40140	2545	22.79	23.0	1.050	-0.09	0.364	0.382
	LTE Band 41	20MHz/100RB	Right Tilt	40140	2545	21.60	22.0	1.096	0.09	0.277	0.304
#8	LTE Band 41	20MHz/1RB	Left Cheek	40140	2545	22.79	23.0	1.050	-0.06	0.501	0.526
	LTE Band 41	20MHz/100RB	Left Cheek	40140	2545	21.60	22.0	1.096	-0.12	0.336	0.368
	LTE Band 41	20MHz/1RB	Left Tilt	40140	2545	22.79	23.0	1.050	-0.15	0.407	0.427
	LTE Band 41	20MHz/100RB	Left Tilt	40140	2545	21.60	22.0	1.096	-0.05	0.315	0.345



<WIFI>

Plot No.	Band	Mode	Test Position	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR _{1g} (W/kg)	Reported SAR _{1g} (W/kg)
	WIFI2.4GHz	802.11n(H T40)	Right Cheek	6	2437	15.57	16.0	1.104	-0.12	0.175	0.193
	WIFI2.4GHz	802.11n(H T40)	Right Tilt	6	2437	15.57	16.0	1.104	-0.14	0.123	0.136
#9	WIFI2.4GHz	802.11n(H T40)	Left Cheek	6	2437	15.57	16.0	1.104	-0.08	0.186	0.205
	WIFI2.4GHz	802.11n(H T40)	Left Tilt	6	2437	15.57	16.0	1.104	-0.07	0.135	0.149
	WIFI5.2GHz	802.11n(H T40)	Right Cheek	38	5190	15.97	16.5	1.130	-0.16	0.236	0.267
	WIFI5.2GHz	802.11n(H T40)	Right Tilt	38	5190	15.97	16.5	1.130	0.06	0.175	0.198
#10	WIFI5.2GHz	802.11n(H T40)	Left Cheek	38	5190	15.97	16.5	1.130	0.03	0.241	0.272
	WIFI5.2GHz	802.11n(H T40)	Left Tilt	38	5190	15.97	16.5	1.130	-0.13	0.186	0.210
	WIFI5.8GHz	802.11a	Right Cheek	165	5825	15.94	16.5	1.138	0.12	0.227	0.258
	WIFI5.8GHz	802.11a	Right Tilt	165	5825	15.94	16.5	1.138	0.07	0.165	0.188
#11	WIFI5.8GHz	802.11a	Left Cheek	165	5825	15.94	16.5	1.138	-0.11	0.235	0.267
	WIFI5.8GHz	802.11a	Left Tilt	165	5825	15.94	16.5	1.138	-0.13	0.174	0.198

Note:

1. Per KDB 865664 D01V01,for each frequency band ,repeated SAR measurement is required only when the measured SAR is ≥ 0.8 W/Kg.
2. Per KDB 865664 D01V01,if the ratio of largest to smallest SAR for the original and first repeated measurement is ≤ 1.2 and the measured SAR < 1.45 W/Kg, only one repeated measurement is required.
3. Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ≥ 1.45 W/Kg
4. The ratio is the difference in percentage between original and repeated measured SAR.



12.2. Body-worn SAR Results**<GSM>**

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR _{1g} (W/kg)	Reported SAR _{1g} (W/kg)
	GSM850	GPRS(4 Tx slots)	Front	5	128	824.2	28.62	29.00	1.091	0.11	0.547	0.597
#12	GSM850	GPRS(4 Tx slots)	Back	5	128	824.2	28.62	29.00	1.091	0.13	0.719	0.785
	GSM850	GPRS(4 Tx slots)	Left Side	5	128	824.2	28.62	29.00	1.091	-0.12	0.345	0.377
	GSM850	GPRS(4 Tx slots)	Right Side	5	128	824.2	28.62	29.00	1.091	-0.03	0.337	0.368
	GSM850	GPRS(4 Tx slots)	Top Side	5	128	824.2	28.62	29.00	1.091	NA	NA	NA
	GSM850	GPRS(4 Tx slots)	Bottom Side	5	128	824.2	28.62	29.00	1.091	0.13	0.682	0.744
	PCS1900	GPRS(4 Tx slots)	Front	5	512	1850.2	26.11	26.50	1.094	0.04	0.354	0.387
#13	PCS1900	GPRS(4 Tx slots)	Back	5	512	1850.2	26.11	26.50	1.094	0.08	0.522	0.571
	PCS1900	GPRS(4 Tx slots)	Left Side	5	512	1850.2	26.11	26.50	1.094	-0.11	0.258	0.282
	PCS1900	GPRS(4 Tx slots)	Right Side	5	512	1850.2	26.11	26.50	1.094	0.04	0.245	0.268
	PCS1900	GPRS(4 Tx slots)	Top Side	5	512	1850.2	26.11	26.50	1.094	NA	NA	NA
	PCS1900	GPRS(4 Tx slots)	Bottom Side	5	512	1850.2	26.11	26.50	1.094	-0.08	0.456	0.499



<WCDMA>

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR _{1g} (W/kg)	Reported SAR _{1g} (W/kg)
#14	WCDMA Band II	RMC 12.2K	Back	5	9538	1907.6	22.20	22.50	1.072	-0.15	0.417	0.447
	WCDMA Band II	RMC 12.2K	Front	5	9538	1907.6	22.20	22.50	1.072	0.07	0.263	0.282
	WCDMA Band II	RMC 12.2K	Left Side	5	9538	1907.6	22.20	22.50	1.072	-0.13	0.169	0.181
	WCDMA Band II	RMC 12.2K	Right Side	5	9538	1907.6	22.20	22.50	1.072	-0.13	0.158	0.169
	WCDMA Band II	RMC 12.2K	Top Side	5	9538	1907.6	22.20	22.50	1.072	NA	NA	NA
	WCDMA Band II	RMC 12.2K	Bottom Side	5	9538	1907.6	22.20	22.50	1.072	0.08	0.368	0.394
#15	WCDMA Band V	RMC 12.2K	Back	5	4132	826.4	22.86	23.00	1.033	-0.13	0.467	0.482
	WCDMA Band V	RMC 12.2K	Front	5	4132	826.4	22.86	23.00	1.033	-0.03	0.311	0.321
	WCDMA Band V	RMC 12.2K	Left Side	5	4132	826.4	22.86	23.00	1.033	-0.14	0.198	0.204
	WCDMA Band V	RMC 12.2K	Right Side	5	4132	826.4	22.86	23.00	1.033	0.02	0.187	0.193
	WCDMA Band V	RMC 12.2K	Top Side	5	4132	826.4	22.86	23.00	1.033	NA	NA	NA
	WCDMA Band V	RMC 12.2K	Bottom Side	5	4132	826.4	22.86	23.00	1.033	-0.13	0.426	0.440



<LTE>

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR _{1g} (W/kg)	Reported SAR _{1g} (W/kg)
#16	LTE Band 5	10MHz/1RB	Back	5	20450	829	22.21	22.5	1.069	0.18	0.419	0.448
	LTE Band 5	10MHz/50RB	Back	5	20450	829	21.07	21.5	1.104	-0.14	0.336	0.371
	LTE Band 5	10MHz/1RB	Front	5	20450	829	22.21	22.5	1.069	0.13	0.265	0.283
	LTE Band 5	10MHz/50RB	Front	5	20450	829	21.07	21.5	1.104	0.05	0.215	0.237
	LTE Band 5	10MHz/1RB	Left Side	5	20450	829	22.21	22.5	1.069	-0.07	0.171	0.183
	LTE Band 5	10MHz/50RB	Left Side	5	20450	829	21.07	21.5	1.104	0.05	0.124	0.137
	LTE Band 5	10MHz/1RB	Right Side	5	20450	829	22.21	22.5	1.069	0.12	0.163	0.174
	LTE Band 5	10MHz/50RB	Right Side	5	20450	829	21.07	21.5	1.104	-0.07	0.113	0.125
	LTE Band 5	10MHz/1RB	Top Side	5	20450	829	22.21	22.5	1.069	NA	NA	NA
	LTE Band 5	10MHz/50RB	Top Side	5	20450	829	21.07	21.5	1.104	NA	NA	NA
	LTE Band 5	10MHz/1RB	Bottom Side	5	20450	829	22.21	22.5	1.069	0.15	0.374	0.400
	LTE Band 5	10MHz/50RB	Bottom Side	5	20450	829	21.07	21.5	1.104	0.07	0.285	0.315
#17	LTE Band 7	20MHz/1RB	Back	5	20850	2510	21.48	21.5	1.005	0.17	0.325	0.327
	LTE Band 7	20MHz/100RB	Back	5	20850	2510	18.43	18.5	1.016	-0.13	0.225	0.229
	LTE Band 7	20MHz/1RB	Front	5	20850	2510	21.48	21.5	1.005	0.12	0.248	0.249
	LTE Band 7	20MHz/100RB	Front	5	20850	2510	18.43	18.5	1.016	0.04	0.215	0.218
	LTE Band 7	20MHz/1RB	Left Side	5	20850	2510	21.48	21.5	1.005	-0.06	0.155	0.156
	LTE Band 7	20MHz/100RB	Left Side	5	20850	2510	18.43	18.5	1.016	0.04	0.116	0.118
	LTE Band 7	20MHz/1RB	Right Side	5	20850	2510	21.48	21.5	1.005	0.11	0.141	0.142
	LTE Band 7	20MHz/100RB	Right Side	5	20850	2510	18.43	18.5	1.016	-0.06	0.110	0.112
	LTE Band 7	20MHz/1RB	Top Side	5	20850	2510	21.48	21.5	1.005	NA	NA	NA
	LTE Band 7	20MHz/100RB	Top Side	5	20850	2510	18.43	18.5	1.016	NA	NA	NA



		B										
	LTE Band 7	20MHz/1RB	Bottom Side	5	20850	2510	21.48	21.5	1.005	0.14	0.285	0.286
	LTE Band 7	20MHz/100RB	Bottom Side	5	20850	2510	18.43	18.5	1.016	0.07	0.193	0.196
#18	LTE Band 38	20MHz/1RB	Back	5	38150	2610	23.04	23.5	1.112	0.17	0.521	0.579
	LTE Band 38	20MHz/100RB	Back	5	38150	2610	22.06	22.5	1.107	-0.15	0.382	0.423
	LTE Band 38	20MHz/1RB	Front	5	38150	2610	23.04	23.5	1.112	0.10	0.375	0.417
	LTE Band 38	20MHz/100RB	Front	5	38150	2610	22.06	22.5	1.107	0.06	0.239	0.264
	LTE Band 38	20MHz/1RB	Left Side	5	38150	2610	23.04	23.5	1.112	-0.08	0.289	0.321
	LTE Band 38	20MHz/100RB	Left Side	5	38150	2610	22.06	22.5	1.107	0.04	0.157	0.174
	LTE Band 38	20MHz/1RB	Right Side	5	38150	2610	23.04	23.5	1.112	0.13	0.278	0.309
	LTE Band 38	20MHz/100RB	Right Side	5	38150	2610	22.06	22.5	1.107	-0.07	0.148	0.164
	LTE Band 38	20MHz/1RB	Top Side	5	38150	2610	23.04	23.5	1.112	NA	NA	NA
	LTE Band 38	20MHz/100RB	Top Side	5	38150	2610	22.06	22.5	1.107	NA	NA	NA
	LTE Band 38	20MHz/1RB	Bottom Side	5	38150	2610	23.04	23.5	1.112	0.15	0.466	0.518
	LTE Band 38	20MHz/100RB	Bottom Side	5	38150	2610	22.06	22.5	1.107	0.07	0.296	0.328
#19	LTE Band 41	20MHz/1RB	Back	5	40140	2545	22.79	23.0	1.050	0.16	0.505	0.530
	LTE Band 41	20MHz/100RB	Back	5	40140	2545	21.60	22.0	1.096	-0.12	0.346	0.379
	LTE Band 41	20MHz/1RB	Front	5	40140	2545	22.79	23.0	1.050	0.11	0.344	0.361
	LTE Band 41	20MHz/100RB	Front	5	40140	2545	21.60	22.0	1.096	0.05	0.203	0.223
	LTE Band 41	20MHz/1RB	Left Side	5	40140	2545	22.79	23.0	1.050	-0.07	0.256	0.269
	LTE Band 41	20MHz/100RB	Left Side	5	40140	2545	21.60	22.0	1.096	0.05	0.141	0.155
	LTE Band 41	20MHz/1RB	Right Side	5	40140	2545	22.79	23.0	1.050	0.10	0.253	0.266



Report No.:18220WC40091007

FCC ID:2BGA8-KING9000

Page 57 of 158

LTE Band 41	20MHz/100RB	Right Side	5	40140	2545	21.60	22.0	1.096	-0.05	0.131	0.144
LTE Band 41	20MHz/1RB	Top Side	5	40140	2545	22.79	23.0	1.050	NA	NA	NA
LTE Band 41	20MHz/100RB	Top Side	5	40140	2545	21.60	22.0	1.096	NA	NA	NA
LTE Band 41	20MHz/1RB	Bottom Side	5	40140	2545	22.79	23.0	1.050	0.15	0.432	0.453
LTE Band 41	20MHz/100RB	Bottom Side	5	40140	2545	21.60	22.0	1.096	0.08	0.253	0.277

<WIFI>

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR _{1g} (W/kg)	Reported SAR _{1g} (W/kg)
#20	WIFI2.4GHz	802.11n(H T40)	Back	5	6	2437	15.57	16.0	1.104	0.05	0.252	0.278
	WIFI2.4GHz	802.11n(H T40)	Front	5	6	2437	15.57	16.0	1.104	-0.01	0.214	0.236
	WIFI2.4GHz	802.11n(H T40)	Left Side	5	6	2437	15.57	16.0	1.104	0.06	0.101	0.112
	WIFI2.4GHz	802.11n(H T40)	Right Side	5	6	2437	15.57	16.0	1.104	N/A	N/A	N/A
	WIFI2.4GHz	802.11n(H T40)	Top Side	5	6	2437	15.57	16.0	1.104	0.09	0.223	0.246
	WIFI2.4GHz	802.11n(H T40)	Bottom Side	5	6	2437	15.57	16.0	1.104	N/A	N/A	N/A
#21	WIFI5.2GHz	802.11n(H T40)	Back	5	38	5190	15.97	16.5	1.130	0.04	0.284	0.321
	WIFI5.2GHz	802.11n(H T40)	Front	5	38	5190	15.97	16.5	1.130	-0.02	0.242	0.273
	WIFI5.2GHz	802.11n(H T40)	Left Side	5	38	5190	15.97	16.5	1.130	0.07	0.126	0.142
	WIFI5.2GHz	802.11n(H T40)	Right Side	5	38	5190	15.97	16.5	1.130	N/A	N/A	N/A
	WIFI5.2GHz	802.11n(H T40)	Top Side	5	38	5190	15.97	16.5	1.130	0.10	0.248	0.280
	WIFI5.2GHz	802.11n(H T40)	Bottom Side	5	38	5190	15.97	16.5	1.130	N/A	N/A	N/A



#22	WIFI5.8GHz	802.11 a	Back	5	165	5825	15.94	16.5	1.138	0.06	0.277	0.315
	WIFI5.8GHz	802.11 a	Front	5	165	5825	15.94	16.5	1.138	-0.02	0.235	0.267
	WIFI5.8GHz	802.11 a	Left Side	5	165	5825	15.94	16.5	1.138	0.05	0.115	0.131
	WIFI5.8GHz	802.11 a	Right Side	5	165	5825	15.94	16.5	1.138	N/A	N/A	N/A
	WIFI5.8GHz	802.11 a	Top Side	5	165	5825	15.94	16.5	1.138	0.08	0.236	0.268
	WIFI5.8GHz	802.11 a	Bottom Side	5	165	5825	15.94	16.5	1.138	N/A	N/A	N/A

Note:

1. Per KDB 865664 D01V01,for each frequency band ,repeated SAR measurement is required only when the measured SAR is $\geq 0.8W/Kg$.
2. Per KDB 865664 D01V01,if the ratio of largest to smallest SAR for the original and first repeated measurement is ≤ 1.2 and the measured SAR $< 1.45W/Kg$, only one repeated measurement is required.
3. Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is $\geq 1.45W/Kg$
4. The ratio is the difference in percentage between original and repeated measured SAR.



13. Simultaneous Transmission Analysis

Simultaneous TX SAR Considerations

No. Applicable Simultaneous Transmission

1. GSM+WIFI
2. WCDMA+WIFI
3. LTE+WIFI
4. GSM+BT
5. WCDMA+BT
6. LTE+BT

Note:

1. EUT will choose either GSM/WCDMA/ LTE according to the network signal condition; therefore, GSM/WCDMA/LTE cannot transmit simultaneously.
2. Because the Bluetooth SAR is exclusion, so the simultaneous SAR is not evaluate.
3. Bluetooth stand-alone SAR tests are not required and are considered zero in the SAR summation.

Evaluation of Simultaneous SAR

Simultaneous-Head

<GSM+WIFI>

Test Position	WiFi2.4 GHz SAR _{1-g} (W/Kg)	WiFi5.2 GHz SAR _{1-g} (W/Kg)	WiFi5.8 GHz SAR _{1-g} (W/Kg)	GSM 850 1-g (W/Kg)	PCS 1900 1-g (W/Kg)	MAX. Σ SAR _{1-g} (W/Kg)	SAR _{1-g} Limit (W/Kg)	Simut. Meas. Required
Left Cheek	0.205	0.272	0.267	0.712	0.583	0.979	1.6	N/A
Left Tilt	0.149	0.210	0.198	0.377	0.258	0.575	1.6	N/A
Right Cheek	0.193	0.267	0.258	0.689	0.545	0.947	1.6	N/A
Right Tilt	0.136	0.198	0.188	0.351	0.234	0.539	1.6	N/A



<WCDMA+WiFi>

Test Position	WiFi2.4 GHz SAR _{1-g} (W/Kg)	WiFi5.2 GHz SAR _{1-g} (W/Kg)	WiFi5.8 GHz SAR _{1-g} (W/Kg)	WCDMA Band 2 1-g (W/Kg)	WCDMA Band 5 1-g (W/Kg)	MAX. ΣSAR _{1-g} (W/Kg)	SAR _{1-g} Limit (W/Kg)	Simut. Meas. Required
Left Cheek	0.205	0.272	0.267	0.467	0.512	0.779	1.6	N/A
Left Tilt	0.149	0.210	0.198	0.239	0.264	0.462	1.6	N/A
Right Cheek	0.193	0.267	0.258	0.445	0.490	0.748	1.6	N/A
Right Tilt	0.136	0.198	0.188	0.226	0.253	0.441	1.6	N/A

<LTE+WiFi>

Test Position	WiFi2.4GHz SAR _{1-g} (W/Kg)	WiFi5.2GHz SAR _{1-g} (W/Kg)	WiFi5.8GHz SAR _{1-g} (W/Kg)	LTE BAND 5 1-g (W/Kg)	LTE BAND 7 1-g (W/Kg)	LTE BAND 38 1-g (W/Kg)	LTE BAND 41 1-g (W/Kg)	MAX. ΣSAR _{1-g} (W/Kg)	SAR _{1-g} Limit (W/Kg)	Simut. Meas. Required
Left Cheek	0.205	0.272	0.267	0.459	0.338	0.571	0.526	0.838	1.6	N/A
Left Tilt	0.149	0.210	0.198	0.325	0.237	0.462	0.427	0.660	1.6	N/A
Right Cheek	0.193	0.267	0.258	0.446	0.327	0.558	0.501	0.816	1.6	N/A
Right Tilt	0.136	0.198	0.188	0.307	0.202	0.417	0.382	0.605	1.6	N/A

Simultaneous- Body

<GSM+WiFi>

Test Position	WiFi2.4G Hz SAR _{1-g} (W/Kg)	WiFi5.2G Hz SAR _{1-g} (W/Kg)	WiFi5.8G Hz SAR _{1-g} (W/Kg)	GSM 850 1-g (W/Kg)	PCS 1900 1-g (W/Kg)	MAX. ΣSAR _{1-g} (W/Kg)	SAR _{1-g} Limit (W/Kg)	Simut. Meas. Required
Front	0.236	0.273	0.267	0.597	0.387	0.870	1.6	N/A
Back	0.278	0.321	0.315	0.785	0.571	1.106	1.6	N/A
Left Side	0.112	0.142	0.131	0.377	0.282	0.519	1.6	N/A
Right Side	N/A	N/A	N/A	0.368	0.268	0.368	1.6	N/A
Top side	0.246	0.280	0.268	N/A	N/A	0.280	1.6	N/A
Bottom Side	N/A	N/A	N/A	0.744	0.499	0.744	1.6	N/A



<WCDMA+WiFi >

Test Position	WiFi2.4 GHz SAR _{1-g} (W/Kg)	WiFi5.2 GHz SAR _{1-g} (W/Kg)	WiFi5.8 GHz SAR _{1-g} (W/Kg)	WCDMA Band 2 1-g (W/Kg)	WCDMA Band 5 1-g (W/Kg)	MAX. Σ SAR _{1-g} (W/Kg)	SAR _{1-g} Limit (W/Kg)	Simut. Meas. Required
Front	0.222	0.273	0.267	0.282	0.321	0.594	1.6	N/A
Back	0.261	0.321	0.315	0.447	0.482	0.803	1.6	N/A
Left Side	0.105	0.142	0.131	0.181	0.204	0.346	1.6	N/A
Right Side	N/A	N/A	N/A	0.169	0.193	0.193	1.6	N/A
Top side	0.231	0.280	0.268	N/A	N/A	0.280	1.6	N/A
Bottom Side	N/A	N/A	N/A	0.394	0.440	0.440	1.6	N/A

<LTE+WiFi >

Test Position	WiFi2.4 GHz SAR _{1-g} (W/Kg)	WiFi5.2 GHz SAR _{1-g} (W/Kg)	WiFi5.8 GHz SAR _{1-g} (W/Kg)	LTE BAND 5 1-g (W/Kg)	LTE BAND 7 1-g (W/Kg)	LTE BAND 38 1-g (W/Kg)	LTE BAND 41 1-g (W/Kg)	MAX. Σ SAR _{1-g} (W/Kg)	SAR _{1-g} Limit (W/Kg)	Simut. Meas. Required
Front	0.222	0.273	0.267	0.283	0.249	0.417	0.361	0.690	1.6	N/A
Back	0.261	0.321	0.315	0.448	0.327	0.579	0.530	0.900	1.6	N/A
Left Side	0.105	0.142	0.131	0.183	0.156	0.321	0.269	0.463	1.6	N/A
Right Side	N/A	N/A	N/A	0.174	0.142	0.309	0.266	0.309	1.6	N/A
Top side	0.231	0.280	0.268	N/A	N/A	N/A	N/A	0.280	1.6	N/A
Bottom Side	N/A	N/A	N/A	0.400	0.286	0.518	0.453	0.518	1.6	N/A



14. Measurement Uncertainty

NO	Source	Uncert. ai (%)	Prob. Dist.	Div.	kci (1g)	ci (10g)	Stand.U ncert. ui (1g)	Stand.U ncert. ui (10g)	Veff
1	Repeat	0.4	N	1	1	1	0.4	0.4	9
Instrument									
2	Probe calibration	7	N	2	1	1	3.5	3.5	∞
3	Axial isotropy	4.7	R	$\sqrt{3}$	0.7	0.7	1.9	1.9	∞
4	Hemispherical isotropy	9.4	R	$\sqrt{3}$	0.7	0.7	3.9	3.9	∞
5	Boundary effect	1.0	R	$\sqrt{3}$	1	1	0.6	0.6	∞
6	Linearity	4.7	R	$\sqrt{3}$	1	1	2.7	2.7	∞
7	Detection limits	1.0	R	$\sqrt{3}$	1	1	0.6	0.6	∞
8	Readout electronics	0.3	N	1	1	1	0.3	0.3	∞
9	Response time	0.8	R	$\sqrt{3}$	1	1	0.5	0.5	∞
10	Integration time	2.6	R	$\sqrt{3}$	1	1	1.5	1.5	∞
11	Ambient noise	3.0	R	$\sqrt{3}$	1	1	1.7	1.7	∞
12	Ambient reflections	3.0	R	$\sqrt{3}$	1	1	1.7	1.7	∞
13	Probe positioner mech. restrictions	0.4	R	$\sqrt{3}$	1	1	0.2	0.2	∞
14	Probe positioning with respect to phantom shell	2.9	R	$\sqrt{3}$	1	1	1.7	1.7	∞




15	Max.SAR evaluation	1.0	R	$\sqrt{3}$	1	1	0.6	0.6	∞
----	--------------------	-----	---	------------	---	---	-----	-----	----------

Test sample related									
16	Device positioning	3.8	N	1	1	1	3.8	3.8	99
17	Device holder	5.1	N	1	1	1	5.1	5.1	5
18	Drift of output power	5.0	R	$\sqrt{3}$	1	1	2.9	2.9	∞
Phantom and set-up									
19	Phantom uncertainty	4.0	R	$\sqrt{3}$	1	1	2.3	2.3	∞
20	Liquid conductivity (target)	5.0	R	$\sqrt{3}$	0.64	0.43	1.8	1.2	∞
21	Liquid conductivity (meas)	2.5	N	1	0.64	0.43	1.6	1.2	∞
22	Liquid Permittivity (target)	5.0	R	$\sqrt{3}$	0.6	0.49	1.7	1.5	∞
23	Liquid Permittivity (meas)	2.5	N	1	0.6	0.49	1.5	1.2	∞
Combined standard			RSS	$U_c = \sqrt{\sum_{i=1}^n C_i^2 U_i^2}$			11.4%	11.3%	236
Expanded uncertainty(P=95%)		$U_c = k U$,k=2					22.8%	22.6%	



Appendix A. EUT Photos and Test Setup Photos

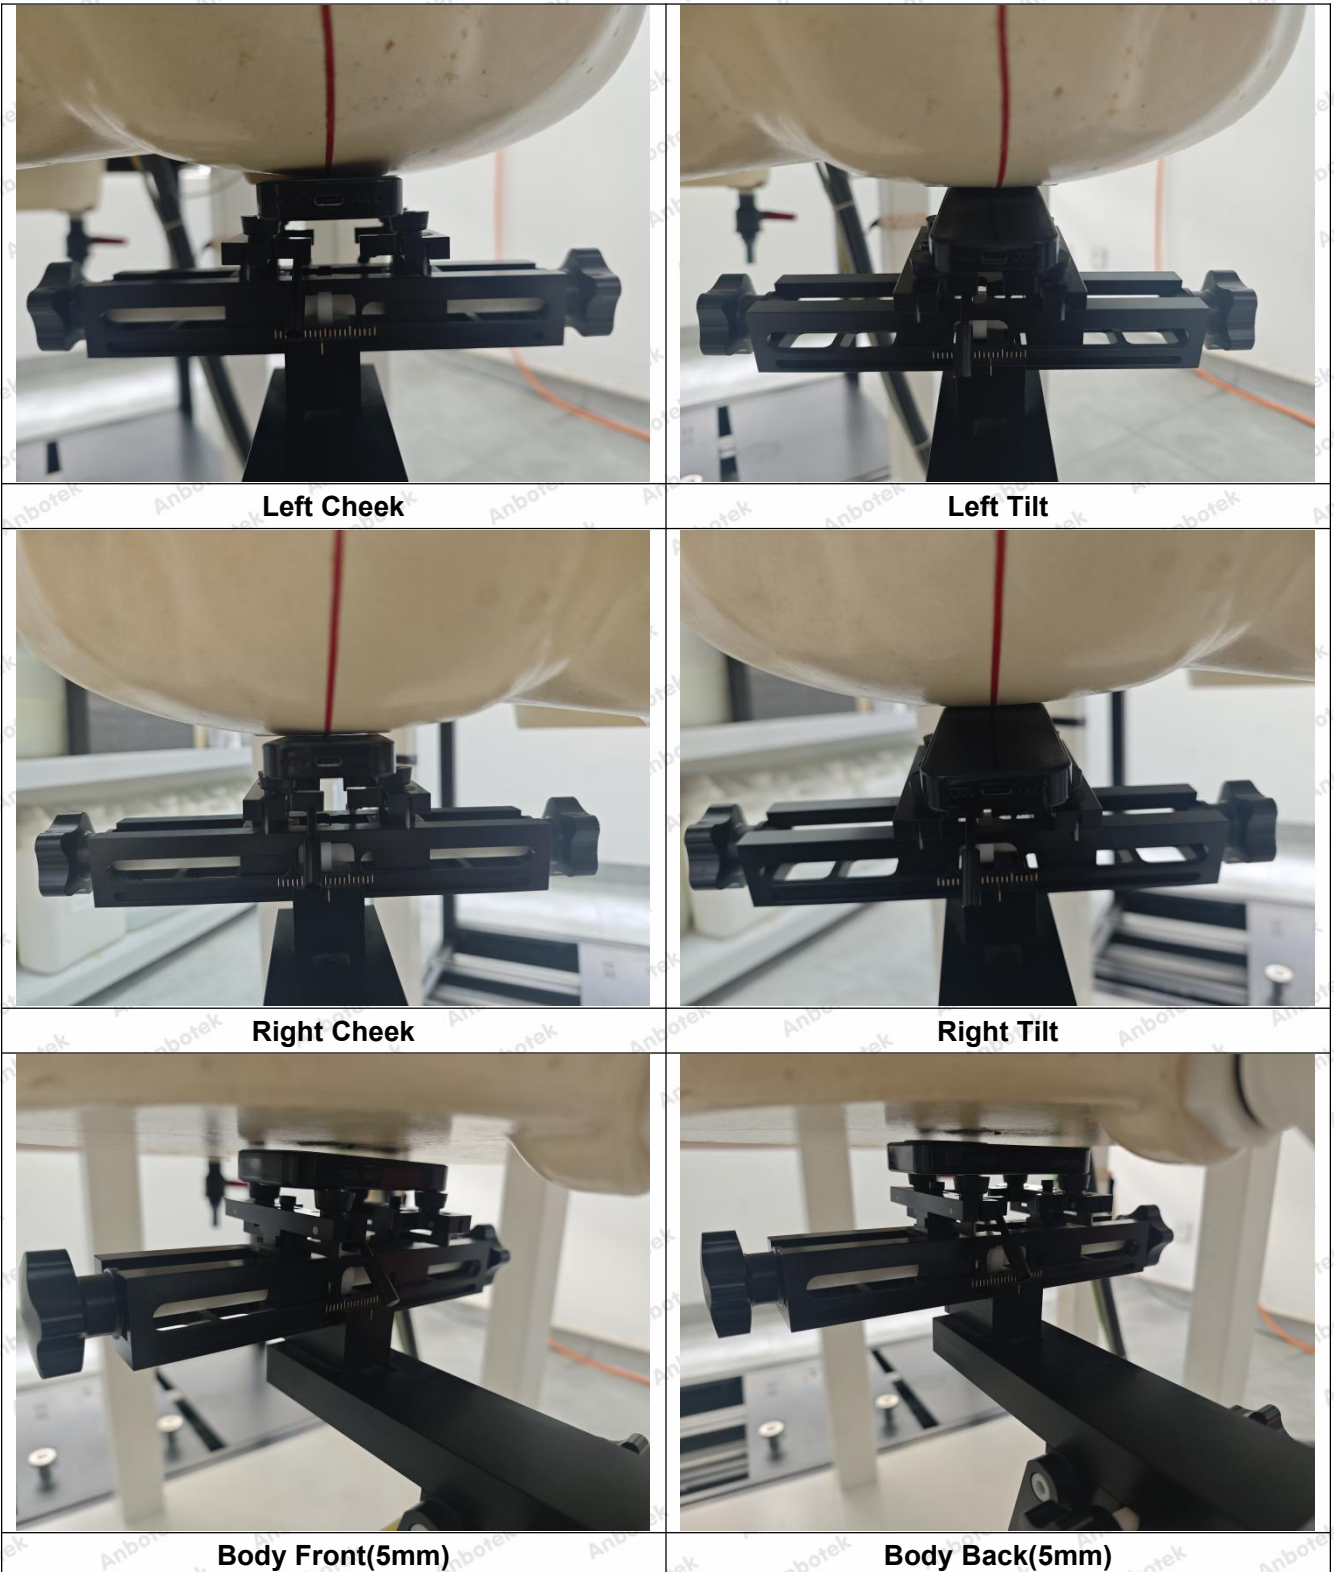





Body Left(5mm)



Body Right(5mm)

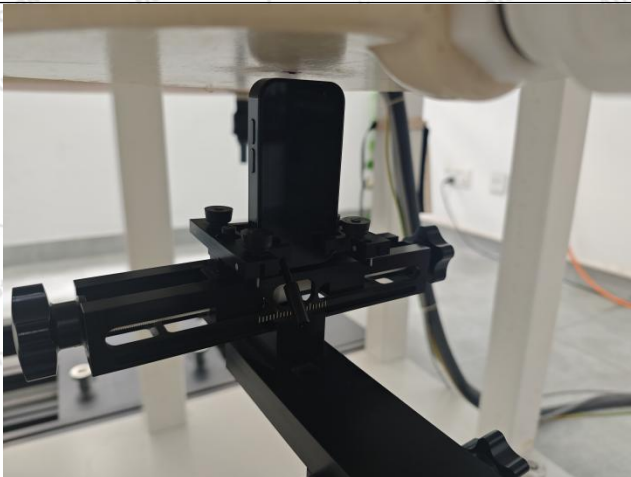

Body Top(5mm)

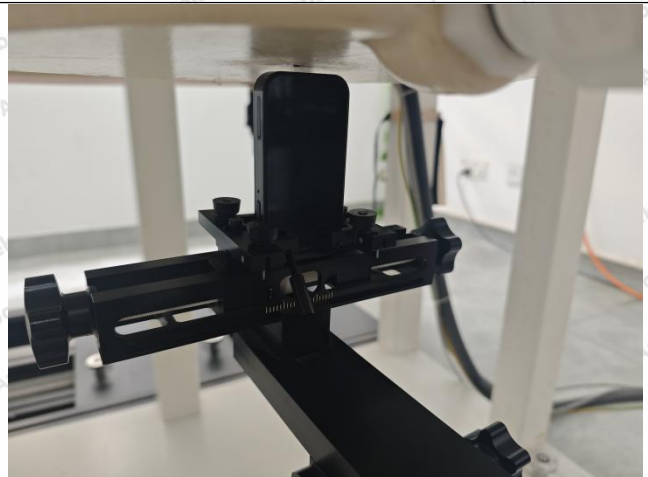

Body Bottom(5mm)



Appendix B. Plots of SAR System Check

835MHz Head System Check

Date:05/27/2024

DUT: Dipole 835 MHz; Type: D835V2; Serial: 4d154

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 835 \text{ MHz}$; $\sigma = 0.92 \text{ S/m}$; $\epsilon_r = 41.62$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7396; ConvF(9.88, 9.88, 9.88); Calibrated: May 06, 2024;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn387; Calibrated: Sep.06,2023;
- Phantom: SAM 1; Type: SAM;
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.10 (7164)

Area Scan (61x91x1):Measurement grid: $dx=15.00 \text{ mm}$, $dy=15.00 \text{ mm}$

Maximum value of SAR (interpolated) = 2.875 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 50.286 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 3.175 W/kg

SAR(1 g) = 2.33 W/kg; SAR(10 g) = 1.55 W/kg

Maximum value of SAR (measured) = 2.574 W/kg

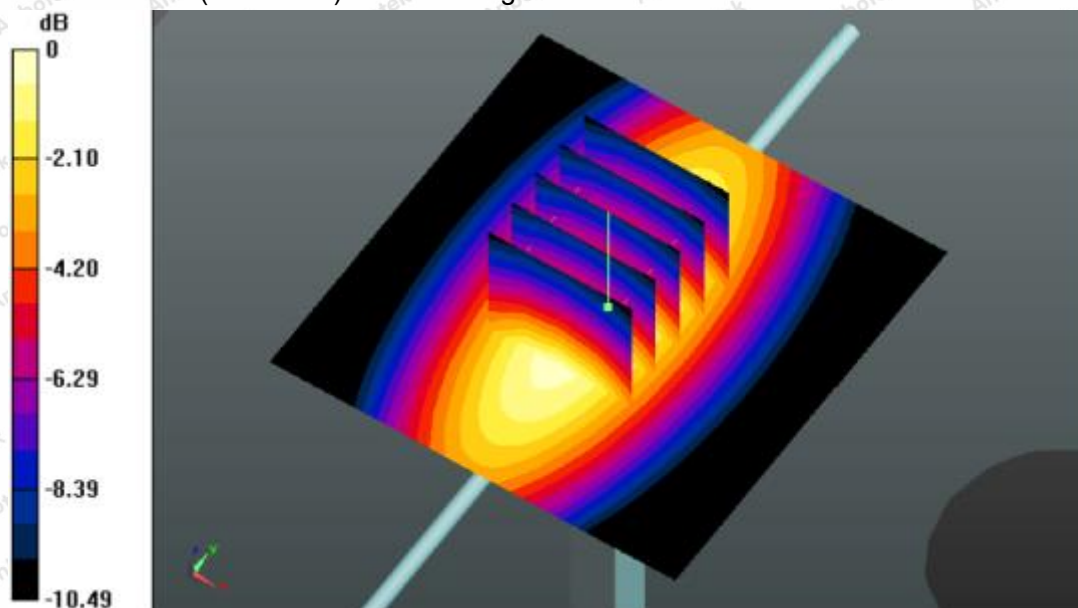

Report No.:18220WC40091007
1900MHz Head System Check

FCC ID:2BGA8-KING9000

Page 67 of 158
Date:05/28/2024

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: 5d175

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1900$ MHz; $\sigma = 1.46$ S/m; $\epsilon_r = 40.12$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN7396; ConvF(7.97, 7.97, 7.97); Calibrated: May 06, 2024;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn387; Calibrated: Sep.06,2023;

Phantom: SAM 1; Type: SAM;

Measurement SW: DASY52, Version 52.8 (1); SEMCAD X Version 14.6.5 (6469)

Area Scan (61x91x1): Measurement grid: $dx=15.00$ mm, $dy=15.00$ mm

Maximum value of SAR (interpolated) = 16.895 W/kg



Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 87.671 V/m; Power Drift = 0.08dB

Peak SAR (extrapolated) = 19.868 W/kg

SAR(1 g) = 10.18 W/kg; SAR(10 g) = 5.37 W/kg

Maximum value of SAR (measured) = 15.332 W/kg

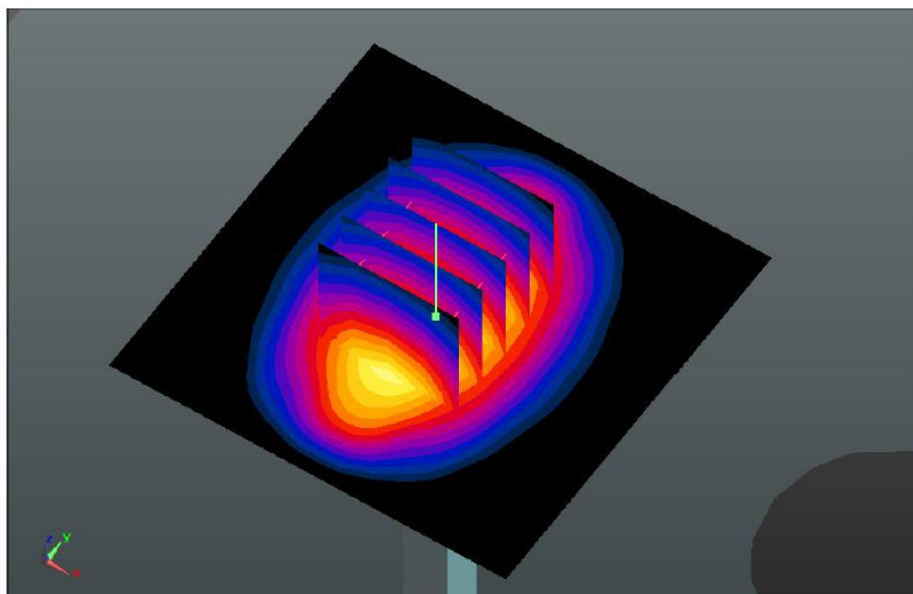

Report No.:18220WC40091007
2450MHz Head System Check

FCC ID:2BGA8-KING9000

Page 68 of 158
Date:05/29/2024

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: 910

Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2450$ MHz; $\sigma = 1.85$ S/m; $\epsilon_r = 39.08$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN7396; ConvF(7.53, 7.53, 7.53); Calibrated: May 06, 2024;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn387; Calibrated: Sep.06.2023;

Phantom: SAM 1; Type: SAM;

Measurement SW: DASY52, Version 52.8 (1); SEMCAD X Version 14.6.5 (6469)

Area Scan (61x91x1): Measurement grid: dx=10.00 mm, dy=10.00 mm

Maximum value of SAR (interpolated) = 19.664 W/kg



Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 84.571 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 26.125 W/kg

SAR(1 g) = 12.95 W/kg; SAR(10 g) = 5.92 W/kg

Maximum value of SAR (measured) = 19.47W/kg

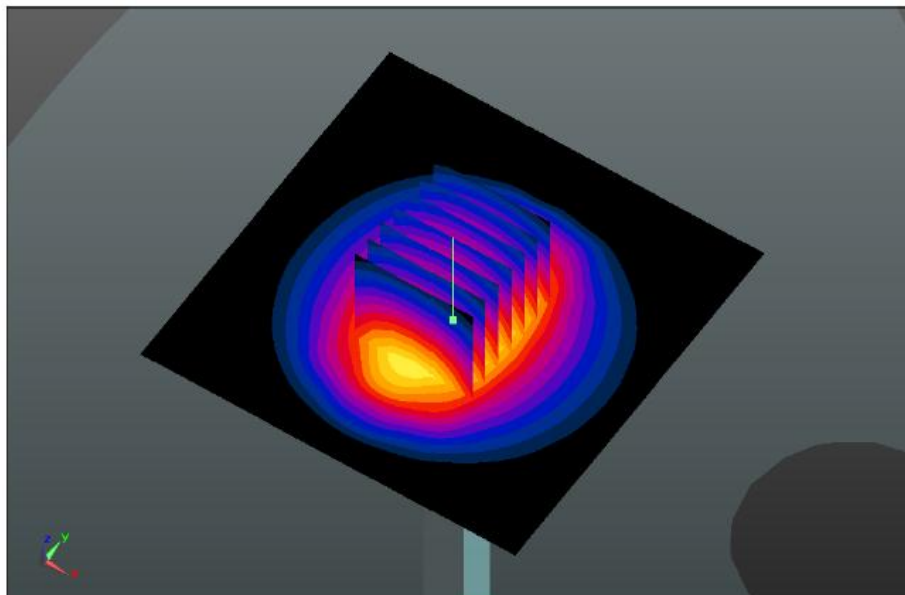

Report No.:18220WC40091007

FCC ID:2BGA8-KING9000

Page 69 of 158

2600MHz Head System Check

Date:05/30/2024

DUT: Dipole 2600 MHz; Type: D2600V2;

Communication System: CW; Frequency: 2600 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2600$ MHz; $\sigma = 2.03$ S/m; $\epsilon_r = 39.35$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 – SN7396; ConvF(7.38, 7.38, 7.38); Calibrated: May 06, 2024;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn387; Calibrated: Sep.06.2023
- Phantom: SAM; Type: QD000P40CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.10 (7164)

Configuration/Pin=250mW/Area Scan (81x81x1):Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 24.576 W/kg



Configuration/Pin=250mW/Zoom Scan (7x7x7)/Cube 0:Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 110.147 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 33.245 W/kg

SAR(1 g) = 13.91 W/kg; SAR(10 g) = 6.43 W/kg

Maximum value of SAR (measured) = 25.668 W/kg

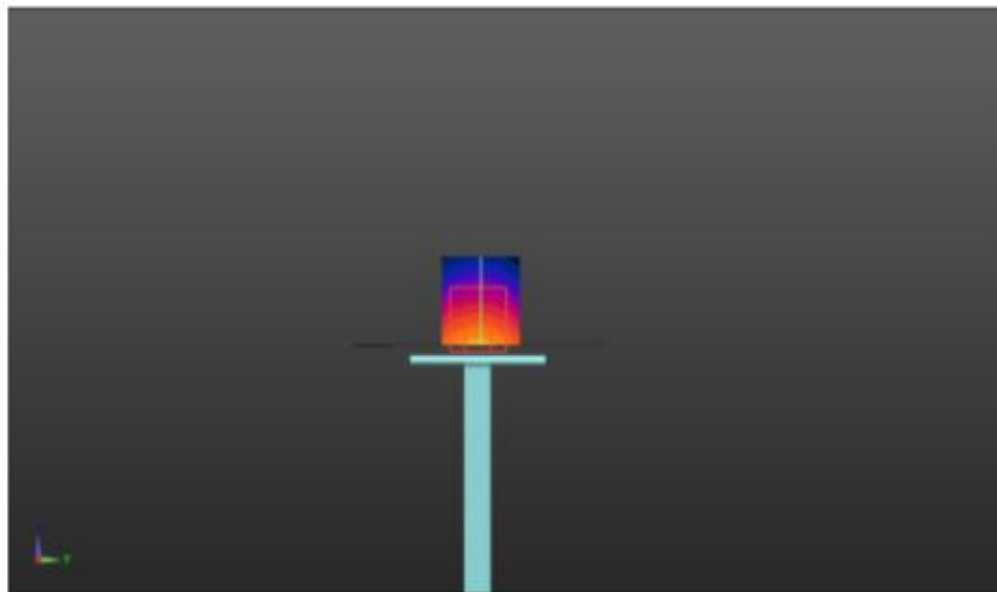

Report No.:18220WC40091007

FCC ID:2BGA8-KING9000

Page 70 of 158

5200MHz Body System Check

Date:05/31/2024

DUT: Dipole 5GHz; Type: D5GHzV2; Serial: D5GHzV2 - SN:1160

Communication System: UID 0, CW; Frequency: 5200 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5200 \text{ MHz}$; $\sigma = 5.2 \text{ S/m}$; $\epsilon_r = 48.23$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 – SN7396; ConvF(4.93, 4.93, 4.93); Calibrated: May 06, 2024;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn387; Calibrated: Sep. 06, 2023
- Phantom: SAM; Type: QD000P40CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.10 (7164)

Configuration/Pin=100mW/Area Scan (71x71x1): Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$

Maximum value of SAR (interpolated) = 20.9 W/kg



Configuration/Pin=100mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=1.4\text{mm}$

Reference Value = 59.857 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 34.58 W/kg

SAR(1 g) = 7.63 W/kg; SAR(10 g) = 2.21 W/kg

Maximum value of SAR (measured) = 20.8 W/kg

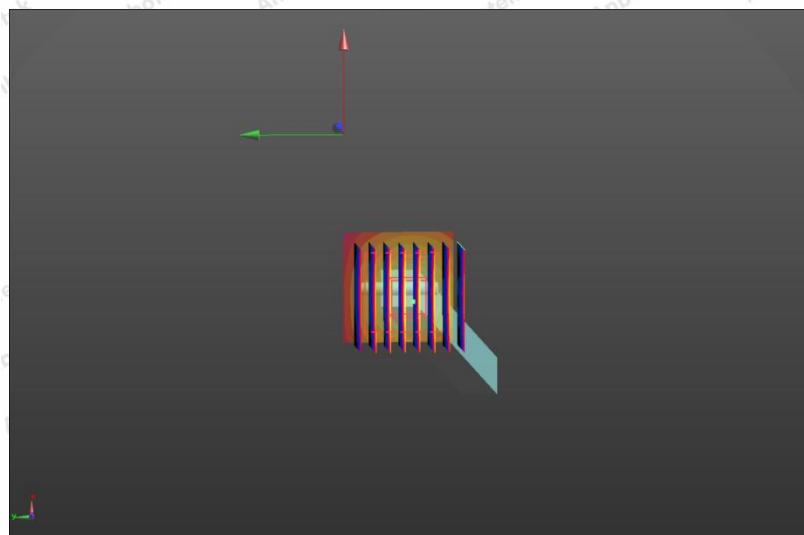

Report No.:18220WC40091007

FCC ID:2BGA8-KING9000

Page 71 of 158

5800MHz Body System Check

Date:06/01/2024

DUT: Dipole 5800 MHz; Type: D5GHzV2; Serial: D5GHzV2 - SN:1160

Communication System: UID 0, CW; Frequency: 5800 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 5800$ MHz; $\sigma = 5.85$ S/m; $\epsilon_r = 48.45$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 – SN7396; ConvF(4.52, 4.52, 4.52); Calibrated: May 06, 2024;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn387; Calibrated: Sep. 06, 2023
- Phantom: SAM; Type: QD000P40CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.10 (7164)

Configuration/Pin=100mW/Area Scan (71x71x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 18.8 W/kg



Configuration/Pin=100mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 56.773 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 31.5 W/kg

SAR(1 g) = 7.95 W/kg; SAR(10 g) = 2.23 W/kg

Maximum value of SAR (measured) = 19.8 W/kg

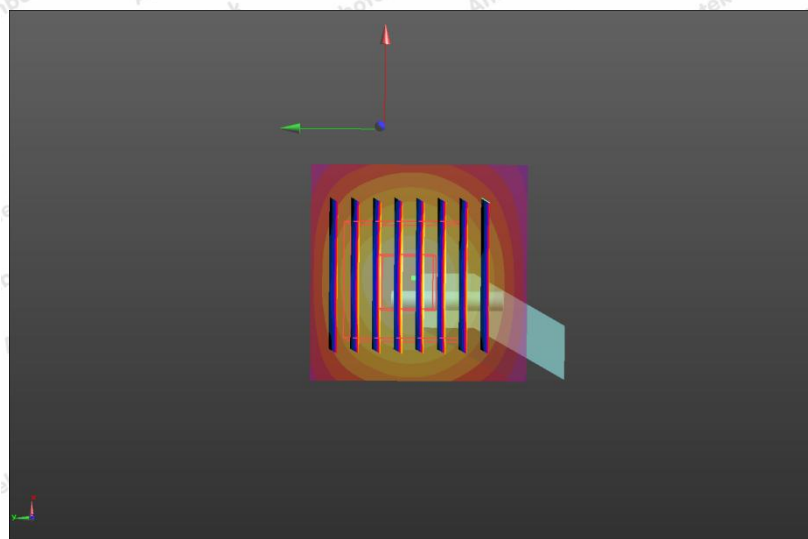

Appendix C. Plots of SAR Test Data

#1

Date: 05/27/2024

GSM850_GPRS_4TX_Left Cheek Touch_Ch128

Communication System: UID 0, GPRS(4 Tx slots) (0); Frequency: 824.2MHz;Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 824.2$ MHz; $\sigma = 0.92$ S/m; $\epsilon_r = 41.62$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7396; ConvF(9.71, 9.71, 9.71); Calibrated: May 06, 2024;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn387; Calibrated: Sep.06,2023
- Phantom: SAM 1; Type: SAM;
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.10 (7164)

Left Cheek Touch/Area Scan (71x131x1): Measurement grid: dx=1.500mm, dy=1.500mm

Maximum value of SAR (interpolated) = 0.812 W/kg



Left Cheek Touch/Zoom Scan (5x5x7)/Cube 0:Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.241 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.836 W/kg

SAR(1 g) = 0.652 W/kg; SAR(10 g) = 0.322 W/kg

Maximum value of SAR (measured) =0.895W/kg

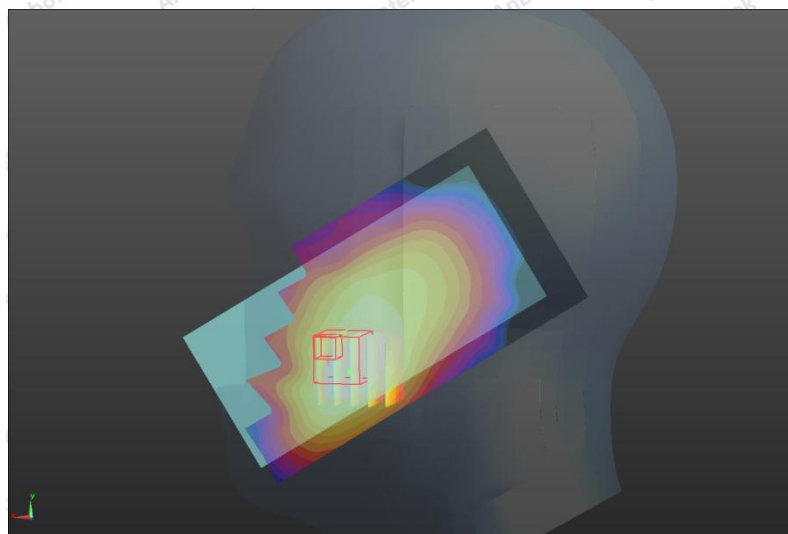

Report No.:18220WC40091007

FCC ID:2BGA8-KING9000

Page 73 of 158

#2

Date: 05/28/2024

GSM1900_GPRS_4TX_ Left Cheek Touch _Ch512



Communication System: UID 0, GPRS(4 Tx slots) (0); Frequency: 1850.2 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1850.2 \text{ MHz}$; $\sigma = 1.46 \text{ S/m}$; $\epsilon_r = 40.12$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7396; ConvF(8.13, 8.13, 8.13); Calibrated: May 06.2024;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn387; Calibrated: Sep.06.2023
- Phantom: SAM 1; Type: SAM;
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.10 (7164)

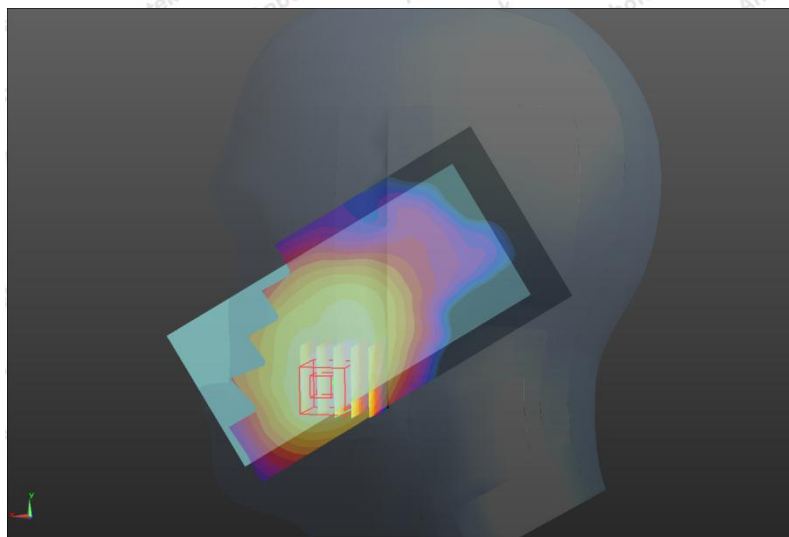Left Cheek Touch /Area Scan (71x131x1): Measurement grid: $dx=1.500\text{mm}$, $dy=1.500\text{mm}$ Maximum value of SAR (measured) = 0.714 W/kg **Left Cheek Touch /Zoom Scan (5x5x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 8.891 V/m ; Power Drift = -0.09 dB Peak SAR (extrapolated) = 0.763 W/kg **SAR(1 g) = 0.533 W/kg ; SAR(10 g) = 0.268 W/kg** Maximum value of SAR (measured) = 0.717 W/kg 

Report No.:18220WC40091007

FCC ID:2BGA8-KING9000

Page 74 of 158

#3

Date: 05/28/2024

WCDMA 1900_RMC 12.2K_ Left Cheek Touch _Ch9538

Communication System: UID 0, Generic WCDMA (0); Frequency: 1907.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1907.6 \text{ MHz}$; $\sigma = 1.46 \text{ S/m}$; $\epsilon_r = 40.12$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:



Probe: EX3DV4 – SN7396; ConvF(8.13, 8.13, 8.13); Calibrated: May,06,2024;

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn387; Calibrated: Sep.06,2023

Phantom: SAM; Type: QD000P40CD; Serial: TP:1670

Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.10 (7164)

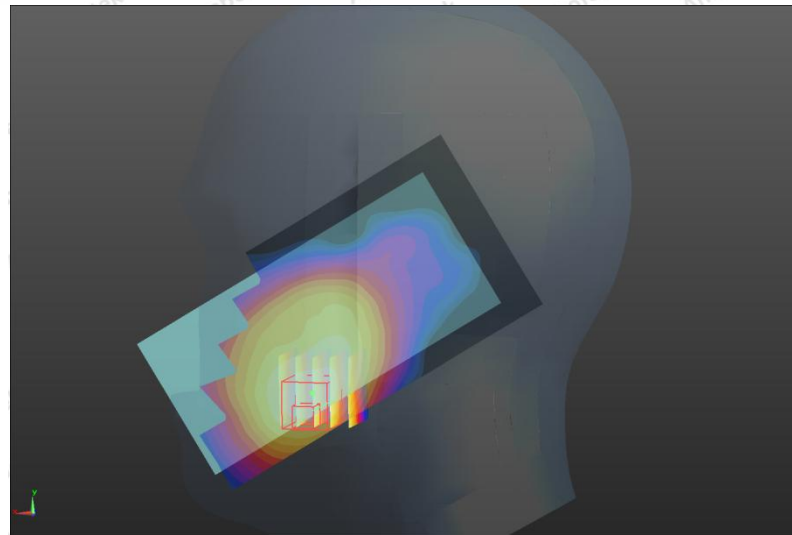Left Cheek Touch /Area Scan (71x131x1): Measurement grid: $dx=1.500\text{mm}$, $dy=1.500\text{mm}$ Maximum value of SAR (measured) = 0.717 W/kg **Left Cheek Touch /Zoom Scan (5x5x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 8.445 V/m ; Power Drift = 0.11 dB Peak SAR (extrapolated) = 0.785 W/kg **SAR(1 g) = 0.436 W/kg ; SAR(10 g) = 0.218 W/kg** Maximum value of SAR (measured) = 0.733 W/kg 

Report No.:18220WC40091007

FCC ID:2BGA8-KING9000

Page 75 of 158

#4

Date: 05/27/2024

WCDMA 850_RMC 12.2K_ Left Cheek Touch _Ch4132

Communication System: UID 0, Generic WCDMA (0); Frequency: 826.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 826.4$ MHz; $\sigma = 0.92$ S/m; $\epsilon_r = 41.62$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 – SN7396; ConvF(9.71, 9.71, 9.71); Calibrated: May,06,2024;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn387; Calibrated: Sep.06,2023
- Phantom: SAM; Type: QD000P40CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.10 (7164)

Left Cheek Touch/Area Scan (71x131x1): Measurement grid: dx=1.500mm, dy=1.500mm

Maximum value of SAR (measured) =0.728 W/kg



Left Cheek Touch /Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.375 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.771 W/kg

SAR(1 g) = 0.496 W/kg; SAR(10 g) = 0.247 W/kg

Maximum value of SAR (measured) = 0.746 W/kg

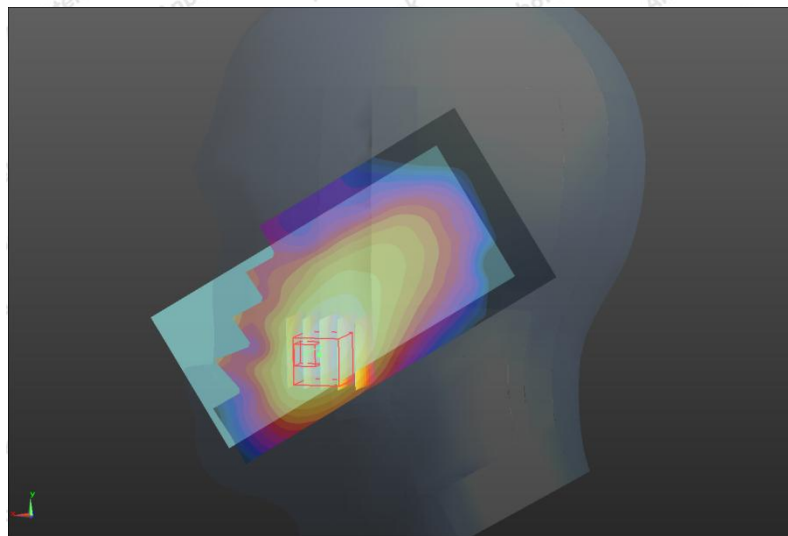

Report No.:18220WC40091007

FCC ID:2BGA8-KING9000

Page 76 of 158

#5

Date: 05/27/2024

LTE Band 5_ Left Cheek Touch _1RB_Ch20450

Communication System: UID 0, Generic LTE (0); Frequency: 829MHz;Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 829 \text{ MHz}$; $\sigma = 0.92 \text{ S/m}$; $\epsilon_r = 41.62$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 – SN7396; ConvF(9.71, 9.71,9.71); Calibrated: May 06, 2024;

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn387; Calibrated: Sep.06,2023

Phantom: SAM; Type: QD000P40CD; Serial: TP:1670

Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.10 (7164)

Left Cheek Touch /Area Scan (71x131x1):Measurement grid: $dx=1.500\text{mm}$, $dy=1.500\text{mm}$

Maximum value of SAR (interpolated) =0.710 W/kg



Left Cheek Touch /Zoom Scan (5x5x7)/Cube 0:Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 7.664 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.768 W/kg

SAR(1 g) = 0.429 W/kg; SAR(10 g) = 0.212 W/kg

Maximum value of SAR (measured) = 0.753 W/kg

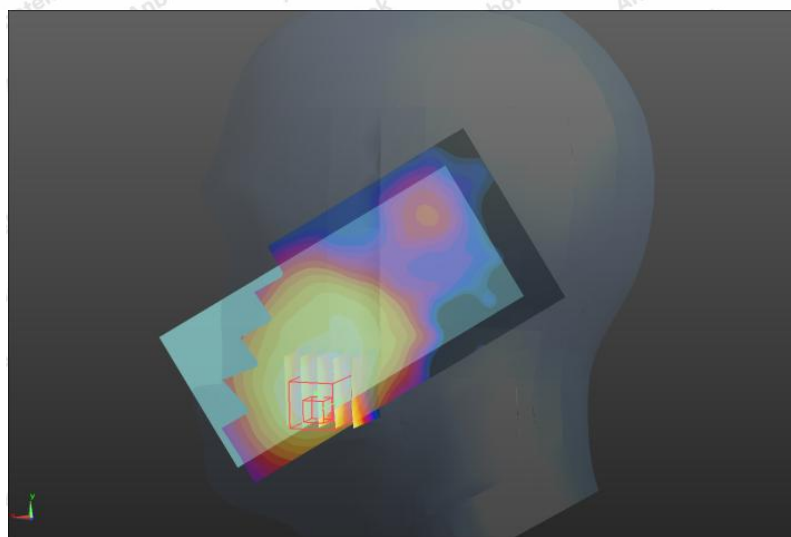

Report No.:18220WC40091007

FCC ID:2BGA8-KING9000

Page 77 of 158

#6

Date: 05/29/2024

LTE Band 7_ Left Cheek Touch _1RB_ Ch20850

Communication System: UID 0, Generic LTE (0); Frequency: 2510 MHz;

Medium parameters used (interpolated): $f=2510$ MHz; $\sigma=1.85$ S/m; $\epsilon_r=39.08$; $\rho=1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

Probe: EX3DV4 – SN7396; ConvF(7.38, 7.38, 7.38); Calibrated: May 06, 2024;

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn387; Calibrated: Sep.06,2023

Phantom: SAM; Type: QD000P40CD; Serial: TP:1670

Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.10 (7164)

Left Cheek Touch /Area Scan (71x131x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.647 W/kg



Left Cheek Touch /Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 6.584 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.663 W/kg

SAR(1 g) = 0.336 W/kg; SAR(10 g) = 0.169 W/kg

Maximum value of SAR (measured) =0.635 W/kg

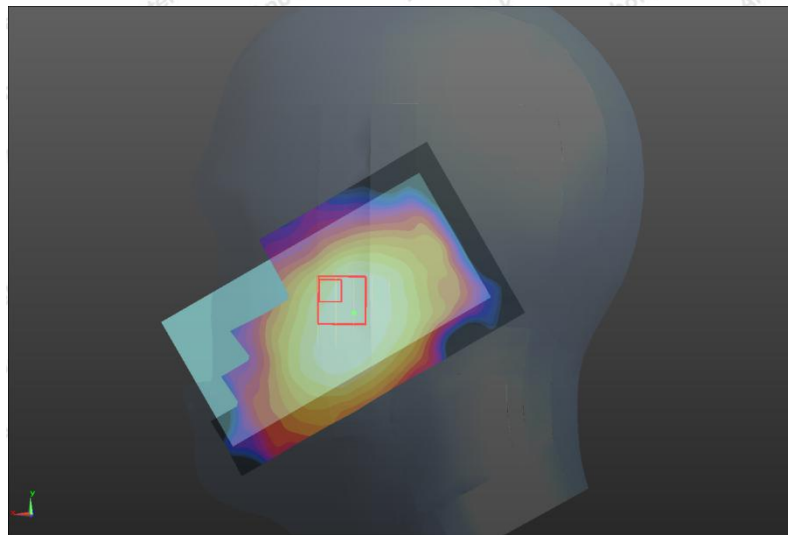

Report No.:18220WC40091007

FCC ID:2BGA8-KING9000

Page 78 of 158

#7

Date: 05/30/2024

LTE Band 38_ Left Cheek Touch _1RB_ Ch38150

Communication System: UID 0, Generic LTE (0); Frequency: 2610 MHz;

Medium parameters used (interpolated): $f=2610$ MHz; $\sigma=2.03$ S/m; $\epsilon_r=39.35$; $\rho=1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

Probe: EX3DV4 – SN7396; ConvF(7.38, 7.38, 7.38); Calibrated: May 06, 2024;

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn387; Calibrated: Sep.06,2023

Phantom: SAM; Type: QD000P40CD; Serial: TP:1670

Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.10 (7164)

Left Cheek Touch /Area Scan (71x131x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.668 W/kg



Left Cheek Touch /Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 6.598 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.684 W/kg

SAR(1 g) = 0.514 W/kg; SAR(10 g) = 0.259 W/kg

Maximum value of SAR (measured) = 0.845 W/kg

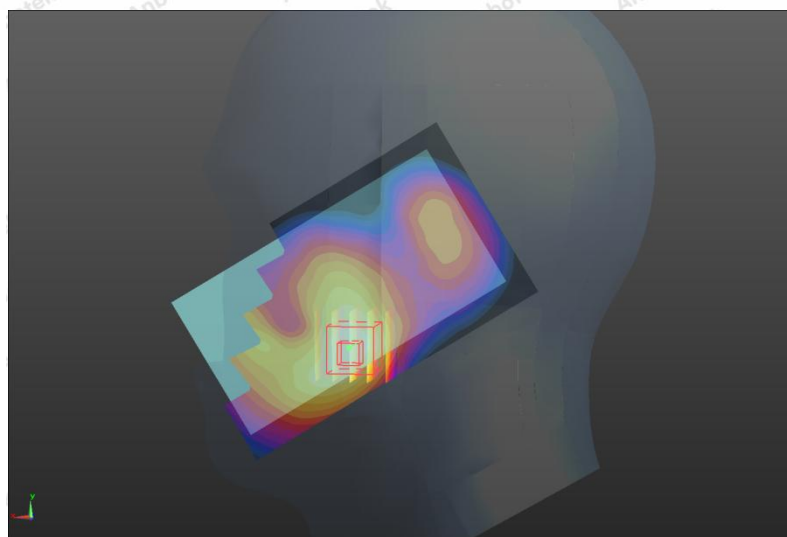

Report No.:18220WC40091007
#8

FCC ID:2BGA8-KING9000

Page 79 of 158
Date: 05/30/2024

LTE Band 41_ Left Cheek Touch _1RB_Ch40140

Communication System: UID 0, Generic LTE (0); Frequency: 2545 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 2545$ MHz; $\sigma = 2.03$ S/m; $\epsilon_r = 39.35$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
DASY5 Configuration:
Probe: EX3DV4 – SN7396; ConvF(7.38, 7.38, 7.38); Calibrated: May 06.2024;
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE4 Sn387; Calibrated: Sep.06,2023
Phantom: SAM; Type: QD000P40CD; Serial: TP:1670
Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.10 (7164)

Left Cheek Touch /Area Scan (71x131x1): Measurement grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.686 W/kg



Left Cheek Touch /Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 7.057 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.713 W/kg

SAR(1 g) = 0.501 W/kg; SAR(10 g) = 0.257 W/kg

Maximum value of SAR (measured) = 0.772 W/kg

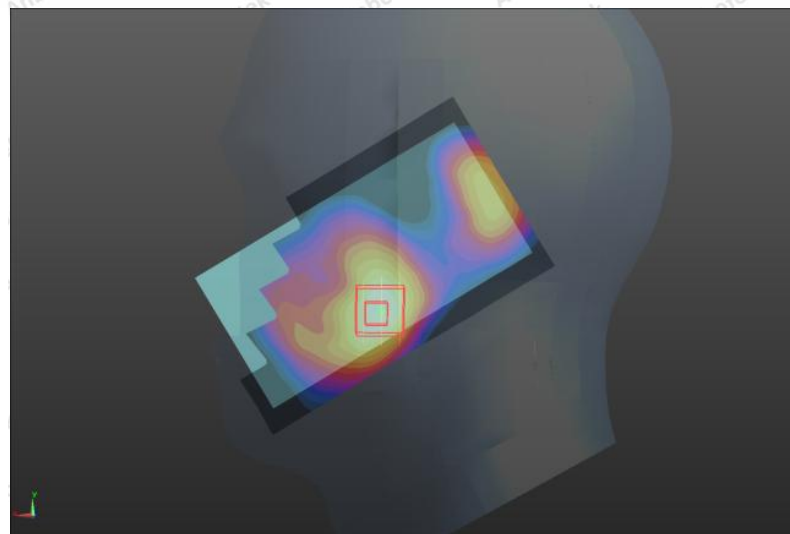

Report No.:18220WC40091007

FCC ID:2BGA8-KING9000

Page 80 of 158

#9

Date: 05/29/2024

WIFI 2.4G_802.11n(HT40)_ Right Cheek Touch _Ch6

Communication System: UID 0, wifi (fcc) (0); Frequency: 2437 MHz;Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.85$ S/m; $\epsilon_r = 39.08$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7396; ConvF(7.57, 7.57, 7.57); Calibrated: May 06.2024;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn387; Calibrated: Sep.06,2023
- Phantom: SAM 1; Type: SAM;
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.10 (7164)

Right Cheek Touch /Area Scan (91x161x1):Measurement grid: dx=1.200mm, dy=1.200mm

Maximum value of SAR (measured) = 0.452 W/kg



Right Cheek Touch /Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.563 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.485 W/kg

SAR(1 g) = 0.186 W/kg; SAR(10 g) = 0.095 W/kg

Maximum value of SAR (measured) = 0.432 W/kg

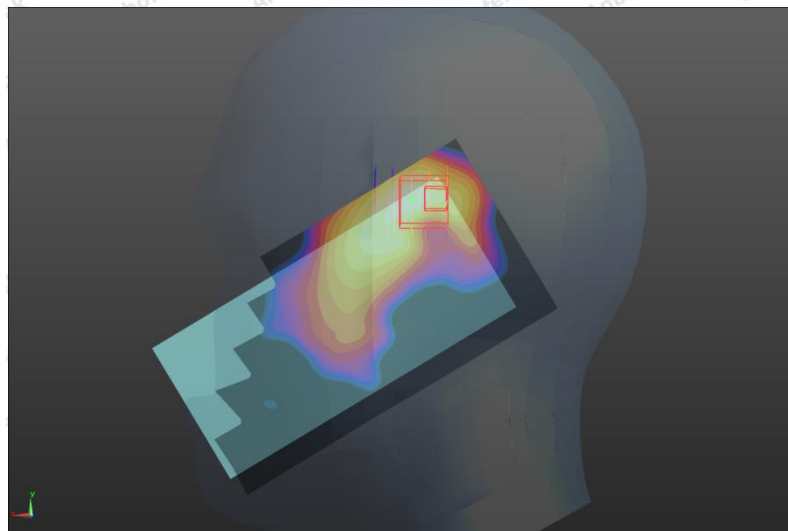

Report No.:18220WC40091007
#10

FCC ID:2BGA8-KING9000

Page 81 of 158
Date: 05/31/2024

WIFI 5.2G_802.11n(HT40)_ Right Cheek Touch _Ch38

Communication System: UID 0, 802.11 (0); Frequency: 5190MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 5190 \text{ MHz}$; $\sigma = 5.20 \text{ S/m}$; $\epsilon_r = 48.23$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 – SN7396; ConvF(5.33, 5.33, 5.33); Calibrated: May 06.2024;

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn387; Calibrated: Sep.06,2023

Phantom: SAM2; Type: QD000P40CD; Serial: TP:1670

Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Right Cheek Touch /Area Scan (91x161x1):Measurement grid: $dx=1.000\text{mm}$, $dy=1.000\text{mm}$

Maximum value of SAR (measured) = 0.523 W/kg



Right Cheek Touch /Zoom Scan (8x8x7)/Cube 0:Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=1.4\text{mm}$

Reference Value = 4.654 V/m ; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.428 W/kg

SAR(1 g) = 0.241 W/kg ; SAR(10 g) = 0.120 W/kg

Maximum value of SAR (measured) = 0.405 W/kg

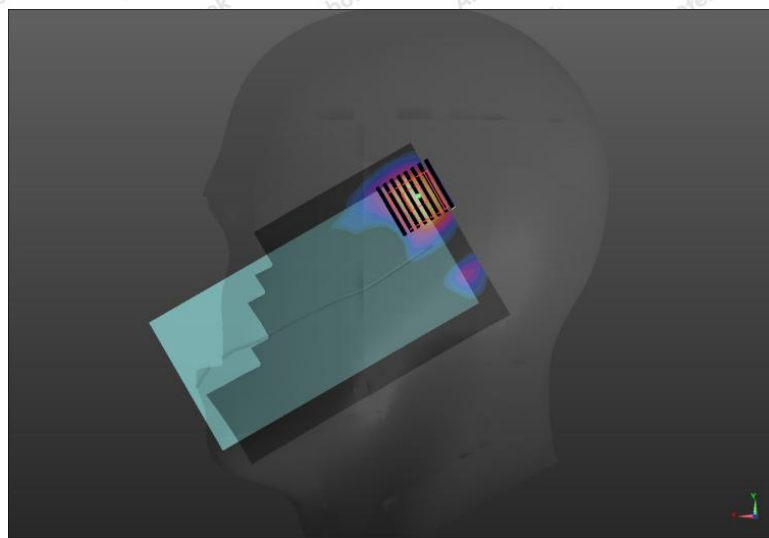

#11

Date: 06/01/2024

WIFI 5.8G_802.11a_ Right Cheek Touch _Ch165

Communication System: UID 0, wifi (fcc) (0); Frequency: 5825MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 5825$ MHz; $\sigma = 5.85$ S/m; $\epsilon_r = 48.45$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 – SN7396; ConvF(4.92, 4.92, 4.92); Calibrated: May 06, 2024;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn387; Calibrated: Sep. 06, 2023
- Phantom: SAM; Type: QD000P40CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.10 (7164)

Right Cheek Touch /Area Scan (91x161x1): Measurement grid: dx=1.000mm, dy=1.000mm

Maximum value of SAR (measured) = 0.441 W/kg


Right Cheek Touch /Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 3.358 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.386 W/kg

SAR(1 g) = 0.235 W/kg; SAR(10 g) = 0.117 W/kg

Maximum value of SAR (measured) = 0.432 W/kg

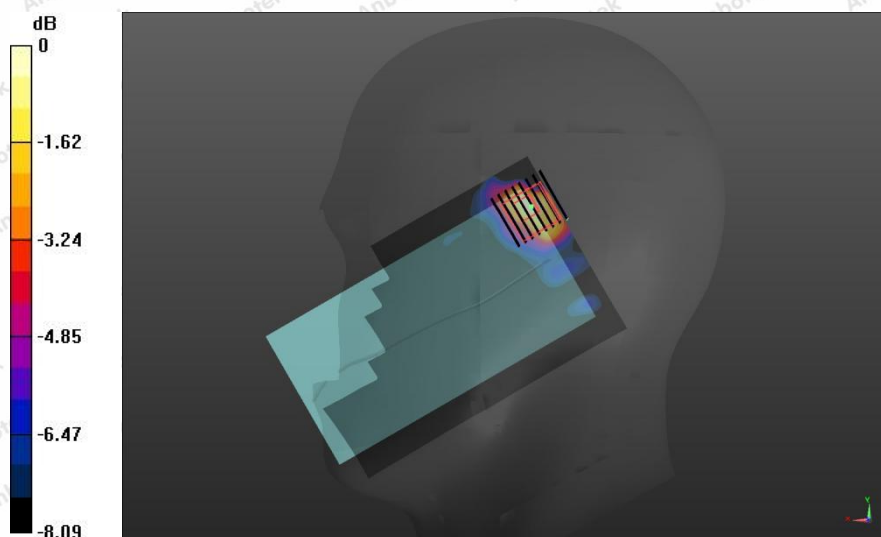

Report No.:18220WC40091007

FCC ID:2BGA8-KING9000

Page 83 of 158

#12

Date: 05/27/2024

GSM850_GPRS_4TX_Body Back_Ch128

Communication System: UID 0, GPRS(4 Tx slots) (0); Frequency: 824.2 MHz; Duty Cycle: 1:1.99986

Medium parameters used (interpolated): $f = 824.2$ MHz; $\sigma = 0.92$ S/m; $\epsilon_r = 41.62$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7396; ConvF(9.88, 9.88, 9.88); Calibrated: May 06, 2024;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn387; Calibrated: Sep.06,2023
- Phantom: SAM 1; Type: SAM;
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.10 (7164)

BODY/Back /Area Scan (71x131x1):Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.214 W/kg


BODY/Back /Zoom Scan (5x5x7)/Cube 0:Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.115 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 1.244 W/kg

SAR(1 g) = 0.719 W/kg; SAR(10 g) = 0.359 W/kg

Maximum value of SAR (measured) = 1.226 W/kg

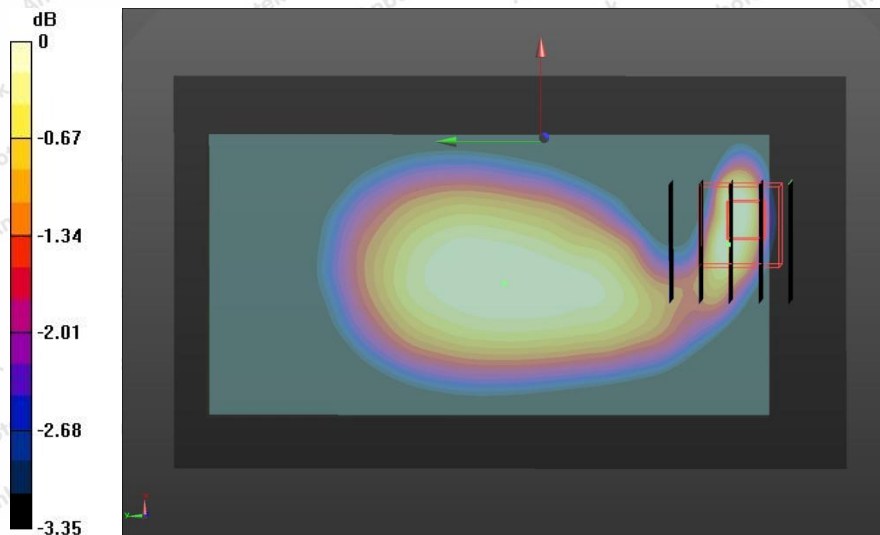

Report No.:18220WC40091007

FCC ID:2BGA8-KING9000

Page 84 of 158

#13

Date: 05/28/2024

GSM1900_GPRS_4TX_Body Back_Ch512

Communication System: UID 0, GPRS(4 Tx slots) (0); Frequency: 1850.2MHz;Duty Cycle: 1:1.99986

Medium parameters used: $f = 1850.2$ MHz; $\sigma = 1.46$ S/m; $\epsilon_r = 40.12$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7396; ConvF(7.97, 7.97, 7.97); Calibrated: May 06.2024;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn387; Calibrated: Sep.06,2023
- Phantom: SAM 1; Type: SAM;
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.10 (7164)

BODY/ BACK /Area Scan (71x131x1):Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (measured) =0.963 W/kg



BODY/ BACK /Zoom Scan (5x5x7)/Cube 0:Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.134 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.997 W/kg

SAR(1 g) = 0.522 W/kg; SAR(10 g) = 0.265 W/kg

Maximum value of SAR (measured) = 0.961 W/kg

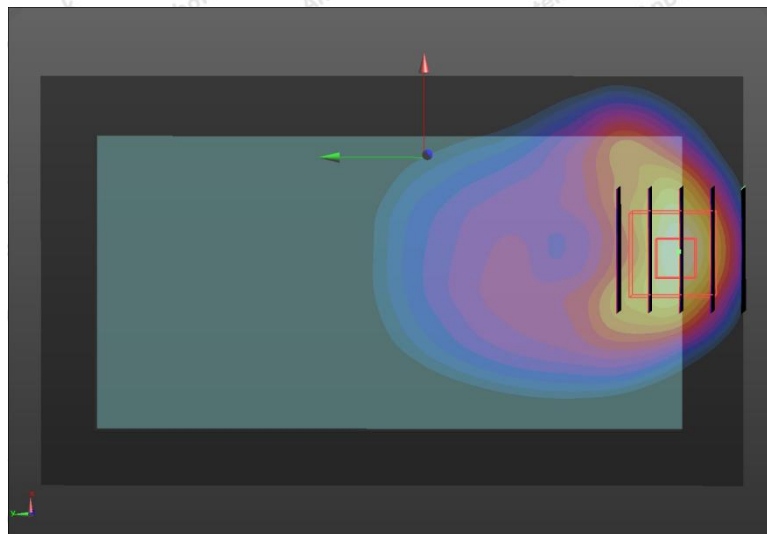

Report No.:18220WC40091007
#14

FCC ID:2BGA8-KING9000

Page 85 of 158
Date: 05/28/2024

WCDMA Band II_RMC 12.2K_Body Back_Ch9538

Communication System: UID 0, Generic WCDMA (0); Frequency: 1907.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1907.6$ MHz; $\sigma = 1.46$ S/m; $\epsilon_r = 40.12$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 – SN7396; ConvF(7.97, 7.97, 7.97); Calibrated: May 06.2024;

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn387; Calibrated: Sep.06,2023

Phantom: SAM; Type: QD000P40CD; Serial: TP:1670

Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.10 (7164)

BODY/ BACK /Area Scan (71x131x1): Measurement grid: dx=1.500mm, dy=1.500mm

Maximum value of SAR (measured) = 1.274 W/kg


BODY/ BACK /Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.311 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 1.359 W/kg

SAR(1 g) = 0.417 W/kg; SAR(10 g) = 0.207 W/kg

Maximum value of SAR (measured) = 0.742 W/kg

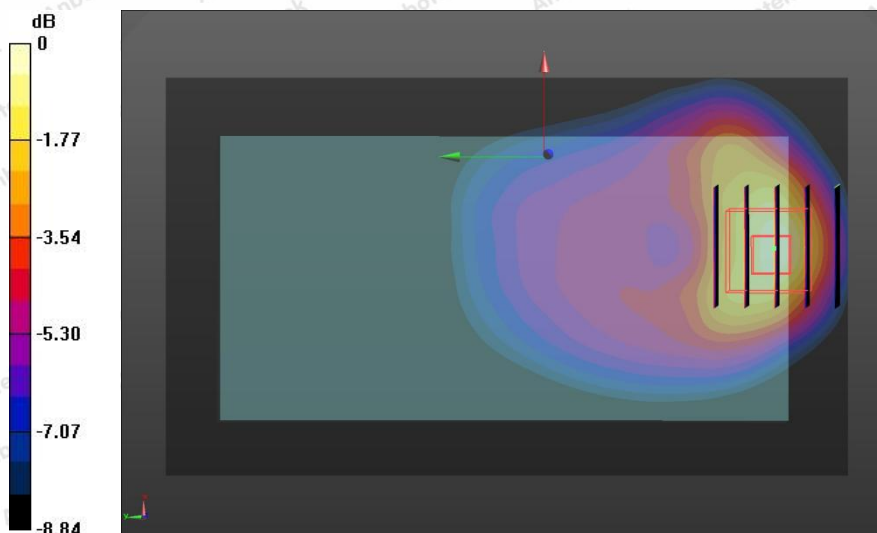

Report No.:18220WC40091007

FCC ID:2BGA8-KING9000

Page 86 of 158

#15

Date: 05/27/2024

WCDMA Band V_RMC 12.2K_Body Back_Ch4132

Communication System: UID 0, Generic WCDMA (0); Frequency: 826.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 826.4$ MHz; $\sigma = 0.92$ S/m; $\epsilon_r = 41.62$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 – SN7396; ConvF(9.88, 9.88, 9.88); Calibrated: May 06.2024;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn387; Calibrated: Sep.06,2023
- Phantom: SAM; Type: QD000P40CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.10 (7164)

BODY/ BACK /Area Scan (71x131x1): Measurement grid: dx=1.500mm, dy=1.500mm

Maximum value of SAR (measured) =1.308 W/kg



BODY/ BACK /Zoom Scan (5x5x7)/Cube 0:Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.462 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) =1.347 W/kg

SAR(1 g) = 0.467 W/kg; SAR(10 g) = 0.237 W/kg

Maximum value of SAR (measured) = 0.551 W/kg

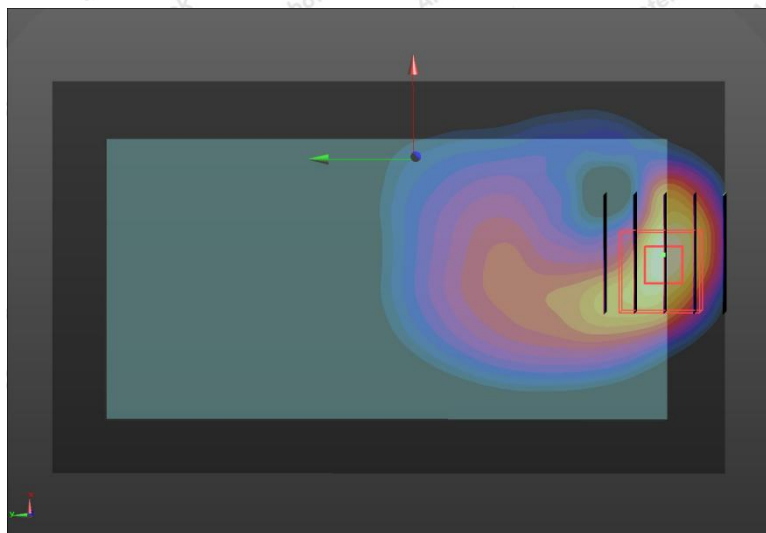

Report No.:18220WC40091007
#16

FCC ID:2BGA8-KING9000

Page 87 of 158
Date: 05/27/2024

LTE Band 5_ Body Back_1RB_Ch20450

Communication System: UID 0, Generic LTE (0); Frequency: 829 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 829$ MHz; $\sigma = 0.92$ S/m; $\epsilon_r = 41.62$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 – SN7396; ConvF(10.09, 10.09, 10.09); Calibrated: May 06, 2024;
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE4 Sn387; Calibrated: Sep.06,2023
Phantom: SAM; Type: QD000P40CD; Serial: TP:1670
Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.10 (7164)

BODY/ BACK /Area Scan (71x131x1): Measurement grid: dx=1.500mm, dy=1.500mm

Maximum value of SAR (interpolated) = 1.415 W/kg



BODY/ BACK /Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.414 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 1.308 W/kg

SAR(1 g) = 0.419 W/kg; SAR(10 g) = 0.198W/kg

Maximum value of SAR (measured) = 0.724 W/kg

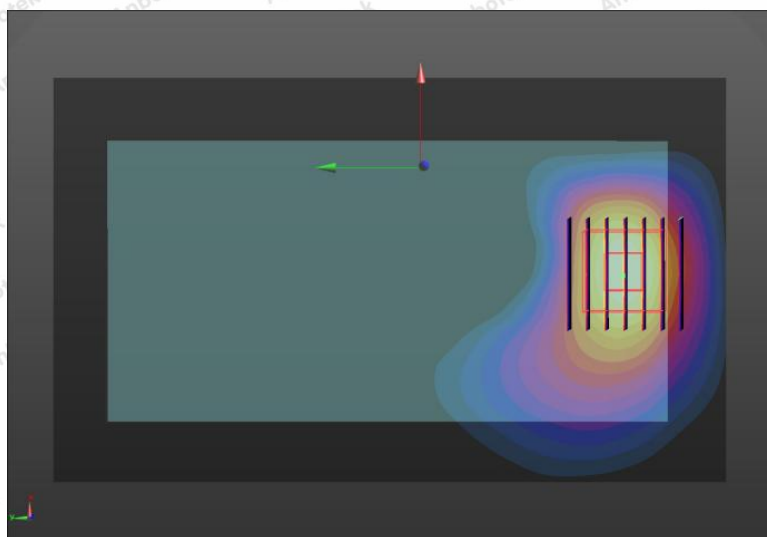

Report No.:18220WC40091007

FCC ID:2BGA8-KING9000

Page 88 of 158

#17

Date: 05/29/2024

LTE Band 7_ Body Back_1RB_ Ch20850

Communication System: UID 0, Generic LTE (0); Frequency: 2510 MHz;

Medium parameters used (interpolated): $f=2510$ MHz; $\sigma=1.85$, S/m; $\epsilon_r=39.08$; $\rho=1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

Probe: EX3DV4 – SN7396; ConvF(7.38, 7.38, 7.38); Calibrated: May 06, 2024;

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn387; Calibrated: Sep.06,2023

Phantom: SAM; Type: QD000P40CD; Serial: TP:1670

Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.10 (7164)

BODY/ BACK /Area Scan (71x131x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) =1.058 W/kg



BODY/ BACK /Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 14.174 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 1.064 W/kg

SAR(1 g) = 0.325 W/kg; SAR(10 g) = 0.155 W/kg

Maximum value of SAR (measured) =0.565 W/kg

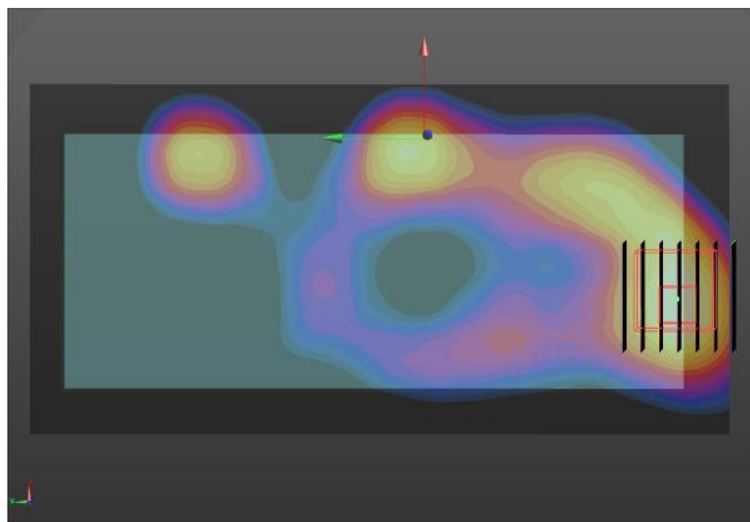

Report No.:18220WC40091007
#18

FCC ID:2BGA8-KING9000

Page 89 of 158
Date: 05/30/2024

LTE Band 38_ Body Back_1RB_Ch38150

Communication System: UID 0, Generic LTE (0); Frequency: 2610 MHz;Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2610$ MHz; $\sigma = 2.03$ S/m; $\epsilon_r = 39.35$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 – SN7396; ConvF(10.09, 10.09,10.09); Calibrated: May 06, 2024;

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn387; Calibrated: Sep.06,2023

Phantom: SAM; Type: QD000P40CD; Serial: TP:1670

Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.10 (7164)

BODY/ BACK /Area Scan (71x131x1):Measurement grid: dx=1.500mm, dy=1.500mm

Maximum value of SAR (interpolated) = 1.202 W/kg



BODY/ BACK /Zoom Scan (5x5x7)/Cube 0:Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.335 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 1.213 W/kg

SAR(1 g) = 0.521 W/kg; SAR(10 g) = 0.259 W/kg

Maximum value of SAR (measured) = 0.825 W/kg

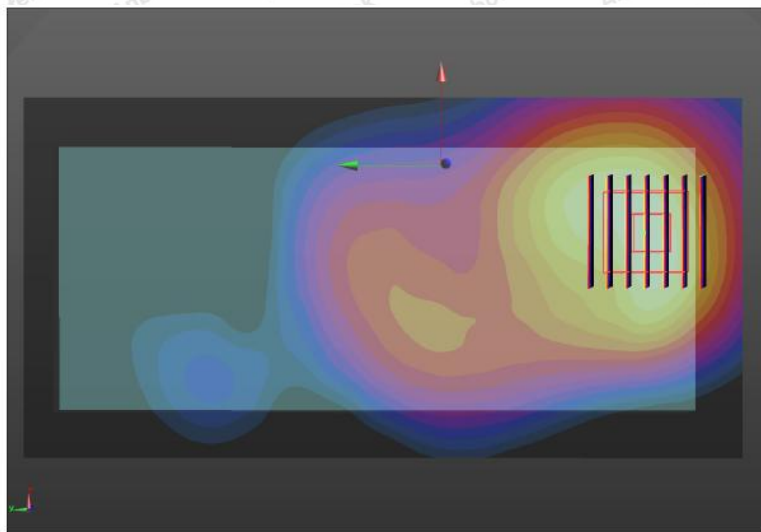

Report No.:18220WC40091007
#19

FCC ID:2BGA8-KING9000

Page 90 of 158
Date: 05/30/2024

LTE Band 41_Body Back_1RB_Ch40140

Communication System: UID 0, Generic LTE (0); Frequency: 2545 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 2545 \text{ MHz}$; $\epsilon = 2.03 \text{ S/m}$; $\epsilon_r = 39.35$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section
DASY5 Configuration:
Probe: EX3DV4 – SN7396; ConvF(10.09, 10.09, 10.09); Calibrated: May 06, 2024;
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE4 Sn387; Calibrated: Sep.06, 2023
Phantom: SAM; Type: QD000P40CD; Serial: TP:1670
Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.10 (7164)

BODY/BACK /Area Scan (71x131x1): Measurement grid: $dx=1.500\text{mm}$, $dy=1.500\text{mm}$

Maximum value of SAR (interpolated) = 1.258 W/kg

BODY/BACK/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 14.832 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 1.248 W/kg

SAR(1 g) = 0.505 W/kg; SAR(10 g) = 0.246 W/kg

Maximum value of SAR (measured) = 0.756 W/kg

