

FCC Test Report

Applicant : Shenzhen Donghuaxing Technology Co., Ltd

Address : 6A016 Building C, No. 164 Pingxin North Road, Hehua Community, Pinghu Street, Longgang District, Shenzhen, Guangdong, 518000, China

Product Name : Mini smartphone

Report Date : Jun. 17, 2024



Shenzhen Anbotek Compliance Laboratory Limited

Shenzhen Anbotek Compliance Laboratory Limited

Address: 1/F., Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.
Tel: (86) 0755-26066440 Fax: (86) 0755-26014772 Email: service@anbotek.com

Code: AB-RF-05-b



Hotline
400-003-0500
www.anbotek.com.cn



Contents

1. General Information	6
1.1. Client Information	6
1.2. Description of Device (EUT)	6
1.3. Auxiliary Equipment Used During Test	7
1.4. Operation State	7
1.5. Environmental Conditions	8
1.6. Test Equipment List	8
1.7. Measurement Uncertainty	9
1.8. Description of Test Facility	9
1.9. Disclaimer	10
2. Summary of Test	11
2.1. Summary of test result	11
3. Conducted Output Power Test	12
3.1. Test Standard and Limit	12
3.2. Test Setup	12
3.3. Test Procedure	12
3.4. Test Data	12
4. Peak-Average Ratio	13
4.1. Test Standard and Limit	13
4.2. Test Setup	13
4.3. Test Procedure	13
4.4. Test Data	13
5. Modulation Characteristic	14
6. 99% Occupied Bandwidth & 26 dB Bandwidth	15
6.1. Test Standard and Limit	15
6.2. Test Setup	15
6.3. Test Procedure	15
6.4. Test Data	15
7. Band Edge	16
7.1. Test Standard and Limit	16
7.2. Test Setup	16
7.3. Test Procedure	16
7.4. Test Data	16
8. Conducted Spurious Emission	17
8.1. Test Standard and Limit	17
8.2. Test Setup	17
8.3. Test Procedure	17



8.4. Test Data	17
9. Radiated Spurious Emission	18
9.1. Test Standard and Limit	18
9.2. Test Setup	18
9.3. Test Procedure	18
9.4. Test Data	20
10. ERP and EIRP	22
10.1. Test Standard and Limit	22
10.2. Test Setup	22
10.3. Test Procedure	22
10.4. Test Data	24
11. Frequency stability VS Voltage measurement	25
11.1. Test Standard and Limit	25
11.2. Test Setup	25
11.3. Test Procedure	25
11.4. Test Data	25
12. Frequency stability VS Temperature measurement	26
12.1. Test Standard and Limit	26
12.2. Test Setup	26
12.3. Test Procedure	26
12.4. Test Data	26
APPENDIX I -- TEST SETUP PHOTOGRAPH	27
APPENDIX II -- EXTERNAL PHOTOGRAPH	27
APPENDIX III -- INTERNAL PHOTOGRAPH	27



TEST REPORT

Applicant : Shenzhen Donghuaxing Technology Co., Ltd
Manufacturer : Shenzhen Donghuaxing Technology Co., Ltd
Product Name : Mini smartphone
Test Model No. : KING 9000
Reference Model No. : KING 1000, KING 2000, KING 3000, KING 4000, KING 5000, KING 6000, KING 7000, KING 8000, S23 Ultra, S24 mini, S24 Ultra, S25 mini, S25 Ultra, P60 PRO, P70 PRO, 15 SE, 15 PRO, 15 MAX, 16 SE, 16 PRO, 16 MAX, 17 SE, 17 PRO, 17 MAX
Trade Mark : SERVO
Rating(s) : Input: 5V=1A (with DC 3.85V, 2000mAh battery inside)
Test Standard(s) : 47 CFR Part 2, 47 CFR Part 22(H), 47 CFR Part 24(E)
Test Method(s) : ANSI C63.26-2015
KDB 971168 D01 Power Meas License Digital Systems v03r01

The device described above is tested by Shenzhen Anbotek Compliance Laboratory Limited to determine the maximum emission levels emanating from the device and the severe levels of the device can endure and its performance criterion. The measurement results are contained in this test report and Shenzhen Anbotek Compliance Laboratory Limited is assumed full of responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT (Equipment Under Test) is technically compliant with the 47 CFR Part 22, 47 CFR Part 24 requirements. This report applies to above tested sample only and shall not be reproduced in part without written approval of Shenzhen Anbotek Compliance Laboratory Limited.

Date of Receipt : May 08, 2024

Date of Test : May 08, 2024 to Jun. 03, 2024

Prepared by : Nianxiu Chen
(Nianxiu Chen)

Approved & Authorized Signer : Edward Pan
(Edward Pan)



Revision History

Report Version	Description	Issued Date
R00	Original Issue.	Jun. 17, 2024



1. General Information

1.1. Client Information

Applicant	:	Shenzhen Donghuaxing Technology Co., Ltd
Address	:	6A016 Building C, No. 164 Pingxin North Road, Hehua Community, Pinghu Street, Longgang District, Shenzhen, Guangdong, 518000, China
Manufacturer	:	Shenzhen Donghuaxing Technology Co., Ltd
Address	:	6A016 Building C, No. 164 Pingxin North Road, Hehua Community, Pinghu Street, Longgang District, Shenzhen, Guangdong, 518000, China
Factory	:	Shenzhen Donghuaxing Technology Co., Ltd
Address	:	6A016 Building C, No. 164 Pingxin North Road, Hehua Community, Pinghu Street, Longgang District, Shenzhen, Guangdong, 518000, China

1.2. Description of Device (EUT)

Product Name	:	Mini smartphone
Test Model No.	:	KING 9000
Reference Model No.	:	KING 1000, KING 2000, KING 3000, KING 4000, KING 5000, KING 6000, KING 7000, KING 8000, S23 Ultra, S24 mini, S24 Ultra, S25 mini, S25 Ultra, P60 PRO, P70 PRO, 15 SE, 15 PRO, 15 MAX, 16 SE, 16 PRO, 16 MAX, 17 SE, 17 PRO, 17 MAX (Note: All samples are the same except the model number, so we prepare "KING 9000" for test only.)
Trade Mark	:	SERVO
Test Power Supply	:	DC 3.85V Battery inside
Test Sample No.	:	1-2-1(Normal Sample), 1-2-2(Engineering Sample)
Adapter	:	N/A

RF Specification

Support Band	:	<input checked="" type="checkbox"/> GSM850 <input checked="" type="checkbox"/> PCS1900
Support Network	:	GSM, GPRS, EGPRS
Transmit Frequency	:	GSM 850: 824.2MHz~848.8 MHz PCS 1900: 1850.2MHz~1909.8 MHz
Receive Frequency	:	GSM 850: 869.20MHz~893.80MHz PCS 1900: 1930.20MHz-1989.80MHz
Modulation Type	:	GMSK for GSM/GPRS 8PSK for EGPRS
GPRS Multislot	:	12



Report No.: 18220WC40091004

FCC ID: 2BGA8-KING9000

Page 7 of 27

Class	
EGPRS Multislot Class	: 12
Antenna Type	: FPC Antenna
Antenna Gain(Peak)	: GSM 850: -4.60 dBi PCS 1900: -4.60 dBi

Remark: 1) All of the RF specification are provided by customer. 2) For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

1.3. Auxiliary Equipment Used During Test

Title	Manufacturer	Model No.	Serial No.
/	/	/	/

1.4. Operation State

Test frequency list:

GSM850		PCS1900	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
128	824.20	512	1850.20
190	836.60	661	1880.00
251	848.80	810	1909.80

Test mode:

Antenna port conducted and radiated test items were performed according to KDB 971168 D01 Power Meas. License Digital Systems v03 and ANSI C63.26-2015 with maximum output power.

Radiated measurements were performed with rotating EUT in different three orthogonal test planes to find the maximum emission.

Radiated emissions were investigated as following frequency range:

30 MHz to 10th harmonic for GSM850, PCS1900.

All modes and data rates and positions were investigated.

Test modes are chosen to be reported as the worst case configuration below:

Test modes		
Band	Radiated	Conducted
GSM 850	<ul style="list-style-type: none"> ■ GSM link ■ GPRS Class 8 link ■ EGPRS Class 8 link 	<ul style="list-style-type: none"> ■ GSM link ■ GPRS Class 8 link ■ EGPRS Class 8 link
PCS 1900	<ul style="list-style-type: none"> ■ GSM link ■ GPRS Class 8 link ■ EGPRS Class 8 link 	<ul style="list-style-type: none"> ■ GSM link ■ GPRS Class 8 link ■ EGPRS Class 8 link

Shenzhen Anbotek Compliance Laboratory Limited

Address: 1/F., Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.
Tel: (86) 0755-26066440 Fax: (86) 0755-26014772 Email: service@anbotek.com

Code: AB-RF-05-b

Hotline
400-003-0500
www.anbotek.com.cn



Report No.: 18220WC40091004

FCC ID: 2BGA8-KING9000

Page 8 of 27

1.5. Environmental Conditions

Temperature range:	21-25 °C
Humidity range:	40-75%
Pressure range:	86-106kPa

1.6. Test Equipment List

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	EMI Preamplifier	SKET Electronic	LNPA-0118G-4 5	SKET-PA-002	Jan. 17, 2024	1 Year
2.	EMI Test Receiver	Rohde & Schwarz	ESR26	101481	Jan. 23, 2024	1 Year
3.	Double Ridged Horn Antenna	SCHWARZBECK	BBHA 9120D	02555	Oct. 16, 2022	3 Year
4.	Bilog Broadband Antenna	Schwarzbeck	VULB9163	345	Oct. 23, 2022	3 Year
5.	Pre-amplifier	SONOMA	310N	186860	Jan. 17, 2024	1 Year
6.	EMI Test Software EZ-EMC	SHURPLE	N/A	N/A	N/A	N/A
7.	MXA Spectrum Analysis	Agilent	N9020A	MY51170037	Oct. 12, 2023	1 Year
8.	DC Power Supply	LW	TPR-6420D	374470	Oct. 20, 2023	1 Year
9.	Constant Temperature Humidity Chamber	ZHONGJIAN	ZJ-KHWS80B	N/A	Oct. 16, 2023	1 Year
10.	Wideband Radio Communication Tester	Rohde & Schwarz	CMW 500	167336	Feb. 04, 2024	1 Year
11.	High-Pass Filter	CDKMF	ZHPF-BM1100 -4000-0730	B201509455 0	Oct. 20, 2023	1 Year
12.	High-Pass Filter	CDKMF	ZHPF-M3.5 -18G-3834	1307006523	Oct. 20, 2023	1 Year
13.	Bilog Broadband Antenna	SCHWARZBECK	VULB 9163	01109	Oct. 16, 2022	3 Year
14.	Double Ridged Horn Antenna	Chengyi Electronics Co., Ltd.	GTH-0118	351600	Nov. 02, 2022	2 Year
15.	Signal Generator	Anritsu	MG3690A	MY48180749	Oct. 12, 2023	1 Year

Shenzhen Anbotek Compliance Laboratory Limited

Address: 1/F., Building D, Sogood Science and Technology Park, Sanwei Community,
Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.
Tel: (86) 0755-26066440 Fax: (86) 0755-26014772 Email: service@anbotek.com

Code: AB-RF-05-b



Hotline
400-003-0500
www.anbotek.com.cn



1.7. Measurement Uncertainty

Parameter	Uncertainty
Occupied Bandwidth	925Hz
Conducted Output Power	0.76dB
Conducted Spurious Emission	1.24dB
Radiated spurious emissions (30MHz~1GHz)	Horizontal: 3.92dB; Vertical: 4.52dB
Radiated spurious emissions (above 1GHz)	1G-6GHz: 4.78dB; 6G-18GHz: 4.88dB
The measurement uncertainty and decision risk evaluated according to AB/WI-RF-F-032. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.	

1.8. Description of Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

FCC-Registration No.: 434132

Shenzhen Anbotek Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No. 434132.

ISED-Registration No.: 8058A

Shenzhen Anbotek Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (ISED) Innovation, Science and Economic Development Canada. The acceptance letter from the ISED is maintained in our files. Registration 8058A.

Test Location

Shenzhen Anbotek Compliance Laboratory Limited.

1/F, Building D, Sogood Science and Technology Park, Sanwei community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.

Shenzhen Anbotek Compliance Laboratory Limited

Address: 1/F., Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.
Tel: (86) 0755-26066440 Fax: (86) 0755-26014772 Email: service@anbotek.com

Code:AB-RF-05-b



Hotline
400-003-0500
www.anbotek.com.cn



1.9. Disclaimer

1. The test report is invalid if not marked with the signatures of the persons responsible for preparing and approving the test report.
2. The test report is invalid if there is any evidence and/or falsification.
3. The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein.
4. This document may not be altered or revised in any way unless done so by Anbotek and all revisions are duly noted in the revisions section.
5. Content of the test report, in part or in full, cannot be used for publicity and/or promotional purposes without prior written approval from the laboratory.
6. The authenticity of the information provided by the customer is the responsibility of the customer and the laboratory is not responsible for its authenticity.

The laboratory is only responsible for the data released by the laboratory, except for the part provided by the applicant.



2. Summary of Test

2.1. Summary of test result

FCC Rules	Description of Test	Result
Part 2.1046 Part 22.913(a) Part 24.232(c)	Conducted Output Power	Compliance
Part 24.232	Peak-Average Ratio	Compliance
§ 2.1047	Modulation Characteristics	N/A
Part 2.1049	99% Occupied Bandwidth & 26 dB Bandwidth	Compliance
Part 2.1051 Part 22.917 Part 24.238	Conducted Spurious Emission	Compliance
Part 2.1051 Part 22.917 Part 24.238	Band Edge	Compliance
Part 2.1055(a)(1)(b) Part 22.355 Part 24.235	Frequency stability VS. temperature	Compliance
Part 2.1055(d)(1)(2) Part 22.355 Part 24.235	Frequency stability VS. voltage	Compliance
Part 2.1046 Part 22.913(a) Part 24.232(c)	ERP and EIRP	Compliance
Part 2.1053 Part 22.917 Part 24.238	Radiated Spurious Emission	Compliance

Note: Testing was performed by configuring EUT to maximum output power status, the declared output power class for different




3. Conducted Output Power Test

3.1. Test Standard and Limit

Applicable Standard:	Part 2.1046 Part 22.913(a) Part 24.232(c)
Limit:	N/A

3.2. Test Setup

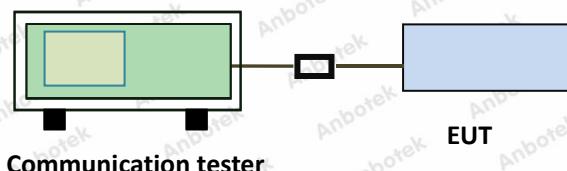

3.3. Test Procedure

1. The EUT output port was connected to communication tester.
2. Set EUT at maximum power through communication tester.
3. Select lowest, middle, and highest channels for each band and different modulation.
4. Measure the maximum burst average power.

3.4. Test Data

Pass

Please refer to Appendix A of the Appendix Test Data.




4. Peak-Average Ratio

4.1. Test Standard and Limit

Applicable Standard:	Part 24.232
Limit:	13dB

4.2. Test Setup

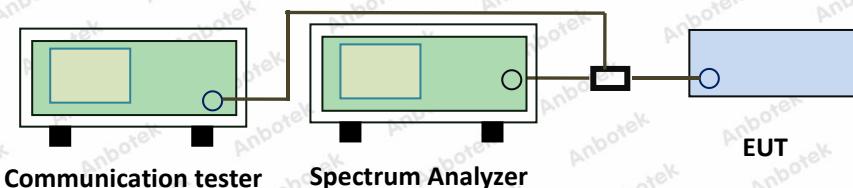

4.3. Test Procedure

According with KDB 971168 D01 Section 5.7:

1. The EUT was connected to the spectrum analyzer and communication tester via a power splitter.
2. Set EUT in maximum power output.
3. Center Frequency = Carrier frequency, RBW > Emission bandwidth of signal.
4. The signal analyzer was set to collect one million samples to generate the CCDF curve.
5. The measurement interval was set depending on the type of signal analyzed.
 - i. For continuous signals (>98% duty cycle), the measurement interval was set to 1ms.
 - ii. For burst transmissions, the spectrum analyzer is set to use an internal "RF Burst" trigger that is synced with an incoming pulse and the measurement interval is set to less than the duration of the "on time" of one burst to ensure that energy is only captured during a time in which the transmitter is operating at maximum power
6. Record the maximum PAPR level associated with a probability of 0.1%.

4.4. Test Data

Pass

Please refer to Appendix B of the Appendix Test Data.



5. Modulation Characteristic

According to FCC § 2.1047(d), Part 22H, Part 24E there is no specific requirement for digital modulation, therefore modulation characteristic is not presented.




6. 99% Occupied Bandwidth & 26 dB Bandwidth

6.1. Test Standard and Limit

Applicable Standard:	Part 2.1049
Limit:	N/A

6.2. Test Setup

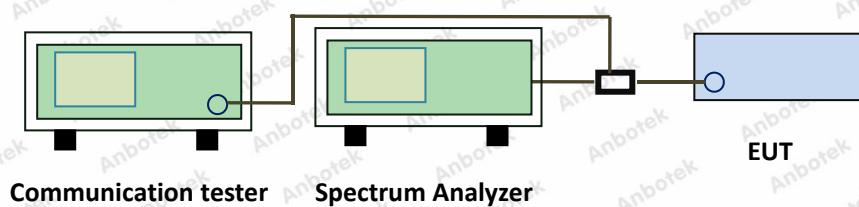

6.3. Test Procedure

1. The EUT was connected to the spectrum analyzer and communication tester via a power splitter.
2. Set EUT in maximum power output.
3. Spectrum analyzer setting as follow:
Center Frequency= Carrier frequency, RBW=1% to 5% of anticipated OBW, VBW= 3 * RBW,
Detector=Peak,
Trace maximum hold.
4. Record the value of 99% Occupied bandwidth and -26dB bandwidth.

6.4. Test Data

Pass

Please refer to Appendix C of the Appendix Test Data.




7. Band Edge

7.1. Test Standard and Limit

Applicable Standard:	Part 2.1051 Part 22.917 Part 24.238
Limit:	Part 24.238 and Part 22.917 specify that the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. The specification that emissions shall be attenuated below the transmitter power (P) by at least $43 + 10 \log (P)$ dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB, which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.

7.2. Test Setup

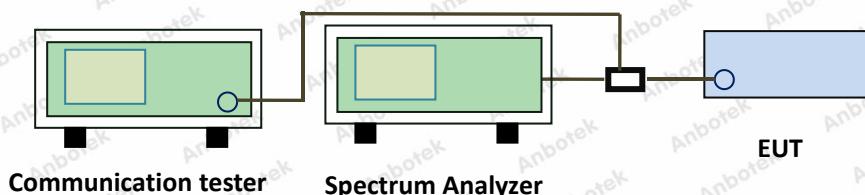

7.3. Test Procedure

1. The EUT was connected to the spectrum analyzer and communication tester via a power splitter.
2. Set EUT in maximum power output.
3. The band edges of low and high channels were measured.
4. Spectrum analyzer setting as follow:
RBW=5.1kHz, VBW = 15kHz, Sweep time= Auto
5. Record the test plot.

7.4. Test Data

Pass

Please refer to Appendix D of the Appendix Test Data.




8. Conducted Spurious Emission

8.1. Test Standard and Limit

Applicable Standard:	Part 2.1051 Part 22.917 Part 24.238
Limit:	Part 24.238 and Part 22.917 specify that the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. The specification that emissions shall be attenuated below the transmitter power (P) by at least $43 + 10 \log (P)$ dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB, which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.

8.2. Test Setup

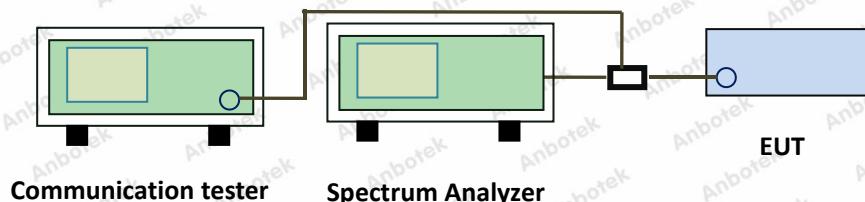

8.3. Test Procedure

1. The EUT was connected to the spectrum analyzer and communication tester via a power splitter.
2. Set EUT in maximum power output.
3. Spectrum analyzer setting as follow:
Below 1GHz, RBW=100kHz, VBW = 300kHz, Detector=Peak, Sweep time= Auto
Above 1GHz, RBW=1MHz, VBW=3MHz, Detector=Peak, Sweep time= Auto
Scan frequency range up to 10th harmonic.
4. Record the test plot.

8.4. Test Data

Pass

Please refer to Appendix E of the Appendix Test Data.




9. Radiated Spurious Emission

9.1. Test Standard and Limit

Applicable Standard:	Part 2.1053 Part 22.917 Part 24.238
Limit:	-13dBm

9.2. Test Setup

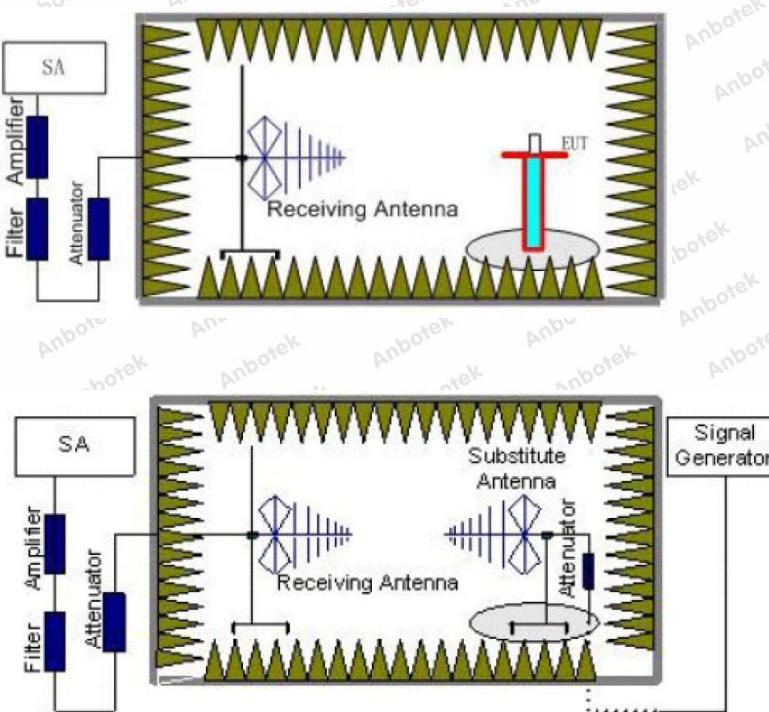

9.3. Test Procedure

1. Place the EUT in the center of the turntable.
 - a) For radiated emissions measurements performed at frequencies less than or equal to 1 GHz, the EUT shall be placed on a RF-transparent table at a nominal height of 80 cm above the reference ground plane
 - b) For radiated measurements performed at frequencies above 1 GHz, the EUT shall be placed on an RF transparent table at a nominal height of 1.5 m above the ground plane.
2. Unless the EUT uses an integral antenna, the EUT shall be terminated with a non-radiating transmitter load. In cases where the EUT uses an adjustable antenna, the antenna shall be adjusted through typical positions and lengths to maximize emissions levels.
3. The EUT shall be tested while operating on the frequency per manufacturer specification. Set the transmitter to operate in continuous transmit mode.
4. Receiver or Spectrum set as follow:



Below 1GHz, RBW=100kHz, VBW=300kHz, Detector=Peak, Sweep time=Auto
Above 1GHz, RBW=1MHz, VBW=3MHz, Detector=Peck, Sweep time=Auto

5. Each emission under consideration shall be evaluated:
 - a) Raise and lower the measurement antenna from 1 m to 4 m, as necessary to enable detection of the maximum emission amplitude relative to measurement antenna height.
 - b) Rotate the EUT through 360° to determine the maximum emission level relative to the axial position.
 - c) Return the turntable to the azimuth where the highest emission amplitude level was observed.
 - d) Vary the measurement antenna height again through 1 m to 4 m again to find the height associated with the maximum emission amplitude.
 - e) Record the measured emission amplitude level and frequency
6. Repeat step 5 for each emission frequency with the measurement antenna oriented in both the horizontal and vertical polarizations to determine the orientation that gives the maximum emissions amplitude.
7. Set-up the substitution measurement with the reference point of the substitution antenna located as near as possible to where the center of the EUT radiating element was located during the initial EUT measurement.
8. Maintain the previous measurement instrument settings and test set-up, with the exception that the EUT is removed and replaced by the substitution antenna.
9. Connect a signal generator to the substitution antenna; locate the signal generator so as to minimize any potential influences on the measurement results. Set the signal generator to the frequency where emissions are detected, and set an output power level such that the radiated signal can be detected by the measurement instrument, with sufficient dynamic range relative to the noise floor.
10. For each emission that was detected and measured in the initial test
 - a) Vary the measurement antenna height between 1 m to 4 m to maximize the received (measured) signal amplitude.
 - b) Adjust the signal generator output power level until the amplitude detected by the measurement instrument equals the amplitude level of the emission previously measured directly in step 5 and step 6.
 - c) Record the output power level of the signal generator when equivalence is achieved in step b).
11. Repeat step 8 through step 10 with the measurement antenna oriented in the opposite polarization.
12. Calculate the emission power in dBm referenced to a half-wave dipole using the following equation:
$$Pe = Ps(dBm) - \text{cable loss (dB)} + \text{antenna gain (dBd)}$$
where
 Pe = equivalent emission power in dBm
 Ps = source (signal generator) power in dBm
NOTE—dBd refers to the measured antenna gain in decibels relative to a half-wave dipole.
13. Correct the antenna gain of the substitution antenna if necessary to reference the emission power to a half-wave dipole. When using measurement antennas with the gain specified in dBi, the equivalent dipole-referenced gain can be determined from:
$$\text{gain (dBd)} = \text{gain (dBi)} - 2.15 \text{ dB}$$
If necessary, the antenna gain can be calculated from calibrated antenna factor information
14. Provide the complete measurement results as a part of the test report.



9.4. Test Data

Pass

Note: Worst case at GSM850/PCS1900

GSM850							
Channel	Frequency (MHz)	Spurious Emission				Limit (dBm)	Result
		Polarization	Reading (dBm)	Factor (dB)	Level (dBm)		
128	1648.40	Vertical	-41.72	5.32	-36.40	<-13.00	PASS
	2472.60	V	-49.53	9.32	-40.21		
	3296.80	V	-53.49	12.48	-41.01		
	1648.40	Horizontal	-42.22	5.32	-36.90	<-13.00	PASS
	2472.60	H	-49.94	9.26	-40.68		
	3296.80	H	-53.90	12.49	-41.41		
190	1673.20	Vertical	-41.35	5.33	-36.02	<-13.00	PASS
	2509.80	V	-49.02	9.16	-39.86		
	3346.40	V	-53.17	12.49	-40.68		
	1673.20	Horizontal	-41.78	5.34	-36.44	<-13.00	PASS
	2509.80	H	-49.57	9.26	-40.31		
	3346.40	H	-53.74	12.68	-41.06		
251	1697.60	Vertical	-40.94	5.56	-35.38	<-13.00	PASS
	2546.40	V	-48.56	9.28	-39.28		
	3395.20	V	-52.78	12.65	-40.13		
	1697.60	Horizontal	-41.89	5.67	-36.22	<-13.00	PASS
	2546.40	H	-49.46	9.36	-40.10		
	3395.20	H	-53.57	12.69	-40.88		

Remark:

1. The emission behaviour belongs to narrowband spurious emission.
2. The emission levels of not record in the report are very lower than the limit and not show in test report.



PCS1900

Channel	Frequency (MHz)	Spurious Emission				Limit (dBm)	Result
		Polarization	Reading (dBm)	Factor (dB)	Level (dBm)		
512	3700.40	Vertical	-47.98	13.45	-34.53	<-13.00	PASS
	5550.60	V	-55.72	16.61	-39.11		
	7400.80	V	-59.61	17.92	-41.69		
	3700.40	Horizontal	-48.49	13.45	-35.04	<-13.00	PASS
	5550.60	H	-56.20	16.61	-39.59		
	7400.80	H	-60.06	17.92	-42.14		
661	3760.00	Vertical	-47.60	13.49	-34.11	<-13.00	PASS
	5640.00	V	-55.40	16.69	-38.71		
	7520.00	V	-59.38	18.06	-41.32		
	3760.00	Horizontal	-48.18	13.49	-34.69	<-13.00	PASS
	5640.00	H	-55.95	16.69	-39.26		
	7520.00	H	-59.89	18.06	-41.83		
810	3819.60	Vertical	-46.73	13.12	-33.61	<-13.00	PASS
	5729.40	V	-55.27	17.03	-38.24		
	7639.20	V	-58.97	18.09	-40.88		
	3819.60	Horizontal	-47.40	13.12	-34.28	<-13.00	PASS
	5729.40	H	-55.90	17.03	-38.87		
	7639.20	H	-59.55	18.09	-41.46		

Remark:

1. The emission behaviour belongs to narrowband spurious emission.
2. The emission levels of not record in the report are very lower than the limit and not show in test report.





10. ERP and EIRP

10.1. Test Standard and Limit

Applicable Standard:	Part 2.1046 Part 22.913(a) Part 24.232(c)
Limit:	GSM850: 7W (38.45dBm) ERP PCS1900: 2W (33dBm) EIRP

10.2. Test Setup

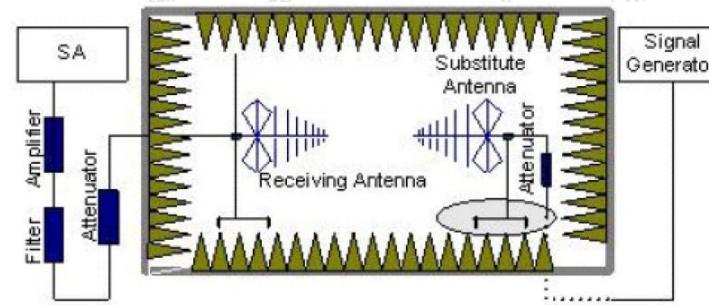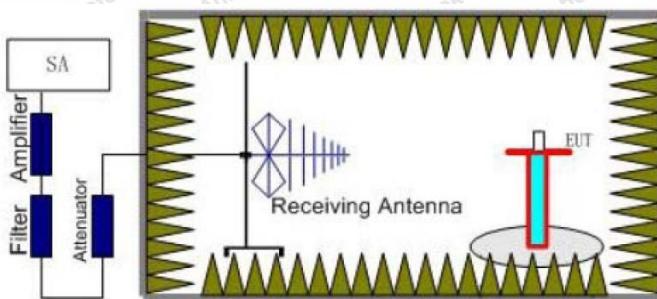

10.3. Test Procedure

1. Place the EUT in the center of the turntable.
 - a) For radiated emissions measurements performed at frequencies less than or equal to 1 GHz, the EUT shall be placed on a RF-transparent table at a nominal height of 80 cm above the reference ground plane
 - b) For radiated measurements performed at frequencies above 1 GHz, the EUT shall be placed on an RF transparent table at a nominal height of 1.5 m above the ground plane.
2. Unless the EUT uses an integral antenna, the EUT shall be terminated with a non-radiating transmitter load. In cases where the EUT uses an adjustable antenna, the antenna shall be adjusted through typical positions and lengths to maximize emissions levels.
3. The EUT shall be tested while operating on the frequency per manufacturer specification. Set the transmitter to operate in continuous transmit mode.
4. Receiver or Spectrum set as follow:



Report No.: 18220WC40091004

FCC ID: 2BGA8-KING9000

Page 23 of 27

Below 1GHz, RBW=100kHz, VBW=300kHz, Detector=Peak, Sweep time=Auto

Above 1GHz, RBW=1MHz, VBW=3MHz, Detector=Peck, Sweep time=Auto

5. Each emission under consideration shall be evaluated:

- a) Raise and lower the measurement antenna from 1 m to 4 m, as necessary to enable detection of the maximum emission amplitude relative to measurement antenna height.
- b) Rotate the EUT through 360° to determine the maximum emission level relative to the axial position.
- c) Return the turntable to the azimuth where the highest emission amplitude level was observed.
- d) Vary the measurement antenna height again through 1 m to 4 m again to find the height associated with the maximum emission amplitude.
- e) Record the measured emission amplitude level and frequency

6. Repeat step 5 for each emission frequency with the measurement antenna oriented in both the horizontal and vertical polarizations to determine the orientation that gives the maximum emissions amplitude.
7. Set-up the substitution measurement with the reference point of the substitution antenna located as near as possible to where the center of the EUT radiating element was located during the initial EUT measurement.
8. Maintain the previous measurement instrument settings and test set-up, with the exception that the EUT is removed and replaced by the substitution antenna.
9. Connect a signal generator to the substitution antenna; locate the signal generator so as to minimize any potential influences on the measurement results. Set the signal generator to the frequency where emissions are detected, and set an output power level such that the radiated signal can be detected by the measurement instrument, with sufficient dynamic range relative to the noise floor.
10. For each emission that was detected and measured in the initial test
 - a) Vary the measurement antenna height between 1 m to 4 m to maximize the received (measured) signal amplitude.
 - b) Adjust the signal generator output power level until the amplitude detected by the measurement instrument equals the amplitude level of the emission previously measured directly in step 5 and step 6.
 - c) Record the output power level of the signal generator when equivalence is achieved in step b).
11. Repeat step 8 through step 10 with the measurement antenna oriented in the opposite polarization.
12. Calculate the emission power in dBm referenced to a half-wave dipole using the following equation:
$$Pe = Ps(dBm) - \text{cable loss (dB)} + \text{antenna gain (dB)}$$
where
$$Pe = \text{equivalent emission power in dBm}$$
$$Ps = \text{source (signal generator) power in dBm}$$

NOTE—dBd refers to the measured antenna gain in decibels relative to a half-wave dipole.
13. Correct the antenna gain of the substitution antenna if necessary to reference the emission power to a half-wave dipole. When using measurement antennas with the gain specified in dBi, the equivalent dipole-referenced gain can be determined from:
$$\text{gain (dBd)} = \text{gain (dBi)} - 2.15 \text{ dB}.$$
If necessary, the antenna gain can be calculated from calibrated antenna factor information
14. Provide the complete measurement results as a part of the test report.



Report No.: 18220WC40091004

FCC ID: 2BGA8-KING9000

Page 24 of 27

10.4. Test Data

Pass

Mode	Channel	ERP (dBm)		Limit (dBm)	Result
		Vertical	Horizontal		
GSM850	128	31.04	28.20	<38.45	PASS
	190	30.25	27.40		
	251	30.50	27.58		
GPRS850	128	27.49	25.67	<38.45	PASS
	190	26.45	25.11		
	251	26.26	24.93		
EGPRS850	128	26.66	27.45	<38.45	PASS
	190	25.93	25.45		
	251	26.14	26.17		

Mode	Channel	EIRP (dBm)		Limit (dBm)	Result
		Vertical	Horizontal		
PCS1900	512	27.11	20.40	<33.00	PASS
	661	27.20	20.69		
	810	26.98	20.43		
GPRS1900	512	23.51	18.61	<33.00	PASS
	661	23.88	18.78		
	810	23.93	18.79		
EGPRS1900	512	26.62	20.39	<33.00	PASS
	661	26.94	20.76		
	810	26.26	20.17		




11. Frequency stability VS Voltage measurement

11.1. Test Standard and Limit

Applicable Standard:	Part 2.1055(d)(1)(2) Part 22.355 Part 24.235
Limit:	2.5ppm

11.2. Test Setup

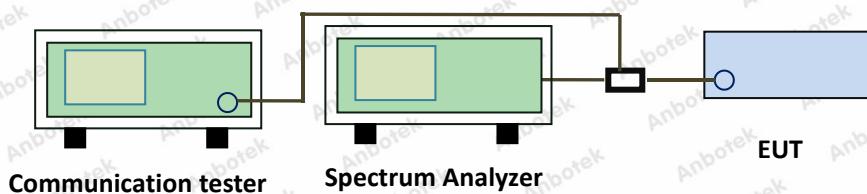

11.3. Test Procedure

1. The equipment under test was connected to an external DC power supply and input rated voltage.
2. The EUT output port was connected to communication tester.
3. The EUT was placed inside the temperature chamber at 25°C.
4. The power supply voltage to the EUT was varied $\pm 15\%$ of the nominal value measured at the input to the EUT.
5. Record the maximum frequency change.

11.4. Test Data

Pass

Please refer to Appendix F of the Appendix Test Data.




12. Frequency stability VS Temperature measurement

12.1. Test Standard and Limit

Applicable Standard:	Part 2.1055(a)(1)(b) Part 22.355 Part 24.235
Limit:	2.5ppm

12.2. Test Setup

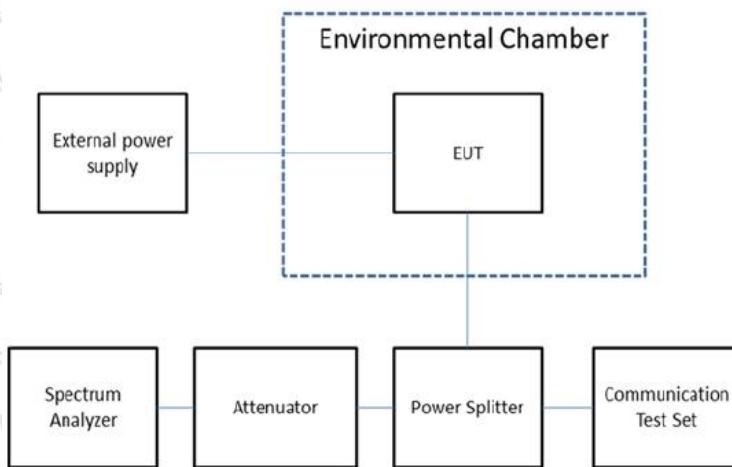

12.3. Test Procedure

1. The equipment under test was connected to an external DC power supply and input rated voltage.
2. The EUT output port was connected to communication tester.
3. The EUT was placed inside the temperature chamber.
4. Turn EUT off and set the chamber temperature to -30°C . After the temperature stabilized for approximately 30 minutes recorded the frequency.
5. Repeat step 4 measure with 10°C increased per stage until the highest temperature of $+50^{\circ}\text{C}$ reached.

12.4. Test Data

Pass

Please refer to Appendix F of the Appendix Test Data.



Report No.: 18220WC40091004

FCC ID: 2BGA8-KING9000

Page 27 of 27

APPENDIX I -- TEST SETUP PHOTOGRAPH

Please refer to separated files Appendix I -- Test Setup Photograph_Licensed

APPENDIX II -- EXTERNAL PHOTOGRAPH

Please refer to separated files Appendix II -- External Photograph

APPENDIX III -- INTERNAL PHOTOGRAPH

Please refer to separated files Appendix III -- Internal Photograph

----- End of Report -----

