
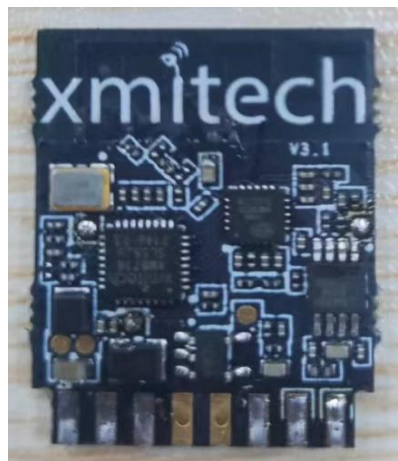


产品图片

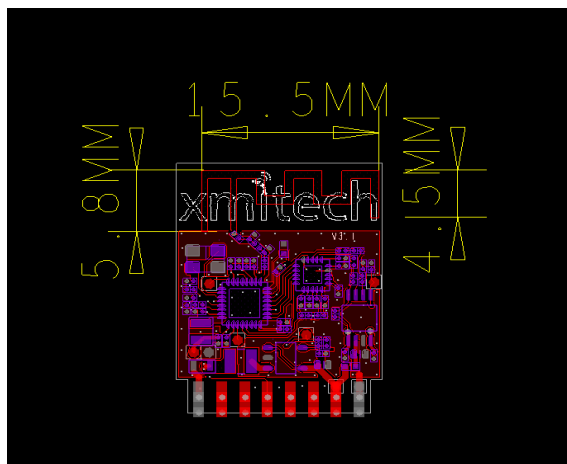


PCB Antenna


| Application Information | |
|-------------------------|--------------|
| 04Version | 5.244.350 |
| TotalTime | 3m 43s 875ms |
| AdditionalInfor | NULL |

| Passive Test For 2.4g | | | | | | | | | |
|-----------------------|----------|------------|------------|----------|----------|----------|----------|-----------|-----------|
| Freq (MHz) | Effi (%) | Gain (dBi) | Gain (dBd) | UHis (%) | DHIS (%) | Max (dB) | Min (dB) | AttH (dB) | AttV (dB) |
| 2400 | 7.2 | -1.46 | -3.61 | 6.765 | 0.432 | -1.46 | -40.65 | 43 | 43 |
| 2410 | 7.98 | -1.11 | -3.26 | 7.55 | 0.435 | -1.11 | -38.48 | 43.06 | 43.09 |
| 2420 | 8.26 | -1 | -3.15 | 7.843 | 0.416 | -1 | -36.74 | 43.19 | 43.25 |
| 2430 | 8.04 | -1.11 | -3.26 | 7.635 | 0.401 | -1.11 | -36.49 | 43.18 | 43.2 |
| 2440 | 8.66 | -0.78 | -2.93 | 8.241 | 0.421 | -0.78 | -35.34 | 43.26 | 43.26 |
| 2450 | 9.17 | -0.51 | -2.66 | 8.729 | 0.444 | -0.51 | -35.76 | 43.34 | 43.32 |
| 2460 | 7.25 | -1.59 | -3.74 | 6.919 | 0.33 | -1.59 | -38.23 | 43.06 | 43.12 |
| 2470 | 7 | -1.64 | -3.79 | 6.642 | 0.355 | -1.64 | -34.46 | 43.03 | 43.1 |
| 2480 | 8.14 | -0.94 | -3.09 | 7.694 | 0.442 | -0.94 | -33.18 | 43.28 | 43.33 |
| 2490 | 8.69 | -0.57 | -2.72 | 8.224 | 0.468 | -0.57 | -34.42 | 43.34 | 43.38 |
| 2500 | 7.98 | -0.79 | -2.94 | 7.546 | 0.439 | -0.79 | -36.21 | 43.41 | 43.47 |


2400.00MHz - 2500.00MHz Gain

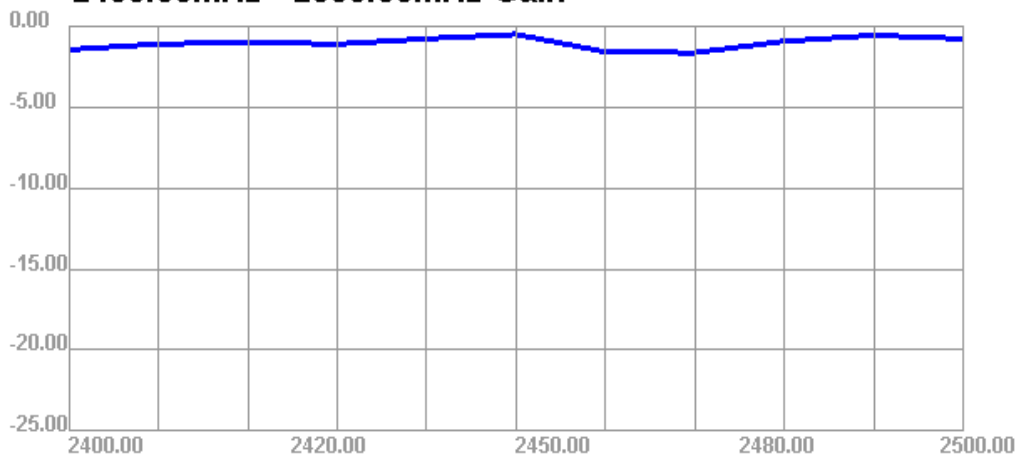


2400.00MHz - 2500.00MHz Efficiency

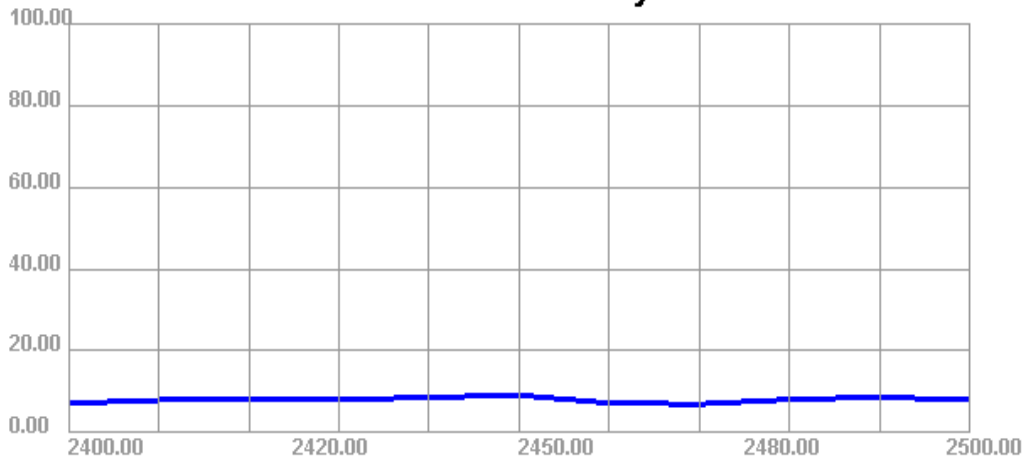


2400.000MHz

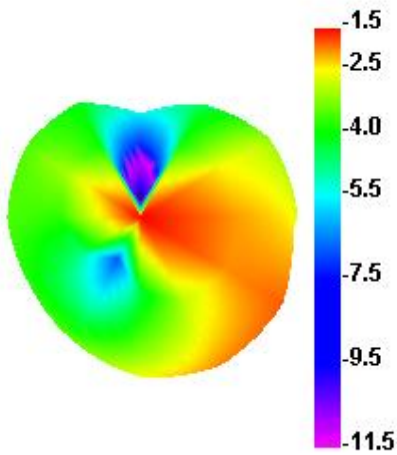


2400.000MHz H

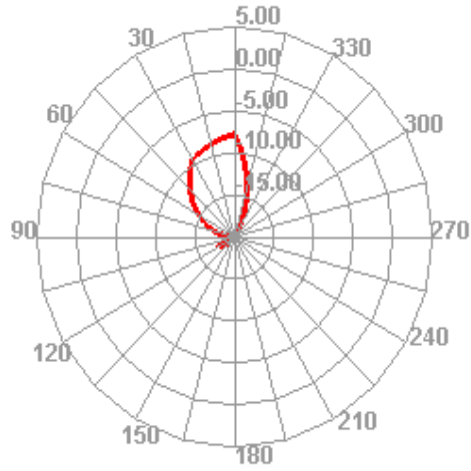


2400.000MHz E1

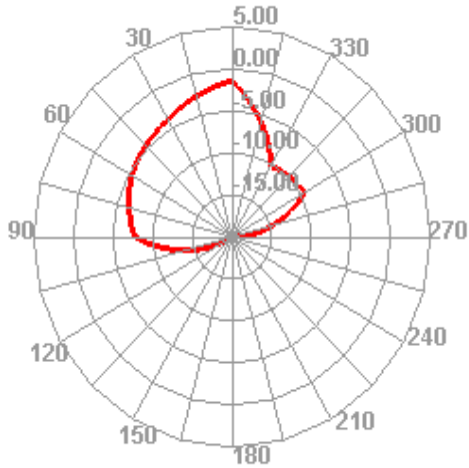


2400.000MHz E2

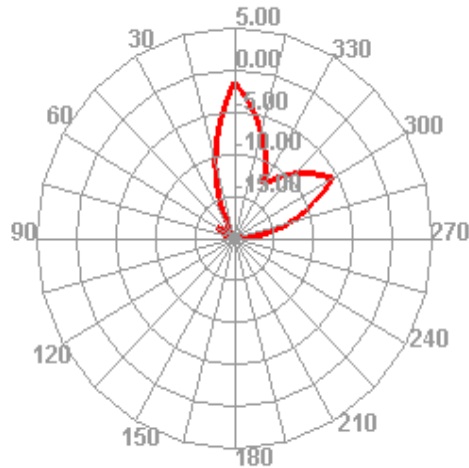


2450.000MHz

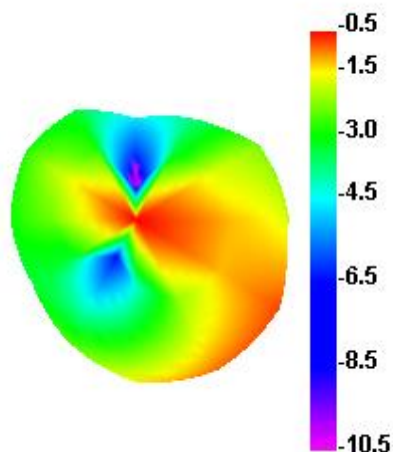


2450.000MHz H

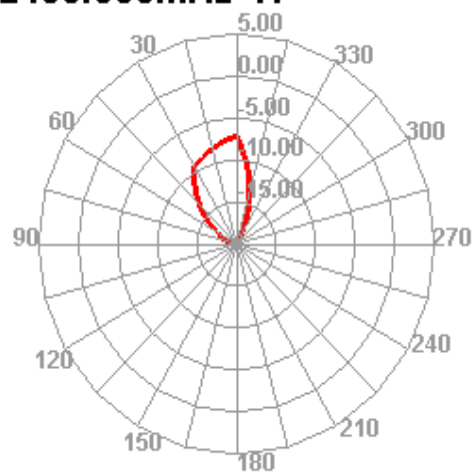


2450.000MHz E1

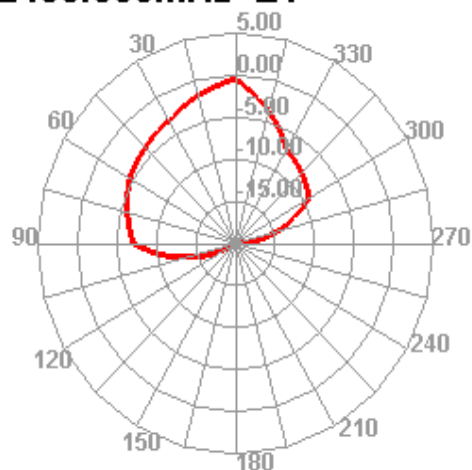


2450.000MHz E2

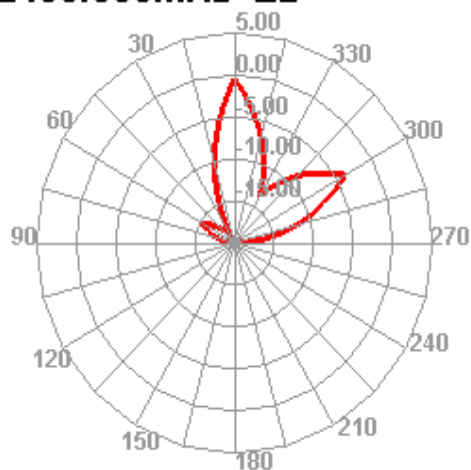


2500.000MHz

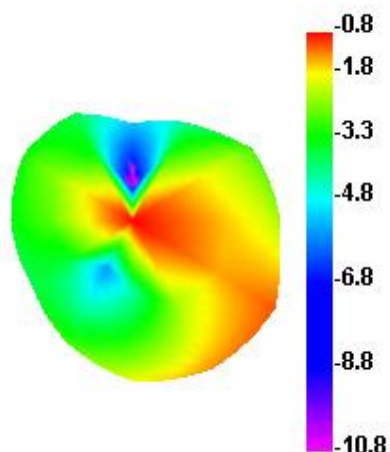

2500.000MHz H

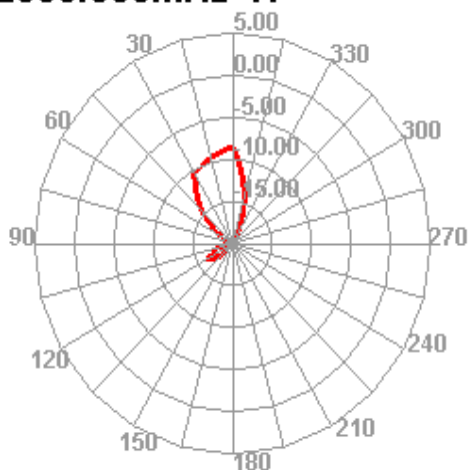

2500.000MHz E1

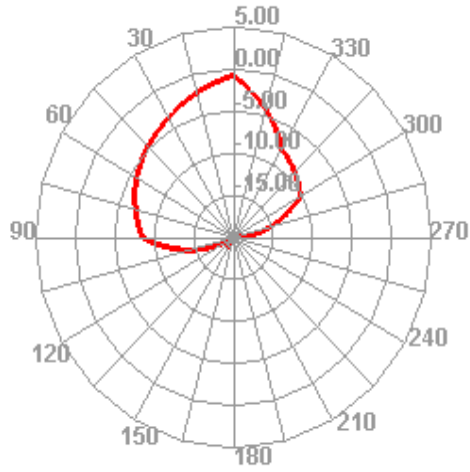

2500.000MHz E2

