



FCC TEST REPORT

FCC ID:2BGEJ-GT-HDWL50

Report Number..... : **ZKT-240508L4906E**

Date of Test..... Apr. 20, 2024 to May. 13, 2024

Date of issue..... : May. 14, 2024

Total number of pages..... 61

Test Result : **PASS**Testing Laboratory..... : **Shenzhen ZKT Technology Co., Ltd.**

Address : 1/F, No. 101, Building B, No. 6, Tangwei Community Industrial Avenue, Fuhai Street, Bao'an District, Shenzhen, China

Applicant's name : **Zhuhai Bigway Electronic Co.,Ltd.**

Address : Guangtai Electronics,Room 401, 4th Floor, Building 7, Wanqu Intl Ind. Park Doumen,Zhuhai China

Manufacturer's name : **Zhuhai Guangtai Electronics Co.,Ltd.**

Address : Guangtai Electronics,Room 401, 4th Floor, Building 7, Wanqu International Industrial Park, No. 2988, Zhufeng Avenue, Qianwu Town, Doumen District, Zhuhai City, Guangdong Province,China

Test specification:

Standard..... : FCC CFR Title 47 Part 15 Subpart C Section 15.407
ANSI C63.10:2013
KDB 789033 D02 v01r02

Test procedure..... : /

Non-standard test method : N/A

Test Report Form No..... : TRF-EL-113_V0**Test Report Form(s) Originator**..... : ZKT Testing**Master TRF** : Dated: 2020-01-06

This device described above has been tested by ZKT, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of ZKT, this document may be altered or revised by ZKT, personal only, and shall be noted in the revision of the document.

Product name..... : **HDMI Wireless Extender**

Trademark : -

Model/Type reference..... : GT-HDWL50,GT-HDWL30,GT-HDWL50B,GT-HDWL100,GT-HDWL100B,GT-HDWL150,GT-HDWL-150B

Ratings..... : DC 5V by adapter



Testing procedure and testing location:

Testing Laboratory.....: Shenzhen ZKT Technology Co., Ltd.

Address.....: 1/F, No. 101, Building B, No. 6, Tangwei Community Industrial Avenue, Fuhai Street, Bao'an District, Shenzhen, China

Tested by (name + signature).....: Jim Liu

Reviewer (name + signature).....: Tom Zou

Approved (name + signature).....: Lake Xie





Table of Contents

Page

| | |
|-------------------------------------------------------------------|-----------|
| 1. VERSION | 5 |
| 2.SUMMARY OF TEST RESULTS | 6 |
| 2.1 TEST FACILITY | 7 |
| 2.2 MEASUREMENT UNCERTAINTY | 7 |
| 3. GENERAL INFORMATION | 8 |
| 3.1 GENERAL DESCRIPTION OF EUT | 8 |
| 3.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED | 11 |
| 3.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE) | 11 |
| 3.5 EQUIPMENTS LIST FOR ALL TEST ITEMS | 12 |
| 4.EMC EMISSION TEST | 14 |
| 4.1 CONDUCTED EMISSION MEASUREMENT | 14 |
| 4.1.1 POWER LINE CONDUCTED EMISSION Limits | 14 |
| 4.1.2 TEST PROCEDURE | 14 |
| 4.1.3 DEVIATION FROM TEST STANDARD | 14 |
| 4.1.4 TEST SETUP | 15 |
| 4.1.5 EUT OPERATING CONDITIONS | 15 |
| 4.2 RADIATED EMISSION MEASUREMENT | 18 |
| 4.2.1 APPLICABLE STANDARD | 18 |
| 4.2.2 CONFORMANCE LIMIT | 18 |
| 4.2.3 MEASURING INSTRUMENTS | 18 |
| 4.2.4 TEST CONFIGURATION | 19 |
| 4.2.5 TEST PROCEDURE | 20 |
| 4.2.6 TEST RESULT | 21 |
| 5.1 APPLIED PROCEDURES / LIMIT | 26 |
| 5.2 TEST PROCEDURE | 27 |
| 5.3 DEVIATION FROM STANDARD | 27 |
| 5.4 TEST SETUP | 27 |
| 5.5 EUT OPERATION CONDITIONS | 27 |
| 5.6 TEST RESULTS | 28 |
| 6. -6 DB & 99% EMISSION BANDWIDTH | 32 |
| 6.1 APPLIED PROCEDURES / LIMIT | 32 |
| 6.2 TEST PROCEDURE | 32 |
| 6.3 EUT OPERATION CONDITIONS | 33 |
| 6.4 TEST RESULTS | 33 |
| 7.MAXIMUM CONDUCTED OUTPUT POWER | 43 |
| 7.1 PPLIED PROCEDURES / LIMIT | 43 |
| 7.2 TEST PROCEDURE | 43 |



| Table of Contents | Page |
|------------------------------------------------|-------------|
| 7.3 DEVIATION FROM STANDARD | 44 |
| 7.4 TEST SETUP | 44 |
| 7.5 EUT OPERATION CONDITIONS | 44 |
| 7.6 TEST RESULTS | 45 |
| 8.OUT OF BAND EMISSIONS | 50 |
| 8.1 APPLICABLE STANDARD | 50 |
| 8.2 TEST PROCEDURE | 50 |
| 8.3 DEVIATION FROM STANDARD | 50 |
| 8.4 TEST SETUP | 50 |
| 8.5 EUT OPERATION CONDITIONS | 51 |
| 8.6 TEST RESULTS | 51 |
| 9.Frequency Stability Measurement | 54 |
| 9.1 LIMIT | 54 |
| 9.2 TEST PROCEDURES | 54 |
| 9.3 TEST SETUP LAYOUT | 54 |
| 9.4 EUT OPERATION DURING TEST | 54 |
| 9.5 TEST RESULTS | 54 |
| 10.ANTENNA REQUIREMENT | 60 |
| 11. TEST SETUP PHOTO | 61 |
| 12. EUT CONSTRUCTIONAL DETAILS | 61 |



1. VERSION

| Report No. | Version | Description | Approved |
|------------------|---------|-------------------------|---------------|
| ZKT-240508L4906E | Rev.01 | Initial issue of report | May. 14, 2024 |
| | | | |
| | | | |



2.SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

| FCC Part15 (15.407) , Subpart E | | | |
|---------------------------------------------------------------|-----------------------------------------|----------|--------|
| Standard Section | Test Item | Judgment | Remark |
| 15.209(a), 15.407 (b)(1) 15.407 (b)(4) 15.407 (b)(8) | Spurious Radiated Emissions | PASS | |
| 15.207 | Conducted Emission | PASS | |
| 15.407 (a)(12) 15.1049 | 99% Emission Bandwidth | PASS | |
| 15.407(e) | 6 dB bandwidth | PASS | |
| 15.407 (a)(1) 15.407 (a)(3) | Maximum Conducted Output Power | PASS | |
| 2.1051, 15.407(b)(1) 15.407(b)(4) | Band Edge | PASS | |
| 15.407 (a)(1) 15.407 (a)(3) | Power Spectral Density | PASS | |
| 2.1051, 15.407(b) | Spurious Emissions at Antenna Terminals | PASS | |
| 15.203 | Antenna Requirement | PASS | |

NOTE:

(1)" N/A" denotes test is not applicable in this Test Report



2.1 TEST FACILITY

Shenzhen ZKT Technology Co., Ltd.

Add. : 1/F, No. 101, Building B, No. 6, Tangwei Community Industrial Avenue, Fuhai Street, Bao'an District, Shenzhen, China

FCC Test Firm Registration Number: 692225

Designation Number: CN1299

IC Registered No.: 27033

CAB identifier: CN0110

2.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$ · where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$ · providing a level of confidence of approximately 95 % ·

| No. | Item | Uncertainty |
|-----|---------------------------------------------------|-------------|
| 1 | 3m chamber Radiated spurious emission(9KHz-30MHz) | U=4.5dB |
| 2 | 3m chamber Radiated spurious emission(30MHz-1GHz) | U=4.8dB |
| 3 | 3m chamber Radiated spurious emission(1GHz-6GHz) | U=4.9dB |
| 4 | 3m chamber Radiated spurious emission(6GHz-40GHz) | U=5.0dB |
| 5 | Conducted disturbance | U=3.2dB |
| 6 | RF Band Edge | U=1.68dB |
| 7 | RF power conducted | U=1.8-6dB |
| 8 | RF conducted Spurious Emission | U=2.2dB |
| 9 | RF Occupied Bandwidth | U=1.8dB |
| 10 | RF Power Spectral Density | U=1.75dB |
| 11 | humidity uncertainty | U=5.3% |
| 12 | Temperature uncertainty | U=0.59°C |



3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

| | | |
|--------------------------|-------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Product Name: | HDMI Wireless Extender | |
| Model No.: | GT-HDWL50,GT-HDWL30,GT-HDWL50B,GT-HDWL100,GT-HDWL100B,GT-HDWL150,GT-HDWL-150B | |
| Model Different.: | Only for different model name | |
| Sample ID | ZKT-240508L4906-1 | |
| Sample(s) Status: | Engineer sample | |
| Product Description | IEEE 802.11 WLAN Mode Supported | <input checked="" type="checkbox"/> 802.11a/ac/n (20MHz channel bandwidth) <input checked="" type="checkbox"/> 802.11ac/n (40MHz channel bandwidth) <input checked="" type="checkbox"/> 802.11ac(80MHz channel bandwidth) |
| | Data Rate | 802.11a 802.11/ac/n(HT20/HT40):MCS0-MCS15; 802.11ac(VHT80):NSS1, MCS0-MCS9 |
| | Modulation | OFDM with BPSK/QPSK/16QAM/64QAM/256QAM for 802.11a/n/ac; |
| | Operating Frequency Range | <input type="checkbox"/> 5180-5240MHz for 802.11a/ac/n(HT20); 5190-5230MHz for 802.11ac/n(HT40); 5210MHz for 802.11 ac80; <input checked="" type="checkbox"/> 5745-5825 MHz for 802.11a/ac/n(HT20); 5755-5795 MHz for 802.11ac/n(HT40); 5775MHz for 802.11 ac80; |
| | Number of Channels | <input type="checkbox"/> 4 channels for 802.11a/ac/n20 in the 5180-5240MHz band ; 2 channels for 802.11 ac/n40 in the 5190-5230 MHz band ; 1 channels for 802.11 ac80 in the 5210MHz band ; <input checked="" type="checkbox"/> 5 channels for 802.11a/ac/n20 in the 5745-5825MHz band ; 2 channels for 802.11 ac/n40 in the 5755-5795 MHz band ; 1 channels for 802.11 ac80 in the 5775MHz band ; |
| Channel List | Please refer to the Note 2. | |
| Antenna Type: | External antenna | |
| Antenna gain: | 5 dBi | |
| Power supply: | DC 5V by adapter | |
| SWITCHING POWER ADAPTER: | N/A | |

Note:

For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.



| 802.11a/ac/n(20 MHz) Frequency Channel | | | | | | | |
|-----------------------------------------|-----------------|---------|-----------------|---------|-----------------|---------|-----------------|
| Channel | Frequency (MHz) | Channel | Frequency (MHz) | Channel | Frequency (MHz) | Channel | Frequency (MHz) |
| 149 | 5745 | 153 | 5765 | 157 | 5785 | 161 | 5805 |
| 165 | 5825 | - | - | - | - | - | - |

| 802.11ac/n(40MHz) Frequency Channel | | | | | |
|-------------------------------------|-----------------|---------|-----------------|---------|-----------------|
| Channel | Frequency (MHz) | Channel | Frequency (MHz) | Channel | Frequency (MHz) |
| 151 | 5755 | 159 | 5795 | - | - |

| 802.11ac 80MHz Frequency Channel | |
|----------------------------------|-----------------|
| Channel | Frequency (MHz) |
| 155 | 5775 |



3.2 DESCRIPTION OF TEST MODES

| | |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------|
| Transmitting mode | Keep the EUT in continuously transmitting mode |
| Remark: During the test, the duty cycle >98%, the test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and found that the worst case was under the nominal rated supply condition. So the report just shows that condition's data. | |

| Pretest Mode | Description |
|--------------|---------------------------------------|
| Mode 1 | 802.11a/ac /n 20 CH149/ CH157/ CH 165 |
| Mode 2 | 802.11ac / n 40 CH 151 / CH 159 |
| Mode 3 | 802.11 ac80 CH 155 |
| Mode 4 | Working mode |

| Conducted Emission | |
|--------------------|---------------------------------------|
| Final Test Mode | Description |
| Mode 1 | 802.11a/ac /n 20 CH149/ CH157/ CH 165 |
| Mode 2 | 802.11ac / n 40 CH 151 / CH 159 |
| Mode 3 | 802.11 ac80 CH 155 |
| Mode 4 | Working mode |

| For Radiated Emission | |
|-----------------------|---------------------------------------|
| Final Test Mode | Description |
| Mode 1 | 802.11a/ac /n 20 CH149/ CH157/ CH 165 |
| Mode 2 | 802.11ac / n 40 CH 151 / CH 159 |
| Mode 3 | 802.11 ac80 CH 155 |
| Mode 4 | Working mode |

Note:


(1) The measurements are performed at all Bit Rate of Transmitter, the worst data was reported.




| | |
|-------------------|-------------------|
| Test Software | Realtek Test Tool |
| Power level setup | <10dBm |

3.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED


Conducted Emission



Radiated Emission



Conducted Spurious



3.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

| Item | Equipment | Mfr/Brand | Model/Type No. | Series No. | Note |
|------|------------------------|-----------|-------------------------------|------------|------|
| E-1 | HDMI Wireless Extender | N/A | CP23,AA24,CP25,CP26,V519,V619 | N/A | EUT |
| E-2 | PC | THinkPad | THinkPad R490 | N/A | AE |
| E-3 | Adapter | HUAWEI | HW-059200CHQ | N/A | AE |
| | | | | | |

| Item | Shielded Type | Ferrite Core | Length | Note |
|------|---------------|--------------|--------|------|
| | | | | |
| | | | | |
| | | | | |

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.



3.5 EQUIPMENTS LIST FOR ALL TEST ITEMS

Radiation emissions& Radio Test equipment

| Item | Equipment | Manufacturer | Type No. | Serial No. | Firmware Version | Last calibration | Calibrated until |
|------|-----------------------------------|----------------|-----------------|--------------------|------------------|------------------|------------------|
| 1 | Spectrum Analyzer (9kHz-26.5GHz) | KEYSIGHT | 9020A | MY55370835 | A.17.05 | Oct. 28, 2023 | Oct. 27, 2024 |
| 2 | Spectrum Analyzer (10kHz-39.9GHz) | R&S | FSV40-N | 100363 | 1.71 SP2 | Oct. 28, 2023 | Oct. 27, 2024 |
| 3 | EMI Test Receiver (9kHz-7GHz) | R&S | ESCI7 | 101169 | 4.32 | Oct. 28, 2023 | Oct. 27, 2024 |
| 4 | Bilog Antenna (30MHz-1500MHz) | Schwarzbeck | VULB9168 | N/A | N/A | Nov. 02, 2023 | Nov. 01, 2024 |
| 5 | Horn Antenna (1GHz-18GHz) | Agilent | AH-118 | 071145 | N/A | Nov. 01, 2023 | Oct. 31, 2024 |
| 6 | Horn Antenna (15GHz-40GHz) | A.H.System | SAS-574 | 588 | N/A | Oct. 28, 2023 | Oct. 27, 2024 |
| 7 | Loop Antenna | TESEQ | HLA6121 | 58357 | N/A | Nov. 01, 2023 | Oct. 31, 2024 |
| 8 | Amplifier (30-1000MHz) | EM Electronics | EM330 Amplifier | 060747 | N/A | Nov. 15, 2023 | Nov. 14, 2024 |
| 9 | Amplifier (1GHz-26.5GHz) | Agilent | 8449B | 3008A00315 | N/A | Oct. 28, 2023 | Oct. 27, 2024 |
| 10 | Amplifier (500MHz-40GHz) | QuanJuDa | DLE-161 | 097 | N/A | Oct. 28, 2023 | Oct. 27, 2024 |
| 11 | Test Cable | N/A | R-01 | N/A | N/A | Oct. 28, 2023 | Oct. 27, 2024 |
| 12 | Test Cable | N/A | R-02 | N/A | N/A | Oct. 28, 2023 | Oct. 27, 2024 |
| 13 | Test Cable | N/A | R-03 | N/A | N/A | Oct. 28, 2023 | Oct. 27, 2024 |
| 14 | Test Cable | N/A | RF-01 | N/A | N/A | Oct. 28, 2023 | Oct. 27, 2024 |
| 15 | Test Cable | N/A | RF-02 | N/A | N/A | Oct. 28, 2023 | Oct. 27, 2024 |
| 16 | Test Cable | N/A | RF-03 | N/A | N/A | Oct. 28, 2023 | Oct. 27, 2024 |
| 17 | ESG Signal Generator | Agilent | E4421B | N/A | B.03.84 | Oct. 21, 2023 | Oct. 20, 2024 |
| 18 | Signal Generator | Agilent | N5182A | N/A | A.01.87 | Oct. 21, 2023 | Oct. 20, 2024 |
| 19 | Magnetic Field Probe Tester | Narda | ELT-400 | 0-0344 | N/A | Nov. 15, 2023 | Nov. 14, 2024 |
| 20 | Wideband Radio Communication Test | R&S | CMW500 | 106504 | V 3.7.22 | Oct. 28, 2023 | Oct. 27, 2024 |
| 21 | MWRF Power Meter Test system | MW | MW100-RF CB | N/A | N/A | Oct. 21, 2023 | Oct. 20, 2024 |
| 22 | D.C. Power Supply | LongWei | TPR-6405D | N/A | N/A | \ | \ |
| 23 | EMC Software | Frad | EZ-EMC | Ver.EMC-CO N 3A1.1 | N/A | \ | \ |
| 24 | RF Software | MW | MTS8310 | V2.0.0.0 | N/A | \ | \ |
| 25 | Turntable | MF | MF-7802BS | N/A | N/A | \ | \ |
| 26 | Antenna tower | MF | MF-7802BS | N/A | N/A | \ | \ |



Conducted emissions Test

| Item | Kind of Equipment | Manufacturer | Type No. | Serial No. | Firmware Version | Last calibration | Calibrated until |
|------|---------------------|--------------|----------|-----------------------|------------------|------------------|------------------|
| 1 | LISN | R&S | ENV216 | 101471 | N/A | Oct. 21, 2023 | Oct. 20, 2024 |
| 2 | LISN | CYBERTEK | EM5040A | E185040014 9 | N/A | Oct. 21, 2023 | Oct. 20, 2024 |
| 3 | Test Cable | N/A | C-01 | N/A | N/A | Oct. 21, 2023 | Oct. 20, 2024 |
| 4 | Test Cable | N/A | C-02 | N/A | N/A | Oct. 21, 2023 | Oct. 20, 2024 |
| 5 | Test Cable | N/A | C-03 | N/A | N/A | Oct. 21, 2023 | Oct. 20, 2024 |
| 6 | EMI Test Receiver | R&S | ESCI3 | 101393 | 4.42 SP3 | Oct. 28, 2023 | Oct. 27, 2024 |
| 7 | Triple-Loop Antenna | N/A | RF300 | N/A | N/A | Oct. 28, 2023 | Oct. 27, 2024 |
| 8 | Absorbing Clamp | DZ | ZN23201 | 15034 | N/A | Oct. 31, 2023 | Oct. 30, 2024 |
| 9 | EMC Software | Frad | EZ-EMC | Ver.EMC-CO N 3A1.1 | N/A | \ | \ |



4.EMC EMISSION TEST

4.1 CONDUCTED EMISSION MEASUREMENT

| | |
|-----------------------|--------------------------------------|
| Test Requirement: | FCC Part15 C Section 15.207 |
| Test Method: | ANSI C63.10:2013 |
| Test Frequency Range: | 150KHz to 30MHz |
| Receiver setup: | RBW=9KHz, VBW=30KHz, Sweep time=auto |

4.1.1 POWER LINE CONDUCTED EMISSION Limits

| FREQUENCY (MHz) | Limit (dBuV) | | Standard |
|-----------------|--------------|-----------|----------|
| | Quasi-peak | Average | |
| 0.15 -0.5 | 66 - 56 * | 56 - 46 * | FCC |
| 0.50 -5.0 | 56.00 | 46.00 | FCC |
| 5.0 -30.0 | 60.00 | 50.00 | FCC |

Note:

(1) *Decreases with the logarithm of the frequency.

4.1.2 TEST PROCEDURE


- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.1.3 DEVIATION FROM TEST STANDARD

No deviation



4.1.4 TEST SETUP

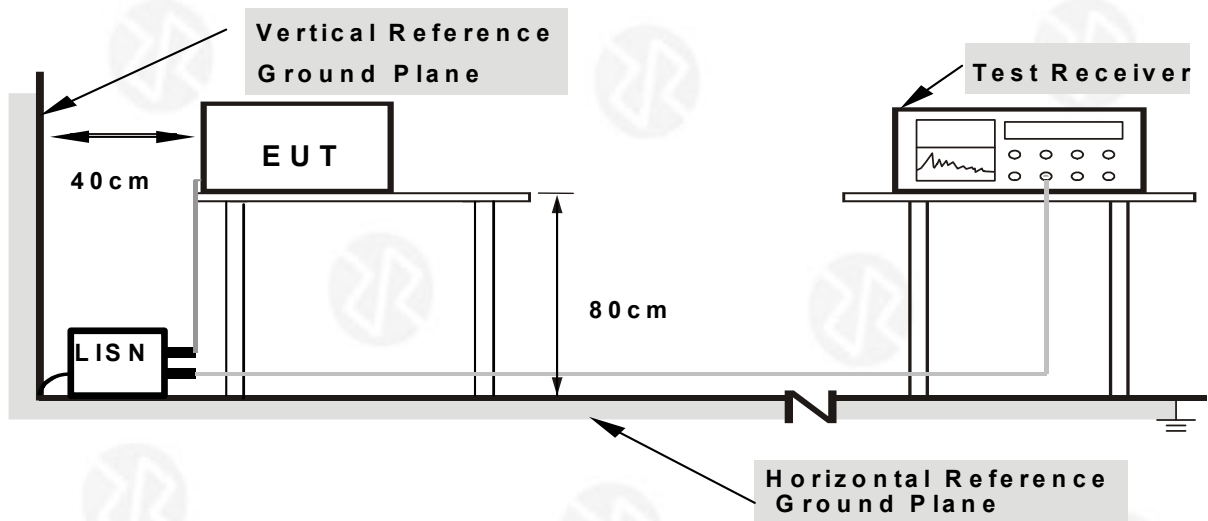

Note: 1. Support units were connected to second LISN.

2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

4.1.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.


We pretest AC 120V and AC 230V, the worst voltage was AC 120V and the data recording in the report.



4.1.6 TEST RESULT

| | | | |
|----------------|--------------|--------------------|-----|
| Temperature: | 26°C | Relative Humidity: | 54% |
| Pressure: | 101kPa | Phase : | L |
| Test Voltage : | AC 120V/60Hz | | |


Report>Note: Pre-scan all modes and recorded the worst case results in this report which is 802.11a mode.

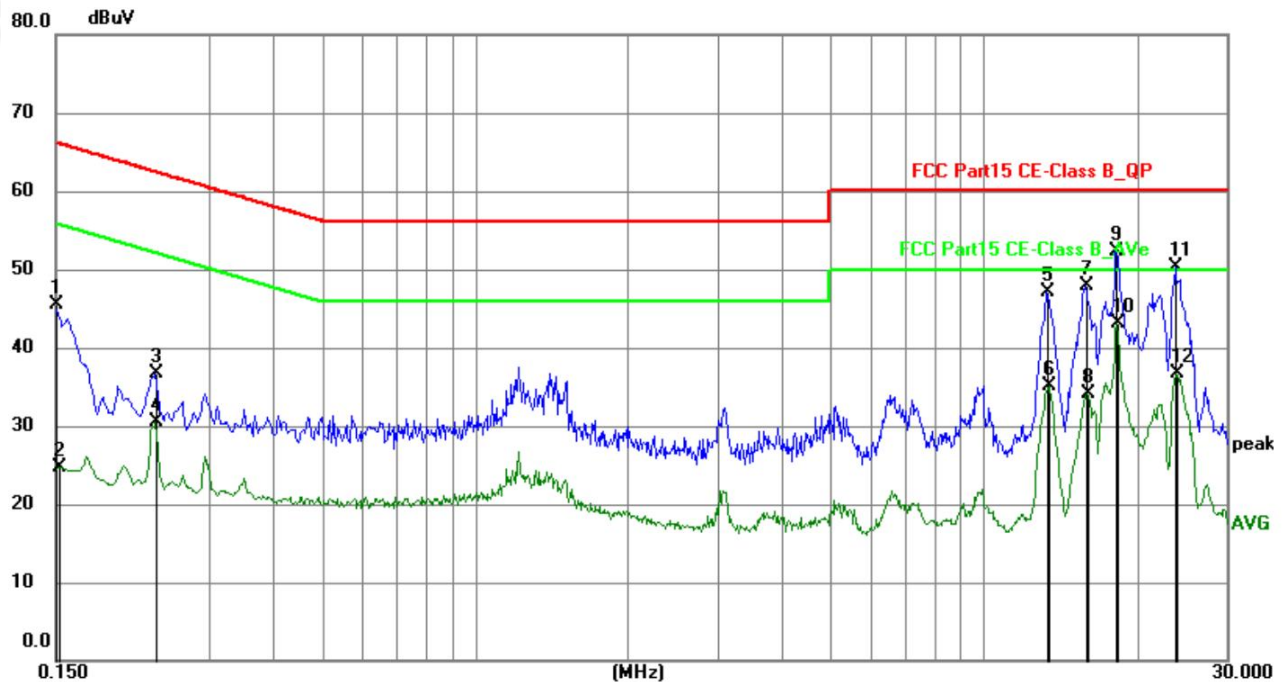

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB) | Level (dBuV) | Limit (dBuV) | Margin (dB) | Detector | P/F | Remark |
|-----|-----------------|----------------|-------------|--------------|--------------|-------------|----------|-----|--------|
| 1 | 0.1500 | 25.06 | 20.38 | 45.44 | 66.00 | -20.56 | QP | P | |
| 2 | 0.1524 | 4.22 | 20.39 | 24.61 | 55.87 | -31.26 | AVG | P | |
| 3 | 0.2355 | 16.19 | 20.61 | 36.80 | 62.25 | -25.45 | QP | P | |
| 4 | 0.2355 | 9.84 | 20.61 | 30.45 | 52.25 | -21.80 | AVG | P | |
| 5 | 13.3350 | 26.20 | 20.86 | 47.06 | 60.00 | -12.94 | QP | P | |
| 6 | 13.4430 | 14.33 | 20.86 | 35.19 | 50.00 | -14.81 | AVG | P | |
| 7 | 15.8595 | 26.98 | 20.89 | 47.87 | 60.00 | -12.13 | QP | P | |
| 8 | 15.9900 | 13.25 | 20.89 | 34.14 | 50.00 | -15.86 | AVG | P | |
| 9 | 18.2265 | 31.44 | 20.92 | 52.36 | 60.00 | -7.64 | QP | P | |
| 10 | 18.2625 | 22.18 | 20.92 | 43.10 | 50.00 | -6.90 | AVG | P | |
| 11 | 23.8650 | 29.36 | 20.99 | 50.35 | 60.00 | -9.65 | QP | P | |
| 12 | 23.9955 | 15.75 | 20.99 | 36.74 | 50.00 | -13.26 | AVG | P | |



| | | | |
|----------------|--------------|--------------------|-----|
| Temperature: | 26°C | Relative Humidity: | 54% |
| Pressure: | 101kPa | Phase : | N |
| Test Voltage : | AC 120V/60Hz | | |

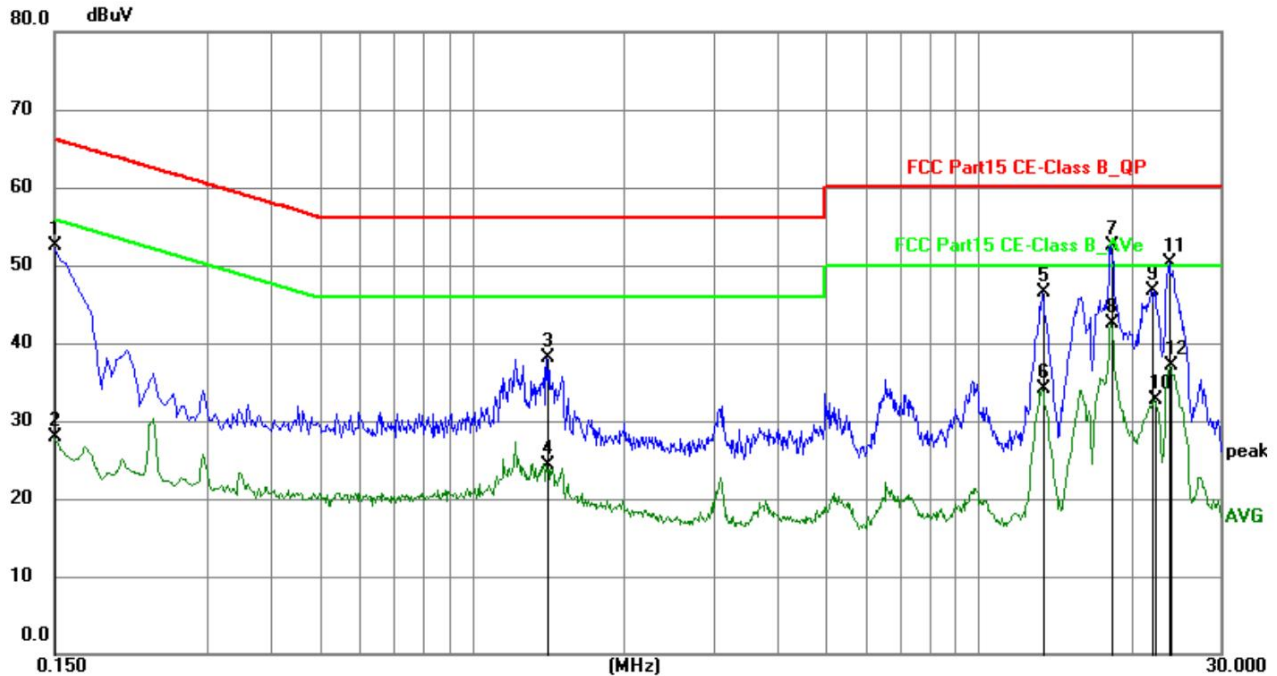

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB) | Level (dBuV) | Limit (dBuV) | Margin (dB) | Detector | P/F | Remark |
|-----|-----------------|----------------|-------------|--------------|--------------|-------------|----------|-----|--------|
| 1 | 0.1500 | 32.21 | 20.23 | 52.44 | 66.00 | -13.56 | QP | P | |
| 2 | 0.1500 | 7.70 | 20.23 | 27.93 | 56.00 | -28.07 | AVG | P | |
| 3 | 1.4100 | 17.42 | 20.71 | 38.13 | 56.00 | -17.87 | QP | P | |
| 4 | 1.4100 | 3.62 | 20.71 | 24.33 | 46.00 | -21.67 | AVG | P | |
| 5 | 13.3620 | 25.67 | 20.80 | 46.47 | 60.00 | -13.53 | QP | P | |
| 6 | 13.3620 | 13.31 | 20.80 | 34.11 | 50.00 | -15.89 | AVG | P | |
| 7 | 18.2760 | 31.63 | 20.91 | 52.54 | 60.00 | -7.46 | QP | P | |
| 8 | 18.2760 | 21.57 | 20.91 | 42.48 | 50.00 | -7.52 | AVG | P | |
| 9 | 22.0470 | 25.76 | 20.99 | 46.75 | 60.00 | -13.25 | QP | P | |
| 10 | 22.2180 | 11.65 | 20.99 | 32.64 | 50.00 | -17.36 | AVG | P | |
| 11 | 23.8875 | 29.37 | 21.01 | 50.38 | 60.00 | -9.62 | QP | P | |
| 12 | 23.9325 | 16.00 | 21.02 | 37.02 | 50.00 | -12.98 | AVG | P | |



4.2 RADIATED EMISSION MEASUREMENT

4.2.1 APPLICABLE STANDARD

According to FCC Part 15.407(d) and 15.209

4.2.2 CONFORMANCE LIMIT

According to FCC Part 15.407(b)(7): radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

According to FCC Part 15.205, Restricted bands

| MHz | MHz | MHz | GHz |
|-------------------|---------------------|---------------|-------------|
| 0.090-0.110 | 16.42-16.423 | 399.9-410 | 4.5-5.15 |
| 10.495-0.505 | 16.69475-16.69525 | 608-614 | 5.35-5.46 |
| 2.1735-2.1905 | 16.80425-16.80475 | 960-1240 | 7.25-7.75 |
| 4.125-4.128 | 25.5-25.67 | 1300-1427 | 8.025-8.5 |
| 4.17725-4.17775 | 37.5-38.25 | 1435-1626.5 | 9.0-9.2 |
| 4.20725-4.20775 | 73-74.6 | 1645.5-1646.5 | 9.3-9.5 |
| 6.215-6.218 | 74.8-75.2 | 1660-1710 | 10.6-12.7 |
| 6.26775-6.26825 | 123-138 | 2200-2300 | 14.47-14.5 |
| 8.291-8.294 | 149.9-150.05 | 2310-2390 | 15.35-16.2 |
| 8.362-8.366 | 156.52475-156.52525 | 2483.5-2500 | 17.7-21.4 |
| 8.37625-8.38675 | 156.7-156.9 | 2690-2900 | 22.01-23.12 |
| 8.41425-8.41475 | 162.0125-167.17 | 3260-3267 | 23.6-24.0 |
| 12.29-12.293 | 167.72-173.2 | 3332-3339 | 31.2-31.8 |
| 12.51975-12.52025 | 240-285 | 3345.8-3358 | 36.43-36.5 |
| 12.57675-12.57725 | 322-335.4 | 3600-4400 | (2) |
| 13.36-13.41 | | | |

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

| Restricted Frequency(MHz) | Field Strength ($\mu\text{V}/\text{m}$) | Field Strength ($\text{dB}\mu\text{V}/\text{m}$) | Measurement Distance |
|---------------------------|-------------------------------------------|----------------------------------------------------|----------------------|
| 0.009~0.490 | 2400/F(KHz) | 20 log ($\mu\text{V}/\text{m}$) | 300 |
| 0.490~1.705 | 2400/F(KHz) | 20 log ($\mu\text{V}/\text{m}$) | 30 |
| 1.705~30.0 | 30 | 29.5 | 30 |
| 30-88 | 100 | 40 | 3 |
| 88-216 | 150 | 43.5 | 3 |
| 216-960 | 200 | 46 | 3 |
| Above 960 | 500 | 54 | 3 |

Limits of Radiated Emission Measurement(Above 1000MHz)

| Frequency(MHz) | Class B ($\text{dB}\mu\text{V}/\text{m}$) (at 3M) | |
|----------------|-----------------------------------------------------|---------|
| | PEAK | AVERAGE |
| Above 1000 | 74 | 54 |

Remark :1. Emission level in $\text{dB}\mu\text{V}/\text{m}=20 \log (\mu\text{V}/\text{m})$

2. Measurement was performed at an antenna to the closed point of EUT distance of meters.

3. Distance extrapolation factor = $40\log(\text{Specific distance}/ \text{test distance})(\text{dB})$;

Limit line=Specific limits($\text{dB}\mu\text{V}$) + distance extrapolation factor.


4.2.3 MEASURING INSTRUMENTS

The Measuring equipment is listed in the section 6.3 of this test report.




4.2.4 TEST CONFIGURATION


1. For radiated emissions below 30MHz

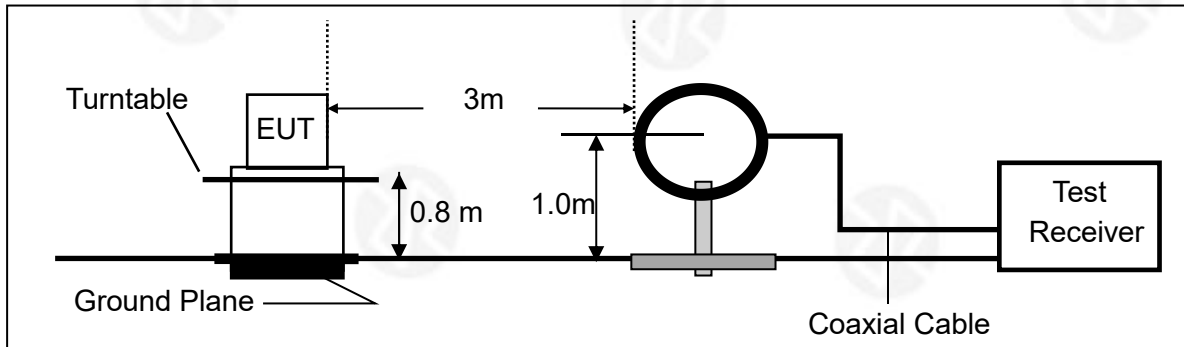

2. For radiated emissions from 30MHz to 1000MHz

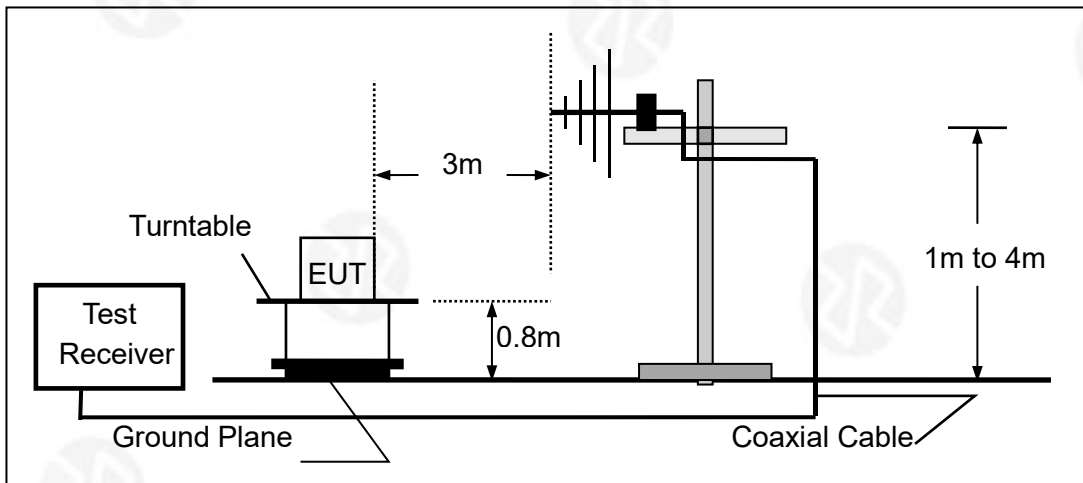

3. Radiated Emission Test-Up Frequency Above 1GHz

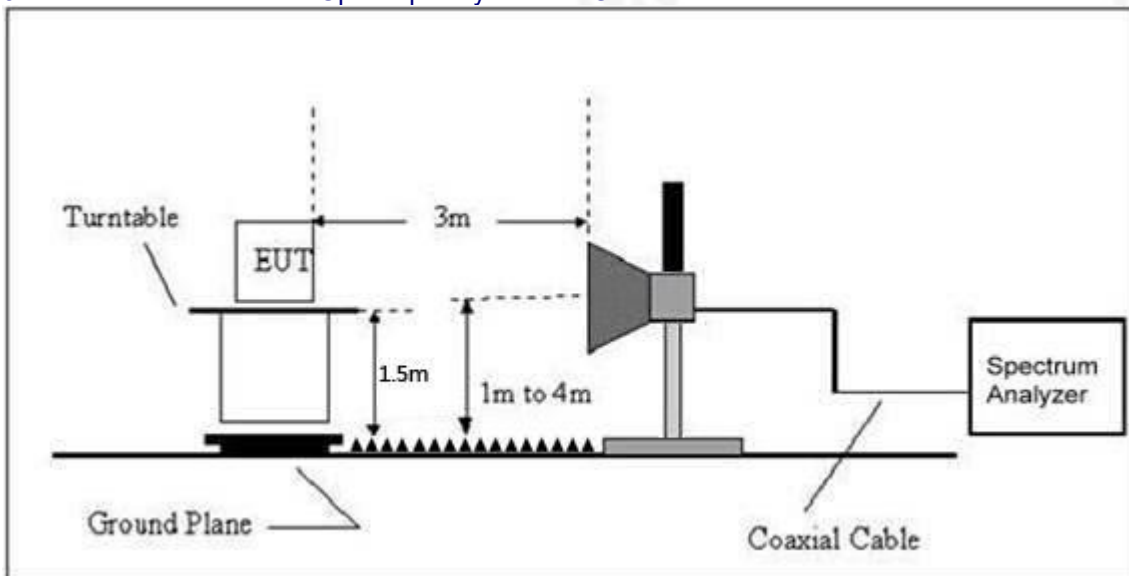



4.2.5 TEST PROCEDURE

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4 dB according to the standards: ANSI C63.10-2013. The test distance is 3m. The setup is according to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 and CAN/CSA-CEI/IEC CISPR 22.

This test is required for any spurious emission that falls in a Restricted Band, as defined in Section 15.205. It must be performed with the highest gain of each type of antenna proposed for use with the EUT.

Use the following spectrum analyzer settings:

| Spectrum Parameter | Setting |
|---------------------------------------|--------------------------------------------------|
| Attenuation | Auto |
| Start Frequency | 1000 MHz |
| Stop Frequency | 10th carrier harmonic |
| RB / VB (emission in restricted band) | 1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average |

| Receiver Parameter | Setting |
|------------------------|----------------------------------|
| Attenuation | Auto |
| Start ~ Stop Frequency | 9kHz~150kHz / RB 200Hz for QP |
| Start ~ Stop Frequency | 150kHz~30MHz / RB 9kHz for QP |
| Start ~ Stop Frequency | 30MHz~1000MHz / RB 120kHz for QP |

- The measuring distance of at 3 m shall be used for measurements at frequency up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- The EUT was placed on the top of a rotating table 0.8 m for below 1GHz and 1.5m for above 1GHz the ground at a 3 meter. The table was rotated 360 degrees to determine the position of the highest radiation.
- The height of the equipment or of the substitution antenna shall be 0.8 m for below 1GHz and 1.5m for above 1GHz; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

Note:

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

During the radiated emission test, the Spectrum Analyzer was set with the following configurations:

| Frequency Band (MHz) | Function | Resolution bandwidth | Video Bandwidth |
|----------------------|----------|----------------------|-----------------|
| 30 to 1000 | QP | 120 kHz | 300 kHz |
| Above 1000 | Peak | 1 MHz | 1 MHz |
| | Average | 1 MHz | 10 Hz |

Note: for the frequency ranges below 30 MHz, a narrower RBW is used for these ranges but the measured value should add a RBW correction factor (RBWCF) where $RBWCF [dB] = 10 \cdot \lg(100 [kHz]/\text{narrower RBW [kHz]})$. , the narrower RBW is 1 kHz and RBWCF is 20 dB for the frequency 9 kHz to 150 kHz, and the narrower RBW is 10 kHz and RBWCF is 10 dB for the frequency 150 kHz to 30 MHz.



4.2.6 TEST RESULT

Between 9KHz – 30MHz


The emission from 9 kHz to 30MHz was pre-tested and found the result was 20dB lower than the limit, and according to 15.31(o) & RSS-Gen 6.13, the test result no need to reported.



Between 30MHz – 1GHz

| | | | |
|---------------|---------|--------------------|------------|
| Temperature: | 26°C | Relative Humidity: | 54% |
| Pressure: | 101 kPa | Polarization: | Horizontal |
| Test Voltage: | DC 5V | | |


Note: Pre-scan all modes and recorded the worst case results in this report which is 802.11a mode

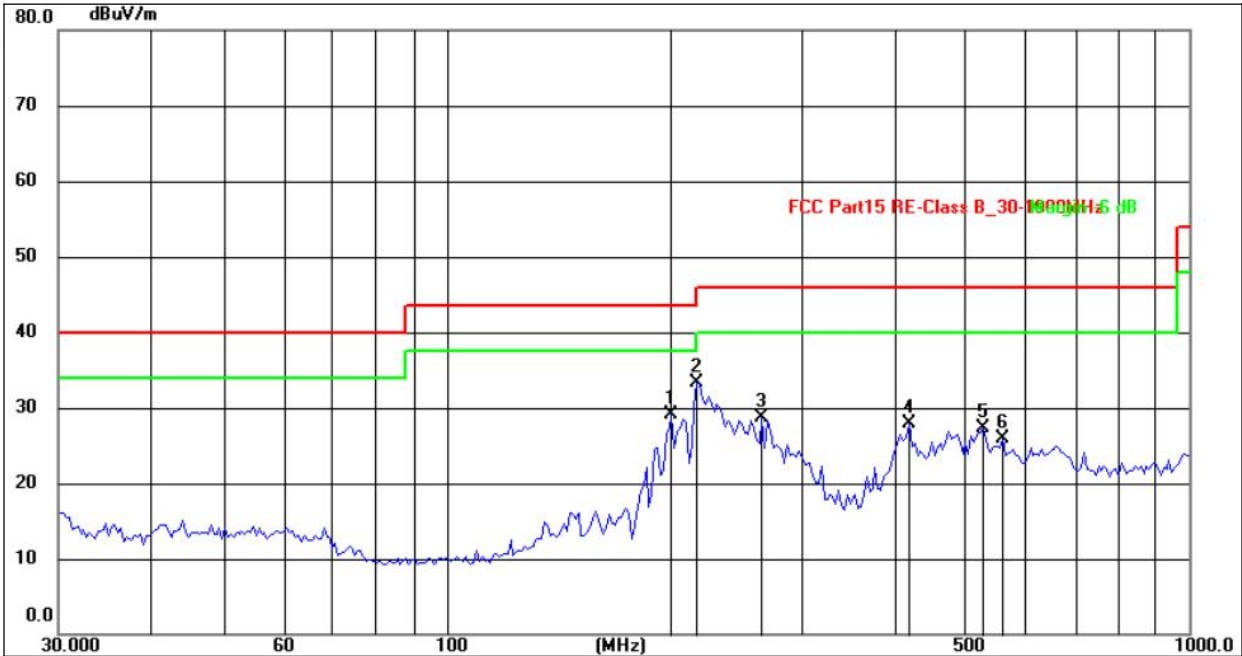

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|
| 1 | 201.0399 | 47.93 | -18.74 | 29.19 | 43.50 | -14.31 | QP |
| 2 | 217.5440 | 51.32 | -17.92 | 33.40 | 46.00 | -12.60 | QP |
| 3 | 266.1419 | 43.91 | -15.18 | 28.73 | 46.00 | -17.27 | QP |
| 4 | 419.8435 | 43.47 | -15.60 | 27.87 | 46.00 | -18.13 | QP |
| 5 | 527.3201 | 38.15 | -10.86 | 27.29 | 46.00 | -18.71 | QP |
| 6 | 560.6928 | 35.90 | -9.93 | 25.97 | 46.00 | -20.03 | QP |



| | | | |
|---------------|--------|--------------------|----------|
| Temperature: | 26°C | Relative Humidity: | 54% |
| Pressure: | 101kPa | Polarization: | Vertical |
| Test Voltage: | DC 5V | | |

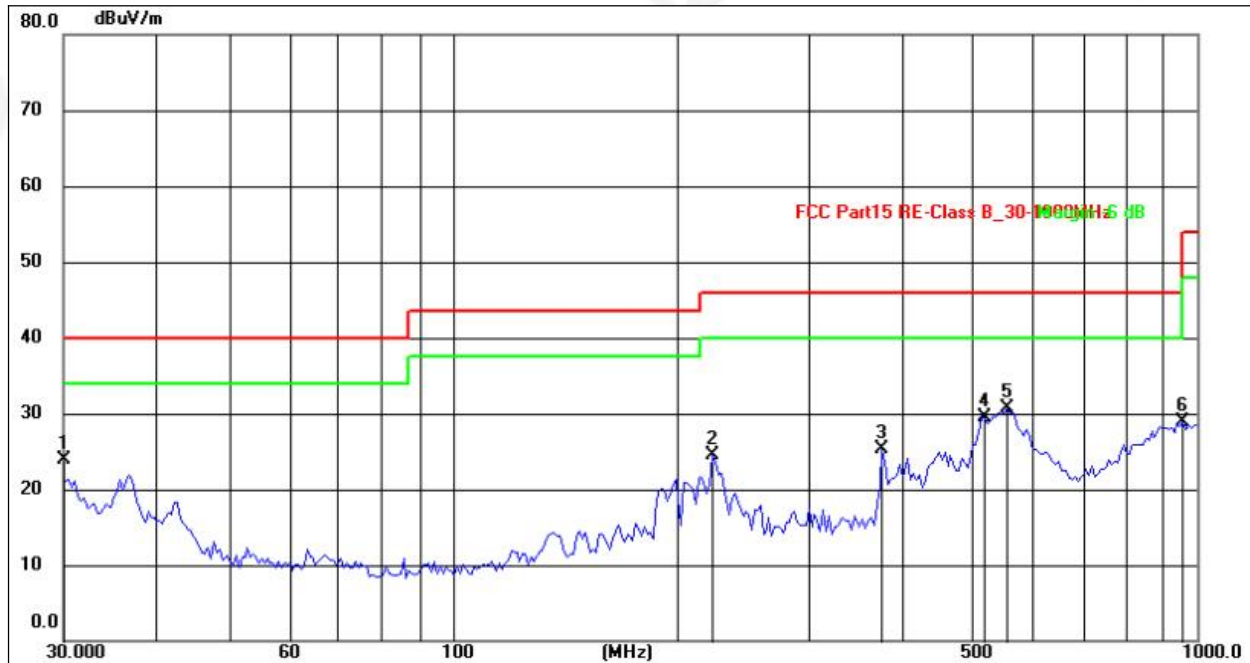

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|
| 1 | 30.0000 | 42.25 | -18.44 | 23.81 | 40.00 | -16.19 | QP |
| 2 | 223.3412 | 44.87 | -20.37 | 24.50 | 46.00 | -21.50 | QP |
| 3 | 377.9211 | 41.01 | -15.76 | 25.25 | 46.00 | -20.75 | QP |
| 4 | 518.1556 | 40.40 | -10.89 | 29.51 | 46.00 | -16.49 | QP |
| 5 | 555.7989 | 40.13 | -9.46 | 30.67 | 46.00 | -15.33 | QP |
| 6 | 957.1145 | 29.37 | -0.44 | 28.93 | 46.00 | -17.07 | QP |

Remarks:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.
3. The test data shows only the worst case 802.11n20 mode



Between 1GHz – 40GHz

| | | | |
|---------------|--------------------|---------------------|-------|
| Temperature : | 26°C | Relative Humidity : | 54% |
| Pressure : | 1010 hPa | Test Voltage : | DC 5V |
| Test Mode : | 5.8G TX- 802.11n20 | | |

Note: Pre-scan all modes and recorded the worst case results in this report which is 802.11a mode
802.11a20

| Polar (H/V) | Frequency | Meter Reading | Pre-amplifier | Cable Loss | Antenna Factor | Emission Level | Limits | Margin | Detect or Type |
|---------------------|-----------|---------------|---------------|------------|----------------|----------------|----------|--------|----------------|
| | (MHz) | (dBuV) | (dB) | (dB) | (dB) | (dBuV/m) | (dBuV/m) | (dB) | |
| Low Channel:5745MHz | | | | | | | | | |
| V | 11490.00 | 51.70 | 30.55 | 5.77 | 24.66 | 51.58 | 74.00 | -22.42 | PK |
| V | 11490.00 | 40.61 | 30.55 | 5.77 | 24.66 | 40.49 | 54.00 | -13.51 | AV |
| V | 17233.30 | 50.72 | 30.33 | 6.32 | 24.55 | 51.26 | 74.00 | -22.74 | PK |
| V | 17233.30 | 47.99 | 30.33 | 6.32 | 24.55 | 48.53 | 54.00 | -5.47 | AV |
| H | 11490.00 | 48.05 | 30.55 | 5.77 | 24.66 | 47.93 | 74.00 | -26.07 | PK |
| H | 11490.00 | 38.92 | 30.55 | 5.77 | 24.66 | 38.80 | 54.00 | -15.20 | AV |
| H | 17233.30 | 48.18 | 30.33 | 6.32 | 24.55 | 48.72 | 74.00 | -25.28 | PK |
| H | 17233.30 | 40.01 | 30.33 | 6.32 | 24.55 | 40.55 | 54.00 | -13.45 | AV |

| Polar (H/V) | Frequency | Meter Reading | Pre-amplifier | Cable Loss | Antenna Factor | Emission Level | Limits | Margin | Detect or Type |
|------------------------|-----------|---------------|---------------|------------|----------------|----------------|----------|--------|----------------|
| | (MHz) | (dBuV) | (dB) | (dB) | (dB) | (dBuV/m) | (dBuV/m) | (dB) | |
| Middle Channel:5785MHz | | | | | | | | | |
| V | 11570.00 | 49.60 | 30.55 | 5.77 | 24.66 | 49.48 | 74.00 | -24.52 | PK |
| V | 11570.00 | 39.12 | 30.55 | 5.77 | 24.66 | 39.00 | 54.00 | -15.00 | AV |
| V | 17353.30 | 49.31 | 30.33 | 6.32 | 24.55 | 49.85 | 74.00 | -24.15 | PK |
| V | 17353.30 | 40.03 | 30.33 | 6.32 | 24.55 | 40.57 | 54.00 | -13.43 | AV |
| H | 11570.00 | 48.88 | 30.55 | 5.77 | 24.66 | 48.76 | 74.00 | -25.24 | PK |
| H | 11570.00 | 40.82 | 30.55 | 5.77 | 24.66 | 40.70 | 54.00 | -13.30 | AV |
| H | 17353.30 | 47.88 | 30.33 | 6.32 | 24.55 | 48.42 | 74.00 | -25.58 | PK |
| H | 17353.30 | 39.82 | 30.33 | 6.32 | 24.55 | 40.36 | 54.00 | -13.64 | AV |

| Polar (H/V) | Frequency | Meter Reading | Pre-amplifier | Cable Loss | Antenna Factor | Emission Level | Limits | Margin | Detect or Type |
|----------------------|-----------|---------------|---------------|------------|----------------|----------------|----------|--------|----------------|
| | (MHz) | (dBuV) | (dB) | (dB) | (dB) | (dBuV/m) | (dBuV/m) | (dB) | |
| High Channel:5825MHz | | | | | | | | | |
| V | 11650.00 | 49.60 | 30.55 | 5.77 | 24.66 | 49.48 | 74.00 | -24.52 | PK |
| V | 11650.00 | 39.12 | 30.55 | 5.77 | 24.66 | 39.00 | 54.00 | -15.00 | AV |
| V | 17473.30 | 49.31 | 30.33 | 6.32 | 24.55 | 49.85 | 74.00 | -24.15 | PK |
| V | 17473.30 | 40.03 | 30.33 | 6.32 | 24.55 | 40.57 | 54.00 | -13.43 | AV |
| H | 11650.00 | 51.00 | 30.55 | 5.77 | 24.66 | 50.88 | 74.00 | -23.12 | PK |
| H | 11650.00 | 40.82 | 30.55 | 5.77 | 24.66 | 40.70 | 54.00 | -13.30 | AV |
| H | 17473.30 | 48.33 | 30.33 | 6.32 | 24.55 | 48.87 | 74.00 | -25.13 | PK |
| H | 17473.30 | 39.82 | 30.33 | 6.32 | 24.55 | 40.36 | 54.00 | -13.64 | AV |

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.
4. The worst mode is 802.11n20 ANT1, only the worst data is recorded.



Radiated Band Edge :

| Worse case mode: | | 802.11a | | | | | |
|------------------|---------------|---------|----------------|----------------|--------|---------------|-----------|
| Frequency | Meter Reading | Factor | Emission Level | Limits | Over | Detector Type | Ant. Pol. |
| (MHz) | (dB μ V) | (dB) | (dB μ V/m) | (dB μ V/m) | (dB) | | H/V |
| 5650 | 48.95 | -0.12 | 48.83 | 68.2 | -19.37 | peak | H |
| 5700 | 87.37 | -0.12 | 87.25 | 105.2 | -17.95 | peak | H |
| 5720 | 87.26 | -0.12 | 87.14 | 110.8 | -23.66 | peak | H |
| 5725 | 96.45 | -0.12 | 96.33 | 122.2 | -25.87 | peak | H |
| 5650 | 40.9 | -0.12 | 40.78 | 68.2 | -27.42 | peak | V |
| 5700 | 87.75 | -0.12 | 87.63 | 105.2 | -17.57 | peak | V |
| 5720 | 88.98 | -0.12 | 88.86 | 110.8 | -21.94 | peak | V |
| 5725 | 91.42 | -0.12 | 91.3 | 122.2 | -30.9 | peak | V |
| 5850 | 98.98 | -0.12 | 98.86 | 122.2 | -23.34 | peak | H |
| 5855 | 83.45 | -0.12 | 83.33 | 110.8 | -27.47 | peak | H |
| 5875 | 80.33 | -0.12 | 80.21 | 105.2 | -24.99 | peak | H |
| 5925 | 52.84 | -0.12 | 52.72 | 68.2 | -15.48 | peak | H |
| 5850 | 101.33 | -0.12 | 101.21 | 122.2 | -20.99 | peak | V |
| 5855 | 88.88 | -0.12 | 88.76 | 110.8 | -22.04 | peak | V |
| 5875 | 84.48 | -0.12 | 84.36 | 105.2 | -20.84 | peak | V |
| 5925 | 52.93 | -0.12 | 52.81 | 68.2 | -15.39 | peak | V |

Remark:

- 1.Factor =Antenna Factor + Cable Loss – Pre-amplifier
- 2.The worst mode is 802.11a20, only the worst data is recorded.



5. POWER SPECTRAL DENSITY TEST

5.1 APPLIED PROCEDURES / LIMIT

According to FCC §15.407(3)

Power limits:

(1) For the band 5.15-5.25 GHz.

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For client devices in the 5.15-5.25 GHz band, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(2) For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(3) For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.



5.2 TEST PROCEDURE

For devices operating in the bands 5.15-5.25 GHz, 5.25-5.35 GHz, and 5.47-5.725 GHz, the above procedures make use of 1 MHz RBW to satisfy directly the 1 MHz reference bandwidth specified in § 15.407(a)(5). For devices operating in the band 5.725-5.85 GHz, the rules specify a measurement bandwidth of 500 kHz. Many spectrum analyzers do not have 500 kHz RBW, thus a narrower RBW may need to be used. The rules permit the use of a RBWs less than 1 MHz, or 500 kHz, “provided that the measured power is integrated over the full reference bandwidth” to show the total power over the specified measurement bandwidth (i.e., 1 MHz, or 500 kHz). If measurements are performed using a reduced resolution bandwidth (< 1 MHz, or < 500 kHz) and integrated over 1 MHz, or 500 KHz bandwidth, the following adjustments to the procedures apply:

- a) Set $RBW \geq 1/T$, where T is defined in section II.B.I.a).
- b) Set $VBW \geq 3 RBW$.
- c) If measurement bandwidth of Maximum PSD is specified in 500 kHz, add $10\log(500\text{kHz}/RBW)$ to the measured result, whereas RBW (< 500 KHz) is the reduced resolution bandwidth of the spectrum analyzer set during measurement.
- d) If measurement bandwidth of Maximum PSD is specified in 1 MHz, add $10\log(1\text{MHz}/RBW)$ to the measured result, whereas RBW (< 1 MHz) is the reduced resolution bandwidth of spectrum analyzer set during measurement.
- e) Care must be taken to ensure that the measurements are performed during a period of continuous transmission or are corrected upward for duty cycle.

Note: As a practical matter, it is recommended to use reduced RBW of 100 KHz for the sections 5.c) and 5.d) above, since RBW=100 KHZ is available on nearly all spectrum analyzers.

5.3 DEVIATION FROM STANDARD

No deviation.

5.4 TEST SETUP



5.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.1 Unless otherwise a special operating condition is specified in the follows during the testing.




5.6 TEST RESULTS

| | | | |
|---------------|----------|---------------------|-------|
| Temperature : | 26 °C | Relative Humidity : | 54% |
| Pressure : | 1015 hPa | Test Voltage : | DC 5V |
| Test Mode : | TX | | |


| Test mode | Test Channel (MHz) | PSD [dBm/500kHz] | Limit (dBm/500kHz) | Result |
|----------------|--------------------|------------------|--------------------|--------|
| 802.11a | 5745 | -6.23 | 30 | Pass |
| | 5785 | -6.27 | 30 | Pass |
| | 5825 | -6.84 | 30 | Pass |
| 802.11n(HT20) | 5745 | -7.16 | 30 | Pass |
| | 5785 | -7.06 | 30 | Pass |
| | 5825 | -7.57 | 30 | Pass |
| 802.11n(HT40) | 5755 | -9.24 | 30 | Pass |
| | 5795 | -9.46 | 30 | Pass |
| 802.11ac(VH20) | 5745 | -6.97 | 30 | Pass |
| | 5785 | -7.01 | 30 | Pass |
| | 5825 | -8.55 | 30 | Pass |
| 802.11ac(VH40) | 5755 | -10.26 | 30 | Pass |
| | 5795 | -10.58 | 30 | Pass |
| 802.11ac(VH80) | 5775 | -12.40 | 30 | Pass |




(802.11a) PSD plot on channel 149

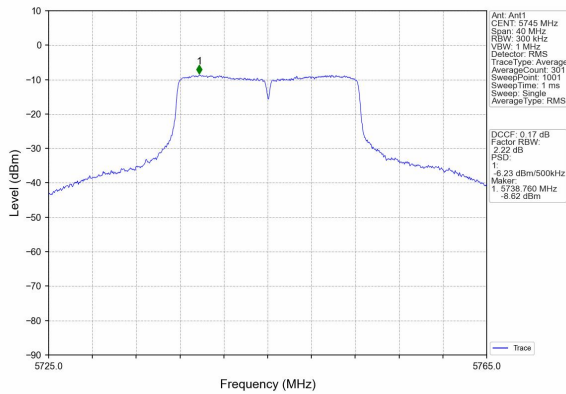


(802.11n HT20) PSD plot on channel 149

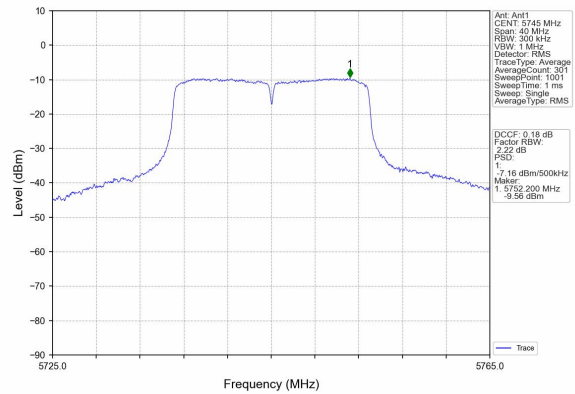


(802.11a) PSD plot on channel 157

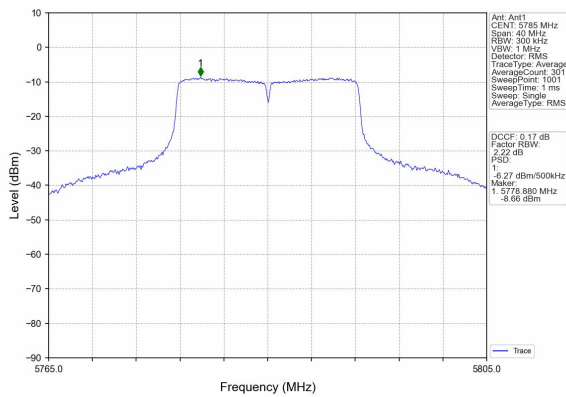


(802.11n HT20) PSD plot on channel 157

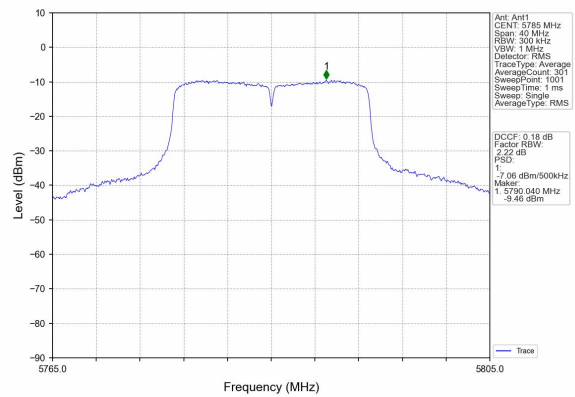

(802.11a) PSD plot on channel 165

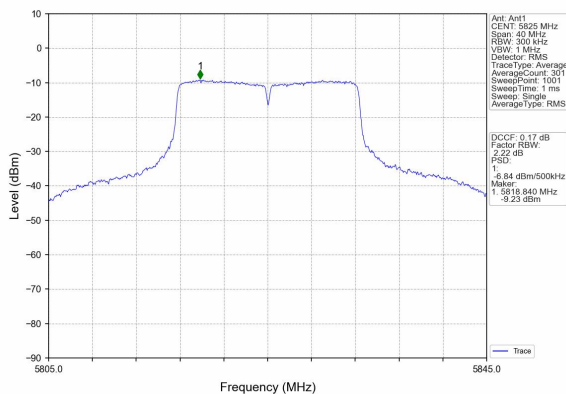


(802.11n HT20) PSD plot on channel 165

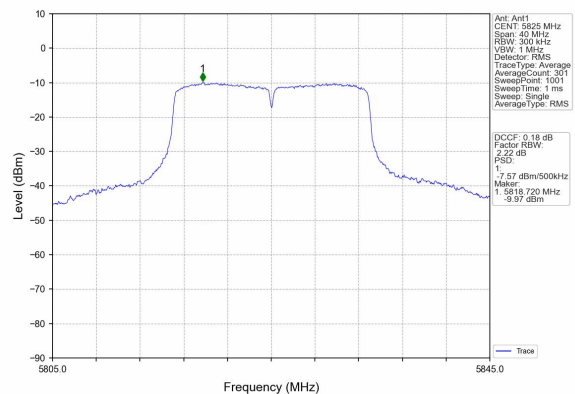





(802.11ac20) PSD plot on channel 149

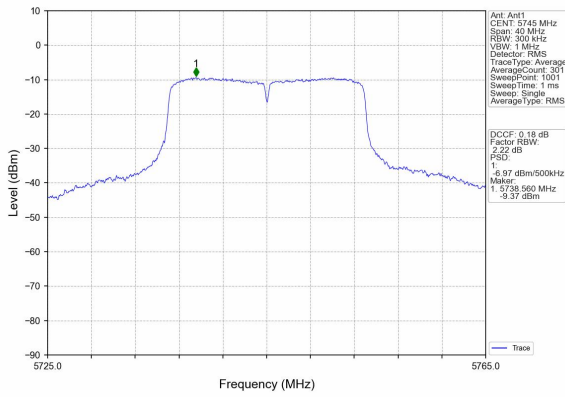


ANT1 (802.11n40) PSD plot on channel 151

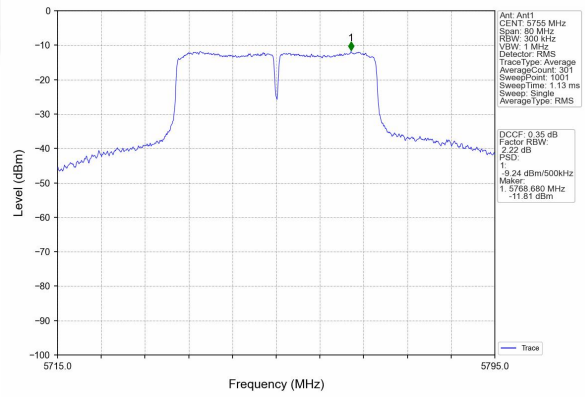


(802.11ac20) PSD plot on channel 157

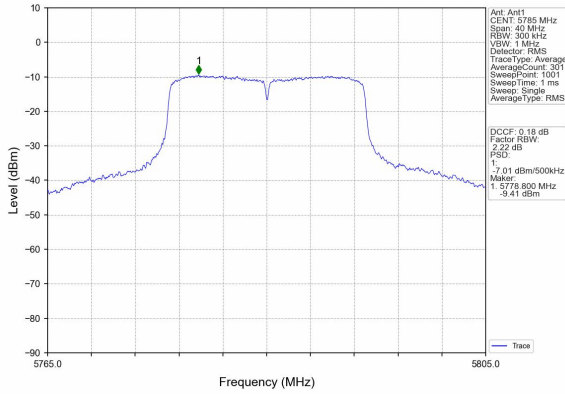

(802.11n40) PSD plot on channel 159

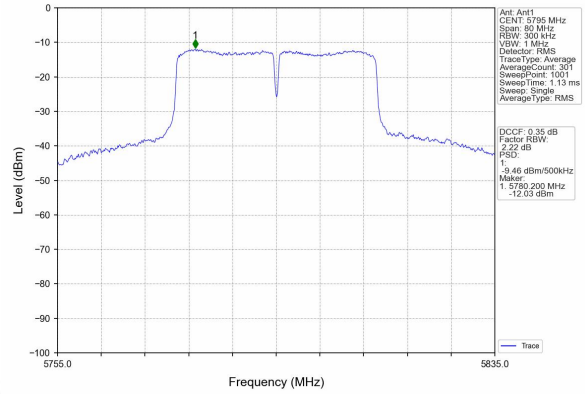


(802.11ac20) PSD plot on channel 165

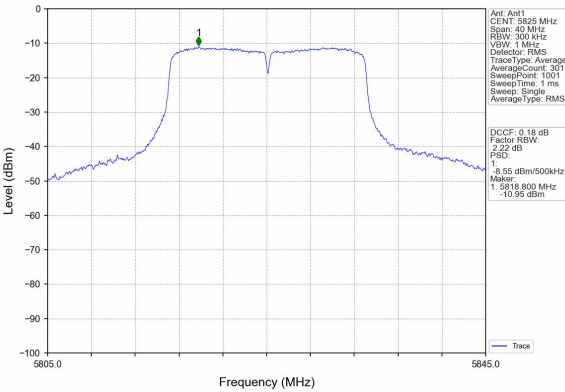





(802.11ac40) PSD plot on channel 151

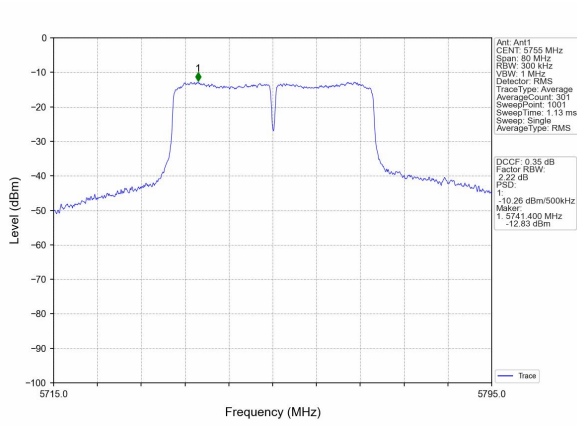

(802.11ac80) PSD plot on channel 155

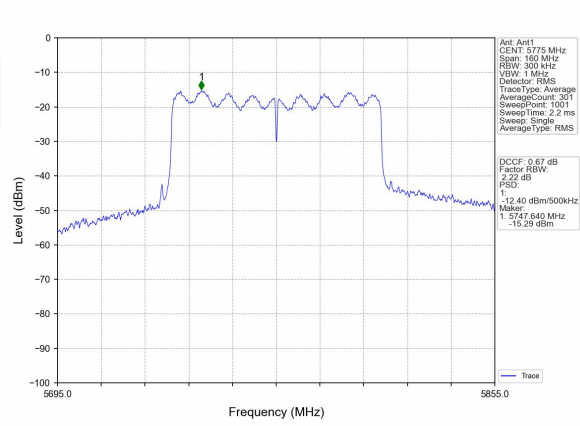

(802.11ac40) PSD plot on channel 159

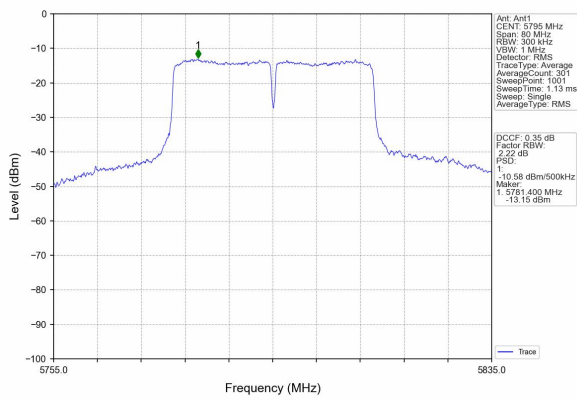



6. -6 DB & 99% EMISSION BANDWIDTH

6.1 APPLIED PROCEDURES / LIMIT

The maximum power spectral density is measured as a conducted emission by direct connection of a calibrated test instrument to the equipment under test. If the device cannot be connected directly, alternative techniques acceptable to the Commission may be used. Measurements in the 5.725-5.85 GHz band, the minimum bandwidth 6 dB bandwidth of U-NII devices shall be at least 500KHz. Measurements in the 5.15-5.25 GHz, 5.25-5.35 GHz, and the 5.47-5.725 GHz bands are made over a bandwidth of 1 MHz or the 26 dB emission bandwidth of the device, whichever is less. A narrower resolution bandwidth can be used, provided that the measured power is integrated over the full reference bandwidth.

6.2 TEST PROCEDURE

- a) Set RBW = 100KHz.
- b) Set the VBW ≥ 3 RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

The following procedure shall be used for measuring (99 %) power bandwidth:

1. Set center frequency to the nominal EUT channel center frequency.
2. Set span = 1.5 times to 5.0 times the OBW.
3. Set RBW = 1 % to 5 % of the OBW
4. Set VBW $\geq 3 \cdot$ RBW
5. Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
6. Use the 99 % power bandwidth function of the instrument (if available).
7. If the instrument does not have a 99 % power bandwidth function, the trace data points are recovered and directly summed in power units. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5 % of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5 % of the total is reached; that frequency is recorded as the upper frequency. The 99% occupied bandwidth is the difference between these two frequencies.





6.3 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

6.4 TEST RESULTS

| | | | |
|---------------|--------|---------------------|-------|
| Temperature : | 26 °C | Relative Humidity : | 54% |
| Pressure : | 101kPa | Test Voltage : | DC 5V |
| Test Mode : | TX | | |


| Test CH | --6dB Channel Bandwidth (MHz) | | | Limit(KHz) | Result |
|---------|-------------------------------|---------------|---------------|------------|--------|
| | 802.11a | 802.11n(HT20) | 802.11n(HT40) | | |
| Lowest | 16.383 | 17.054 | 35.795 | >500 | Pass |
| Middle | 16.363 | 17.059 | - | | |
| Highest | 16.364 | 17.066 | 35.543 | | |

| Test CH | --6dB Channel Bandwidth (MHz) | | | Limit(KHz) | Result |
|---------|-------------------------------|----------------|----------------|------------|--------|
| | 802.11ac(HT20) | 802.11ac(HT40) | 802.11ac(HT80) | | |
| Lowest | 17.062 | 35.815 | - | >500 | Pass |
| Middle | 16.859 | - | 75.217 | | |
| Highest | 17.142 | 35.679 | - | | |




Test plot


(802.11a) -6dB Bandwidth plot on channel 149

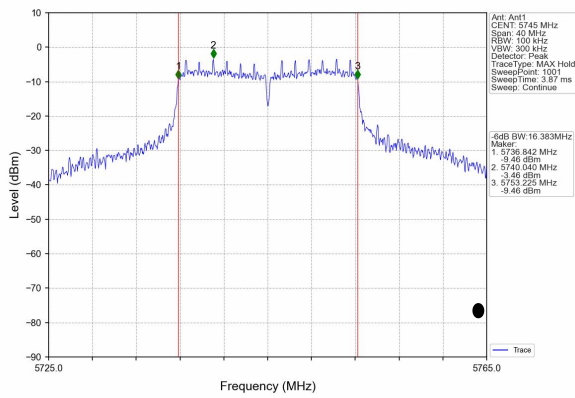

(802.11a) -6dB Bandwidth plot on channel 157

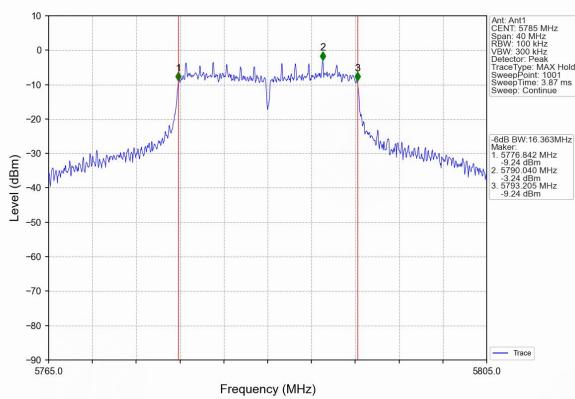


(802.11a) -6dB Bandwidth plot on channel 165

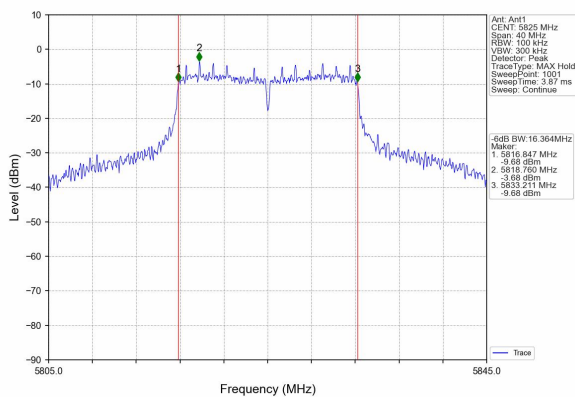




Test plot


(802.11n20) -6dB Bandwidth plot on channel 149

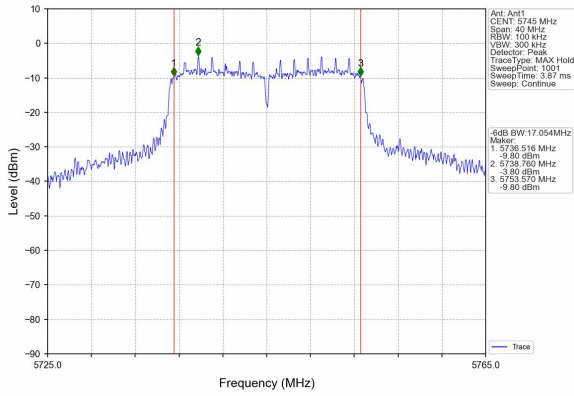


(802.11 n40) -6dB Bandwidth plot on channel 151

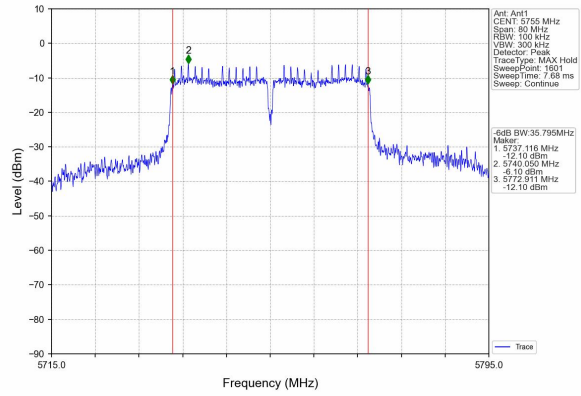


(802.11n20) -6dB Bandwidth plot on channel 157

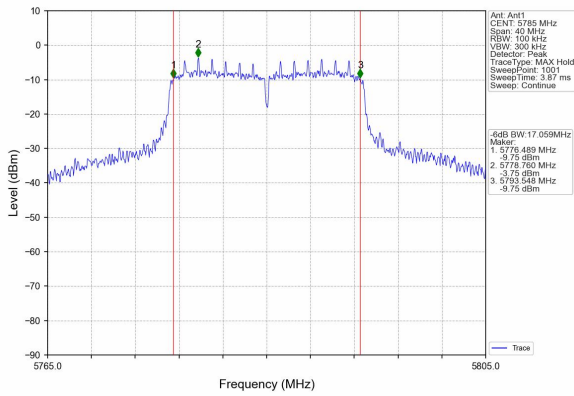

(802.11 n40) -6dB Bandwidth plot on channel 159

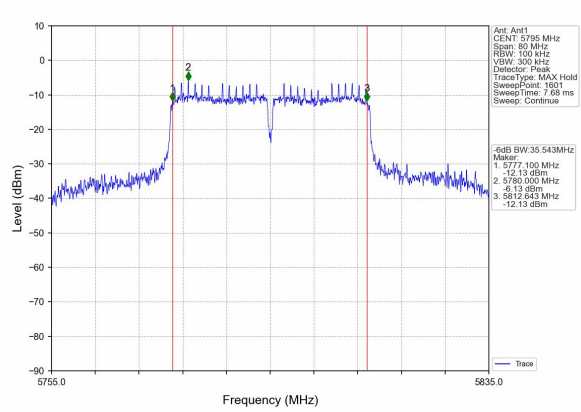


(802.11n20) -6dB Bandwidth plot on channel 165

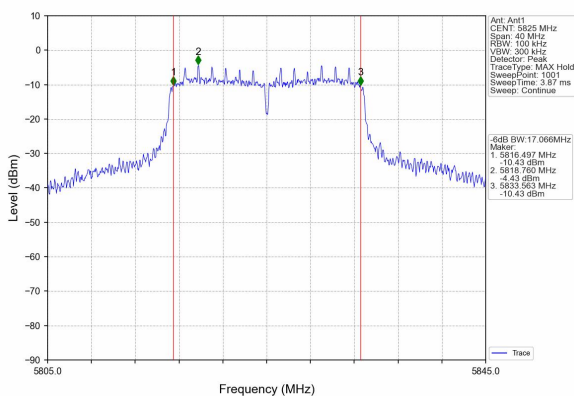




Test plot


(802.11ac20) -6dB Bandwidth plot on channel 149

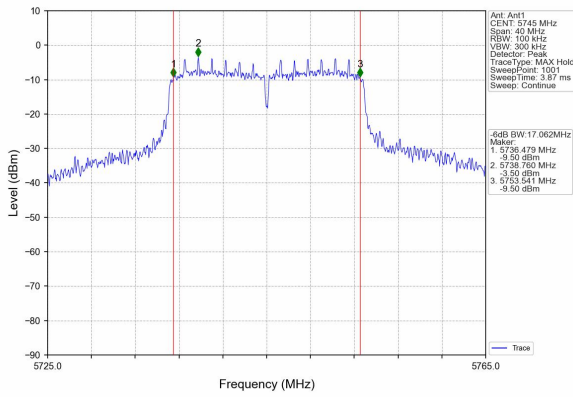


(802.11 ac40) -6dB Bandwidth plot on channel 151

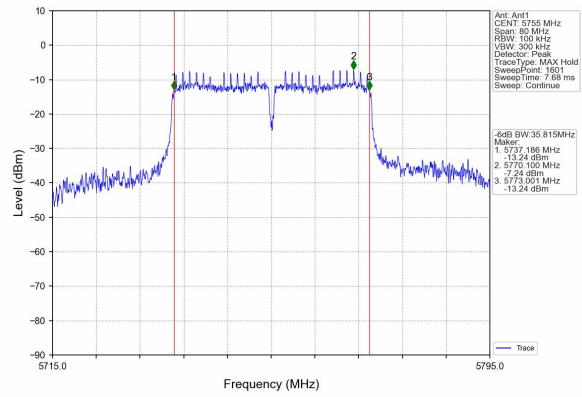


(802.11ac20) -6dB Bandwidth plot on channel 157

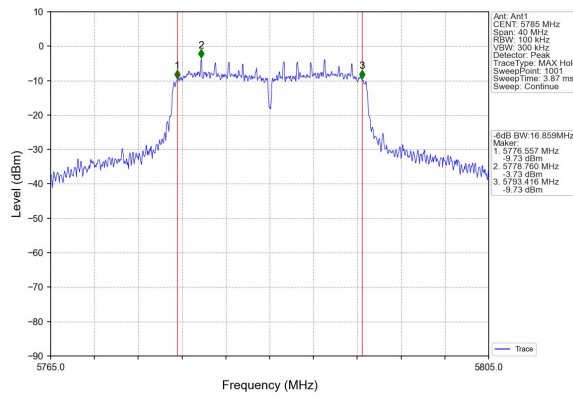

(802.11 ac40) -6dB Bandwidth plot on channel 159

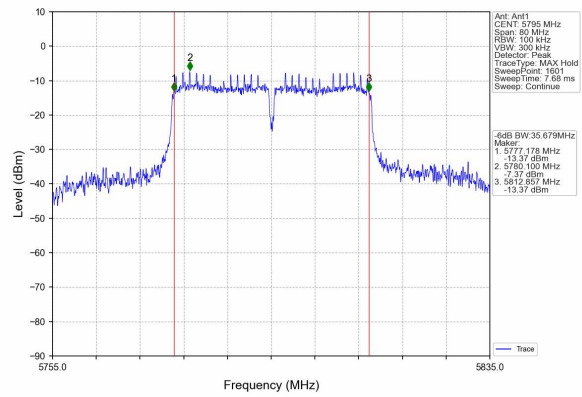


(802.11ac20) -6dB Bandwidth plot on channel 165

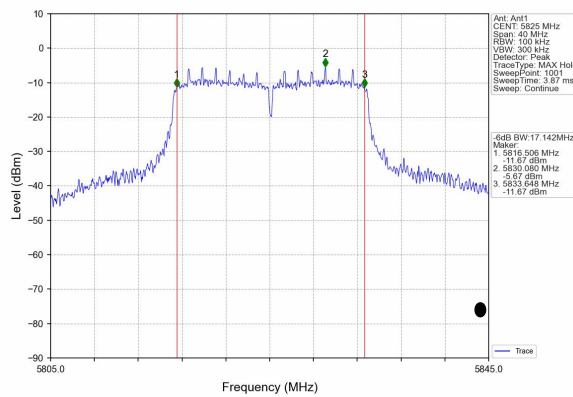



(802.11 ac80) -6dB Bandwidth plot on channel 155

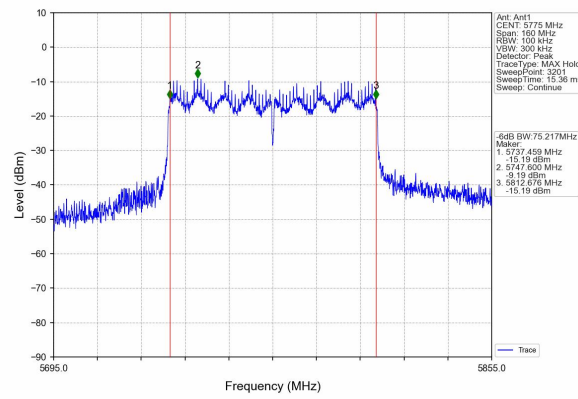




| Mode | Frequency (MHz) | 99% Occupied Bandwidth (MHz) | Verdict |
|-------------------|-----------------|------------------------------|---------|
| | | Result | |
| 802.11a | 5745 | 19.746 | Pass |
| | 5785 | 19.770 | |
| | 5825 | 18.886 | |
| 802.11n (HT20) | 5745 | 19.169 | |
| | 5785 | 19.387 | |
| | 5825 | 19.021 | |
| 802.11n (HT40) | 5755 | 38.629 | |
| | 5795 | 38.390 | |
| 802.11ac(VHT20) | 5745 | 19.752 | |
| | 5785 | 19.385 | |
| | 5825 | 18.724 | |
| 802.11ac(VHT40) | 5755 | 37.845 | |
| | 5795 | 37.834 | |
| 802.11ac(VHT80) | 5775 | 77.308 | |




Test plot


(802.11a) channel 149

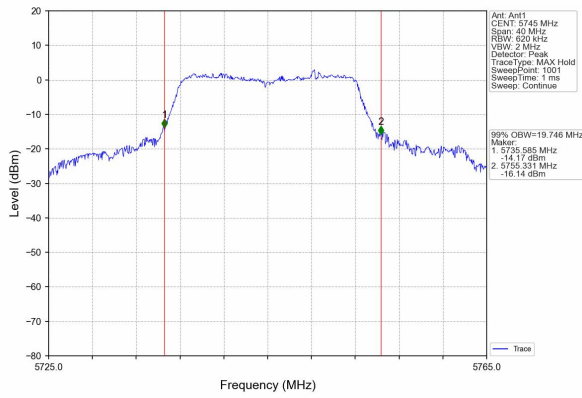

(802.11a) channel 157

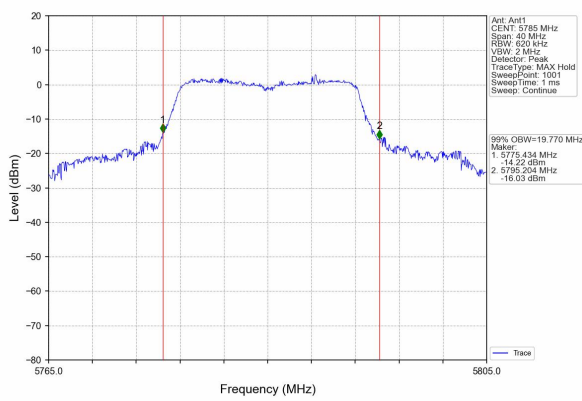


(802.11a) channel 165

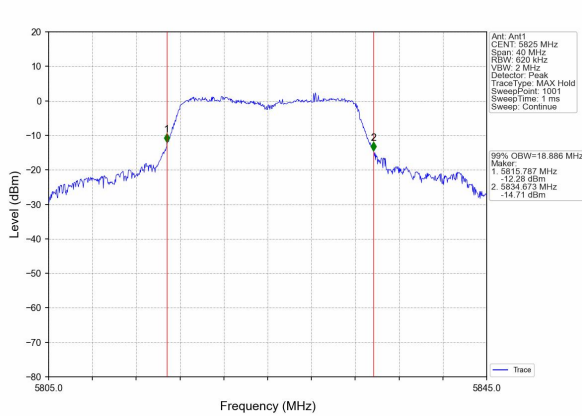




Test plot


(802.11n20) channel 149

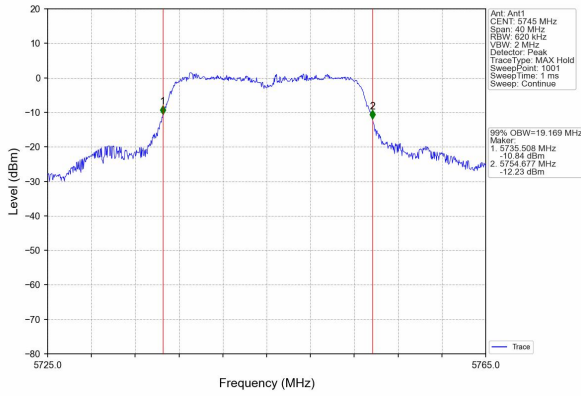


(802.11 n40) channel 151

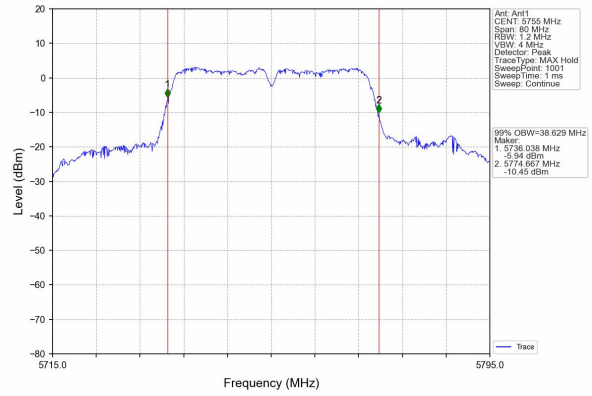

(802.11n20) channel 157

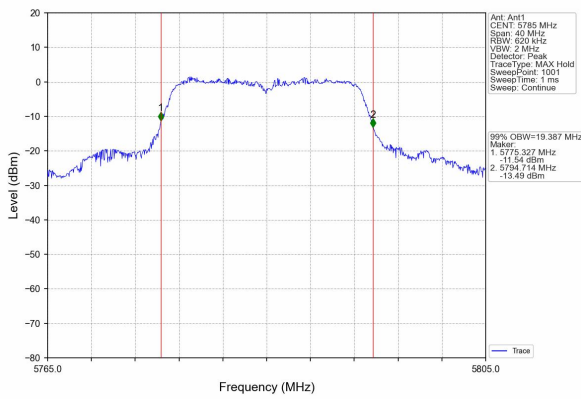

(802.11 n40) channel 159

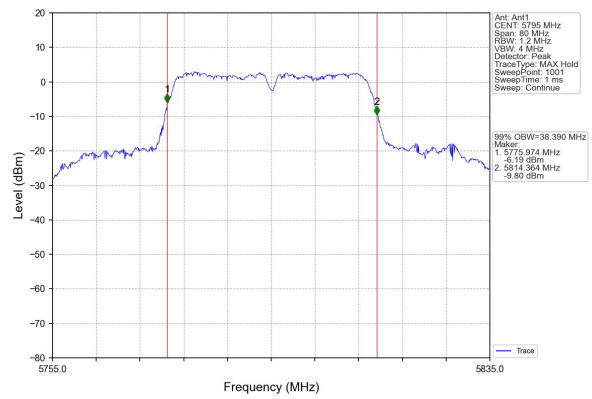

(802.11n20) channel 165

