

Product specification


1. Technical indicators of products

| | |
|---------------------------------------|-----------------|
| Frequency Range (MHz) | 2400~2500 |
| Band Width (MHz) | 100 |
| Impedance (Ω) | 50 |
| VSWR | 1.91 MAX |
| Return Loss (dB) | -15.3 |
| Peak Gain (dBi) | 1.78 |
| Polarization | Linear Vertical |
| Antenna Material | PCB |
| Operating Temp ($^{\circ}\text{C}$) | -20~65 |
| Storage Temp ($^{\circ}\text{C}$) | -30~75 |


2. Product picture




3. Return Loss

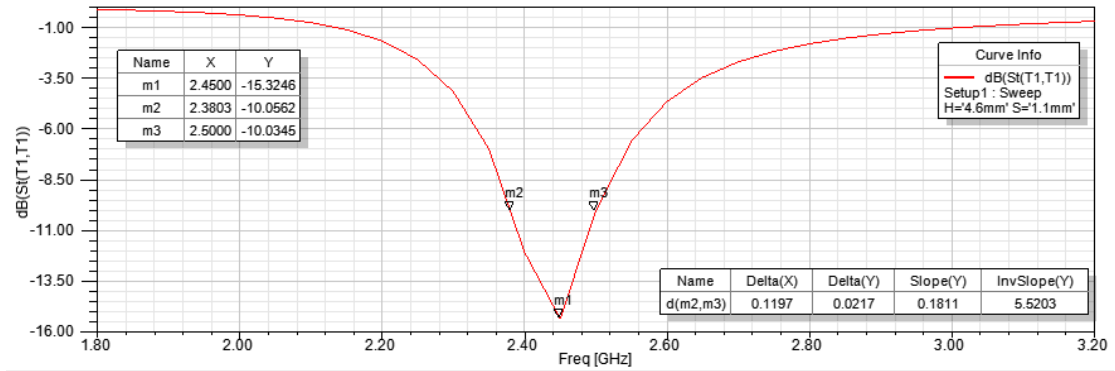


4. VSWR

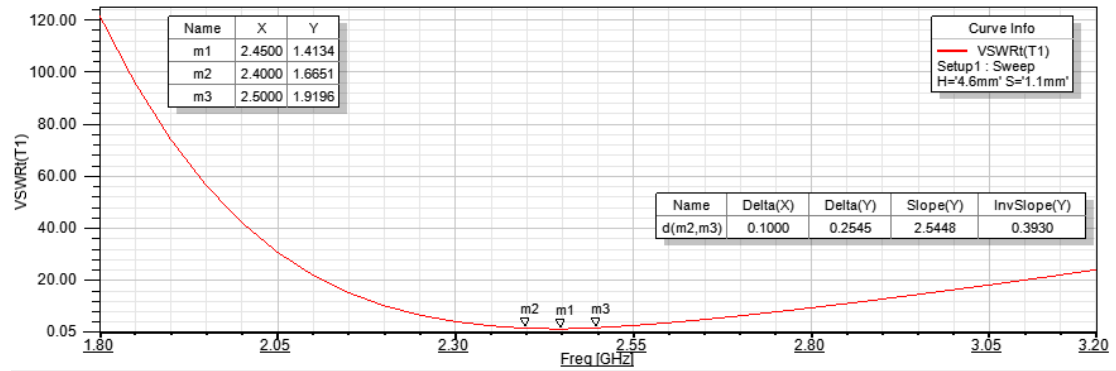

6. 3D gain pattern

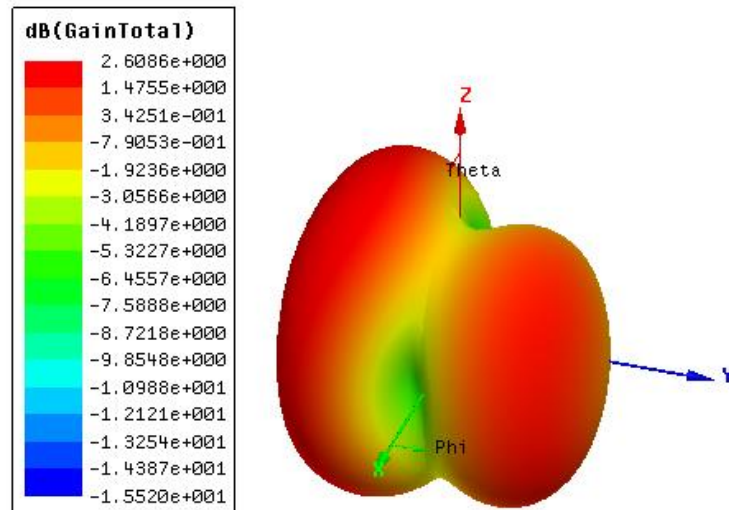

7. E ,h plan

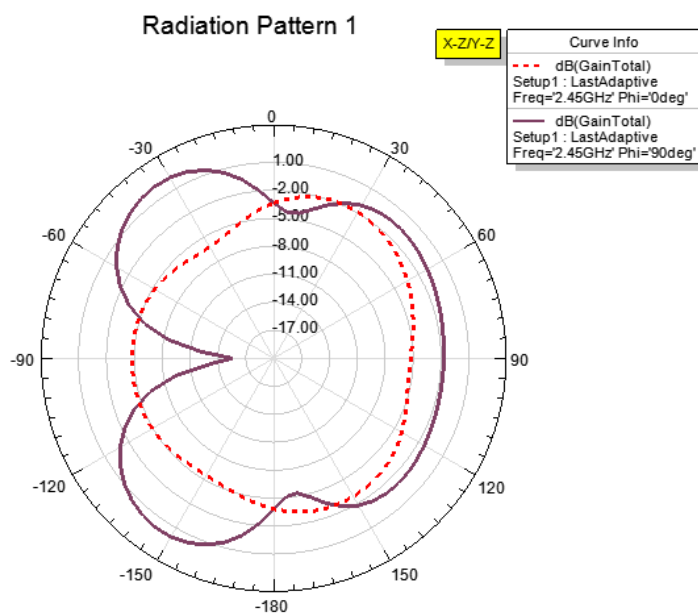

Radiation Pattern 2

