




三合微科股份有限公司
SAMHOP Microelectronics Corp.

17F.-12, No. 95, Sec. 1, Xintai 5th Rd., Xizhi Dist., New Taipei City 221416 , Taiwan

Ceramic antenna

RAN3126MC02


C
H
I
P
—
2
4
5
0
—
3
2
1
6

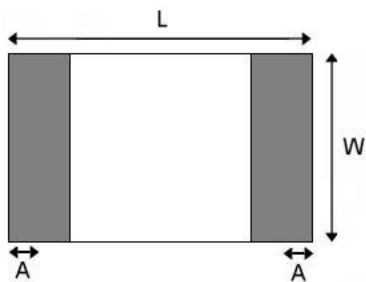


UNLESS OTHER SPECIFIED TOLERANCES ON:			
UNIT mm		THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF PBXY TECHNOLOGY Limited AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION	
CHECKED BY: XD			
APPROVED BY: XD			
DOCUMENT NO.		3216	SPEC REV. P1

SHAPE AND DIMENSIONS

L	W	H	A
3.1 ± 0.3	1.6 ± 0.3	0.52 ± 0.2	0.4 ± 0.25

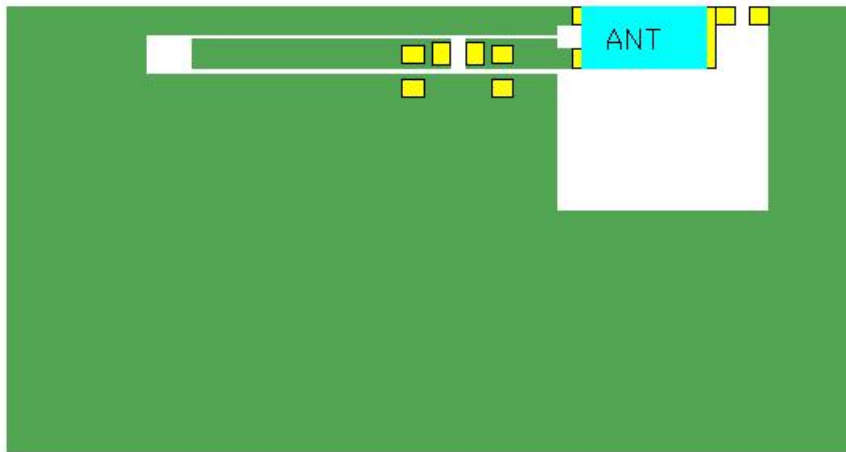

- ANT
- PAD
- Bottom copper
- Top copper

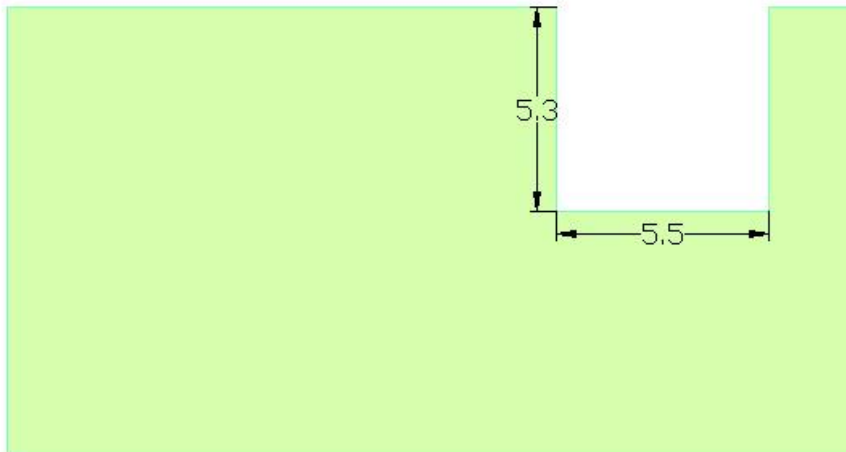

UNLESS OTHER SPECIFIED TOLERANCES ON:

UNIT mm

CHECKED BY: XD

APPROVED BY: XD



THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF PBXY TECHNOLOGY Limited AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

DOCUMENT
NO.

3216


SPEC REV.

P1

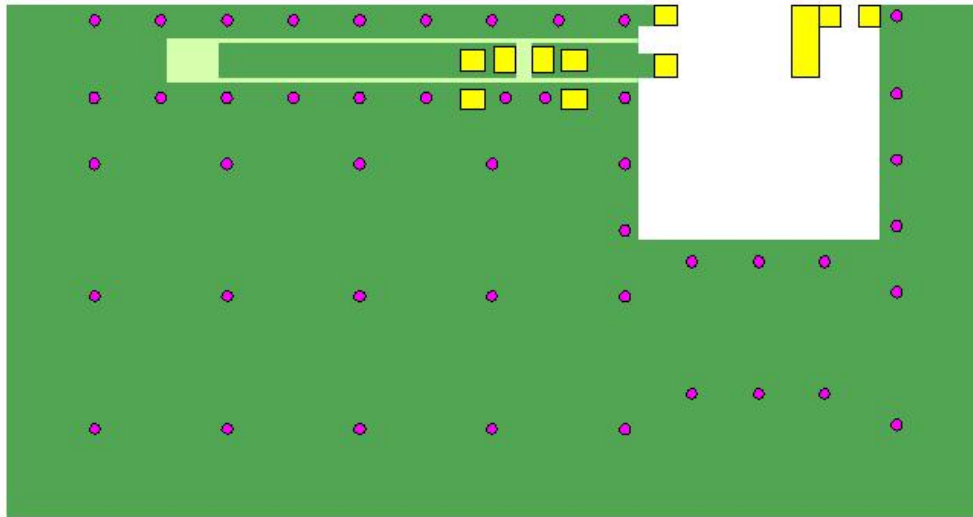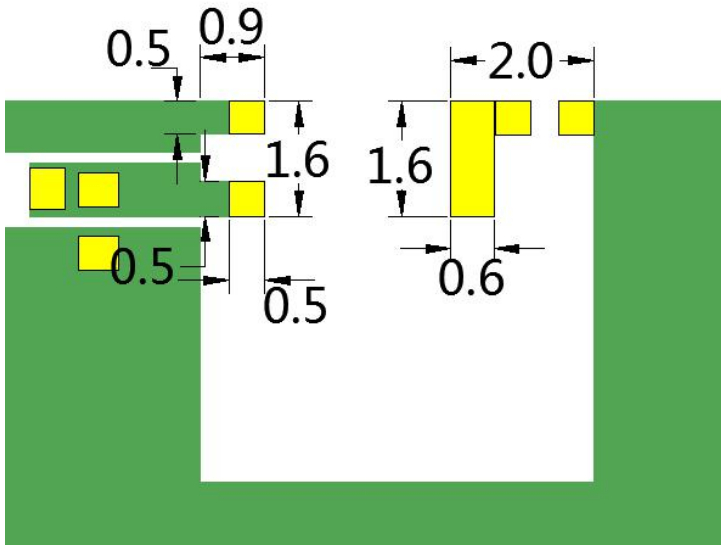

- ANT
- PAD
- Bottom copper
- Top copper
- Punching

UNLESS OTHER SPECIFIED TOLERANCES ON:			
UNIT mm		THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF PBXY TECHNOLOGY Limited AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION	
CHECKED BY: XD			
APPROVED BY: XD			
DOCUMENT NO.		3216	SPEC REV. P1

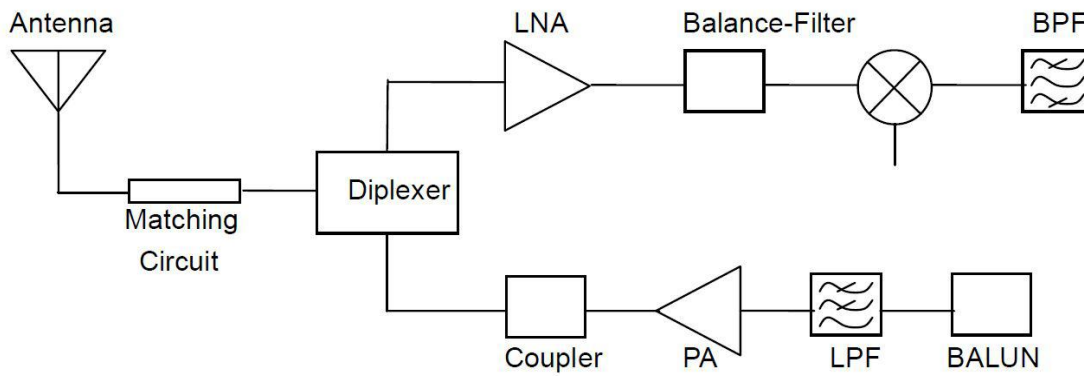


5. SPECIFICATIONS:

Test Item	Spec.
bandwidth	
Polarization mode	Linear polarization
Maximum gain	
efficiency	
Input impedance	


* Test condition: Test board size 90*40 mm
 Matching circuit: Pi matching circuit will be required

6. Electrical Characteristics :

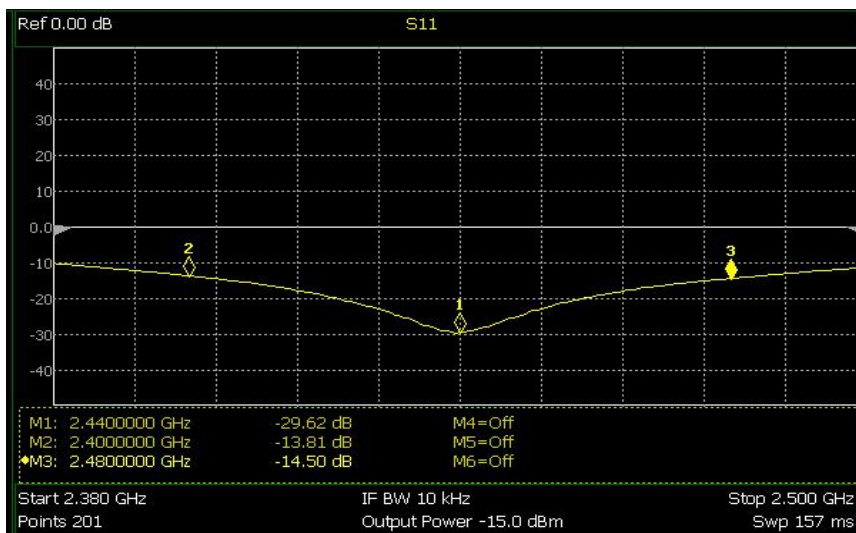

UNLESS OTHER SPECIFIED TOLERANCES ON:			
UNIT mm		THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF PBXY TECHNOLOGY Limited AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION	
CHECKED BY: XD			
APPROVED BY: XD			
DOCUMENT NO.		3216	SPEC REV. P1

驻


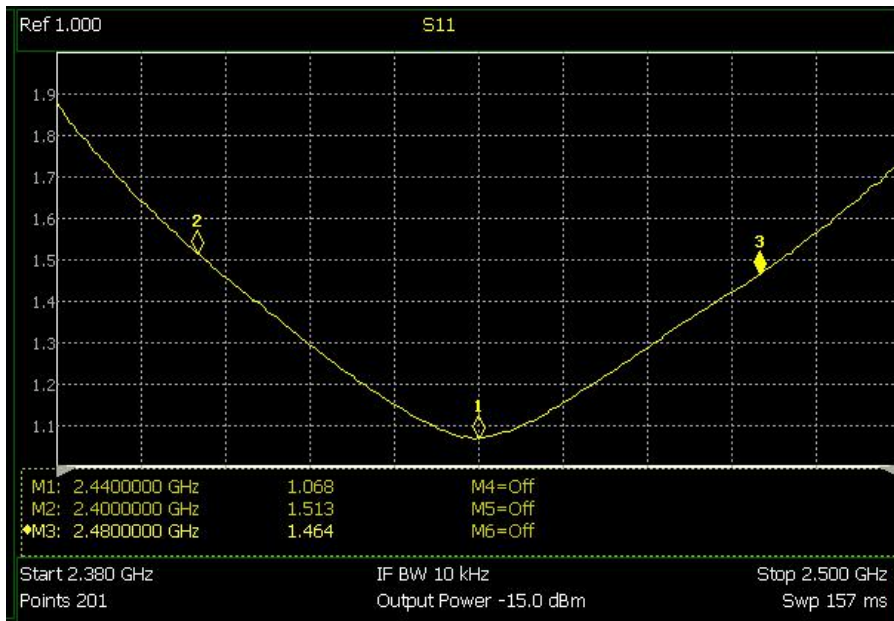


Mark	Frequency	VSWR
1	2400 MHz	1.513
2	2440 MHz	1.068
3	2480 MHz	1.464


Radiation Pattern

The Gain pattern is measured in FAR-field chamber. DUT is placed on the table of rotator, a standard horn antenna and Vector Network Analyzer is used to collect data.

UNLESS OTHER SPECIFIED TOLERANCES ON:			
UNIT mm		THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF PBXY TECHNOLOGY Limited AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION	
CHECKED BY: XD			
APPROVED BY: XD			
DOCUMENT NO.		3216	SPEC REV. P1

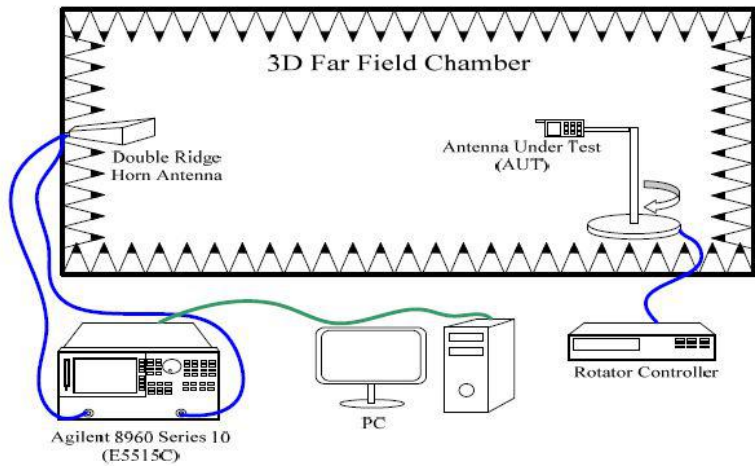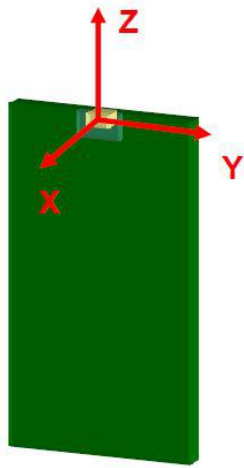


©

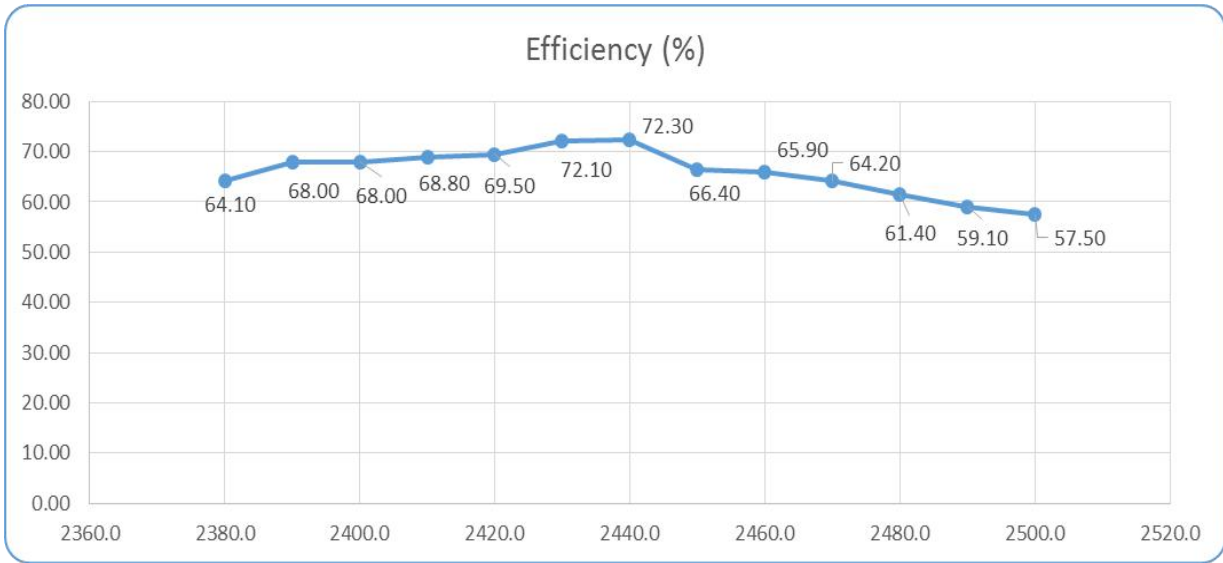


©


UNLESS OTHER SPECIFIED TOLERANCES ON:			
UNIT mm		THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF PBXY TECHNOLOGY Limited AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION	
CHECKED BY: XD			
APPROVED BY: XD			
DOCUMENT NO.		3216	SPEC REV. P1

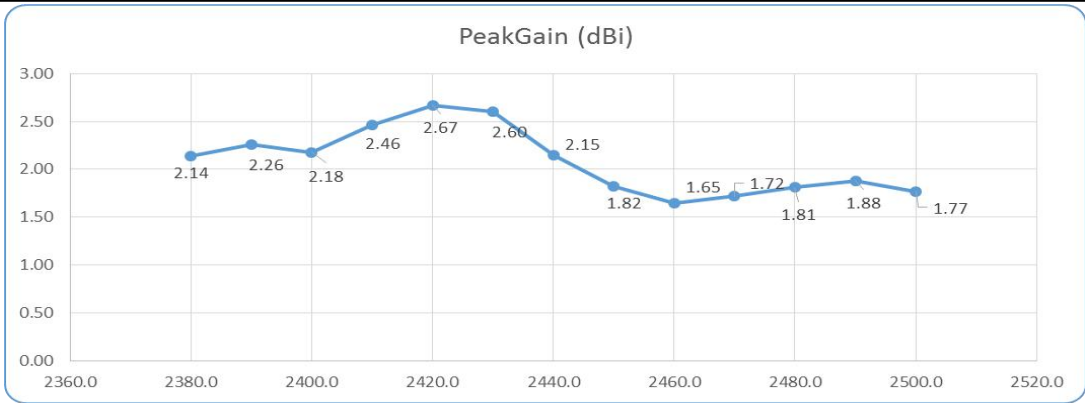

© 3D Gain Pattern (2400 MHz)

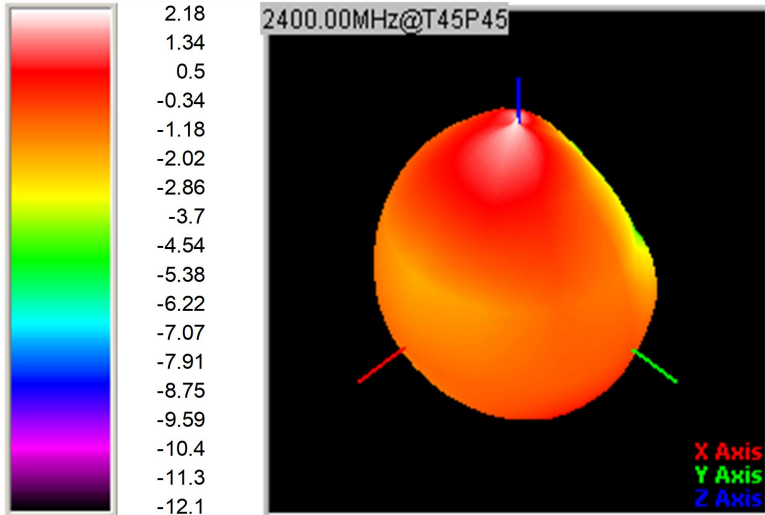

© 3D Gain Pattern (2440 MHz)

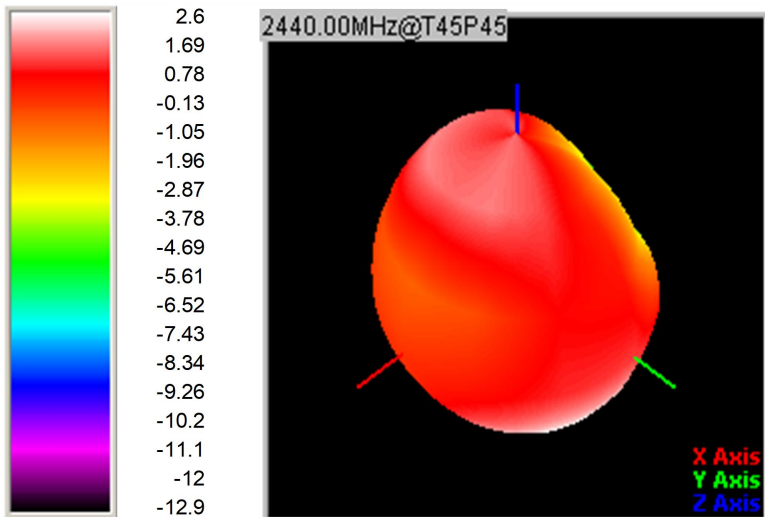

UNLESS OTHER SPECIFIED TOLERANCES ON:

UNIT mm

CHECKED BY: XD

APPROVED BY: XD

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF PBXY TECHNOLOGY Limited AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION


DOCUMENT NO.

3216

SPEC REV.

P1

© 3D Gain Pattern (2480 MHz)

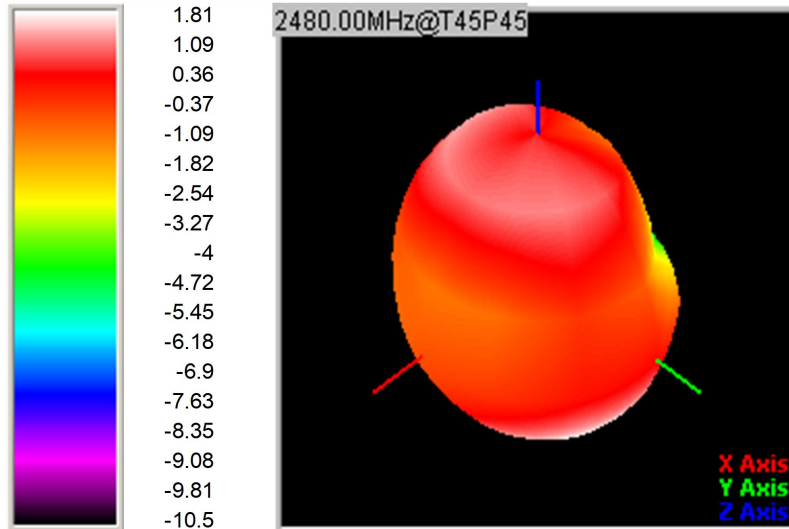

7. Environmental Characteristics

(1) Reliability Test

Item	Condition	Specification
Thermal shock	1. 30 ± 3 minutes at $-40^\circ \text{C} \pm 5^\circ \text{C}$, 2. Convert to $+105^\circ \text{C}$ (5 minutes) 3. 30 ± 3 minutes at $+105^\circ \text{C} \pm 5^\circ \text{C}$, 4. Convert to -40°C (5 minutes) 5. Total 100 continuous cycles	No apparent damage Fulfill the electrical spec. after test.
Humidity resistance	1. Humidity: 85% R.H. 2. Temperature: $85 \pm 5^\circ \text{C}$ 3. Time: 1000 hours.	No apparent damage Fulfill the electrical spec. after test.
High temperature resistance	1. Temperature: $150^\circ \text{C} \pm 5^\circ \text{C}$ 2. Time: 1000 hours.	No apparent damage Fulfill the electrical spec. after test.
Low temperature resistance	1. Temperature: $-40^\circ \text{C} \pm 5^\circ \text{C}$ 2. Time: 1000 hours.	No apparent damage Fulfill the electrical spec. after test.
Soldering heat resistance	1. Solder bath temperature : $260 \pm 5^\circ \text{C}$ 2. Bathing time: 10 ± 1 seconds	No apparent damage
Solderability	The dipped surface of the terminal shall be at least 95% covered with solder after dipped in solder bath of $245 \pm 5^\circ \text{C}$ for 3 ± 1 seconds.	No apparent damage

UNLESS OTHER SPECIFIED TOLERANCES ON:

UNIT mm

CHECKED BY: XD

APPROVED BY: XD

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF PBXY TECHNOLOGY Limited AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

DOCUMENT NO.

3216

SPEC REV.

P1

(2) Storage Condition

(a) At warehouse:

The temperature should be within 0 ~ 30°C and humidity should be less than 60% RH.

The product should be used within 1 year from the time of delivery.


(b) On board:

The temperature should be within -40~85°C and humidity should be less than 85% RH.

(3) Operating Temperature Range

Operating temperature range : -40°C to +105°C.

8. Recommended Reflow Soldering

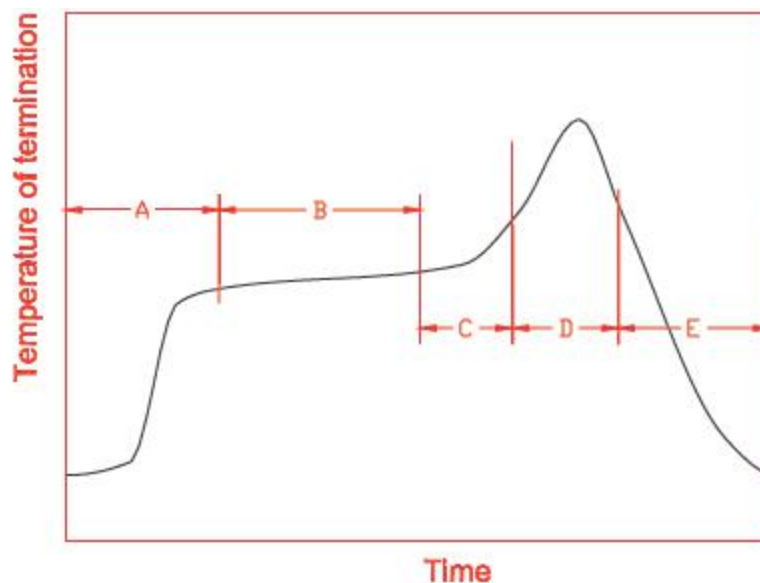

Phase	Description	Temperature Range	Time
A	1 st rising temperature	The normal to Preheating temperature	30s to 60s
B	Preheating	140°C to 160°C	60s to 120s
C	2 nd rising temperature	Preheating to 200°C	20s to 40s
D	Main heating	if 220°C	50s~60s
		if 230°C	40s~50s
		if 240°C	30s~40s
		if 250°C	20s~40s
		if 260°C	20s~40s
E	Regular cooling	200°C to 100°C	1°C/s ~ 4°C/s

*reference: J-STD-020C

UNLESS OTHER SPECIFIED TOLERANCES ON:			
UNIT mm		THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF PBXY TECHNOLOGY Limited AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION	
CHECKED BY: XD			
APPROVED BY: XD			
DOCUMENT NO.		3216	SPEC REV. P1

(1) Soldering Gun Procedure

Note the follows, in case of using solder gun for replacement.

- (a) The tip temperature must be less than 350° C for the period within 3 seconds by using soldering gun under 30 W.
- (b) The soldering gun tip shall not touch this product directly.


(2) Soldering Volume

Note that excess of soldering volume will easily get crack the body of this product.

9. Taping Package and Label Marking: (unit: mm)

(1) Quantity/Reel: 5000pcs/Reel

(2) Carrier tape dimensions

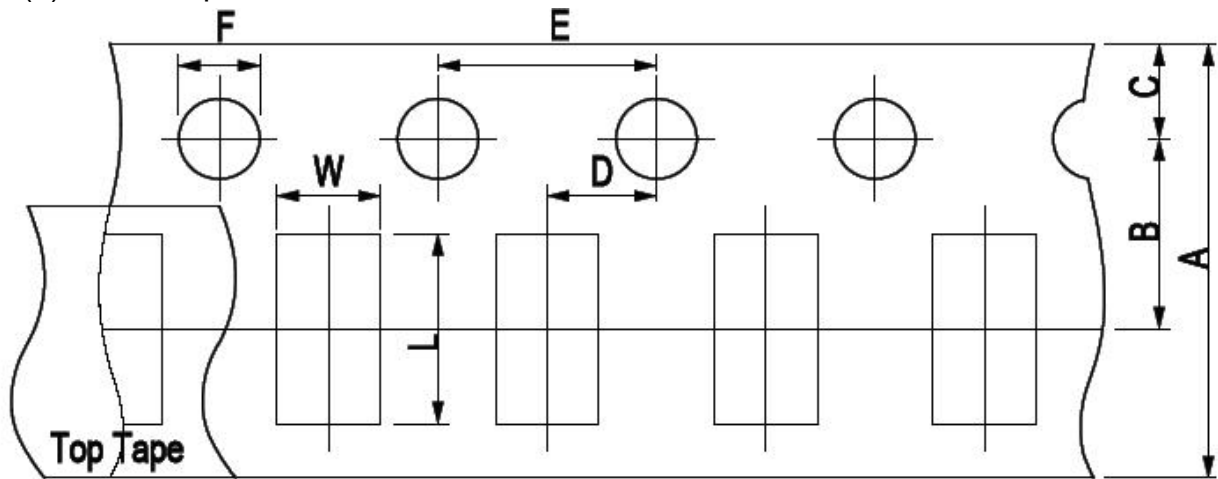

Type	A	B	C	D	E	F	L	W
2450-21	8.00±0.3	3.50±0.05	1.75±0.1	2.00±0.05	4.00±0.1	1.50±0.1	2.30±0.1	1.55±0.1

UNLESS OTHER SPECIFIED TOLERANCES ON:

UNIT mm

CHECKED BY: XD

APPROVED BY: XD

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF PBXY TECHNOLOGY Limited AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION


DOCUMENT NO.

3216

SPEC REV.

P1

(3) Taping reel dimensions

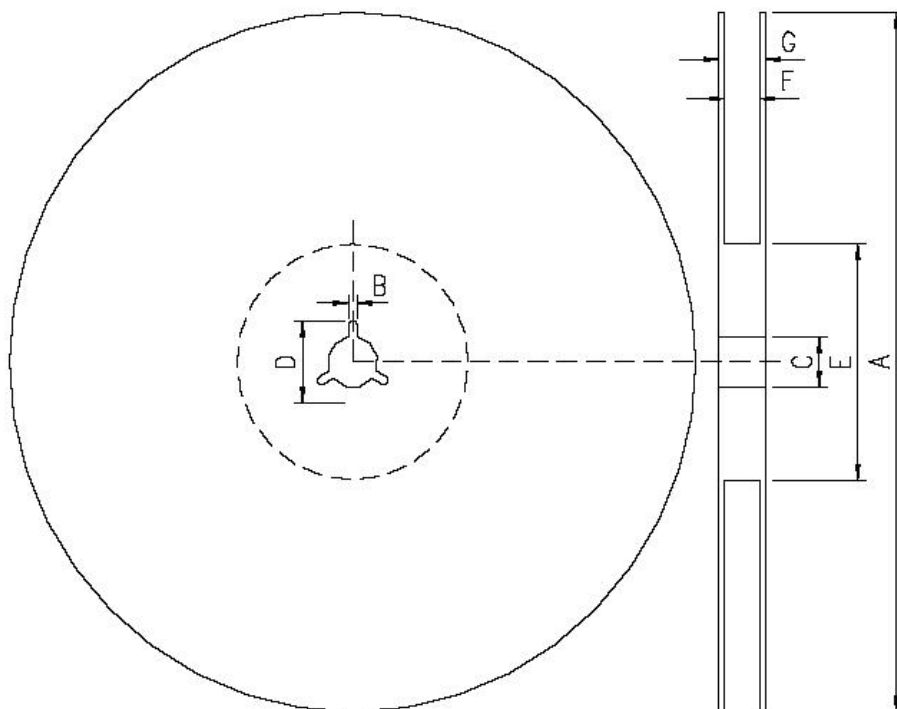

A	178.0±2.0
B	2.0±0.5
C	13.0±0.5
D	21.0±0.8
E	62.0±1.5
F	9.0±0.5
G	13.0±1.0

UNLESS OTHER SPECIFIED TOLERANCES ON:

UNIT mm

CHECKED BY: XD

APPROVED BY: XD

DOCUMENT NO.

3216

SPEC REV.

P1