

FCC Test Report

Report No.: AGC00688240509FR01

FCC ID	:	2BGL7TK4
APPLICATION PURPOSE	:	Original Equipment
PRODUCT DESIGNATION	:	Helmet Bluetooth Intercom
BRAND NAME	:	N/A
MODEL NAME	:	TK-X4SC, TK-X4SCP, TK-X4SCpro, X4SCpro, X4SCL, TK-X4, TK-X4P, TK-X4pro, X4pro, X4L
APPLICANT	:	Shenzhen Yiyue Electronic Technology Co., Ltd.
DATE OF ISSUE	:	Jun. 07, 2024
STANDARD(S)	:	FCC Part 15 Subpart C §15.247
REPORT VERSION	:	V1.0







Report Revise Record

Report Version	Revise Time	Issued Date Valid Version		Notes
V1.0	/	Jun. 07, 2024	Valid	Initial Release



Table of Contents

1. General Information	5
2. Product Information	6
2.1 Product Technical Description	6
2.2 Test Frequency List	6
2.3 Related Submittal(S) / Grant (S)	7
2.4 Test Methodology	7
2.5 Receiver Input Bandwidth	7
2.6 Equally Average Use of Frequencies And Behaviour	7
2.7 Pseudorandom Frequency Hopping Sequence	
2.8 Special Accessories	9
2.9 Equipment Modifications	9
2.10 Antenna Requirement	9
3. Test Environment	
3.1 Address of The Test Laboratory	
3.2 Test Facility	
3.3 Environmental Conditions	11
3.4 Measurement Uncertainty	11
3.5 List of Equipment Used	
4.System Test Configuration	14
4.1 EUT Configuration	
4.2 EUT Exercise	
4.3 Configuration of Tested System	14
4.4 Equipment Used in Tested System	
4.5 Summary of Test Results	
5. Description of Test Modes	
6. RF Output Power Measurement	
6.1 Provisions Applicable	
6.2 Measurement Procedure	
6.3 Measurement Setup (Block Diagram of Configuration)	
6.4 Measurement Result	
7. 20dB Bandwidth and 99% Occupied Bandwidth Measurement	19
7.1 Provisions Applicable	
7.2 Measurement Procedure	24
7.3 Measurement Setup (Block Diagram of Configuration)	24
7.4 Measurement Results	
8. Conducted Band Edge and Out-of-Band Emissions	
8.1 Provisions Applicable	
8.2 Measurement Procedure	
8.3 Measurement Setup (Block Diagram of Configuration)	
9.4 Maggurament Regulta	24



9. Radiated Spurious Emission	
9.1 Measurement Limit	
9.2 Measurement Procedure	
9.3 Measurement Setup (Block Diagram of Configuration)	
9.4 Measurement Result	
10. Number of Hopping Frequency Measurement	
10.1 Provisions Applicable	
10.2 Measurement Procedure	
10.3 Measurement Setup (Block Diagram of Configuration)	
10.4 Measurement Result	
11. Time of Occupancy (Dwell Time) Measurement	71
11.1 Provisions Applicable	
11.2 Measurement Procedure	71
11.3 Measurement Setup (Block Diagram of Configuration)	71
11.4 Measurement Result	71
12. Frequency Separation Measurement	75
12.1 Provisions Applicable	
12.2 Measurement Procedure	
12.3 Measurement Setup (Block Diagram of Configuration)	
12.4 Measurement Result	
13. AC Power Line Conducted Emission Test	
13.1 Measurement Limit	
13.2 Measurement Setup (Block Diagram of Configuration)	
13.3 Preliminary Procedure of Line Conducted Emission Test	
13.4 Final Procedure of Line Conducted Emission Test	
13.5 Measurement Results	
Appendix I: Photographs of Test Setup	
Appendix II: Photographs of Test EUT	



1. General Information

Applicant	Shenzhen Yiyue Electronic Technology Co., Ltd.
Address	Room 606, Building S, No. 1, Ruiji Road, Nanlian Community, Longgang Street, Longgang District, Shenzhen, China
Manufacturer	Shenzhen Yiyue Electronic Technology Co., Ltd.
Address	Room 606, Building S, No. 1, Ruiji Road, Nanlian Community, Longgang Street, Longgang District, Shenzhen, China
Factory	Shenzhen Yiyue Electronic Technology Co., Ltd.
Address	Room 606, Building S, No. 1, Ruiji Road, Nanlian Community, Longgang Street, Longgang District, Shenzhen, China
Product Designation	Helmet Bluetooth Intercom
Brand Name	N/A
Test Model	TK-X4SC
Series Model(s)	TK-X4SCP, TK-X4SCpro, X4SCpro, X4SCL, TK-X4, TK-X4P, TK-X4pro, X4pro, X4L
Difference Description	TK-X4SC, TK-X4SCP, TK-X4SCpro, X4SCpro, X4SCL are with screen and only with different model names TK-X4, TK-X4P, TK-X4pro, X4pro, X4L are without screen and only with different model names
Date of receipt of test item	May 22, 2024
Date of Test	May 22, 2024 to Jun. 05, 2024
Deviation from Standard	No any deviation from the test method
Condition of Test Sample	Normal
Test Result	Pass
Test Report Form No	AGCER-FCC-BR_EDR-V1

Note: The test results of this report relate only to the tested sample identified in this report.

Prepared By

Bibo zhay

Bibo Zhang (Project Engineer)

Jun. 07, 2024

Reviewed By

Calvin Liu (Reviewer)

Jun. 07, 2024

Approved By

ax than

Max Zhang (Authorized Officer)

Jun. 07, 2024



2. Product Information

2.1 Product Technical Description

Frequency Band	2400MHz-2483.5MHz
Operation Frequency Range	2402MHz-2480MHz
Bluetooth Version	V5.1
Modulation Type	BR 🖾 GFSK, EDR 🖾 π /4-DQPSK, 🖾 8DPSK
Number of channels	79 Channels
Channel Separation	1 MHz
Maximum Transmitter Power	-0.260dBm
Hardware Version	V1.0
Software Version	V1.0
Antenna Designation	Chip Antenna
Antenna Gain	4.3dBi
Power Supply	DC 3.7V by battery or DC 5V by adapter

2.2 Test Frequency List

Frequency Band	Channel Number	Frequency			
	0	2402 MHz			
	1	2403 MHz			
	:	:			
2400~2483.5MHz	39	2441MHz			
	:	:			
	77	2479 MHz			
	78	2480 MHz			
Note: f = 2402 + 1k MHz, k =	Note: f = 2402 + 1k MHz, k = 0,, 78 ; "f "is the operating frequency (MHz); "k" is the operating channel.				



2.3 Related Submittal(S) / Grant (S)

This submittal(s) (test report) is intended for FCC ID: 2BGL7TK4, filing to comply with Part 2, Part 15 of the Federal Communication Commission rules.

2.4 Test Methodology

The tests were performed according to following standards:

No.	Identity	Document Title		
1	FCC 47 CFR Part 2	Frequency allocations and radio treaty matters; general rules and regulations		
2	2 FCC 47 CFR Part 15 Radio Frequency Devices			
3	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices		
4	KDB 558074 D01 15.247 Meas Guidance v05r02	Guidance for compliance measurements on Digital Transmission Systems, Frequency Hopping Spread Spectrum system, and Hybrid system devices operating under Section 15.247 of the FCC rules		

2.5 Receiver Input Bandwidth

The input bandwidth of the receiver is 1.3MHz, in every connection one Bluetooth device is the master and the other one is slave. The master determines the hopping sequence. The slave follows this sequence. Both devices shift between RX and TX time slot according to the clock of the master. Additionally, the type of connection (e.g. single of multi slot packet) is set up at the beginning of the connection. The master adapts its hopping frequency and its TX/RX timing according to the packet type of the connection. Also, the slave of the connection will use these settings. Repeating of a packet has no influence on the hopping sequence. The hopping sequence generated by the master of the connection will be followed in any case. That means, a repeated packet will not be send on the same frequency, it is send on the next frequency of the hopping sequence.

2.6 Equally Average Use of Frequencies and Behaviour.

The generation of the hopping sequence in connection mode depends essentially on two input values:

1. LAP/UAP of the master of the connection.

2. Internal master clock.

The LAP (lower address part) are the 24 LSB's of the 48 BD_ADDRESS. The BD_ADDRESS is an unambiguous number of every Bluetooth unit. The UAP (upper address part) are the 24MSB's of the 48BD_ADDRESS

The internal clock of a Bluetooth unit is derived from a free running clock which is never adjusted and is never turned off. For behavior action with other units only offset is used. It has no relation to the time of the day. Its resolution is at least half the RX/TX slot length of 312.5us. The clock has a cycle of about one day(23h30).

In most case it is implemented as 28 bits counter. For the deriving of the hopping sequence the entire. LAP (24 bits),4LSB's(4bits) (Input 1) and the 27MSB's of the clock (Input 2) are used. With this input values different mathematical procedures (permutations, additions, XOR-operations) are performed to generate the Sequence. This will be done at the beginning of every new transmission.

Regarding short transmissions the Bluetooth system has the following behavior:


The first connection between the two devices is established, a hopping sequence was generated. For Transmitting the wanted data the complete hopping sequence was not used. The connection ended. The second connection will be established. A new hopping sequence is generated. Due to the fact the Bluetooth clock has a different value, because the period between the two transmission is longer (and it Cannot be shorter) than the minimum resolution of the clock(312.5us). The hopping sequence will always differ from the first one.



2.7 Pseudorandom Frequency Hopping Sequence

The pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONEs; i.e. the shift register is initialized with nine ones.

- Number of shift register stages: 9
- Length of pseudo-random sequence: 29 1 = 511 bits
- Longest sequence of zeros: 8 (non-inverted signal)



Linear Feedback Shift Register for Generation of The PRBS Sequence

An example of Pseudorandom Frequency Hopping Sequence as follow:

44	35	78	03	20) 76	02	19		 21	64	75
				·					 		
			Ιi						1		
			¦			1			i.		
				L		<u>'i</u>		1	 		

Each frequency used equally on the average by each transmitter.

The system receivers have input bandwidths that match the hopping channel bandwidths of their Corresponding transmitters and shift frequencies in synchronization with the transmitted signals.



2.8 Special Accessories

Not available for this EUT intended for grant.

2.9 Equipment Modifications

Not available for this EUT intended for grant.

2.10 Antenna Requirement

Standard Requirement

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi

EUT Antenna:

The non-detachable antenna inside the device cannot be replaced by the user at will. The gain of the antenna is 4.3dBi.



3. Test Environment

3.1 Address of The Test Laboratory

Laboratory: Attestation of Global Compliance (Shenzhen) Co., Ltd.

Address: 1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

3.2 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L5488

Attestation of Global Compliance (Shenzhen) Co., Ltd. has been assessed and proved to follow CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories.)

A2LA-Lab Cert. No.: 5054.02

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to follow ISO/IEC 17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

FCC-Registration No.: 975832

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files with Registration 975832.

IC-Registration No.: 24842(CAB identifier: CN0063)

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the Certification and Engineering Bureau of Industry Canada. The acceptance letter from the IC is maintained in our files with Registration 24842.



3.3 Environmental Conditions

	Normal Conditions
Temperature range (°C)	15 - 35
Relative humidity range	20 % - 75 %
Pressure range (kPa)	86 - 106
Power supply	DC 3.7V

3.4 Measurement Uncertainty

The reported uncertainty of measurement y \pm U, where expended uncertainty U is based on a standard

uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95%.				
Item	Measurement Uncertainty			
Uncertainty of Conducted Emission for AC Port	$U_c = \pm 2.9 \text{ dB}$			
Uncertainty of Radiated Emission below 1GHz	$U_c = \pm 3.9 \text{ dB}$			
Uncertainty of Radiated Emission above 1GHz	$U_c = \pm 4.9 \text{ dB}$			
Uncertainty of total RF power, conducted	$U_c = \pm 0.8 \text{ dB}$			
Uncertainty of RF power density, conducted	$U_c = \pm 2.6 \text{ dB}$			
Uncertainty of spurious emissions, conducted	U _c = ±2 %			
Uncertainty of Occupied Channel Bandwidth	U _c = ±2 %			



3.5 List of Equipment Used

• R	RF Conducted Test System								
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)		
\boxtimes	AGC-ER-E036	Spectrum Analyzer	Agilent	N9020A	MY49100060	Y49100060 2024-05-24 2025-05-23			
\boxtimes	AGC-ER-E062	Power Sensor	Agilent	U2021XA	MY54110007	2024-02-01	2025-01-31		
\boxtimes	AGC-ER-E063	Power Sensor	Agilent	U2021XA	MY54110009	2024-02-01	2025-01-31		
\boxtimes	AGC-EM-A152	6dB Attenuator	Eeatsheep	LM-XX-6-5W	N/A	2023-06-09	2025-06-08		
	AGC-ER-E083	Signal Generator	Agilent	E4421B	US39340815	2024-05-23	2025-05-22		
\boxtimes	N/A	RF Connection Cable	N/A	1#	N/A	Each time	N/A		
\boxtimes	N/A	RF Connection Cable	N/A	2#	N/A	Each time	N/A		

• F	Radiated Spurious Emission							
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)	
	AGC-EM-E046	EMI Test Receiver	R&S	ESCI	10096	2024-02-01	2025-01-31	
\boxtimes	AGC-EM-E116	EMI Test Receiver	R&S	ESCI	100034	2024-05-24	2025-05-23	
\square	AGC-EM-E061	Spectrum Analyzer	Agilent	N9010A	MY53470504	2024-05-28	2025-05-27	
\boxtimes	AGC-EM-E086	Loop Antenna	ZHINAN	ZN30900C	18051	2024-03-05	2026-03-04	
\boxtimes	AGC-EM-E001	Wideband Antenna	SCHWARZBECK	VULB9168	D69250	2023-05-11	2025-05-10	
\boxtimes	AGC-EM-E029	Broadband Ridged Horn Antenna	ETS	3117	00034609	2024-03-31	2025-03-30	
\boxtimes	AGC-EM-E082	Horn Antenna	SCHWARZBECK	BBHA 9170	#768	2023-09-24	2025-09-23	
\boxtimes	AGC-EM-E146	Pre-amplifier	ETS	3117-PA	00246148	2022-08-04	2024-08-03	
\boxtimes	AGC-EM-A119	2.4G Filter	SongYi	N/A	N/A	2024-05-23	2025-05-22	
\square	AGC-EM-A138	6dB Attenuator	Eeatsheep	LM-XX-6-5W	N/A	2023-06-09	2025-06-08	
	AGC-EM-A139	6dB Attenuator	Eeatsheep	LM-XX-6-5W	N/A	2023-06-09	2025-06-08	

• A	AC Power Line Conducted Emission							
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)	
\boxtimes	AGC-EM-E045	EMI Test Receiver	R&S	ESPI	101206	2024-05-28	2025-05-27	
\boxtimes	AGC-EM-A130	6dB Attenuator	Eeatsheep	LM-XX-6-5W	DC-6GZ	2023-06-09	2025-06-08	
\boxtimes	AGC-EM-E023	AMN	R&S	100086	ESH2-Z5	2024-05-28	2025-05-27	



Test Software						
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Version Information	
	AGC-EM-S001	CE Test System	R&S	ES-K1	V1.71	
	AGC-EM-S003	RE Test System	FARA	EZ-EMC	VRA-03A	
	AGC-ER-S012	BT/WIFI Test System	Tonscend	JS1120-2	2.6	
\boxtimes	AGC-EM-S011	RSE Test System	Tonscend	TS+-Ver2.1(JS36-RSE)	4.0.0.0	



4.System Test Configuration

4.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commission's requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

4.2 EUT Exercise

The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

4.3 Configuration of Tested System

Radiated Emission Configure:



Conducted Emission Configure:

EUT	 AE

4.4 Equipment Used in Tested System

The following peripheral devices and interface cables were connected during the measurement:

Test Accessories Come From The Laboratory

			,				
No.	Equipment	Manufacturer	Model No.	Specification Information	Cable		
1	Control Box		USB-TTL				
2	Adapter	HUAWEI	HW-200440C00				
	Test Accessories Come From The Manufacturer						
No.	Equipment	Manufacturer	Model No.	Specification Information	Cable		
1							



4.5 Summary of Test Results

Item	FCC Rules	Description of Test	Result
1	§15.203&15.247(b)(4)	Antenna Equipment	Pass
2	§15.247 (b)(1)	RF Output Power	Pass
3	§15.247 (a)(1)	20 dB Bandwidth	Pass
4	§15.247 (d)	Conducted Band Edge and Out-of-Band Emissions	Pass
5	§15.209	Radiated Spurious Emission	Pass
6	§15.247 (a)(1)(iii)	Number of Hopping Frequency	Pass
7	§15.247 (a)(1)(iii)	Time of Occupancy	Pass
8	§15.247 (a)(1)	Frequency Separation	Pass
9	§15.207	AC Power Line Conducted Emission	Pass



5. Description of Test Modes

Summary table of Test Cases							
Test Item	Data Rate / Modulation						
	Bluetooth – BR_EDR (GFSK/π /4-DQPSK/8DPSK)						
Radiated & Conducted Test Cases	Mode 1: Bluetooth Tx CH00_2402 MHz_1Mbps (Battery powered or AC/DC adapter) Mode 2: Bluetooth Tx CH39_2441 MHz_1Mbps (Battery powered or AC/DC adapter) Mode 3: Bluetooth Tx CH78_2480 MHz_1Mbps (Battery powered or AC/DC adapter) Mode 4: Bluetooth Tx CH00_2402 MHz_2Mbps (Battery powered or AC/DC adapter) Mode 5: Bluetooth Tx CH39_2441 MHz_2Mbps (Battery powered or AC/DC adapter) Mode 6: Bluetooth Tx CH39_2441 MHz_2Mbps (Battery powered or AC/DC adapter) Mode 6: Bluetooth Tx CH78_2480 MHz_2Mbps (Battery powered or AC/DC adapter) Mode 7: Bluetooth Tx CH00_2402 MHz_3Mbps (Battery powered or AC/DC adapter) Mode 8: Bluetooth Tx CH39_2441 MHz_3Mbps (Battery powered or AC/DC adapter) Mode 8: Bluetooth Tx CH39_2441 MHz_3Mbps (Battery powered or AC/DC adapter) Mode 9: Bluetooth Tx CH78_2480 MHz_3Mbps (Battery powered or AC/DC adapter) Mode 10: Bluetooth Tx Hopping-1Mbps (Battery powered or AC/DC adapter) Mode11: Bluetooth Tx Hopping-2Mbps (Battery powered or AC/DC adapter) Mode12: Bluetooth Tx Hopping-3Mbps (Battery powered or AC/DC adapter)						
AC Conducted Emission	Mode 1: Bluetooth Link + Battery + USB Cable (Charging from AC Adapter)						
Note:							
 Only the result of the worst case was recorded in the report, if no other cases. The battery is full-charged during the test. 							
	5 11						
4. For Conducted Test r	4. For Conducted Test method, a temporary antenna connector is provided by the manufacture. Software Setting Diagram						
BlueTest3 - Test Command Mode – – ×							



6. RF Output Power Measurement

6.1 Provisions Applicable

The maximum out power permissible output power is 1 Watt for all frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels.

The maximum out power permissible output power is 0.125 watts for all other frequency hopping systems in the 2400-2483.5 MHz band.

6.2 Measurement Procedure

⊠For Peak power test:


- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2. Span: Approximately five times the 20 dB bandwidth, centered on a hopping channel.
- 3. RBW > 20 dB bandwidth of the emission being measured.
- 4. VBW \geq RBW.
- 5. Sweep: Auto.
- 6. Detector function: Peak.
- 7. Trace: Max hold.
- 8. Allow trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. The indicated level is the peak output power, after any corrections for external attenuators and cables.

For Average power test:

Measurements may be performed using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since this measurement is made only during the ON time of the transmitter, no duty cycle correction is required


6.3 Measurement Setup (Block Diagram of Configuration)

For Average power test setup

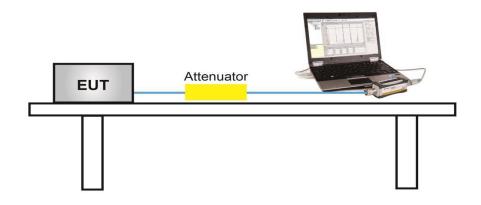




\boxtimes For peak power test setup

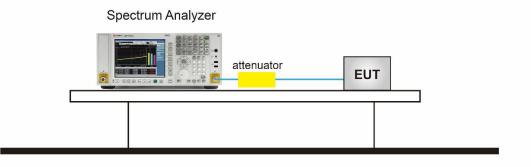

6.4 Measurement Result

Test Data of Conducted Output Power					
Test Mode	Test Frequency (MHz)	Peak Power (dBm)	Limits (dBm)	Pass or Fail	
	2402	-1.106	≤21	Pass	
GFSK	2441	-0.615	≤21	Pass	
	2480	-0.455	≤21	Pass	
	2402	-0.762	≤21	Pass	
π /4-DQPSK	2441	-0.405	≤21	Pass	
	2480	-0.260	≤21	Pass	
	2402	-0.371	≤21	Pass	
8DPSK	2441	-0.379	≤21	Pass	
	2480	-0.430	≦21	Pass	



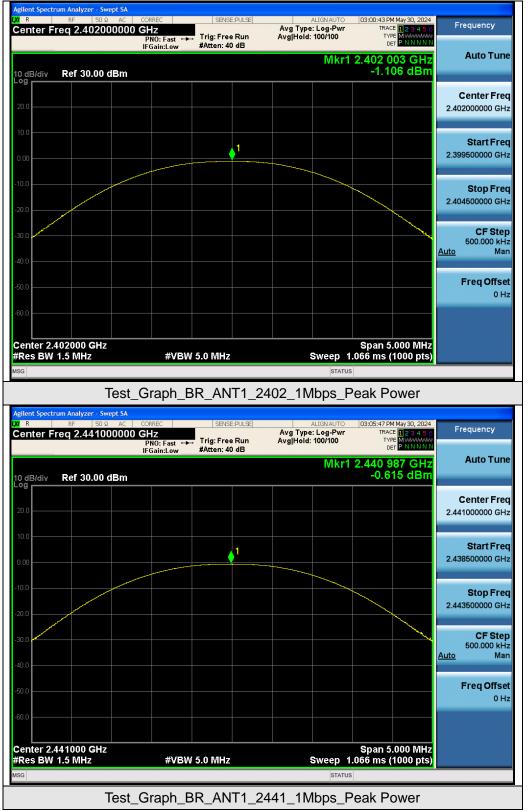

Test Graphs of Conducted Output Power













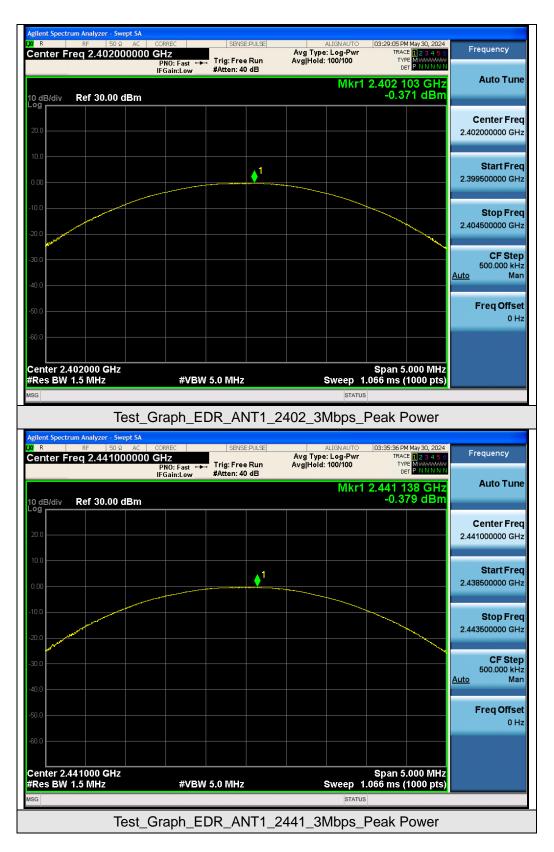



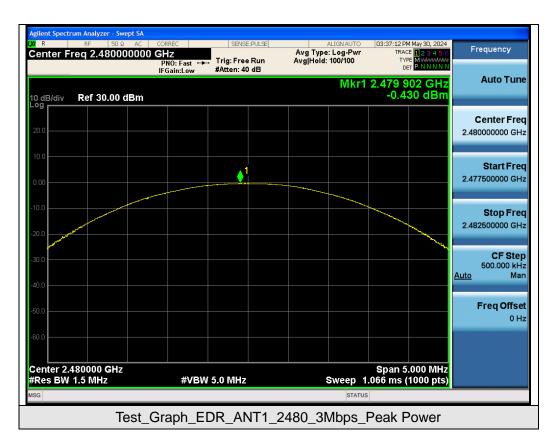



7. 20dB Bandwidth and 99% Occupied Bandwidth Measurement

7.1 Provisions Applicable


There is no corresponding limit requirement for this test item.

7.2 Measurement Procedure

The testing follows the ANSI C63.10 Section 6.9.3 (OBW) and 6.9.2 (20dB BW).

- The 20dB bandwidth spectrum analyzer setting reference is as follows:
- 1. Set RBW ≥ 1% to 5% of the 20dB bandwidth
- 2. VBW = Approximately three times RBW
- 3. Span = Approximately 2 to 5 times the 20dB bandwidth, centered on a hopping channel
- 4. Detector = Peak
- 5. Trace mode = Max hold
- 6. Sweep = Auto couple
- 7. Allow the trace to stabilize
- 8. Measure the maximum width of the emission that is constrained by the frequencies associated
- 9. with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 20
- 10. dB relative to the maximum level in the fundamental emission.
- The 99% bandwidth spectrum analyzer setting reference is as follows:
- 1. Span = 1.5 times to 5 times the OBW
- 2. Set RBW = 1% to 5% the OBW
- 3. VBW \geq 3 × RBW
- 4. Detector = Peak
- 5. Trace mode = Max hold
- 6. Sweep = Auto couple
- 7. Allow the trace was allowed to stabilize

7.3 Measurement Setup (Block Diagram of Configuration)

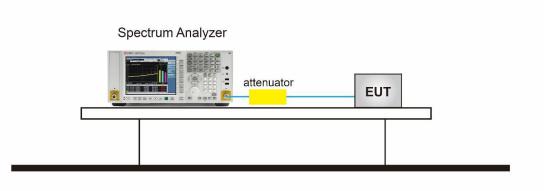




7.4 Measurement Results

Test Data of Occupied Bandwidth and -20dB Bandwidth						
Test Mode	Test Frequency (MHz)	99% Occupied Bandwidth (MHz)	-20dB Bandwidth (MHz)	Limits	Pass or Fail	
	2402	0.919	1.040	N/A	Pass	
GFSK	2441	0.918	1.039	N/A	Pass	
	2480	0.907	1.029	N/A	Pass	
	2402	1.179	1.287	N/A	Pass	
π /4-DQPSK	2441	1.179	1.305	N/A	Pass	
	2480	1.174	1.307	N/A	Pass	
	2402	1.193	1.297	N/A	Pass	
8DPSK	2441	1.196	1.296	N/A	Pass	
	2480	1.184	1.295	N/A	Pass	


Test Graphs of Occupied Bandwidth and -20 Bandwidth

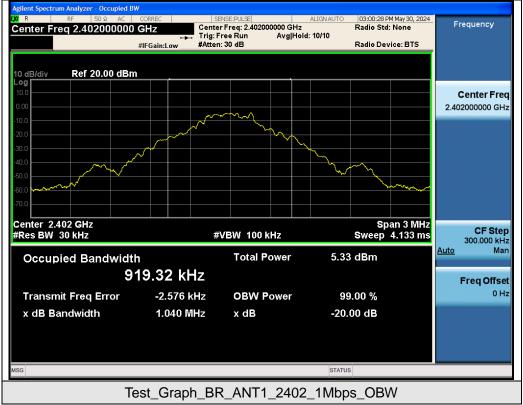









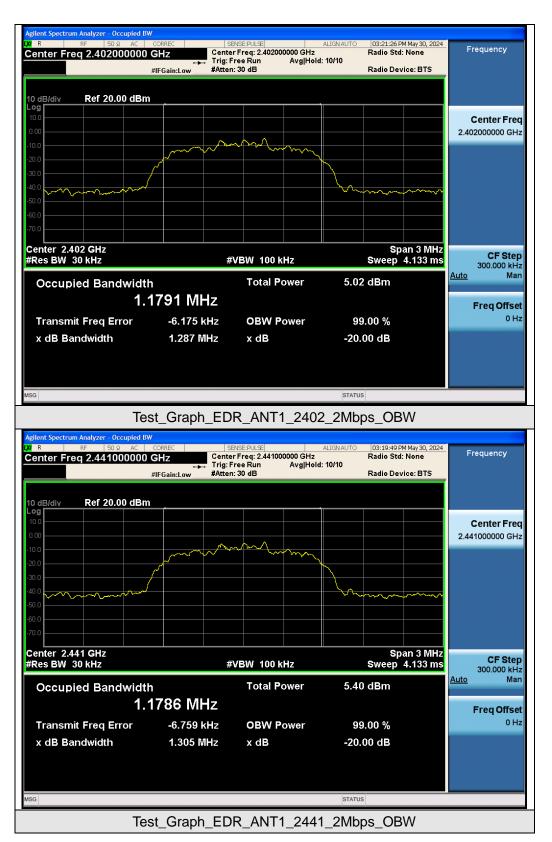



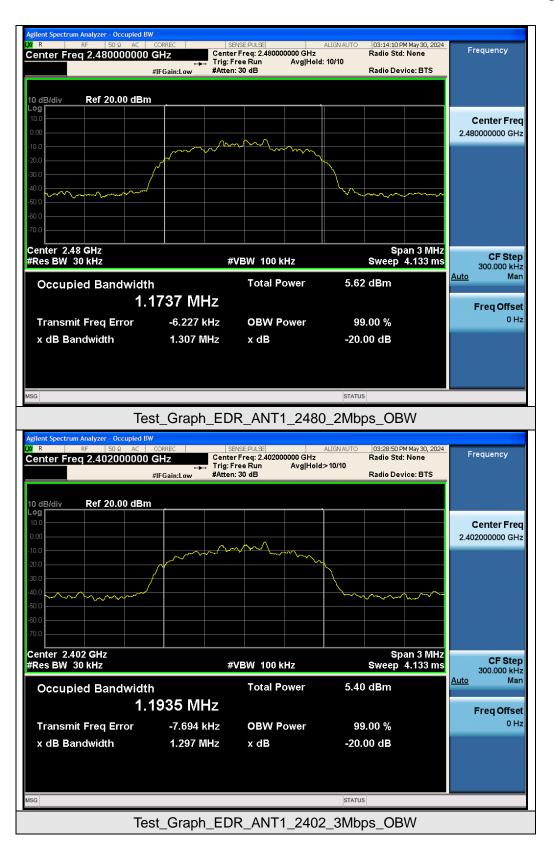



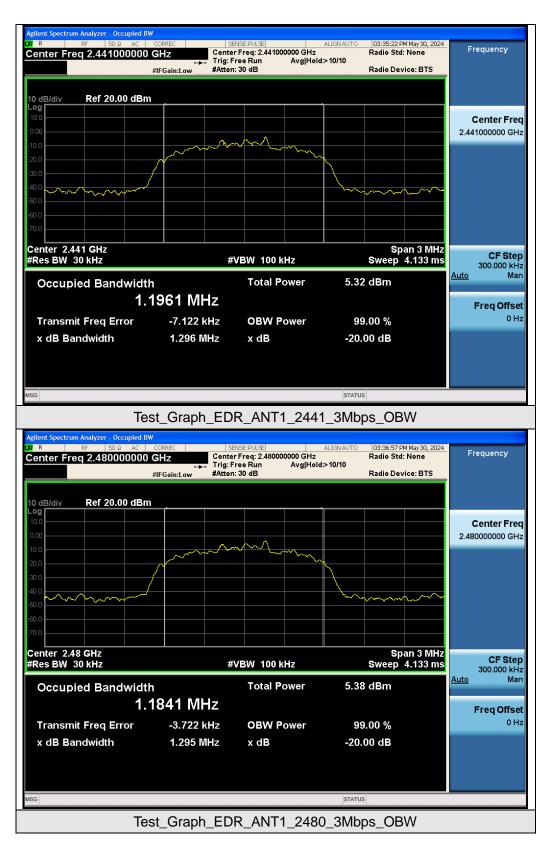



8. Conducted Band Edge and Out-of-Band Emissions

8.1 Provisions Applicable


In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

8.2 Measurement Procedure

The testing follows the ANSI C63.10 Section 6.10.4 and 7.8.8:


- Reference level measurement
- 1. Span = Wide enough to capture the peak level of the emission operating on the channel closest to the band edge, as well as any modulation products which fall outside of the authorized band of operation.
- 2. RBW = 100kHz
- 3. VBW = 300kHz
- 4. Detector = Peak
- 5. Sweep time = Auto couple
- 6. Trace mode = Max hold
- 7. Allow the trace to stabilize. Set the marker on the emission at the band edge, or on the highest modulation product outside of the band, if this level is greater than that at the band edge. Enable the marker-delta function, then use the marker-to-peak function to move the marker to the peak of the in-band emission.
- Emission level measurement
- 1. Span = Wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic. Typically, several plots are required to cover this entire span.
- 2. RBW = 100kHz
- 3. VBW = 300kHz
- 4. Detector = Peak
- 5. Sweep time = Auto couple
- 6. Trace mode = Max hold
- 7. Trace was allowed to stabilize
- 8. Set the marker on the peak of any spurious emission recorded. The level displayed must comply with the limit specified in this section.

8.3 Measurement Setup (Block Diagram of Configuration)

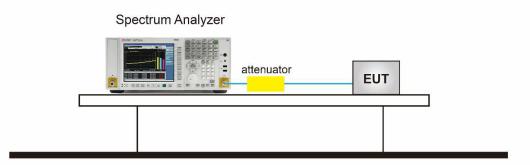




8.4 Measurement Results

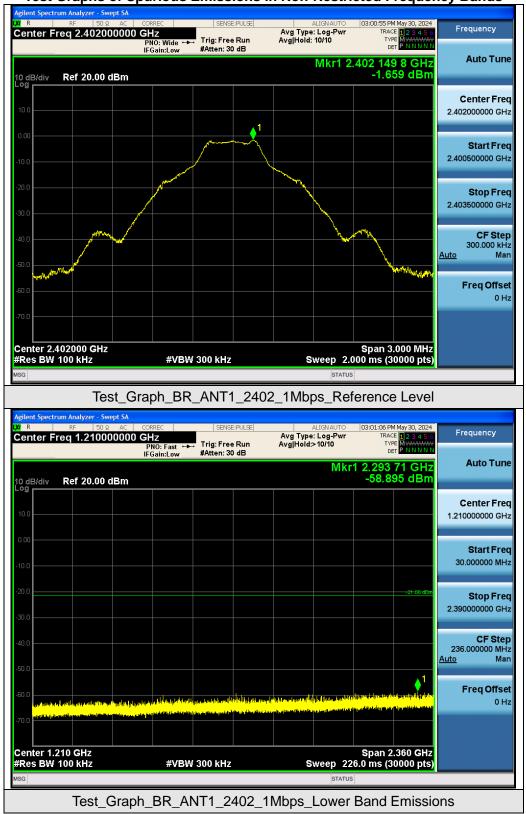


Test Graphs of Spurious Emissions in Non-Restricted Frequency Bands



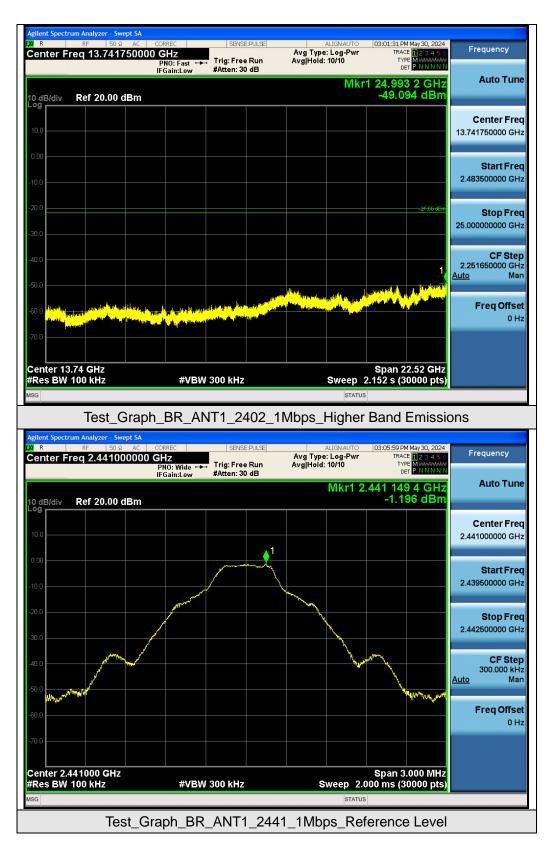




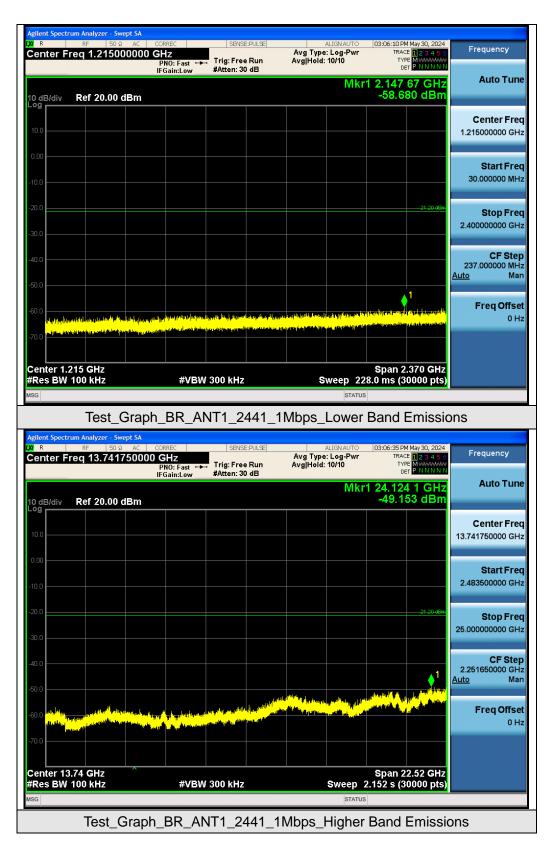








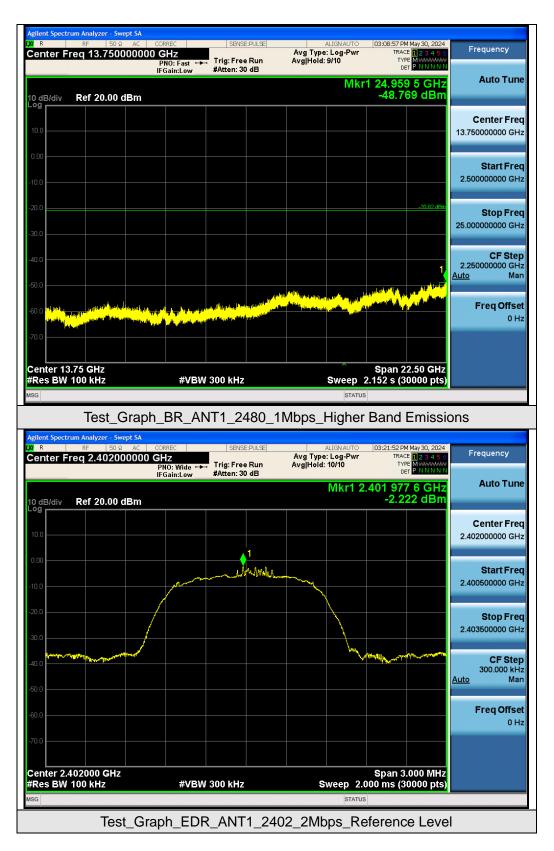




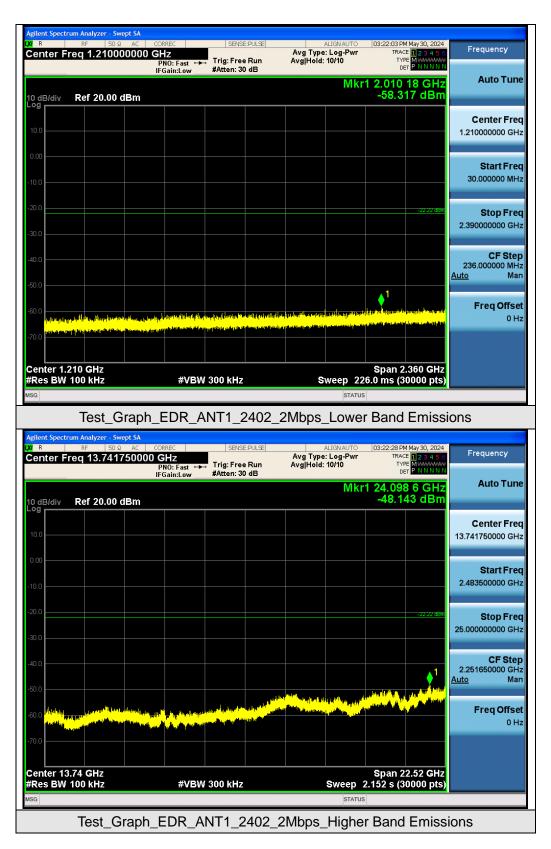









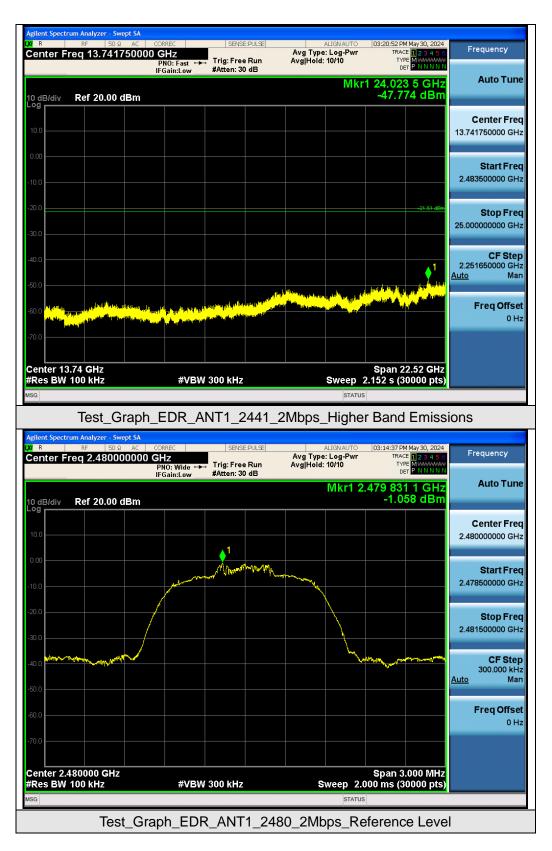




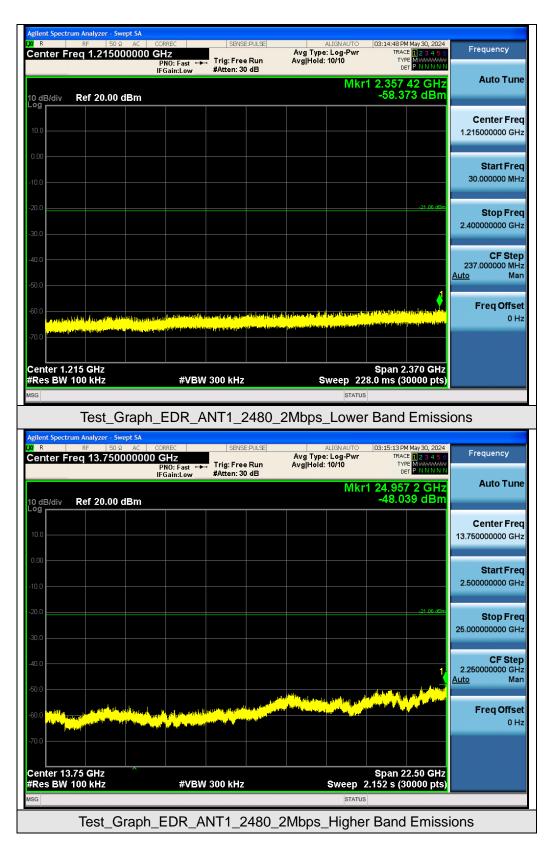




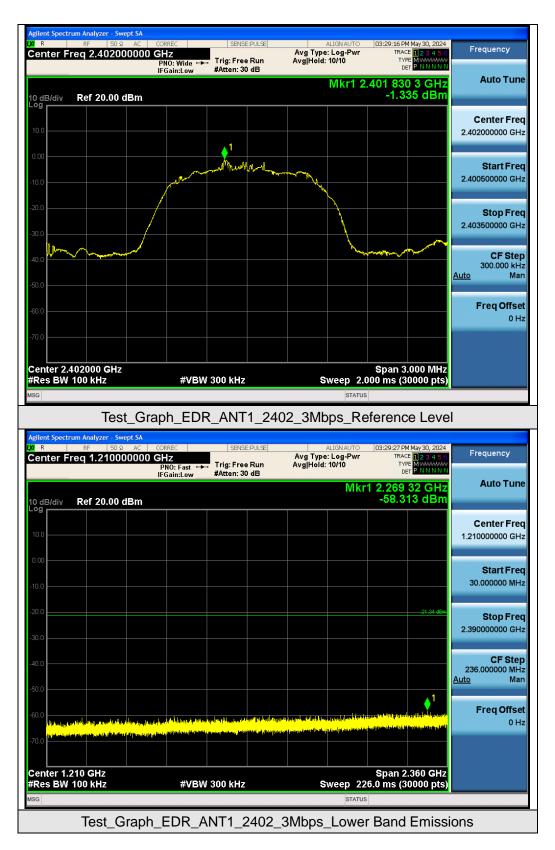




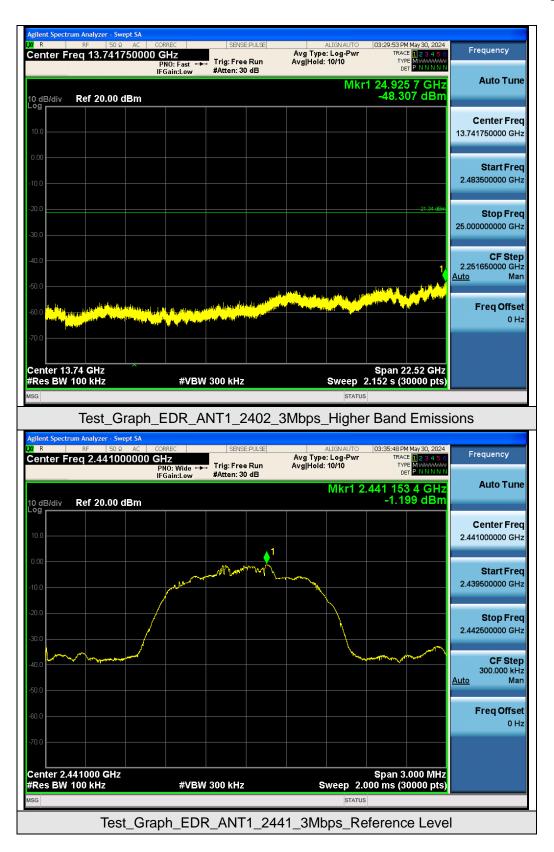




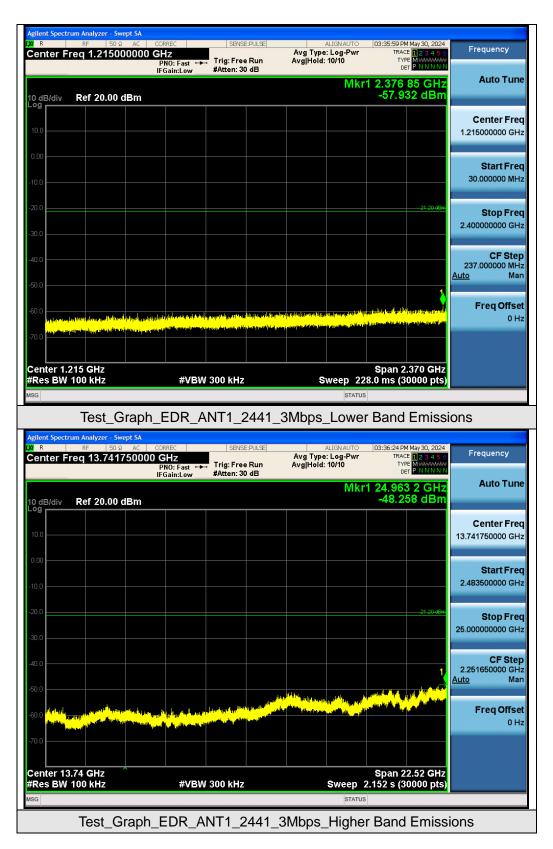




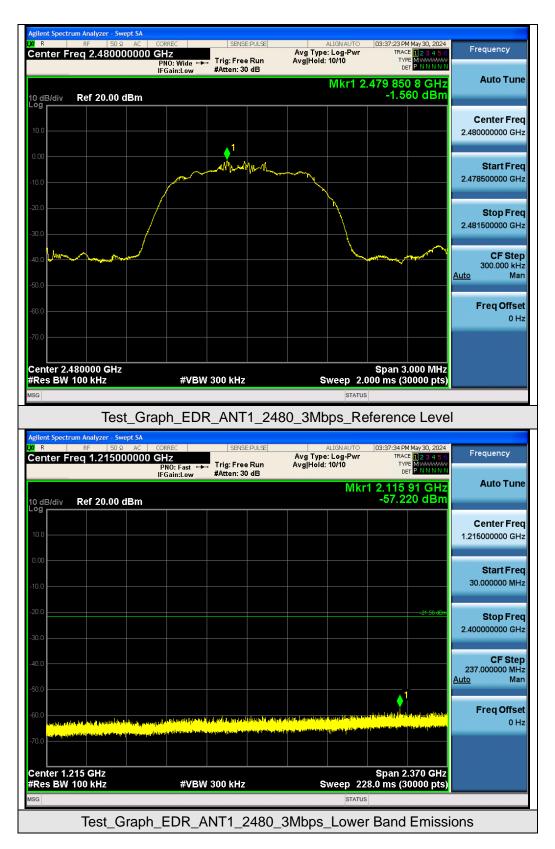



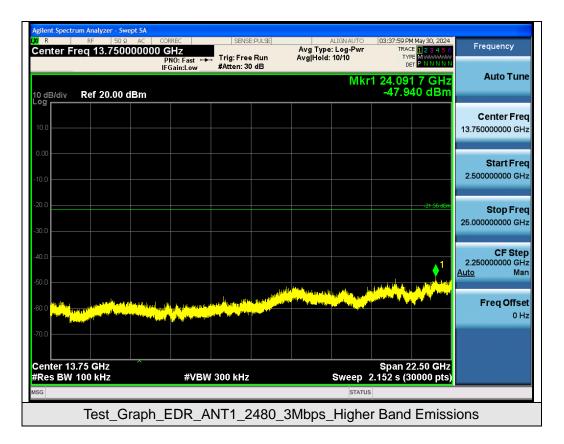




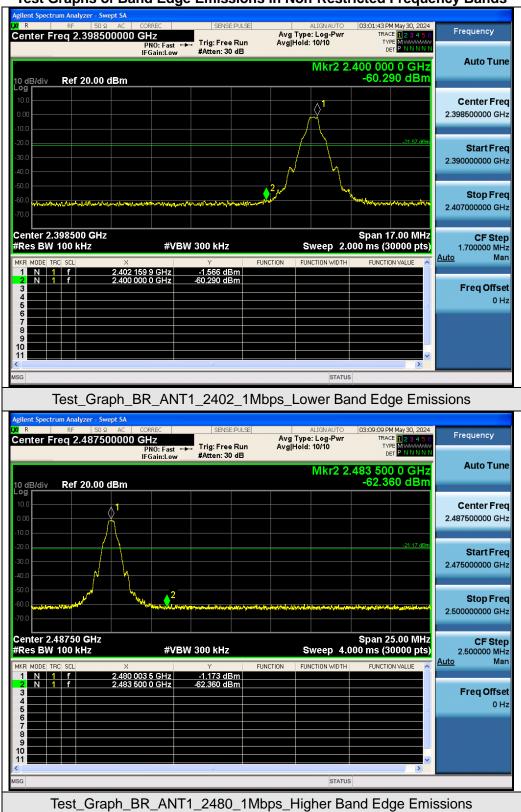

Test Graphs of Band Edge Emissions in Non-Restricted Frequency Bands




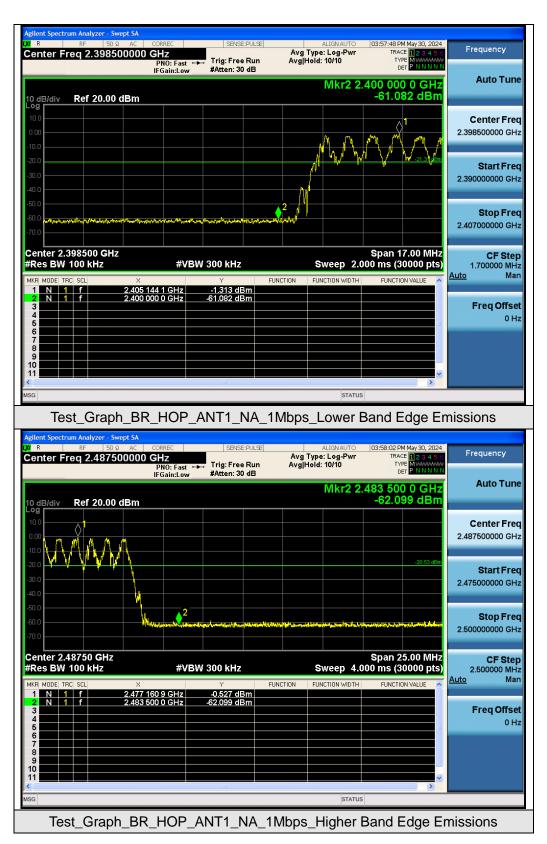







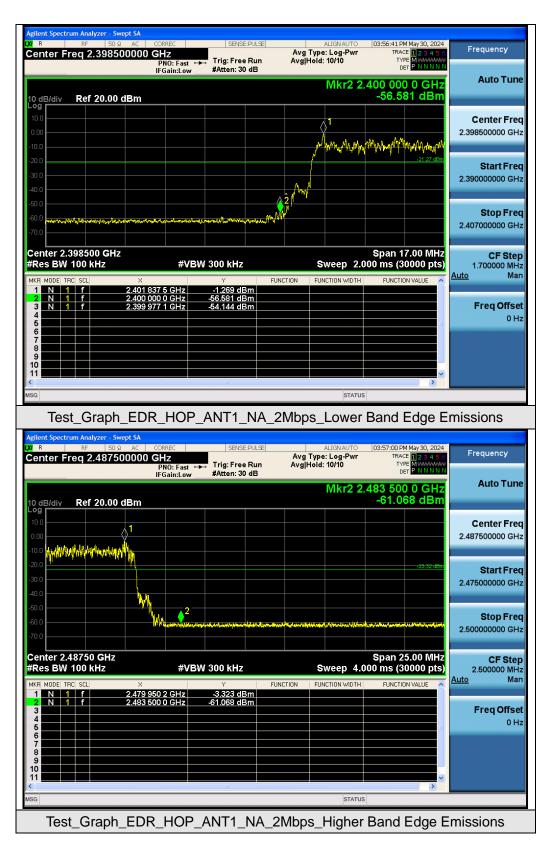











9. Radiated Spurious Emission

9.1 Measurement Limit

15.209 Limit in the below table has to be followed

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

Note: All modes were tested for restricted band radiated emission, the test records reported below are the worst result compared to other modes.

9.2 Measurement Procedure

- 1. The EUT was placed on the top of the turntable 0.8 or 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
- 2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- 3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
- 4. For each suspected emission, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- 5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
- 6. For emissions above 1GHz, use 1MHz RBW and 3MHz VBW for peak reading. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- 7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection"

Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.



absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.

- 8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
- 9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- 10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High Low scan is not required in this case.

Spectrum Parameter	Setting
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP
Start ~Stop Frequency	1GHz~26.5GHz 1MHz/3MHz for Peak, 1MHz/3MHz for Average

The following table is the setting of spectrum analyzer and receiver.

Receiver Parameter	Setting
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP



• Quasi-Peak Measurements below 1GHz

- 1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
- 2. Span was set greater than 1MHz
- 3. RBW = as shown in the table above
- 4. Detector = CISPR quasi-peak
- 5. Sweep time = auto couple
- 6. Trace was allowed to stabilize

Peak Measurements above 1GHz


- 1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
- 2. RBW = 1MHz
- 3. VBW = 3MHz
- 4. Detector = peak
- 5. Sweep time = auto couple
- 6. Trace mode = max hold
- 7. Trace was allowed to stabilize

<u>Average Measurements above 1GHz</u>


- 1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
- 2. RBW = 1MHz
- 3. VBW \geq [3 × RBW]
- 4. Detector = Power averaging (rms)
- 5. Averaging type = power (i.e., rms)
- 6. Sweep time = auto
- 7. Perform a trace average of at least 100 traces.
- The applicable correction factor is [10*log (1 / D)], where D is the duty cycle. The factor had been edited in the "Input Correction" of the Spectrum Analyzer.




9.3 Measurement Setup (Block Diagram of Configuration)

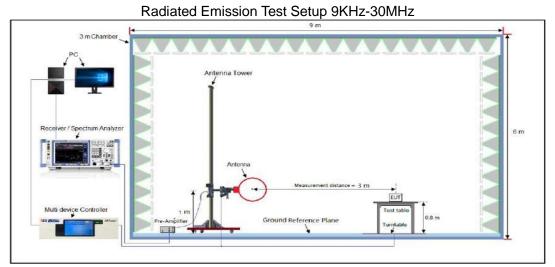

Radiated Emission Test Setup 30MHz-1000MHz

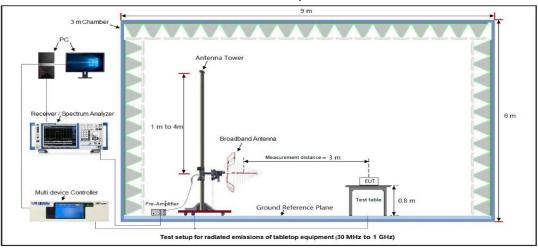

Radiated Emission Test Setup Above 1000MHz

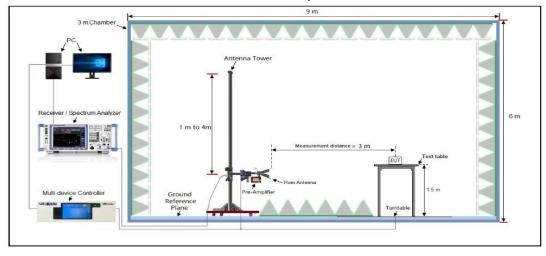




9.4 Measurement Result

Radiated Emission Below 30MHz

The amplitude of spurious emissions from 9kHz to 30MHz which are attenuated more than 20 dB below the permissible value need not be reported.

			Radia	ted Emiss	ion Test Res	ults at 30MHz	-1GHz		
EUT N	lame	Helr	met Bluetooth I	ntercom		Test Mode	el Name	TK-X4SC	
Tempe	erature	23.1	$^{\circ}$ C			Relative H	umidity	58.6 %	
Press	ure	960	hPa			Test Volta	ge	DC 3.7V b	y battery
Test N	lode	Мос	de 6			Antenna F	Polarity	Horizontal	
	130				FCC Part 15	C			
	110								
	100								
	90 80								
	[W//180 60 60 60 60 60 60 60 60 60 60 60 60 60								
	a 50 40								6
	30	" 1	* ²	4 3	~ ~ ~ ~ ~ · · ·			and the strength with a free with a strength and the stre	***
	20	~	~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~		w c v minin	market Walnumber			
	0								
	-10 30M			100M					1G
		ODUini	t — Horizontal PK		Frequency[H	z]			
	•	QP Limit QP Dete							
Suspe	cted Data	a List							
NO.	Freq [MHz		Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	33.8	8	23.90	12.12	40.00	16.10	100	359	Horizontal
2	65.8	9	23.84	15.98	40.00	16.16	100	190	Horizontal
3	102.7	75	26.16	16.93	43.50	17.34	100	280	Horizontal
4	459.7	71	29.35	24.69	46.00	16.65	100	146	Horizontal
5	618.7	79	31.65	25.79	46.00	14.35	100	85	Horizontal
6	894.2	27	37.49	30.02	46.00	8.51	100	227	Horizontal





			Rad	liated Emiss	ion Test Res	ults at 30MHz	2-1GHz		
EUT N	lame	Helm	net Bluetoot	h Intercom		Test Mode	el Name	TK-X4SC	
Tempe	erature	23.1	°C			Relative H	lumidity	58.6 %	
Press	ure	960ŀ	nPa			Test Volta	ige	DC 3.7V b	y battery
Test N	lode	Mod	e 6			Antenna I	Polarity	Vertical	
					500.0 // 2/				
	130				FCC Part 150				
	110								
	100 90								
	80								
	[W] 70								
	۳۵ (MN/TE) 60 (MN/TE) 50 (MN/TE)								
	40		* ²					5	6
	30		\sim	in mi	man	A	and the second	Mar Marin Marine	
	10	~			~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~	and from the			
	0								
	-10 30M	I		100M					1G
	_	- QP Limit	Vertical PK		Frequency[Hz	<u>z]</u>			
	1	QP Detect	tor						
Suspe	cted Data	a List							
NO.	Freq [MHz		Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	32.9	1	29.47	12.41	40.00	10.53	100	359	Vertical
2	49.4	ŀ	35.68	14.92	40.00	4.32	100	1	Vertical
2 3	49.4 65.8		35.68 29.00	14.92 15.98	40.00 40.00	4.32	100 100	1 24	Vertical Vertical
		9							
3	65.8	9	29.00	15.98	40.00	11.00	100	24	Vertical

RESULT: Pass

Note: 1. Factor=Antenna Factor + Cable loss, Margin=Limit-Level.

2. All test modes had been pre-tested. The mode 6 is the worst case and recorded in the report.



			Radia	ted Emiss	ion Test Res	ults at 30MH	z-1GHz		
EUT N	Name	Heln	net Bluetooth I	ntercom		Series Mo	odel Name	TK-X4	
Temp	erature	23.1	°C			Relative H	lumidity	58.6 %	
Press	ure	960ł	nPa			Test Volta	age	DC 3.7V t	by battery
Test N	lode	Mod	le 6			Antenna	Polarity	Horizonta	
								1	
	130				FCC Part 150	<u>;</u>			
	120								
	100 90								
	80								
	「 一 一 一 一 一 一 一 一 一 一 一 一 一								
	[W//18] 70 60 50								
	40						4	5	
	30 20	\sim	- the	~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~	min	annumber	www.www.workson.or	where a property and the second	
	10				·····	Arrow Arrest			
	-10								
	30M			100M	Frequency[H:	z]			1G
	-	QP Limit QP Detec							
Suspe	ected Dat	a List							
NO.	Frec [MH:		Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	60.0	7	24.29	17.86	40.00	15.71	100	8	Horizontal
2	102.7	75	26.88	16.93	43.50	16.62	100	360	Horizontal
3	141.5	55	28.56	16.13	43.50	14.94	100	353	Horizontal
4	462.6	62	29.87	24.11	46.00	16.13	100	1	Horizontal
	1				40.00	4.4.40	100	177	Horizontal
5	623.6	54	31.58	25.40	46.00	14.42	100	177	Honzoniai



			I	Radia	ted Emiss	ion Test Res	ults at 30MH	z-1GHz		
EUT N	lame	Helr	net Bluet	ooth l	ntercom		Series Mo	odel Name	TK-X4	
Temp	erature	23.1	°C				Relative H	lumidity	58.6 %	
Press	ure	960	hPa				Test Volta	age	DC 3.7V b	y battery
Test N	lode	Moc	le 6				Antenna	Polarity	Vertical	
	120					FCC Part 150	;			
	130 120									
	110									
	100 90									
	80									
	[W/V14B] 60 [mi/V14B] 60 50									
	p 60									
	40								5	6
	30 20	\sim	\sim	-h	1 m	man	A	mundeling the way	and the second and the second s	
	10				•	~~~~	mu france			
	-10									
	30M				100M	F (1)				1G
	-	QP Limit QP Detect	Vertic	al PK		Frequency[H:	-]			
			201							
Suspe	ected Data	a List								
NO.	Frec		Leve		Factor	Limit			Anglo	
	[MHz		[dBµV		[dB]	[dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	[MH: 32.9	<u>z]</u>		/m]						Polarity Vertical
1	•	z] 1	[dBµV/	/m] 3	[dB]	[dBµV/m]	[dB]	[cm]	[°]	
	32.9	z] 1 9	[dBµV/ 29.8	/m] 3 6	[dB] 12.41	[dBµV/m] 40.00	[dB] 10.17	[cm] 100	[°] 1	Vertical
2	32.9 65.8	z] 1 9 75	[dBµV/ 29.8 30.1	/m] 3 6 8	[dB] 12.41 15.98	[dBµV/m] 40.00 40.00	[dB] 10.17 9.84	[cm] 100 100	[°] 1 359	Vertical Vertical
2 3	32.9 65.8 102.7	2] 1 9 75 55	[dBµV/ 29.8 30.1 30.9	/m] 3 6 8 2	[dB] 12.41 15.98 16.93	[dBµV/m] 40.00 40.00 43.50	[dB] 10.17 9.84 12.52	[cm] 100 100 100	[°] 1 359 332	Vertical Vertical Vertical

RESULT: Pass

Note: 1. Factor=Antenna Factor + Cable loss, Margin=Limit-Level.

2. All test modes had been pre-tested. The mode 6 is the worst case and recorded in the report.



UT Name	Helmet Bluet	tooth Interco	m Tes	st Model Name	TK-X4S	SC
emperature	23.1 ℃		Re	lative Humidity	58.6%	
ressure	960hPa		Те	st Voltage	DC 3.7	V by battery
est Mode	Mode 4		An	tenna Polarity	Horizor	ntal
						_
Frequency	Meter Reading	Factor	Emission Lev		Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	
4804.000	47.95	0.08	48.03	74	-25.97	peak
4804.000	38.51	0.08	38.59	54	-15.41	AVG
7206.000	42.12	2.21	44.33	74	-29.67	peak
7206.000	31.28	2.21	33.49	54	-20.51	AVG
Remark:						
	nna Factor + Cable	e Loss – Pre-	amplifier.			
	nna Factor + Cable Helmet Bluet			st Model Name	TK-X4S	SC .
Factor = Anter			m Te s	st Model Name lative Humidity	TK-X45	6C
Factor = Anter	Helmet Bluet		m Tes Re		58.6%	SC V by battery
Factor = Anter	Helmet Bluet 23.1℃		m Tes Re Tes	lative Humidity	58.6%	V by battery
Factor = Anter	Helmet Bluet 23.1°C 960hPa Mode 4	tooth Interco	m Tes Re Tes	lative Humidity st Voltage tenna Polarity	58.6% DC 3.7 Vertical	V by battery
Factor = Anter	Helmet Bluet 23.1℃ 960hPa Mode 4 Meter Reading	tooth Interco	m Tes Re Tes An	lative Humidity st Voltage tenna Polarity el Limits	58.6% DC 3.7 Vertical	V by battery
Factor = Anter	Helmet Bluet 23.1℃ 960hPa Mode 4 Meter Reading (dBµV)	tooth Interco Factor (dB)	m Tes Re Tes Emission Lev (dBµV/m)	lative Humidity st Voltage tenna Polarity el Limits (dBµV/m)	58.6% DC 3.7 Vertical Margin (dB)	V by battery
Factor = Anter	Helmet Bluef 23.1℃ 960hPa Mode 4 Meter Reading (dBµV) 47.59	Factor (dB) 0.08	m Tes Re Tes Δn Emission Lew (dBμV/m) 47.67	lative Humidity st Voltage tenna Polarity el Limits (dBµV/m) 74	58.6% DC 3.7 Vertical Margin (dB) -26.33	V by battery Value Type
Factor = Anter	Helmet Bluet 23.1 °C 960hPa Mode 4 Meter Reading (dBµV) 47.59 38.45	Factor (dB) 0.08 0.08	m Tes Re Tes An Emission Lev (dBµV/m) 47.67 38.53	lative Humidity st Voltage tenna Polarity el Limits (dBµV/m) 74 54	58.6% DC 3.7 Vertical Margin (dB) -26.33 -15.47	V by battery Value Type peak AVG
Factor = Anter EUT Name emperature Pressure est Mode Frequency (MHz) 4804.000 4804.000 7206.000	Helmet Bluet 23.1℃ 960hPa Mode 4 Meter Reading (dBµV) 47.59 38.45 42.54	Factor (dB) 0.08 0.08 2.21	m Tes Re Tes An Emission Lew (dBµV/m) 47.67 38.53 44.75	lative Humidity st Voltage tenna Polarity el Limits (dBµV/m) 74 54 74	58.6% DC 3.7 Vertical Margin (dB) -26.33 -15.47 -29.25	V by battery Value Type
Factor = Anter	Helmet Bluet 23.1 °C 960hPa Mode 4 Meter Reading (dBµV) 47.59 38.45	Factor (dB) 0.08 0.08	m Tes Re Tes An Emission Lev (dBµV/m) 47.67 38.53	lative Humidity st Voltage tenna Polarity el Limits (dBµV/m) 74 54	58.6% DC 3.7 Vertical Margin (dB) -26.33 -15.47	V by battery Value Type peak AVG peak
Factor = Anter EUT Name emperature Pressure est Mode Frequency (MHz) 4804.000 4804.000 7206.000	Helmet Bluet 23.1℃ 960hPa Mode 4 Meter Reading (dBµV) 47.59 38.45 42.54	Factor (dB) 0.08 0.08 2.21	m Tes Re Tes An Emission Lew (dBµV/m) 47.67 38.53 44.75	lative Humidity st Voltage tenna Polarity el Limits (dBµV/m) 74 54 74	58.6% DC 3.7 Vertical Margin (dB) -26.33 -15.47 -29.25	V by battery Value Type peak AVG peak

Radiated Emissions Test Results Above 1GHz

RESULT: Pass



EUT Name		Helmet E	Bluetooth Inte	rcom	Test	Model Na	ime	TK-X4	SC	
Temperature		23.1 ℃			Relat	tive Humi	dity	58.6%		
Pressure		960hPa			Test	Voltage		DC 3.7	V by batter	у
Test Mode		Mode 5			Ante	nna Pola	rity	Horizo	ntal	
Frequen	су	Meter Readin	g Factor	Emissio	n Level	Limits		Margin	Value Typ	
(MHz)		(dBµV)	(dB)	(dBµ∖	//m)	(dBµV/m	ı)	(dB)	value ry	be
4882.00	0	47.54	0.14	47.6	68	74		-26.32	peak	
4882.00	0	38.36	0.14	38.	5	54		-15.5	AVG	
7323.00		42.29	2.36	44.6		74		-29.35	peak	
7323.00	0	31.16	2.36	33.5	52	54		-20.48	AVG	
D										
Remark:		F								
Factor = F	Antenna	1 + actor + C	Cable Loss – F	re-amplifier.						
EUT Name		Helmet E	luetooth Inte	rcom	Test	Model Na	ime	TK-X4	SC	
Temperature		23.1 ℃			Relat	tive Humi	dity	58.6%		
Pressure		960hPa			Test	Voltage		DC 3.7	V by batter	у
Test Mode		Mode 5			Ante	nna Pola	rity	Vertica	I	
				T						
Frequency		Reading	Factor	Emission Lev		Limits	Margi		Value Type	
(MHz)		dBµV)	(dB)	(dBµV/m)	(0	dBµV/m)	(dB)			
4882.000		18.39	0.14	48.53		74	-25.4		peak	
4882.000		37.41	0.14	37.55		54	-16.4		AVG	
7323.000 7323.000		42.28 32.37	2.36	44.64		74 54	-29.3 -19.2		peak AVG	
7323.000		52.31	2.30	34.73		J4	-19.2	<u>/ </u>	AVG	
Remark:	1			1				I		
Factor = Anter	na Fac	tor + Cable	loss – Pre-a	molifier						

Radiated Emissions Test Results for Above 1GHz

RESULT: Pass



Radiated Emissions	Test Results for Above 1GHz
---------------------------	-----------------------------

EUT Name	Helmet Bluet	ooth Intercor	m Test N	lodel Name	TK-X4S	C
Temperature	23.1 ℃		Relati	ve Humidity	58.6%	
Pressure	960hPa		Test V	oltage	DC 3.7V	by battery
Test Mode	Mode 6		Anten	na Polarity	Horizont	al
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4960.000	47.82	0.22	48.04	74	-25.96	peak
4960.000	38.66	0.22	38.88	54	-15.12	AVG
7440.000	42.51	2.64	45.15	74	-28.85	peak
7440.000	32.72	2.64	35.36	54	-18.64	AVG
l l						
Remark:				I		
	nna Factor + Cable	e Loss – Pre-	amplifier.	ł		
	nna Factor + Cable Helmet Bluet			lodel Name	TK-X4S	
Factor = Ante			m Test N	Nodel Name	TK-X4S0 58.6%	2
Factor = Ante	Helmet Bluet		m Test M Relation		58.6%	C by battery
Factor = Ante EUT Name Temperature Pressure	Helmet Bluet 23.1℃		m Test M Relativ Test V	ve Humidity	58.6%	-
Factor = Ante EUT Name Temperature Pressure Test Mode	Helmet Bluet 23.1℃ 960hPa Mode 6	ooth Intercor	m Test M Relation Test V Anten	ve Humidity /oltage na Polarity	58.6% DC 3.7V Vertical	by battery
Factor = Ante	Helmet Bluet 23.1°C 960hPa Mode 6 Meter Reading	ooth Intercor	m Test M Relation Test V Anten	ve Humidity /oltage na Polarity Limits	58.6% DC 3.7V Vertical	-
Factor = Ante EUT Name Temperature Pressure Test Mode Frequency (MHz)	Helmet Bluet 23.1 °C 960hPa Mode 6 Meter Reading (dBµV)	ooth Intercor Factor (dB)	m Test N Relation Test V Anten	ve Humidity Voltage na Polarity Limits (dBµV/m)	58.6% DC 3.7V Vertical Margin (dB)	by battery Value Type
Factor = Ante EUT Name Temperature Pressure Test Mode Frequency (MHz) 4960.000	Helmet Bluet 23.1℃ 960hPa Mode 6 Meter Reading (dBµV) 48.66	ooth Intercor Factor (dB) 0.22	m Test M Relation Test V Anten Emission Level (dBµV/m) 48.88	ve Humidity foltage na Polarity Limits (dBµV/m) 74	58.6% DC 3.7V Vertical Margin (dB) -25.12	by battery Value Type peak
Factor = Ante EUT Name Temperature Pressure Test Mode Frequency (MHz) 4960.000	Helmet Bluet 23.1℃ 960hPa Mode 6 Meter Reading (dBµV) 48.66 37.51	ooth Intercor Factor (dB) 0.22 0.22	m Test M Relation Test V Anten Emission Level (dBµV/m) 48.88 37.73	ve Humidity foltage na Polarity Limits (dBµV/m) 74 54	58.6% DC 3.7V Vertical Margin (dB) -25.12 -16.27	Value Type Peak AVG
Factor = Ante EUT Name Temperature Pressure Test Mode Frequency (MHz) 4960.000	Helmet Bluet 23.1℃ 960hPa Mode 6 Meter Reading (dBµV) 48.66	ooth Intercor Factor (dB) 0.22	m Test M Relation Test V Anten Emission Level (dBµV/m) 48.88	ve Humidity foltage na Polarity Limits (dBµV/m) 74	58.6% DC 3.7V Vertical Margin (dB) -25.12	by battery Value Type peak
Factor = Ante EUT Name Temperature Pressure Test Mode Frequency (MHz) 4960.000 7440.000	Helmet Bluet 23.1℃ 960hPa Mode 6 Meter Reading (dBµV) 48.66 37.51 42.22	Factor (dB) 0.22 0.22 2.64	m Test M Relation Test V Anten Emission Level (dBµV/m) 48.88 37.73 44.86	ve Humidity voltage na Polarity Limits (dBµV/m) 74 54 74	58.6% DC 3.7V Vertical Margin (dB) -25.12 -16.27 -29.14	by battery Value Type peak AVG peak
Factor = Ante EUT Name Temperature Pressure Test Mode Frequency (MHz) 4960.000 7440.000	Helmet Bluet 23.1℃ 960hPa Mode 6 Meter Reading (dBµV) 48.66 37.51 42.22	Factor (dB) 0.22 0.22 2.64	m Test M Relation Test V Anten Emission Level (dBµV/m) 48.88 37.73 44.86	ve Humidity voltage na Polarity Limits (dBµV/m) 74 54 74	58.6% DC 3.7V Vertical Margin (dB) -25.12 -16.27 -29.14	by battery Value Type peak AVG peak

RESULT: Pass

Note:

- 1. The amplitude of other spurious emissions from 1G to 25 GHz which are attenuated more than 20 dB below the permissible value need not be reported.
- 2. Factor = Antenna Factor + Cable loss Pre-amplifier gain, Margin = Emission Level-Limit.
- 3. The "Factor" value can be calculated automatically by software of measurement system.



UT Name	Helmet Blue	tooth Interco	m Seri	es Model Name	TK-X4	
emperature	23.1 ℃		Rela	ative Humidity	58.6%	
ressure	960hPa		Test	t Voltage	DC 3.7	V by battery
est Mode	Mode 4		Ante	enna Polarity	Horizo	ntal
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4804.000	47.88	0.08	47.96	74	-26.04	peak
4804.000	38.46	0.08	38.54	54	-15.46	AVG
7206.000	42.23	2.21	44.44	74	-29.56	peak
7206.000	31.37	2.21	33.58	54	-20.42	AVG
Remark:						
	nna Factor + Cab Helmet Blue	le Loss – Pre-		es Model Name	TK-X4	
Factor = Anter			m Seri	es Model Name ative Humidity	TK-X4 58.6%	
Factor = Anter	Helmet Blue		n Seri Rela		58.6%	V by battery
Factor = Anter UT Name emperature	Helmet Blue		n Seri Rela Test	ative Humidity	58.6%	
Factor = Anter UT Name emperature ressure est Mode	Helmet Blue 23.1°C 960hPa Mode 4		n Seri Rela Test	ative Humidity t Voltage enna Polarity	58.6% DC 3.7 Vertica	
Factor = Anter UT Name emperature ressure	Helmet Blue 23.1°C 960hPa	tooth Interco	m Seri Rela Test Ante	ative Humidity t Voltage enna Polarity	58.6% DC 3.7	
Factor = Anter	Helmet Blue 23.1°C 960hPa Mode 4 Meter Reading	tooth Intercon	m Seri Rela Test Anto	ative Humidity t Voltage enna Polarity Limits	58.6% DC 3.7 Vertica Margin	
Factor = Anter	Helmet Blue 23.1 °C 960hPa Mode 4 Meter Reading (dBµV)	tooth Intercon Factor (dB)	m Seri Rela Test Anto Emission Level (dBµV/m)	t Voltage enna Polarity Limits (dBµV/m)	58.6% DC 3.7 Vertica Margin (dB)	l Value Type
Factor = Anter UT Name emperature ressure est Mode Frequency (MHz) 4804.000	Helmet Blue 23.1℃ 960hPa Mode 4 Meter Reading (dBµV) 47.61	Factor (dB) 0.08	m Seri Rela Test Emission Level (dBµV/m) 47.69	t Voltage enna Polarity Limits (dBµV/m) 74	58.6% DC 3.7 Vertica Margin (dB) -26.31	l Value Type peak
Factor = Anter UT Name emperature ressure est Mode Frequency (MHz) 4804.000 4804.000	Helmet Blue 23.1℃ 960hPa Mode 4 Meter Reading (dBµV) 47.61 38.51	Factor (dB) 0.08 0.08	m Seri Rela Test Anto (dBµV/m) 47.69 38.59	Limits (dBµV/m) 74 54	58.6% DC 3.7 Vertica Margin (dB) -26.31 -15.41	l Value Type peak AVG
Factor = Anter UT Name emperature ressure est Mode Frequency (MHz) 4804.000 4804.000 7206.000	Helmet Blue 23.1℃ 960hPa Mode 4 Meter Reading (dBµV) 47.61 38.51 42.63	Factor (dB) 0.08 0.08 2.21	m Seri Rela Test Anto (dBµV/m) 47.69 38.59 44.84	t Voltage Enna Polarity Limits (dBµV/m) 74 54 74	58.6% DC 3.7 Vertica Margin (dB) -26.31 -15.41 -29.16	Value Type peak AVG peak

Radiated Emissions Test Results Above 1GHz

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

RESULT: Pass



Pressure 960hPa Test Voltage DC 3.7V by batter Test Mode Mode 5 Antenna Polarity Horizontal Frequency Meter Reading Factor Emission Level Limits Margin Value Type (MHz) (dBµV) (dB) (dBµV/m) (dB) Value Type 4882.000 47.82 0.14 47.96 74 -26.04 peak 4882.000 38.53 0.14 38.67 54 -15.33 AVG 7323.000 42.67 2.36 45.03 74 -28.97 peak 7323.000 31.39 2.36 33.75 54 -20.25 AVG Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Image: California Image: California S8.6% Pressure 960hPa Test Voltage DC 3.7V by batter Feature 23.1°C Relative Humidity 58.6% Pressure 960hPa Test Voltage DC 3.7V by batter Test Mode Mode 5 Antenna Polarity<	EUT Name	Helmet Blue	tooth Intercor	n	Serie	s Model Nam	e	TK-X4	
Test Mode Mode 5 Antenna Polarity Horizontal Frequency Meter Reading Factor Emission Level Limits Margin Value Typ (MHz) (dBµV) (dB) (dBµV/m) (dBµV/m) (dB) Value Typ 4882.000 47.82 0.14 47.96 74 -26.04 peak 4882.000 38.53 0.14 38.67 54 -15.33 AVG 7323.000 42.67 2.36 45.03 74 -28.97 peak 7323.000 42.67 2.36 33.75 54 -20.25 AVG Remark: Eactor Eactor + Cable Loss – Pre-amplifier.	Temperature	23.1 ℃			-		58.6% DC 3.7V by battery		
Frequency Meter Reading Factor Emission Level Limits Margin Value Typ (MHz) (dBµV) (dB) (dBµV/m) (dBµV/m) (dB) Value Typ 4882.000 47.82 0.14 47.96 74 -26.04 peak 4882.000 38.53 0.14 38.67 54 -15.33 AVG 7323.000 42.67 2.36 45.03 74 -28.97 peak 7323.000 31.39 2.36 33.75 54 -20.25 AVG Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.	Pressure	960hPa							
(MHz) (dBµV) (dB) (dBµV/m) (dBµV/m) (dB) Value Typ 4882.000 47.82 0.14 47.96 74 -26.04 peak 4882.000 38.53 0.14 38.67 54 -15.33 AVG 7323.000 42.67 2.36 45.03 74 -28.97 peak 7323.000 31.39 2.36 33.75 54 -20.25 AVG Remark:	Test Mode	Mode 5	Mode 5 Antenna Polarity			Horizontal			
(MHz) (dBµV) (dB) (dBµV/m) (dBµV/m) (dB) Value Typ 4882.000 47.82 0.14 47.96 74 -26.04 peak 4882.000 38.53 0.14 38.67 54 -15.33 AVG 7323.000 42.67 2.36 45.03 74 -28.97 peak 7323.000 31.39 2.36 33.75 54 -20.25 AVG Remark:									
(MHz) (dBµV) (dB) (dBµV/m) (dBµV/m) (dB) (dB) 4882.000 47.82 0.14 47.96 74 -26.04 peak 4882.000 38.53 0.14 38.67 54 -15.33 AVG 7323.000 42.67 2.36 45.03 74 -28.97 peak 7323.000 31.39 2.36 33.75 54 -20.25 AVG Remark:	Frequency	Meter Reading	Factor	Emission	Level	Limits	1	Margin	
4882.000 38.53 0.14 38.67 54 -15.33 AVG 7323.000 42.67 2.36 45.03 74 -28.97 peak 7323.000 31.39 2.36 33.75 54 -20.25 AVG 7323.000 31.39 2.36 33.75 54 -20.25 AVG Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. - - - - - EUT Name Helmet Bluetooth Intercom Series Model Name TK-X4 - </td <td>(MHz)</td> <td>(dBµV)</td> <td>(dB)</td> <td>(dBµV/</td> <td>/m)</td> <td>(dBµV/m)</td> <td></td> <td>(dB)</td> <td>value Type</td>	(MHz)	(dBµV)	(dB)	(dBµV/	/m)	(dBµV/m)		(dB)	value Type
Image: Note of the second se	4882.000	47.82	0.14	47.9	6	74		26.04	peak
7323.000 31.39 2.36 33.75 54 -20.25 AVG Remark: Remark: Image: Sector and Sector	4882.000	38.53	0.14	38.6	7	54		15.33	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.EUT NameHelmet Bluetooth IntercomSeries Model NameTK-X4Temperature23.1 °CRelative Humidity58.6%Pressure960hPaTest VoltageDC 3.7V by batterTest ModeMode 5Antenna PolarityVerticalFrequencyMeter ReadingFactorEmission LevelLimitsMargin(MHz)(dBµV)(dB)(dBµV/m)(dBµV/m)(dB)Value Type4882.00048.710.1448.8574-25.15peak4882.00037.590.1437.7354-16.27AVG7323.00042.262.3644.6274-29.38peak	7323.000	42.67	2.36	45.03	3	74		28.97	peak
Factor = Antenna Factor + Cable Loss – Pre-amplifier.EUT NameHelmet Bluetooth IntercomSeries Model NameTK-X4Temperature23.1 °CRelative Humidity58.6%Pressure960hPaTest VoltageDC 3.7V by batterPressure960hPaMode 5Antenna PolarityVerticalFeat ModeMode 5Antenna PolarityVerticalFrequencyMeter ReadingFactorEmission LevelLimitsMarginValue Type(MHz)(dBµV)(dB)(dBµV/m)(dB)Value Type4882.00037.590.1437.7354-16.27AVG7323.00042.262.3644.6274-29.38peak	7323.000	31.39	2.36	33.7	5	54		20.25	AVG
Factor = Antenna Factor + Cable Loss – Pre-amplifier.EUT NameHelmet Bluetooth IntercomSeries Model NameTK-X4Temperature23.1 °CRelative Humidity58.6%Pressure960hPaTest VoltageDC 3.7V by batterPressure960hPaMode 5Antenna PolarityVerticalFeat ModeMode 5Antenna PolarityVerticalFrequencyMeter ReadingFactorEmission LevelLimitsMarginValue Type(MHz)(dBµV)(dB)(dBµV/m)(dB)Value Type4882.00037.590.1437.7354-16.27AVG7323.00042.262.3644.6274-29.38peak									
Factor = Antenna Factor + Cable Loss – Pre-amplifier.EUT NameHelmet Bluetooth IntercomSeries Model NameTK-X4Temperature 23.1° Relative Humidity 58.6% Pressure960hPaTest VoltageDC $3.7V$ by batterPrest ModeMode 5Antenna PolarityVerticalFrequencyMeter ReadingFactorEmission LevelLimitsMargin (dBµV/m)(MHz)(dBµV)(dB)(dBµV/m)(dB)Value Type4882.00048.710.1448.8574-25.15peak4882.00037.590.1437.7354-16.27AVG7323.00042.262.3644.6274-29.38peak	Remark:								
EUT NameHelmet Bluetooth IntercomSeries Model NameTK-X4Temperature23.1 °CRelative Humidity58.6%Pressure960hPaTest VoltageDC 3.7V by batterPress ModeMode 5Antenna PolarityVerticalFrequencyMeter ReadingFactorEmission LevelLimitsMargin (dBµV/m)FrequencyMeter ReadingFactorEmission LevelLimitsMargin (dB)Value Type(dBµV)(dB)(dBµV/m)(dB)Value Type4882.00048.710.1448.8574-25.15peak4882.00037.590.1437.7354-16.27AVG7323.00042.262.3644.6274-29.38peak									
Temperature 23.1 °C Relative Humidity 58.6% Pressure 960hPa Test Voltage DC 3.7V by batter Frest Mode Mode 5 Antenna Polarity Vertical Frequency Meter Reading Factor Emission Level Limits Margin Value Type (MHz) (dBµV) (dB) (dBµV/m) (dBµV/m) (dB) Value Type 4882.000 48.71 0.14 48.85 74 -25.15 peak 4882.000 37.59 0.14 37.73 54 -16.27 AVG 7323.000 42.26 2.36 44.62 74 -29.38 peak	r = actor = anter	na Factor + Cabl	e Loss – Pre-	amplifier					
Pressure 960hPa Test Voltage DC 3.7V by batter Frest Mode Mode 5 Antenna Polarity Vertical Frequency Meter Reading Factor Emission Level Limits Margin Value Type (MHz) (dBµV) (dB) (dBµV/m) (dB) Value Type 4882.000 48.71 0.14 48.85 74 -25.15 peak 4882.000 37.59 0.14 37.73 54 -16.27 AVG 7323.000 42.26 2.36 44.62 74 -29.38 peak	ractor = Anter	ina Factor + Cabl	e Loss – Pre-	amplifier.					
Frequency Meter Reading Factor Emission Level Limits Margin Value Type (MHz) (dBµV) (dB) (dBµV/m) (dBµV/m) (dB) Value Type 4882.000 48.71 0.14 48.85 74 -25.15 peak 4882.000 37.59 0.14 37.73 54 -16.27 AVG 7323.000 42.26 2.36 44.62 74 -29.38 peak					Serie	s Model Nam	9	TK-X4	
Frequency Meter Reading Factor Emission Level Limits Margin Value Typ (MHz) (dBµV) (dB) (dBµV/m) (dBµV/m) (dB) Value Typ 4882.000 48.71 0.14 48.85 74 -25.15 peak 4882.000 37.59 0.14 37.73 54 -16.27 AVG 7323.000 42.26 2.36 44.62 74 -29.38 peak	EUT Name	Helmet Blue					9		
(MHz) (dBµV) (dB) (dBµV/m) (dBµV/m) (dB) Value Typ 4882.000 48.71 0.14 48.85 74 -25.15 peak 4882.000 37.59 0.14 37.73 54 -16.27 AVG 7323.000 42.26 2.36 44.62 74 -29.38 peak	EUT Name Femperature	Helmet Blue 23.1℃			Relat	ive Humidity	9	58.6%	/ by battery
(MHz) (dBµV) (dB) (dBµV/m) (dBµV/m) (dB) Value Typ 4882.000 48.71 0.14 48.85 74 -25.15 peak 4882.000 37.59 0.14 37.73 54 -16.27 AVG 7323.000 42.26 2.36 44.62 74 -29.38 peak	EUT Name Temperature Pressure	Helmet Blue 23.1℃ 960hPa			Relat Test V	ive Humidity /oltage	9	58.6% DC 3.7	/ by battery
4882.000 48.71 0.14 48.85 74 -25.15 peak 4882.000 37.59 0.14 37.73 54 -16.27 AVG 7323.000 42.26 2.36 44.62 74 -29.38 peak	EUT Name Femperature Pressure Fest Mode	Helmet Blue 23.1°C 960hPa Mode 5	tooth Intercor	n	Relat Test V Anter	ive Humidity /oltage nna Polarity		58.6% DC 3.7 Vertical	
4882.000 37.59 0.14 37.73 54 -16.27 AVG 7323.000 42.26 2.36 44.62 74 -29.38 peak	EUT Name Temperature Pressure Test Mode Frequency	Helmet Blue 23.1℃ 960hPa Mode 5 Meter Reading	tooth Intercor	n Emission	Relat Test V Anter	ive Humidity Voltage nna Polarity Limits		58.6% DC 3.7 Vertical	
7323.000 42.26 2.36 44.62 74 -29.38 peak	EUT Name Temperature Pressure Test Mode	Helmet Blue 23.1℃ 960hPa Mode 5 Meter Reading (dBµV)	tooth Intercor Factor (dB)	n Emission (dBµV/	Relat Test V Anter	ive Humidity Voltage nna Polarity Limits (dBµV/m)		58.6% DC 3.7 Vertical Margin (dB)	Value Type
	UT Name emperature Pressure est Mode Frequency (MHz) 4882.000	Helmet Blue 23.1℃ 960hPa Mode 5 Meter Reading (dBµV) 48.71	tooth Intercor Factor (dB) 0.14	n Emission (dBµV/ 48.8	Relat Test Anter	ive Humidity Voltage nna Polarity Limits (dBµV/m) 74	1	58.6% DC 3.7 Vertical Margin (dB) -25.15	Value Type
	EUT Name Temperature Pressure Test Mode Frequency (MHz) 4882.000 4882.000	Helmet Blue 23.1 °C 960hPa Mode 5 Meter Reading (dBµV) 48.71 37.59	Factor (dB) 0.14 0.14	n Emission (dBµV/ 48.8 37.7	Relat Test Anter	ive Humidity Voltage nna Polarity Limits (dBµV/m) 74 54		58.6% DC 3.7 Vertical Margin (dB) -25.15 -16.27	Value Type peak AVG
	EUT Name Temperature Pressure Test Mode Frequency (MHz) 4882.000 4882.000 7323.000	Helmet Blue 23.1℃ 960hPa Mode 5 Meter Reading (dBµV) 48.71 37.59 42.26	Factor (dB) 0.14 0.14 2.36	n Emission (dBµV/ 48.88 37.73 44.62	Relat Test V Anter	ive Humidity Voltage nna Polarity Limits (dBµV/m) 74 54 74	1	58.6% DC 3.7 Vertical Margin (dB) -25.15 -16.27 -29.38	Value Type peak AVG peak

Radiated Emissions Test Results for Above 1GHz

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

RESULT: Pass



Radiated Emissions Test Results for Above 1GHz	Radiated Emissions	Test Results	for Above 1GHz
--	---------------------------	---------------------	----------------

EUT	۲ Name	Helmet Blueto	ooth Intercor	m Series	Model Name	TK-X4		
Terr	emperature 23.1℃			Relative Humidity		58.6%		
Pre	ssure	960hPa		Test V	Test Voltage		DC 3.7V by battery	
Tes	Fest Mode Mode 6 Antenna Polarity He		Horizont	al				
		·		·				
	Frequency	Meter Reading	Factor	Emission Level	ssion Level Limits			
	(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Value Type	
	4960.000	47.96	0.22	48.18	74	-25.82	peak	
	4960.000	38.71	0.22	38.93	54	-15.07	AVG	
	7440.000	42.55	2.64	45.19	74	-28.81	peak	
	7440.000	32.34	2.64	34.98	54	-19.02	AVG	
	Remark:							
	incinairi.							
		nna Factor + Cable	e Loss – Pre-	amplifier.				
EUT		nna Factor + Cable Helmet Blueto			s Model Name	TK-X4		
_	Factor = Anter			m Series	s Model Name ve Humidity	TK-X4 58.6%		
Terr	Factor = Anter	Helmet Blueto		m Series Relation		58.6%	by battery	
Terr Pre:	Factor = Anter	Helmet Blueto		m Series Relativ Test V	ve Humidity	58.6%	by battery	
Terr Pre:	Factor = Anter	Helmet Blueto 23.1 °C 960hPa Mode 6	ooth Intercor	m Series Relation Test V Anten	ve Humidity /oltage na Polarity	58.6% DC 3.7V Vertical	by battery	
Terr Pre:	Factor = Anter	Helmet Blueto 23.1 °C 960hPa Mode 6	ooth Intercor	m Series Relation Test V Anten	ve Humidity /oltage na Polarity Limits	58.6% DC 3.7V Vertical Margin	by battery	
Terr Pre:	Factor = Anter	Helmet Blueto 23.1℃ 960hPa Mode 6 Meter Reading (dBµV)	ooth Intercor Factor (dB)	m Series Relative Test V Anten	ve Humidity /oltage na Polarity Limits (dBµV/m)	58.6% DC 3.7V Vertical Margin (dB)	Value Type	
Terr Pre	Factor = Anter	Helmet Blueto 23.1℃ 960hPa Mode 6 Meter Reading (dBµV) 48.71	Factor (dB) 0.22	m Series Relation Test V Anten Emission Level (dBµV/m) 48.93	ve Humidity /oltage na Polarity Limits (dBµV/m) 74	58.6% DC 3.7V Vertical Margin (dB) -25.07	Value Type	
Terr Pre:	Factor = Anter T Name Deperature SSURE T Mode Frequency (MHz) 4960.000	Helmet Blueto 23.1 °C 960hPa Mode 6 Meter Reading (dBµV) 48.71 37.62	Factor (dB) 0.22 0.22	m Series Relativ Test V Anten Emission Level (dBµV/m) 48.93 37.84	ve Humidity foltage na Polarity Limits (dBµV/m) 74 54	58.6% DC 3.7V Vertical Margin (dB) -25.07 -16.16	- Value Type peak AVG	
Terr Pre:	Factor = Anter	Helmet Blueto 23.1 °C 960hPa Mode 6 Meter Reading (dBμV) 48.71 37.62 42.38	Factor (dB) 0.22 0.22 2.64	m Series Relativ Test V Anten Emission Level (dBµV/m) 48.93 37.84 45.02	ve Humidity oltage na Polarity Limits (dBµV/m) 74 54 74	58.6% DC 3.7V Vertical Margin (dB) -25.07 -16.16 -28.98	Value Type peak AVG peak	
Terr Pre	Factor = Anter T Name Deperature SSURE T Mode Frequency (MHz) 4960.000	Helmet Blueto 23.1 °C 960hPa Mode 6 Meter Reading (dBµV) 48.71 37.62	Factor (dB) 0.22 0.22	m Series Relativ Test V Anten Emission Level (dBµV/m) 48.93 37.84	ve Humidity foltage na Polarity Limits (dBµV/m) 74 54	58.6% DC 3.7V Vertical Margin (dB) -25.07 -16.16	- Value Type peak AVG	
Terr Pre	Factor = Anter Factor = Anter perature ssure t Mode Frequency (MHz) 4960.000 7440.000 7440.000	Helmet Blueto 23.1 °C 960hPa Mode 6 Meter Reading (dBμV) 48.71 37.62 42.38	Factor (dB) 0.22 0.22 2.64	m Series Relativ Test V Anten Emission Level (dBµV/m) 48.93 37.84 45.02	ve Humidity oltage na Polarity Limits (dBµV/m) 74 54 74	58.6% DC 3.7V Vertical Margin (dB) -25.07 -16.16 -28.98	Value Type peak AVG peak	
Terr Pre:	Factor = Anter Factor = Anter perature ssure t Mode Frequency (MHz) 4960.000 7440.000 7440.000 Remark:	Helmet Blueto 23.1 °C 960hPa Mode 6 Meter Reading (dBμV) 48.71 37.62 42.38	Factor (dB) 0.22 0.22 2.64 2.64	m Series Relation Test V Anten Emission Level (dBµV/m) 48.93 37.84 45.02 35.08	ve Humidity oltage na Polarity Limits (dBµV/m) 74 54 74	58.6% DC 3.7V Vertical Margin (dB) -25.07 -16.16 -28.98	Value Type peak AVG peak	

RESULT: Pass

Note:


- 4. The amplitude of other spurious emissions from 1G to 25 GHz which are attenuated more than 20 dB below the permissible value need not be reported.
- 5. Factor = Antenna Factor + Cable loss Pre-amplifier gain, Margin = Emission Level-Limit.
- 6. The "Factor" value can be calculated automatically by software of measurement system.




EUT Name	Helmet Bluetooth Intercom	Model Name	TK-X4SC
Temperature	23.1 ℃	Relative Humidity	58.6%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 4	Antenna Polarity	Horizontal

Band Edge Emission Test Results for Restricted Bands

Test Graph for Peak Measurement

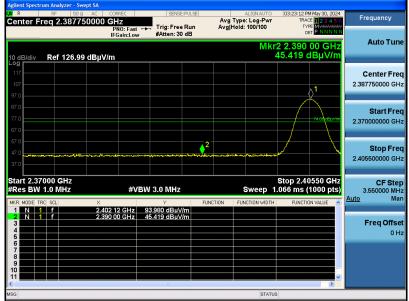

Test Graph for Average Measurement

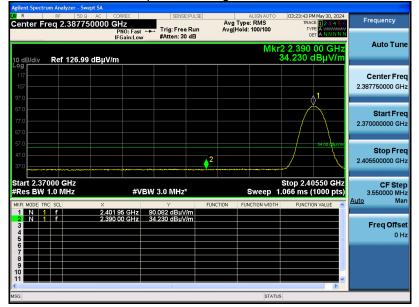


RESULT: Pass




EUT Name	Helmet Bluetooth Intercom	Model Name	TK-X4SC
Temperature	23.1 ℃	Relative Humidity	58.6%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 4	Antenna Polarity	Vertical

Test Graph for Peak Measurement

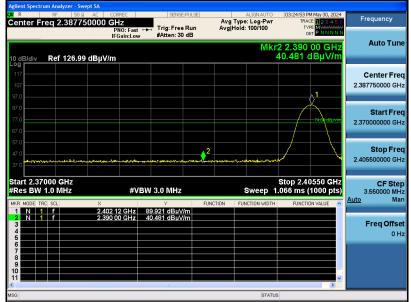

Test Graph for Average Measurement

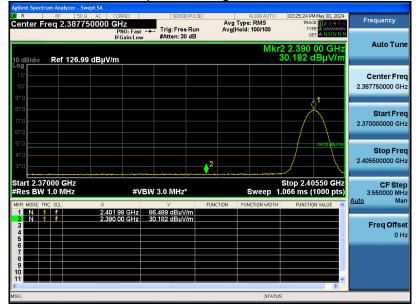


RESULT: Pass



EUT Name	Helmet Bluetooth Intercom	Model Name	TK-X4SC
Temperature	23.1 ℃	Relative Humidity	58.6%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 6	Antenna Polarity	Horizontal

Test Graph for Peak Measurement

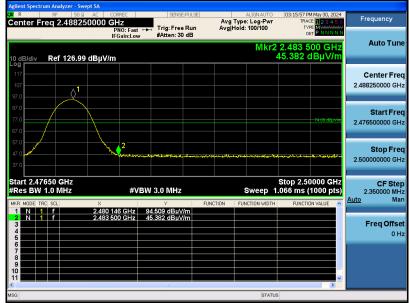


Test Graph for Average Measurement



RESULT: Pass




EUT Name	Helmet Bluetooth Intercom	Model Name	TK-X4SC
Temperature	23.1 ℃	Relative Humidity	58.6%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 6	Antenna Polarity	Vertical

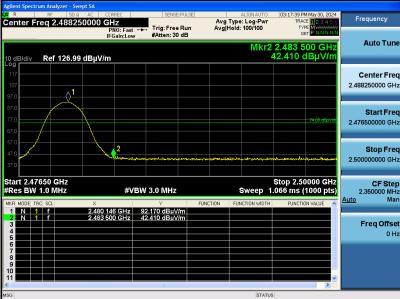

Test Graph for Peak Measurement

Test Graph for Average Measurement

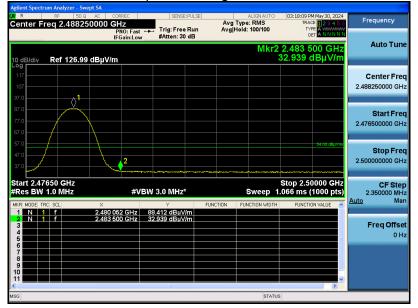

<u>RESULT: Pass</u> Note: The factor had been edited in the "Input Correction" of the Spectrum Analyzer.



10. Number of Hopping Frequency Measurement

10.1 Provisions Applicable


This frequency hopping system must employ a minimum of 15 hopping channels.

10.2 Measurement Procedure

The EUT shall have its hopping function enabled. Use the following spectrum analyzer settings:

- 1. Span = The frequency band of operation. Depending on the number of channels the device
- 2. supports, it may be necessary to divide the frequency range of operation across multiple spans, to allow the individual channels to be clearly seen.
- 3. RBW: To identify clearly the individual channels, set the RBW to less than 30% of the channel spacing or the 20 dB bandwidth, whichever is smaller.
- 4. VBW \geq RBW
- 5. Sweep time = Auto couple
- 6. Detector = Peak
- 7. Trace mode = Max hold
- 8. Allow the trace to stabilize


10.3 Measurement Setup (Block Diagram of Configuration)

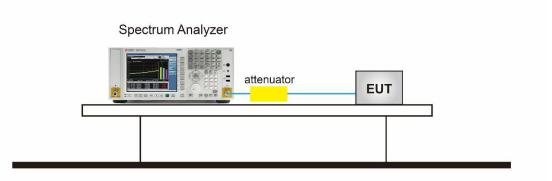

10.4 Measurement Result

Test Data of Number of Hopping Frequency					
Test Mode	Number of Hopping Frequency	Limits	Pass or Fail		
π /4-DQPSK Hopping	79	>=15	Pass		



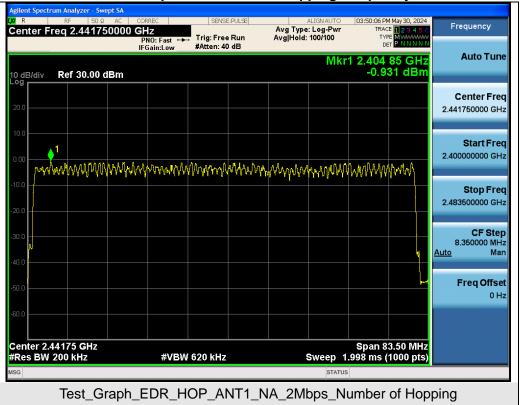

Test Graphs of Number of Hopping Frequency

Note: All mode rates are tested and evaluated, π /4-DQPSK modulated 2DH5 mode is the worst case and documented in the report.



11. Time of Occupancy (Dwell Time) Measurement

11.1 Provisions Applicable


The maximum permissible time of occupancy is 400ms within a period of 400ms multiplied by the number of hopping channels employed.

11.2 Measurement Procedure

The EUT shall have its hopping function enabled. Use the following spectrum analyzer settings:

- 1. Span = Zero span, centered on a hopping channel.
- 2. RBW shall be \leq channel spacing and where possible RBW should be set >> 1 / T, where T is the expected dwell time per channel.
- 3. VBW \geq RBW
- 4. Sweep time = As necessary to capture the entire dwell time per hopping channel
- 5. Detector = Peak
- 6. Trace mode = Free Run
- 7. Use the marker-delta function to determine the transmit time per hop. If this value varies with different modes of operation (data rate, modulation format, number of hopping channels, etc.), then repeat this test for each variation in transmit time. An oscilloscope may be used instead of a spectrum analyzer. The EUT shall show compliance with the appropriate regulatory limit for the number of hopping channels. A plot of the data shall be included in the test report.


11.3 Measurement Setup (Block Diagram of Configuration)

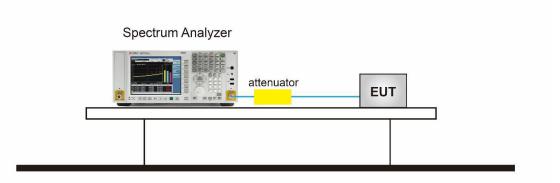

11.4 Measurement Result


Test Data of Dwell Time					
Channel	Time of Pulse for 2DH5 (ms)	Number of hops in the period specified in the requirements	Dwell Time (ms)	Limit (ms)	Pass or Fail
2402	2.885	31.0*4	357.740	400	Pass
2441	2.885	25.0*4	288.500	400	Pass
2480	2.885	26.0*4	300.040	400	Pass



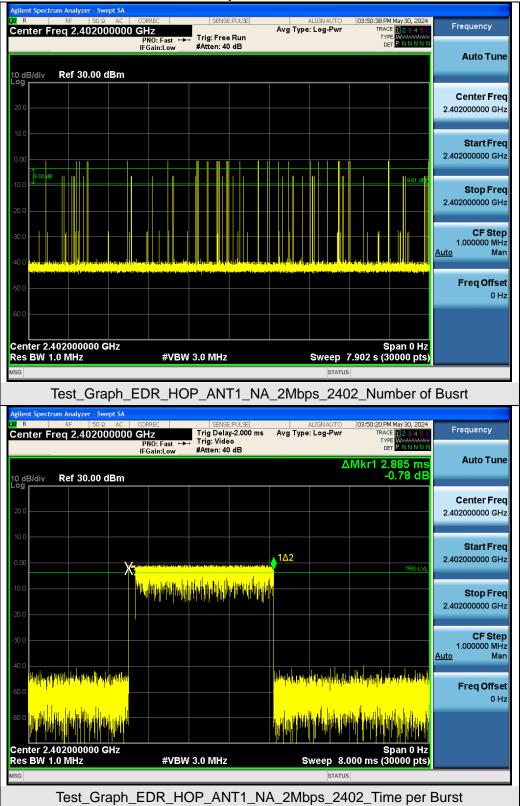


Test Graphs of Dwell Time



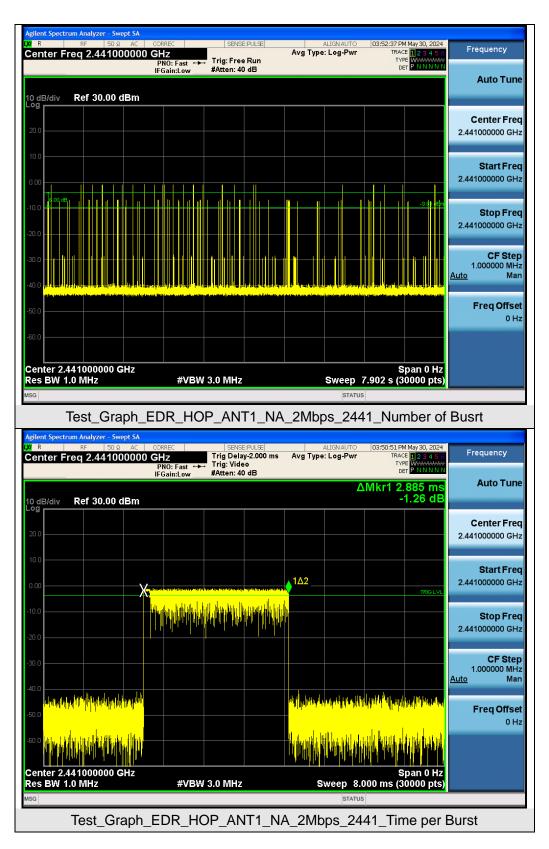



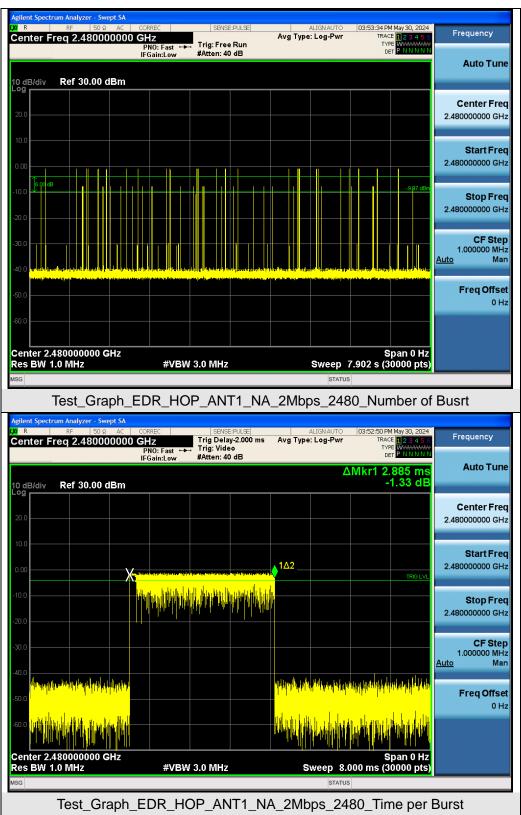

Note: All mode rates are tested and evaluated, π /4-DQPSK modulated 2DH5 mode is the worst case and documented in the report.



12. Frequency Separation Measurement

12.1 Provisions Applicable

When the power is less than 0.125W: The minimum permissible channel separation for this system is 2/3 the value of the 20dB BW.


When the power is less than 1W: The minimum permissible channel separation for this system is 20dB BW.

12.2 Measurement Procedure

The EUT shall have its hopping function enabled. Use the following spectrum analyzer settings:

- 1. Span: Wide enough to capture the peaks of two adjacent channels.
- 2. RBW: Start with the RBW set to approximately 30% of the channel spacing; adjust as necessary to best identify the center of each individual channel.
- 3. Video (or average) bandwidth (VBW) \geq RBW.
- 4. Sweep: Auto.
- 5. Detector function: Peak.
- 6. Trace: Max hold. g) Allow the trace to stabilize.
- 7. Use the marker-delta function to determine the separation between the peaks of the adjacent channels.


12.3 Measurement Setup (Block Diagram of Configuration)

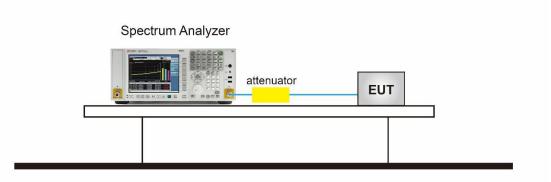

12.4 Measurement Result

Test Data of Frequency Separation					
Test Mode	Channel Separation (MHz)	Limits (MHz)	Pass or Fail		
π /4-DQPSK	0.961	≥0.871	Pass		



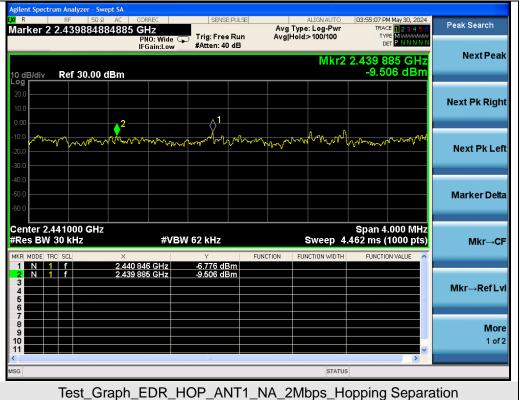

Test Graphs of Number of Hopping Frequency

Note: All mode rates are tested and evaluated, π /4-DQPSK modulated 2DH5 mode is the worst case and documented in the report.



13. AC Power Line Conducted Emission Test

13.1 Measurement Limit


Francisco	Maximum RF Line Voltage				
Frequency	Q.P. (dBµV)	Average (dBµV)			
150kHz~500kHz	66-56	56-46			
500kHz~5MHz	56	46			
5MHz~30MHz	60	50			

Note:

1. The lower limit shall apply at the transition frequency.

2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

13.2 Measurement Setup (Block Diagram of Configuration)

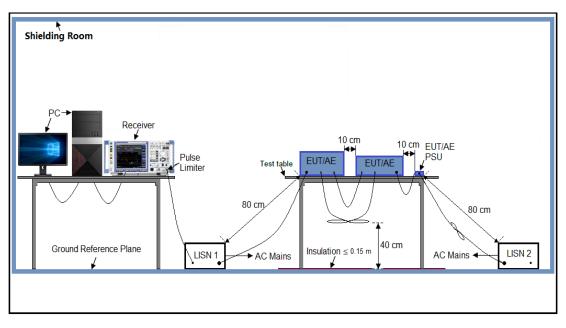



13.3 Preliminary Procedure of Line Conducted Emission Test

- 1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
- 2. Support equipment, if needed, was placed as per ANSI C63.10.
- 3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.
- 4. All support equipment received AC120V/60Hz power from a LISN, if any.
- 5. The EUT received DC 5V power from adapter which received AC120V/60Hz power from a LISN.
- 6. The test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7. Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
- 8. During the above scans, the emissions were maximized by cable manipulation.
- 9. The test mode(s) were scanned during the preliminary test.


Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.

13.4 Final Procedure of Line Conducted Emission Test

- 1. EUT and support equipment was set up on the test bench as per step 2 of the preliminary test.
- A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less – 2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.
- 3. The test data of the worst case condition(s) was reported on the Summary Data page.

13.5 Measurement Results



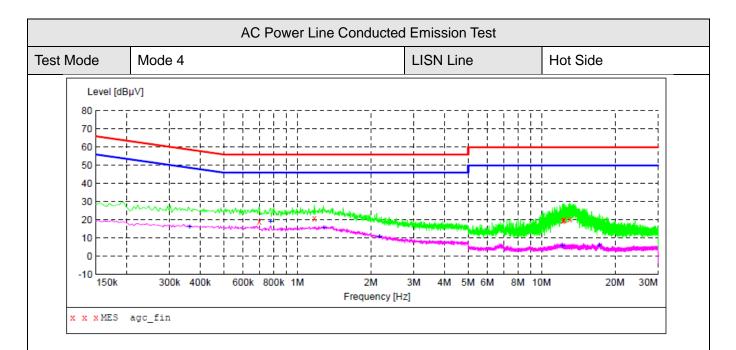

MEASUREMENT RESULT: "agc_fin"

2024/5/30 Frequenc MH	cy Level	Transd dB	Limit dBµV	Margin dB	Detector	Line
0.69800 1.17400 12.21400 12.32600 12.39000 13.01800	20.80 20.80 19.50 20.00 20.00 20.10	6.2 6.2 6.8 6.8 6.8 6.8	56 56 60 60 60	36.7 35.2 40.5 40.0 39.9 39.5	QP	L1 L1 L1 L1 L1 L1

MEASUREMENT RESULT: "agc fin2"

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line
0.362000	16.30	6.1	49	32.4	AV	L1
0.778000	19.10	6.2	46	26.9	AV	L1
1.282000	15.70	6.2	46	30.3	AV	L1
2.170000	10.80	6.3	46	35.2	AV	L1
12.182000	5.70	6.8	50	44.3	AV	L1
17.238000	6.20	7.0	50	43.8	AV	L1


RESULT: Pass

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Attestation of Global Compliance(Shenzhen)Co., LtdAttestation of Global Compliance(Shenzhen)Std & Tech Co., LtdTel: +86-755 2523 4088E-mail: agc@agccert.comWeb: http://www.agccert.com/



2

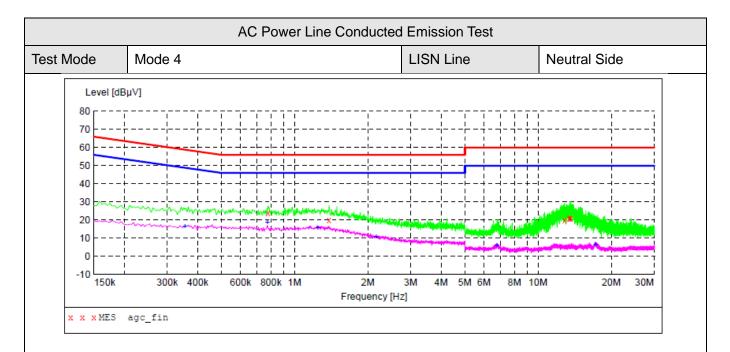

MEASUREMENT RESULT: "agc fin"

2024/5/30 10: Frequency MHz		Transd dB	Limit dBµV	Margin dB	Detector	Line
0.778000 1.386000 12.850000 13.454000 13.498000	23.90 20.10 20.00 21.00 21.30	6.2 6.2 6.8 6.8 6.8	56 56 60 60	32.1 35.9 40.0 39.0 38.7	-	N N N N
13.618000	20.90	6.8	60	39.1	QP	N

MEASUREMENT RESULT: "agc fin2"

2024/5/30 10: Frequency MHz		Transd dB	Limit dBµV	Margin dB	Detector	Line
0.354000	16.40	6.1	49	32.5	AV	N
0.774000	18.60	6.2	46	27.4	AV	N
1.246000	15.70	6.2	46	30.3	AV	N
2.162000	10.90	6.2	46	35.1	AV	N
6.778000	6.00	6.5	50	44.0	AV	N
17.238000	6.70	7.0	50	43.3	AV	N

RESULT: Pass

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Attestation of Global Compliance(Shenzhen)Co., LtdAttestation of Global Compliance(Shenzhen)Std & Tech Co., LtdTel: +86-755 2523 4088E-mail: agc@agccert.comWeb: http://www.agccert.com/



Report No.: AGC00688240509FR01 Page 81 of 81

Appendix I: Photographs of Test Setup

Refer to the Report No.: AGC00688240509AP02

Appendix II: Photographs of Test EUT

Refer to the Report No.: AGC00688240509AP03

-----End of Report-----



Conditions of Issuance of Test Reports

1. All samples and goods are accepted by the Attestation of Global Compliance (Shenzhen) Co., Ltd (the "Company") solely for testing and reporting in accordance with the following terms and conditions. The company provides its services on the basis that such terms and conditions constitute express agreement between the company and any person, firm or company requesting its services (the "Clients").

2. Any report issued by Company as a result of this application for testing services (the "Report") shall be issued in confidence to the Clients and the Report will be strictly treated as such by the Company. It may not be reproduced either in its entirety or in part and it may not be used for advertising or other unauthorized purposes without the written consent of the Company. The Clients to whom the Report is issued may, however, show or send it, or a certified copy thereof prepared by the Company to its customer, supplier or other persons directly concerned. The Company will not, without the consent of the Clients, enter into any discussion or correspondence with any third party concerning the contents of the Report, unless required by the relevant governmental authorities, laws or court orders.

3. The Company shall not be called or be liable to be called to give evidence or testimony on the Report in a court of law without its prior written consent, unless required by the relevant governmental authorities, laws or court orders.

4. In the event of the improper use of the report as determined by the Company, the Company reserves the right to withdraw it, and to adopt any other additional remedies which may be appropriate.

5. Samples submitted for testing are accepted on the understanding that the Report issued cannot form the basis of, or be the instrument for, any legal action against the Company.

6. The Company will not be liable for or accept responsibility for any loss or damage however arising from the use of information contained in any of its Reports or in any communication whatsoever about its said tests or investigations.

7. Clients wishing to use the Report in court proceedings or arbitration shall inform the Company to that effect prior to submitting the sample for testing.

8. The Company is not responsible for recalling the electronic version of the original report when any revision is made to them. The Client assumes the responsibility to providing the revised version to any interested party who uses them.

9. Subject to the variable length of retention time for test data and report stored hereinto as otherwise specifically required by individual accreditation authorities, the Company will only keep the supporting test data and information of the test report for a period of six years. The data and information will be disposed of after the aforementioned retention period has elapsed. Under no circumstances shall we provide any data and information which has been disposed of after retention period. Under no circumstances shall we be liable for damage of any kind, including (but not limited to) compensatory damages, lost profits, lost data, or any form of special, incidental, indirect, consequential or punitive damages of any kind, whether based on breach of contract of warranty, tort (including negligence), product liability or otherwise, even if we are informed in advance of the possibility of such damages.