


ANNEX D TEST DATA

For

Project No.:	8230EU012403W
Client:	GamerZnationTech Co.,Ltd.
Product Name:	Ultra Catcher 4
Model No.:	ZPP006G
FCC ID:	2BGQP-ZPP006G
Technology:	Bluetooth BLE
Test Engineer:	<i>Mikoy zhu</i>
Test Date:	2024-07-17

Test Summary

Item	Result
Duty Cycle	Pass
Bandwidth	Pass
Maximum Conducted Output Power	Pass
Maximum Power Spectral Density	Pass
Unwanted Emissions In Non-restricted Frequency Bands	Pass

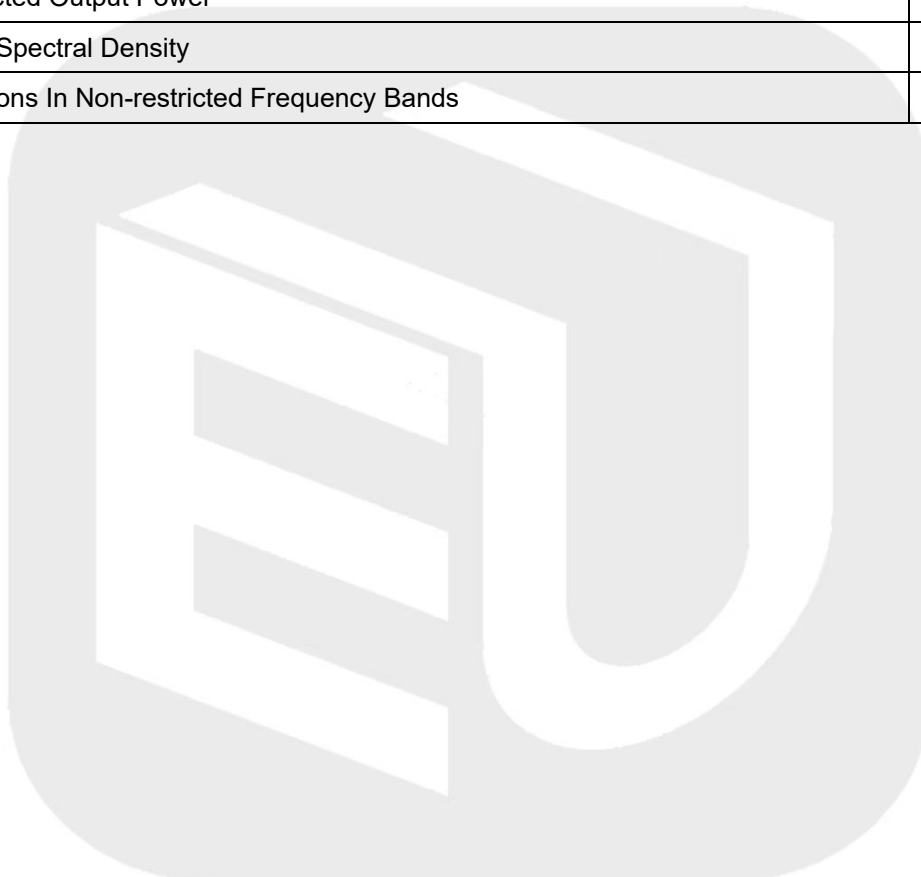

Module 1

1. Duty Cycle


1.1 Test Result


1.1.1 Ant1

Ant1							
Mode	TX Type	Frequency (MHz)	T_on (ms)	Period (ms)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	Max. DC Variation (%)
1M	SISO	2402	0.392	0.625	62.72	2.03	0.02
		2440	0.392	0.625	62.72	2.03	0.08
		2480	0.392	0.625	62.72	2.03	0.03

1.2 Test Graph

1.2.1 Ant1

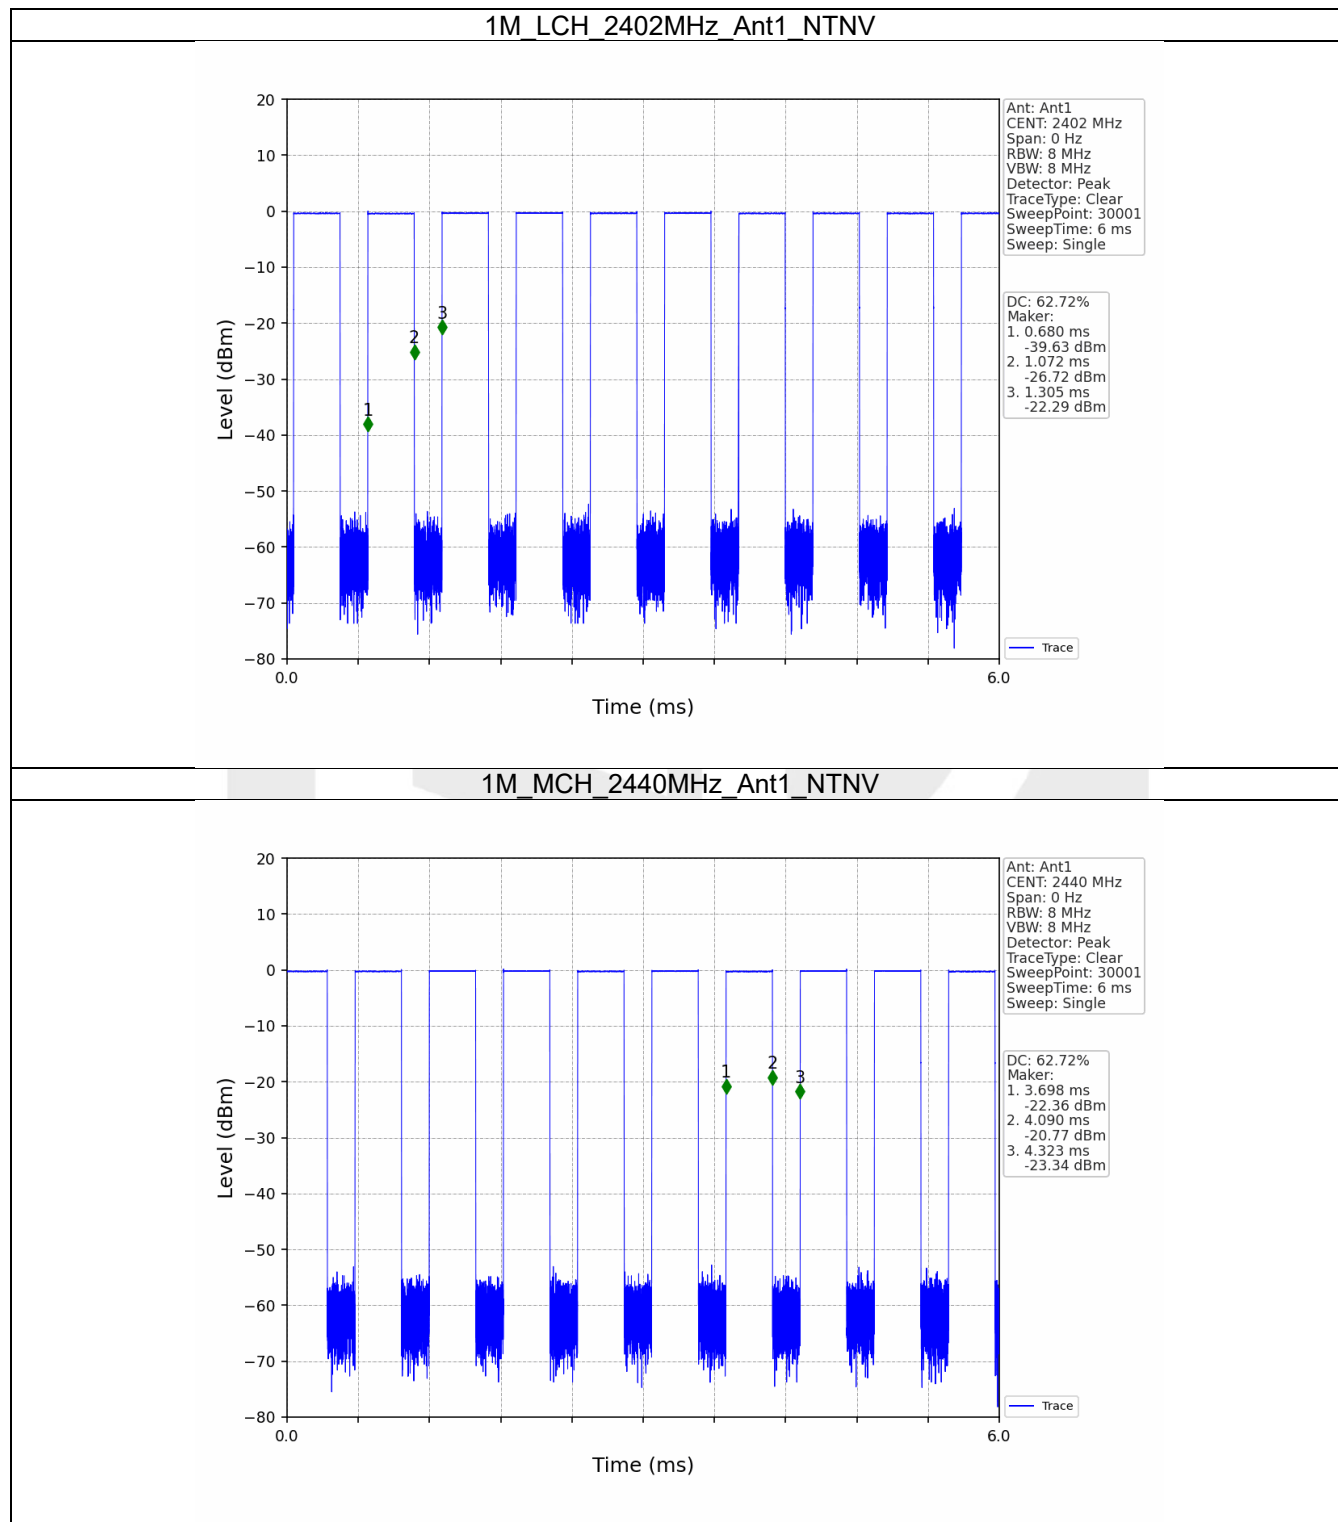

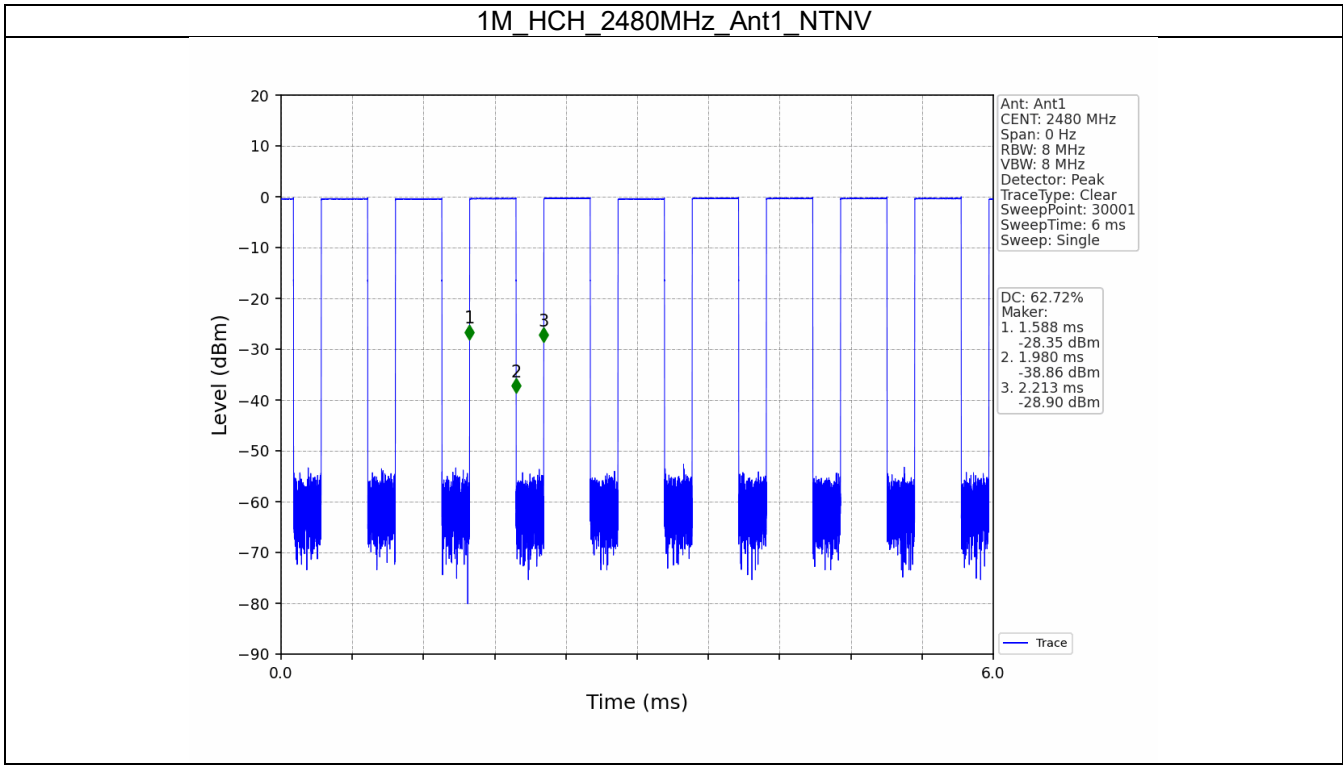

2. Bandwidth

2.1 Test Result

2.1.1 OBW


Mode	TX Type	Frequency (MHz)	ANT	99% Occupied Bandwidth (MHz)		Verdict
				Result	Limit	
1M	SISO	2402	1	1.084	/	Pass
		2440	1	1.090	/	Pass
		2480	1	1.114	/	Pass


2.1.2 6dB BW

Mode	TX Type	Frequency (MHz)	ANT	6dB Bandwidth (MHz)		Verdict
				Result	Limit	
1M	SISO	2402	1	0.718	≥ 0.5	Pass
		2440	1	0.740	≥ 0.5	Pass
		2480	1	0.748	≥ 0.5	Pass


2.2 Test Graph


2.2.1 OBW

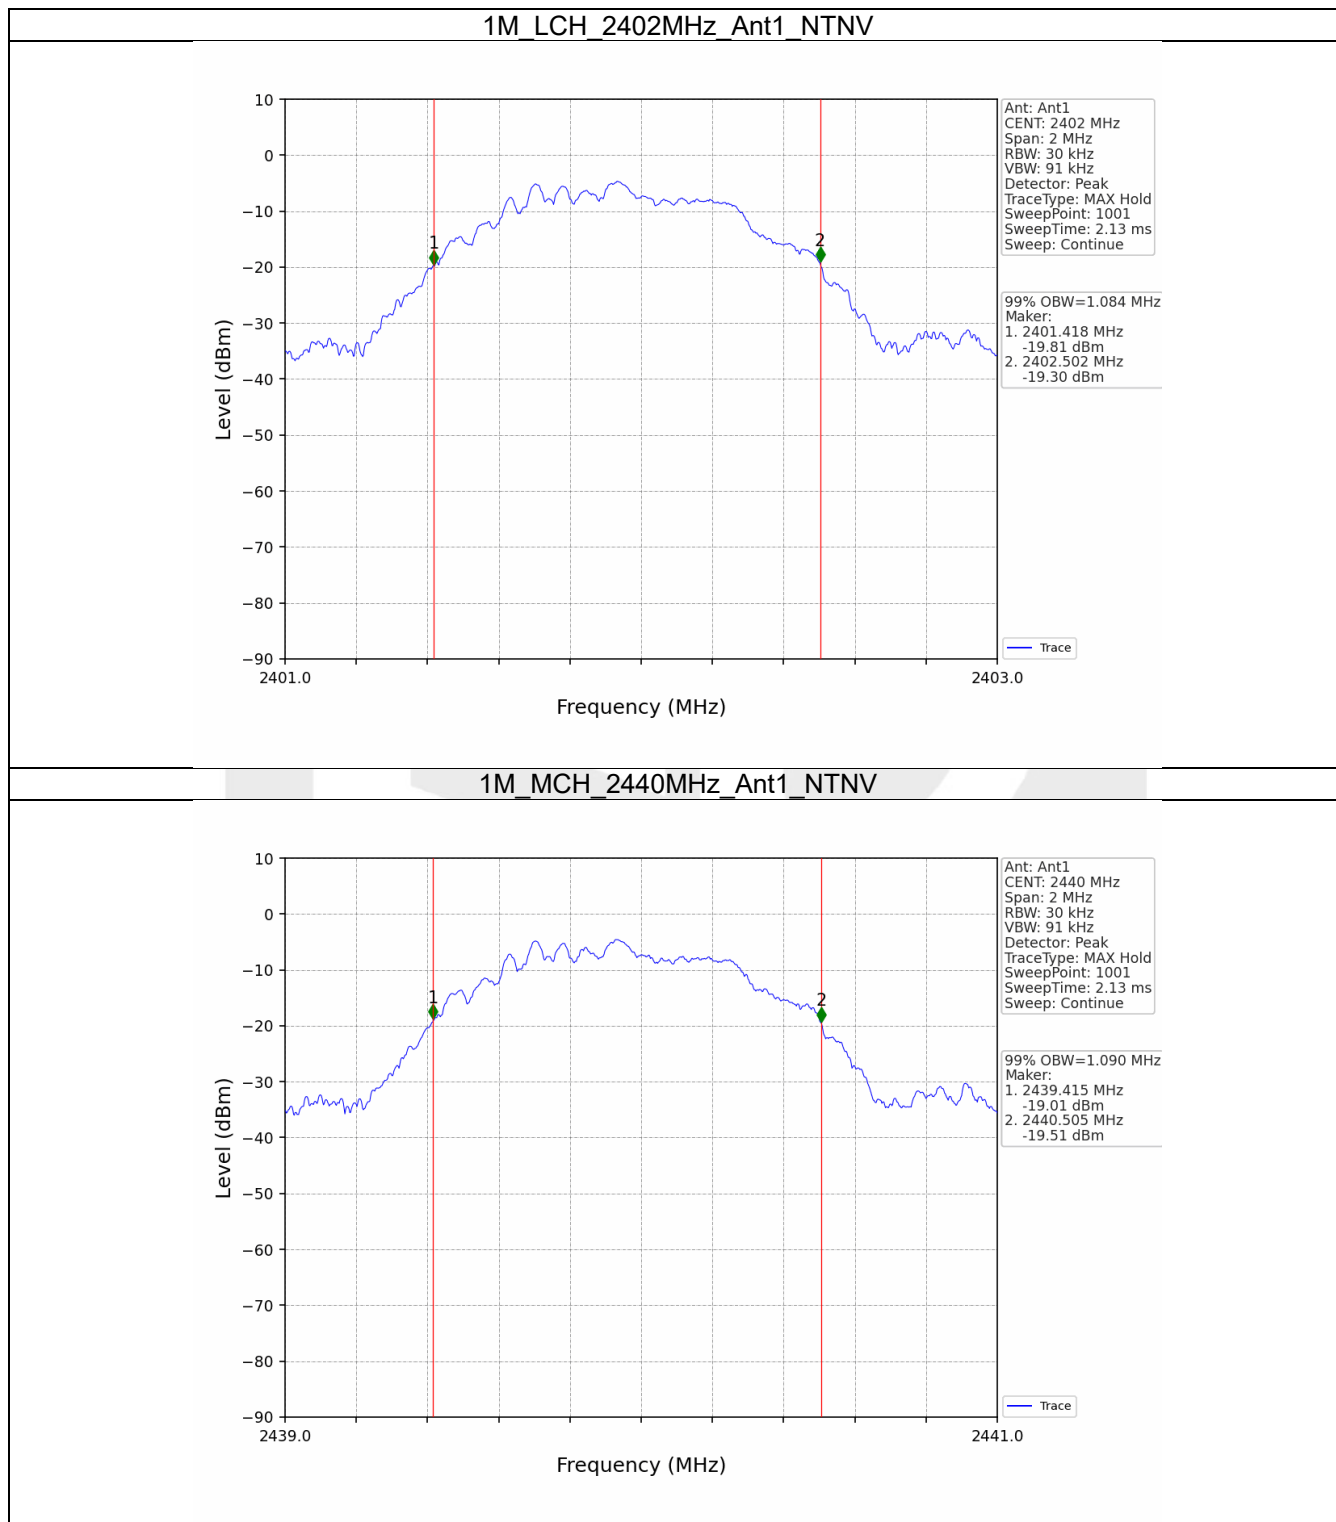

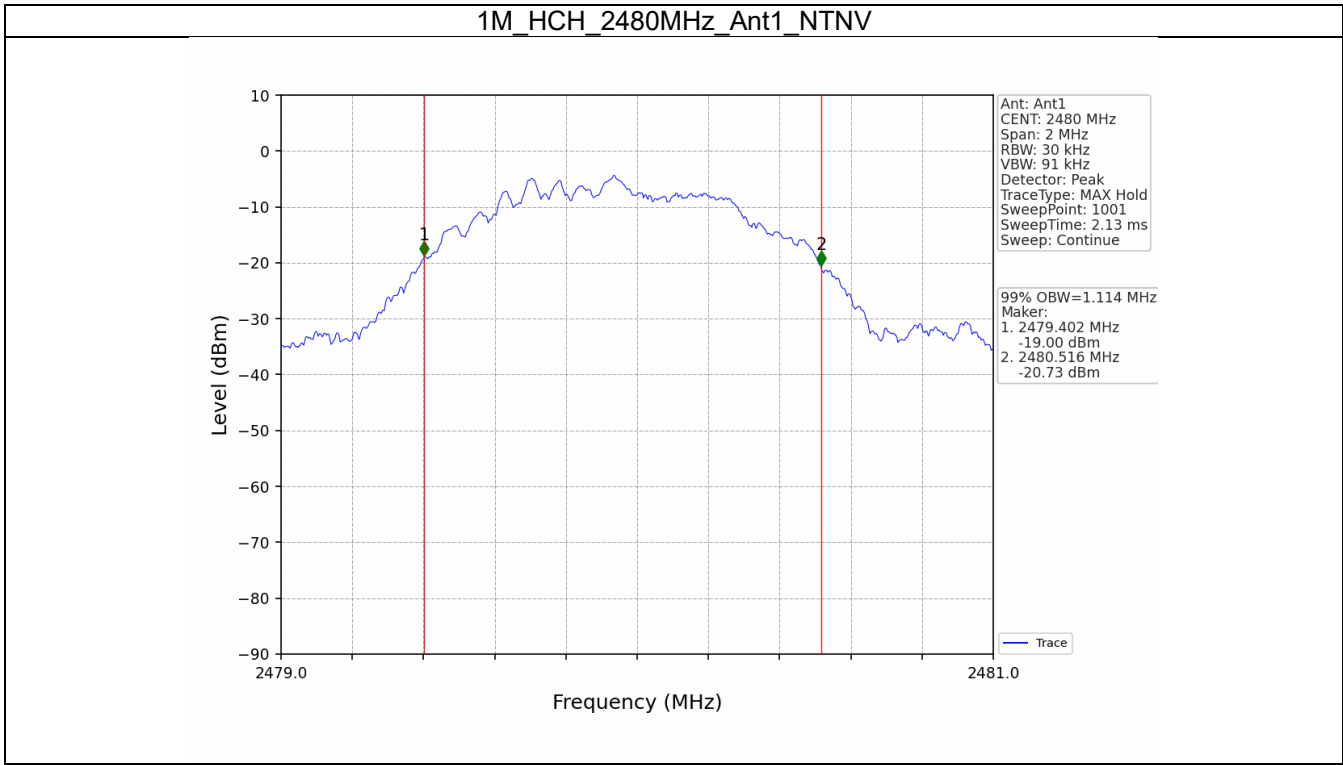

2.2.2 6dB BW

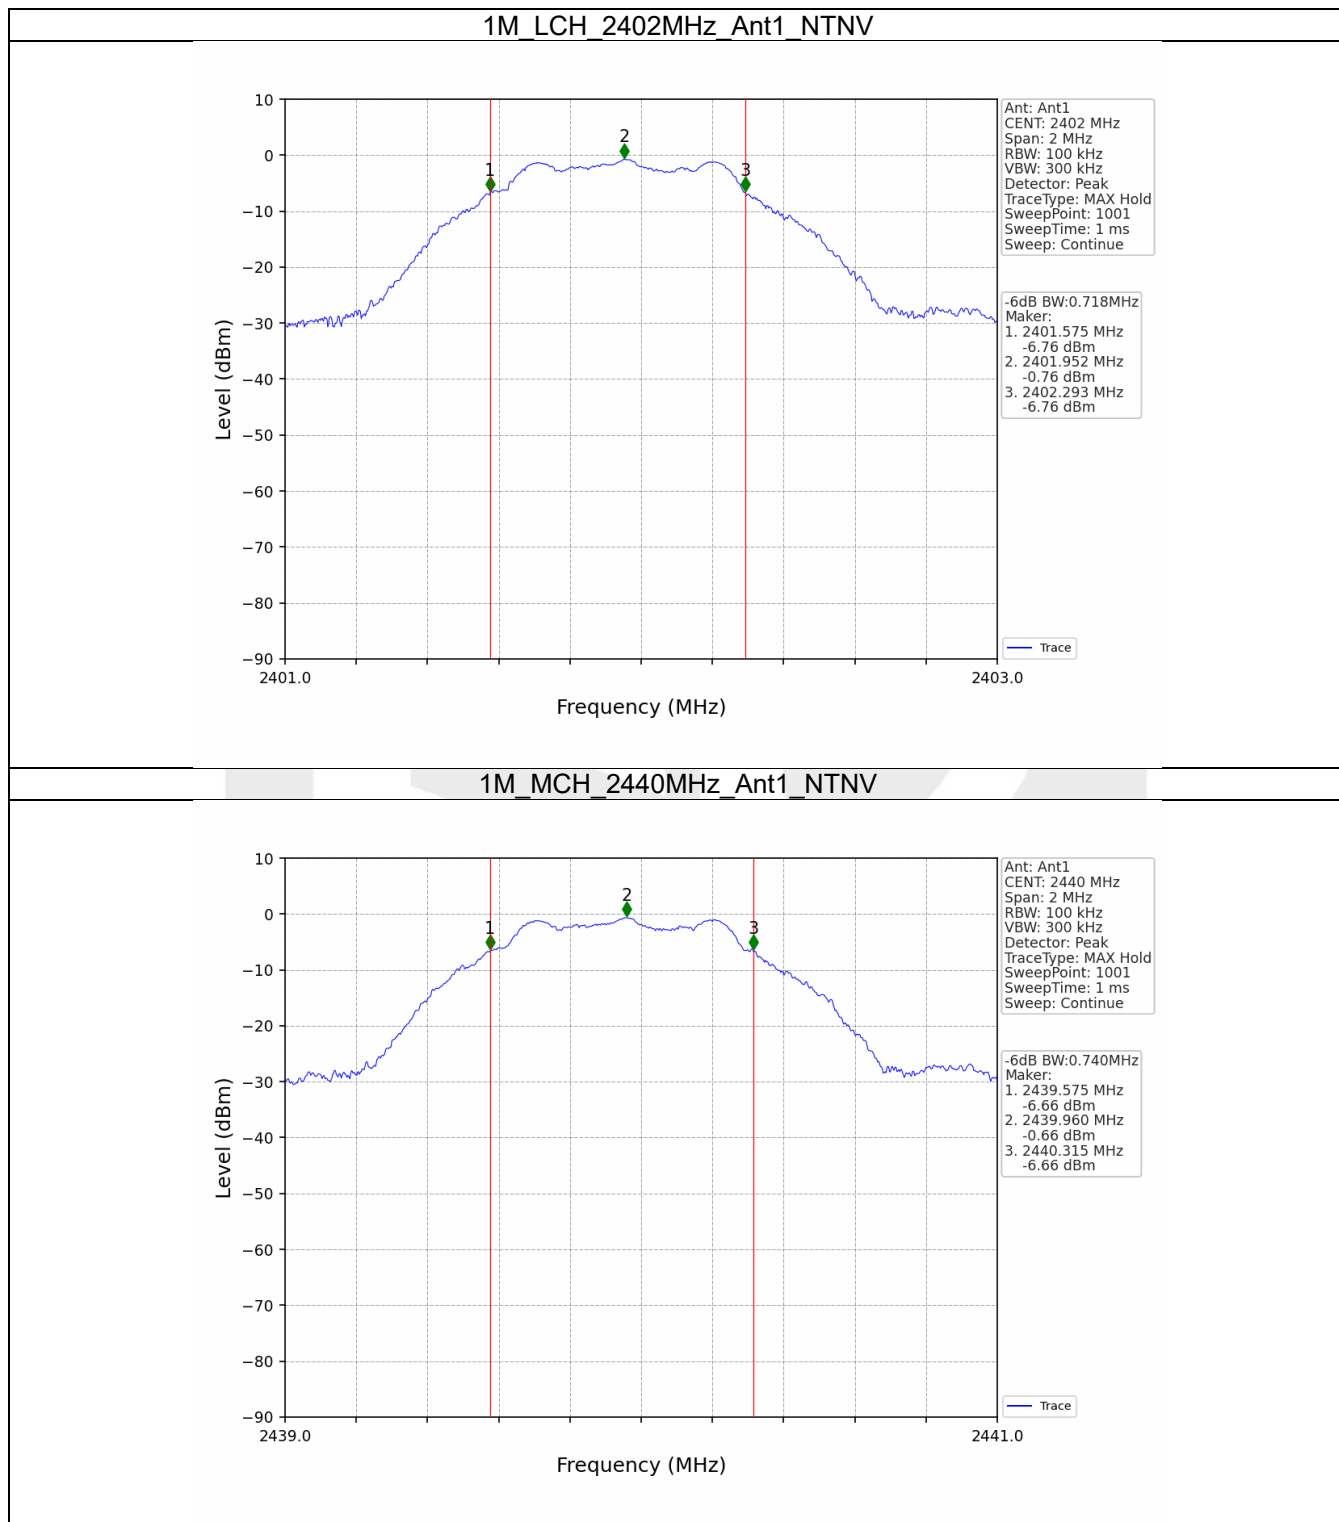

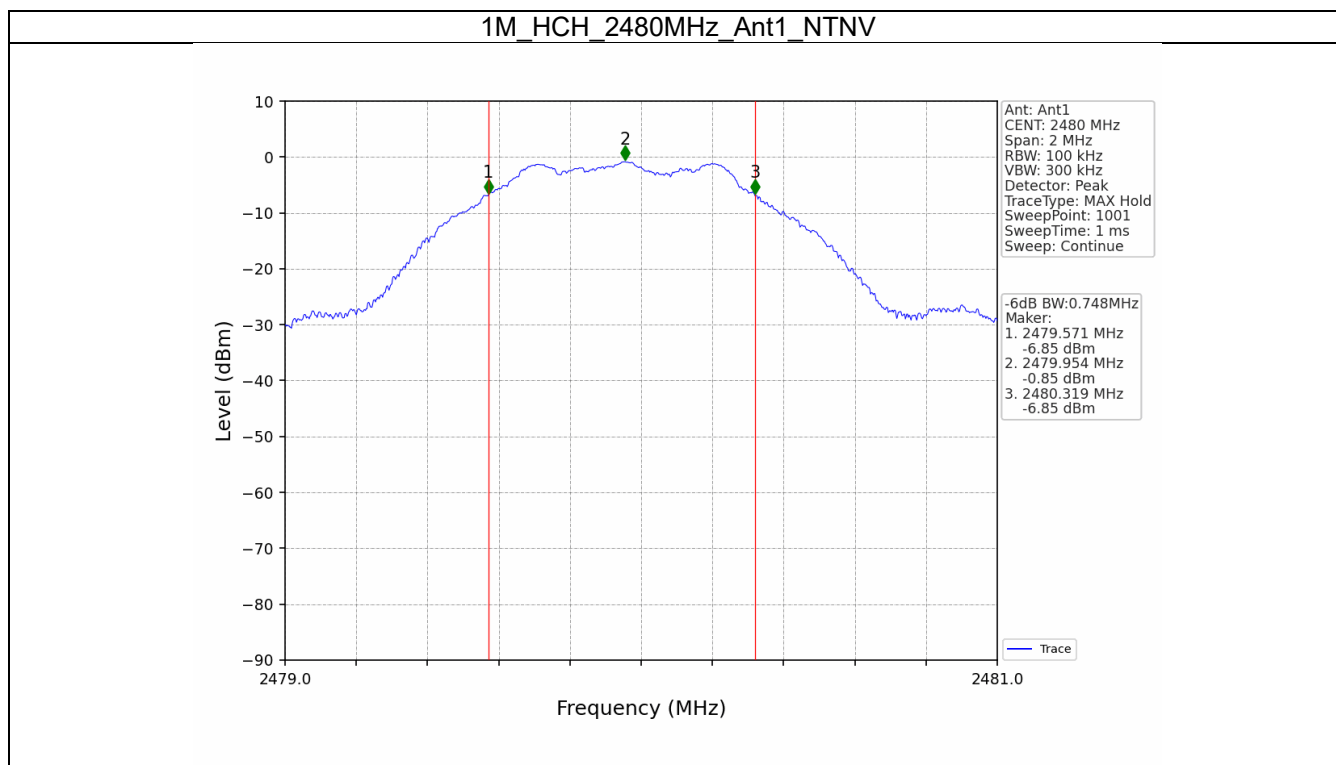

3. Maximum Conducted Output Power

3.1 Test Result

3.1.1 Power

Mode	TX Type	Frequency (MHz)	Maximum Peak Conducted Output Power (dBm)		Verdict
			ANT1	Limit	
1M	SISO	2402	-0.30	<=30	Pass
		2440	-0.16	<=30	Pass
		2480	-0.29	<=30	Pass

4. Maximum Power Spectral Density


4.1 Test Result


4.1.1 PSD

Mode	TX Type	Frequency (MHz)	Maximum PSD (dBm/3kHz)		Verdict
			ANT1	Limit	
1M	SISO	2402	-15.01	<=8	Pass
		2440	-15.16	<=8	Pass
		2480	-15.39	<=8	Pass

4.2 Test Graph

4.2.1 PSD

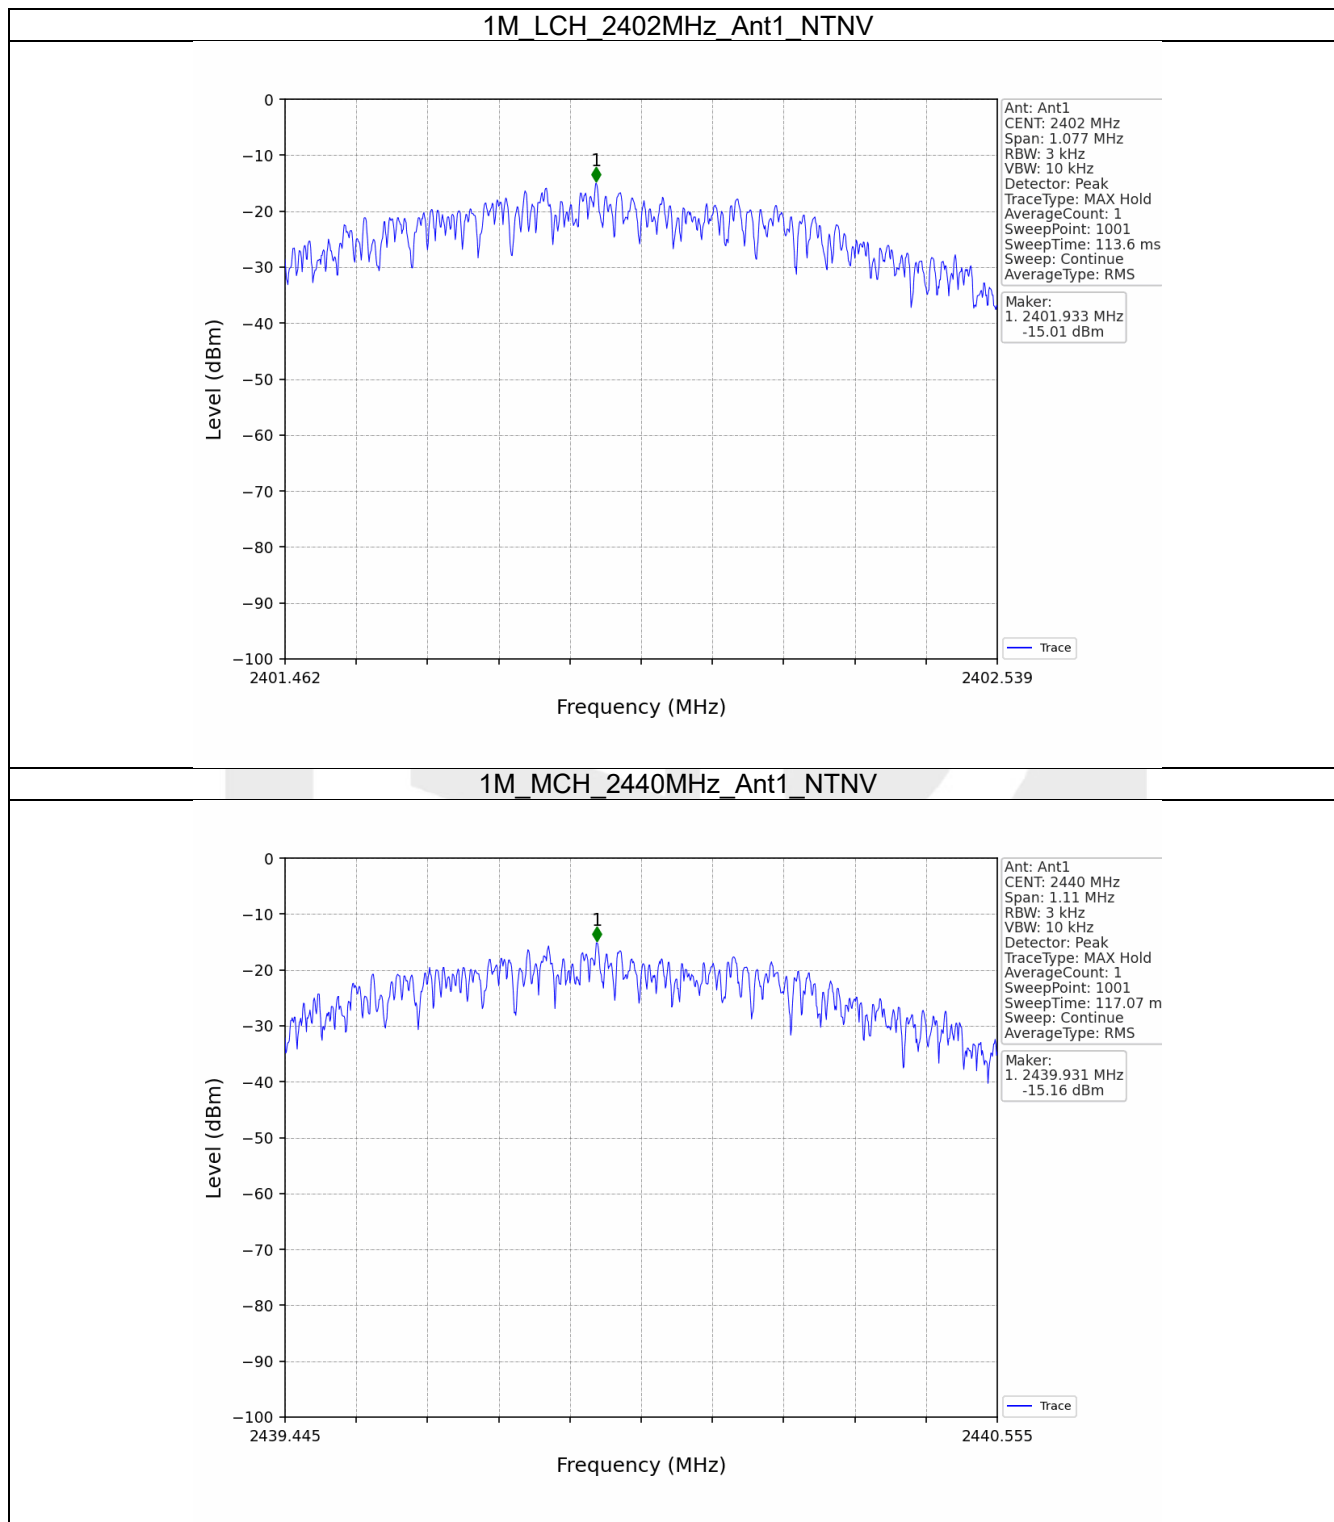

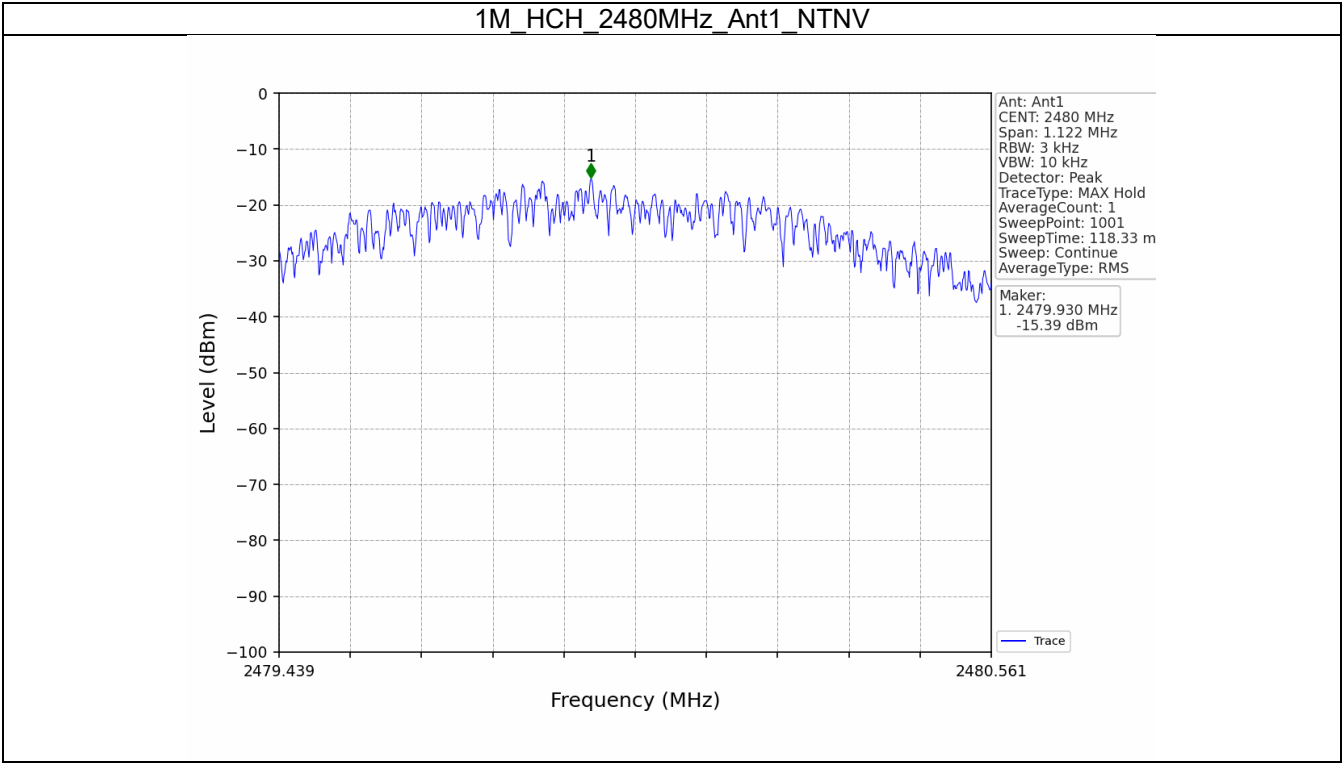

5. Unwanted Emissions In Non-restricted Frequency Bands

5.1 Test Result

5.1.1 Ref


Mode	TX Type	Frequency (MHz)	ANT	Level of Reference (dBm)
1M	SISO	2402	1	-0.76
		2440	1	-0.63
		2480	1	-0.92
Note1: Refer to FCC Part 15.247 (d) and ANSI C63.10-2020, the channel contains the maximum PSD level was used to establish the reference level.				


5.1.2 CSE

Mode	TX Type	Frequency (MHz)	ANT	Level of Reference (dBm)	Limit (dBm)	Verdict
1M	SISO	2402	1	-0.76	-20.76	Pass
		2440	1	-0.63	-20.63	Pass
		2480	1	-0.92	-20.92	Pass
Note1: Refer to FCC Part 15.247 (d) and ANSI C63.10-2020, the channel contains the maximum PSD level was used to establish the reference level.						


5.2 Test Graph


5.2.1 Ref

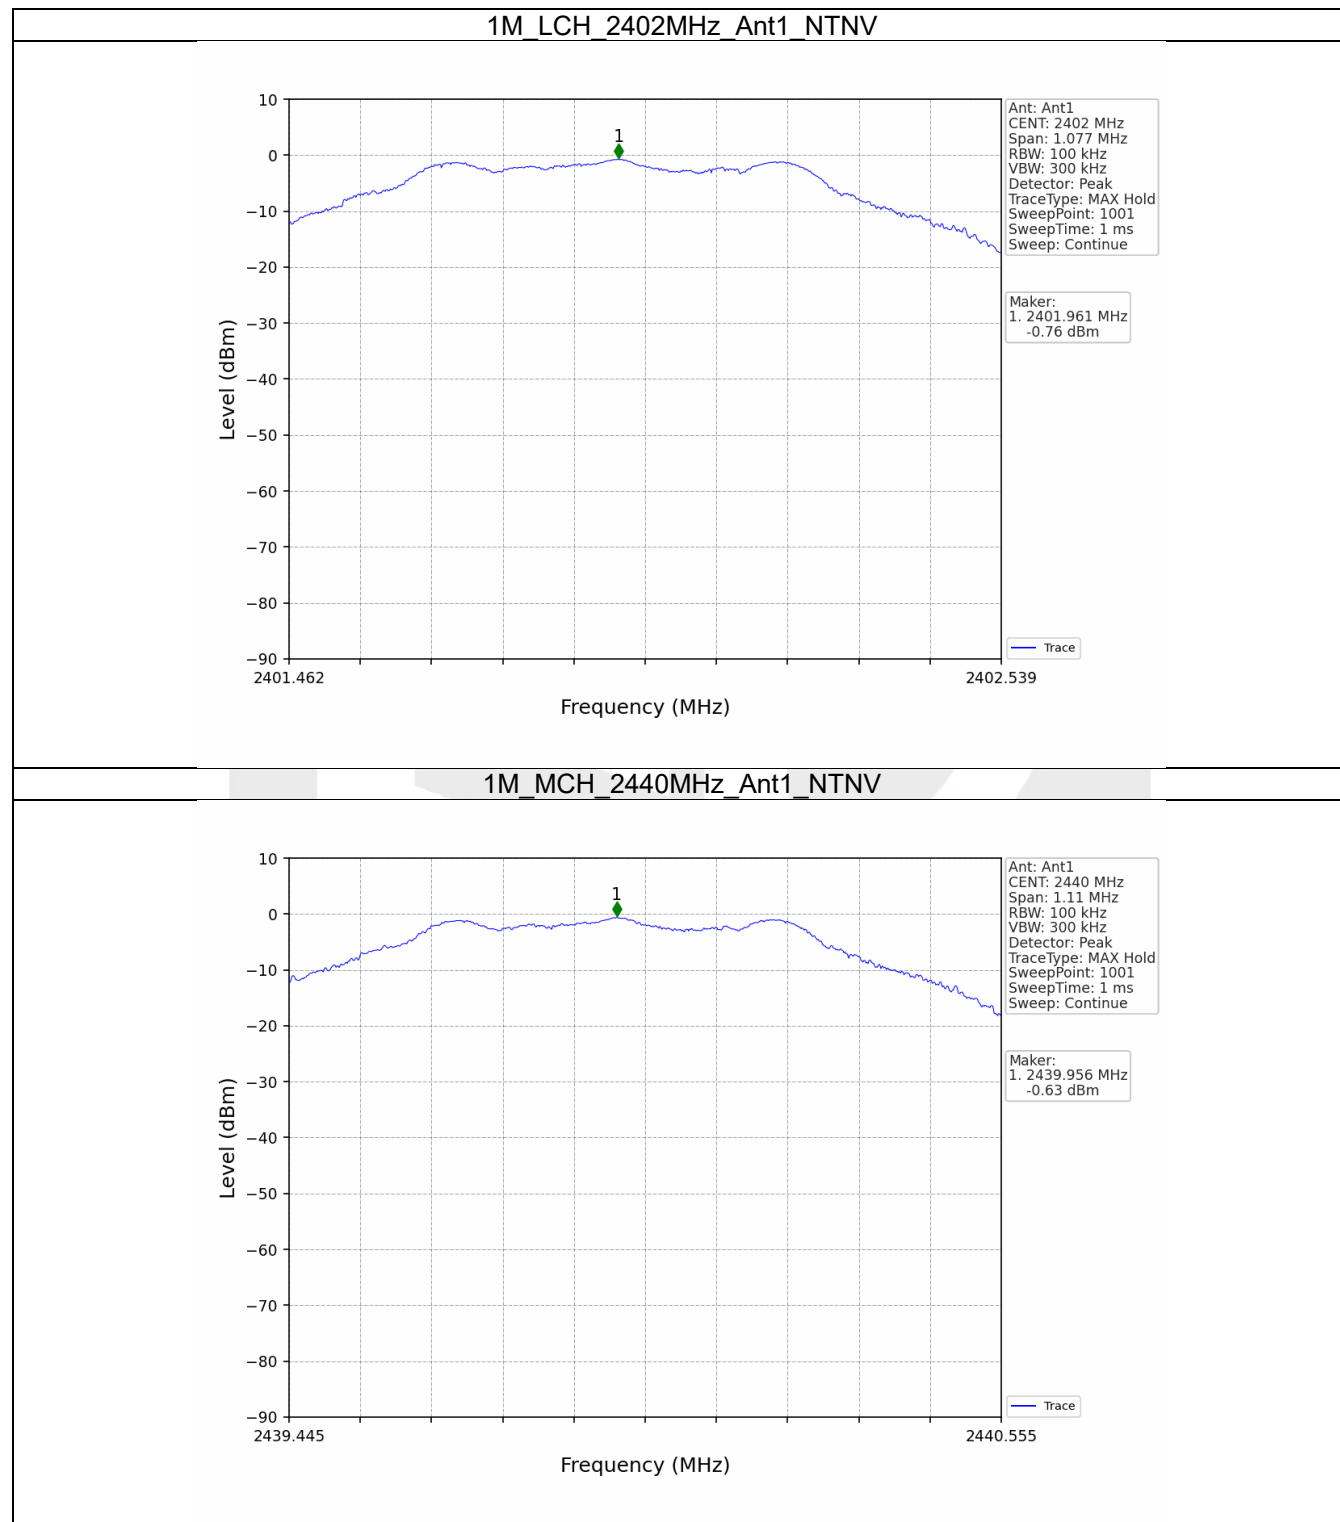


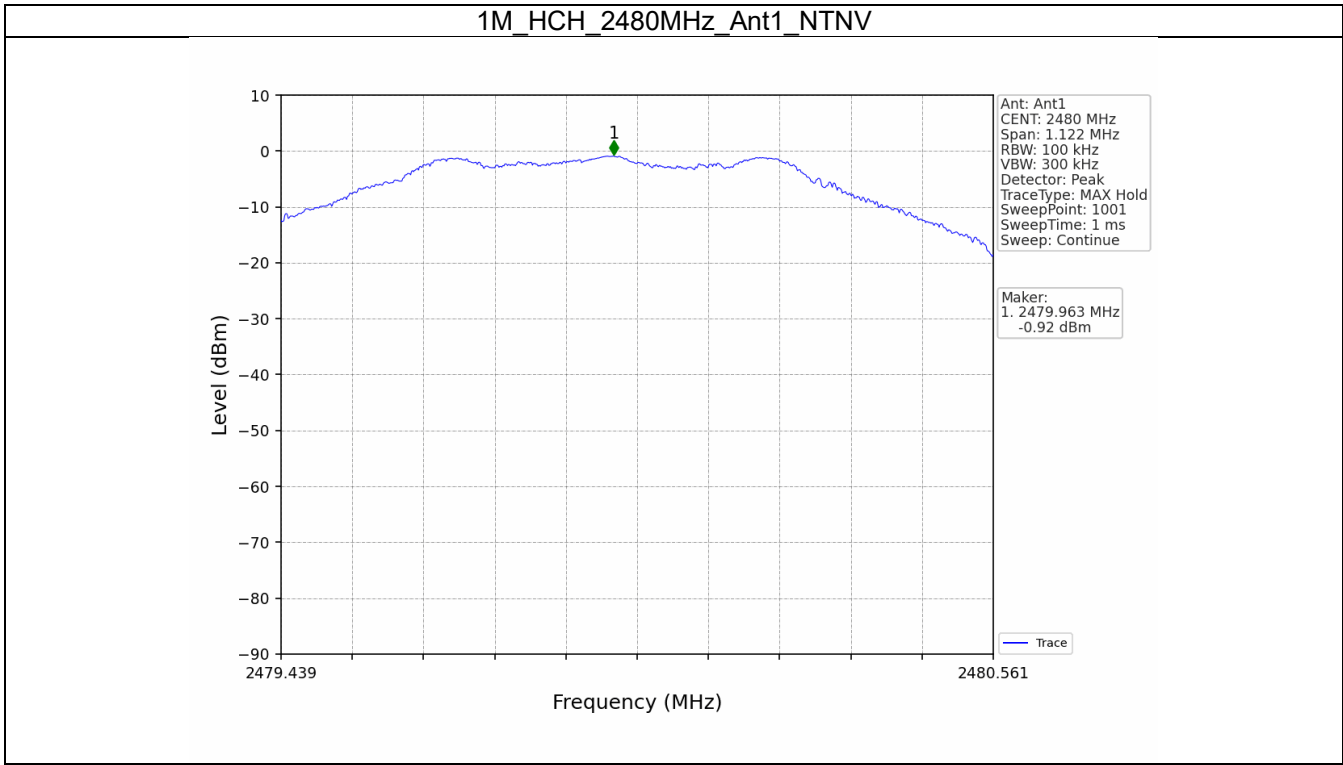



5.2.2 CSE

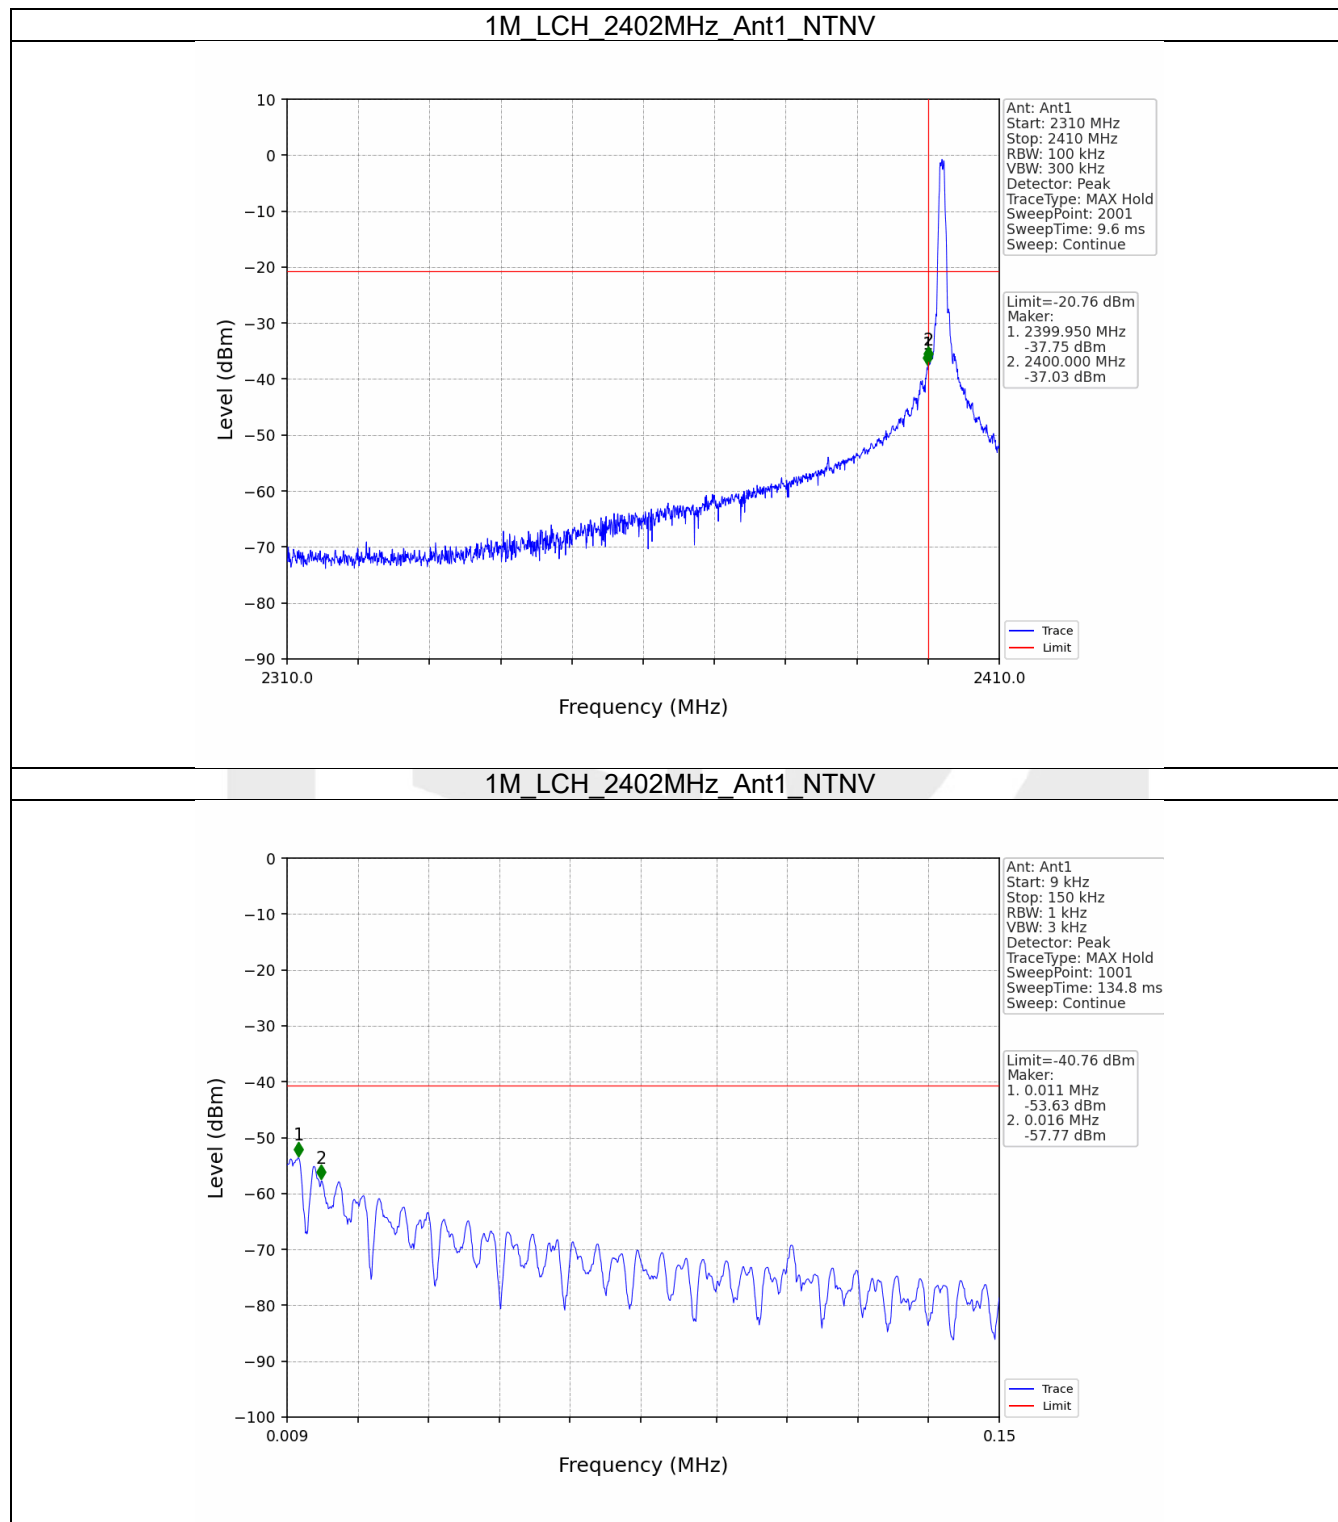


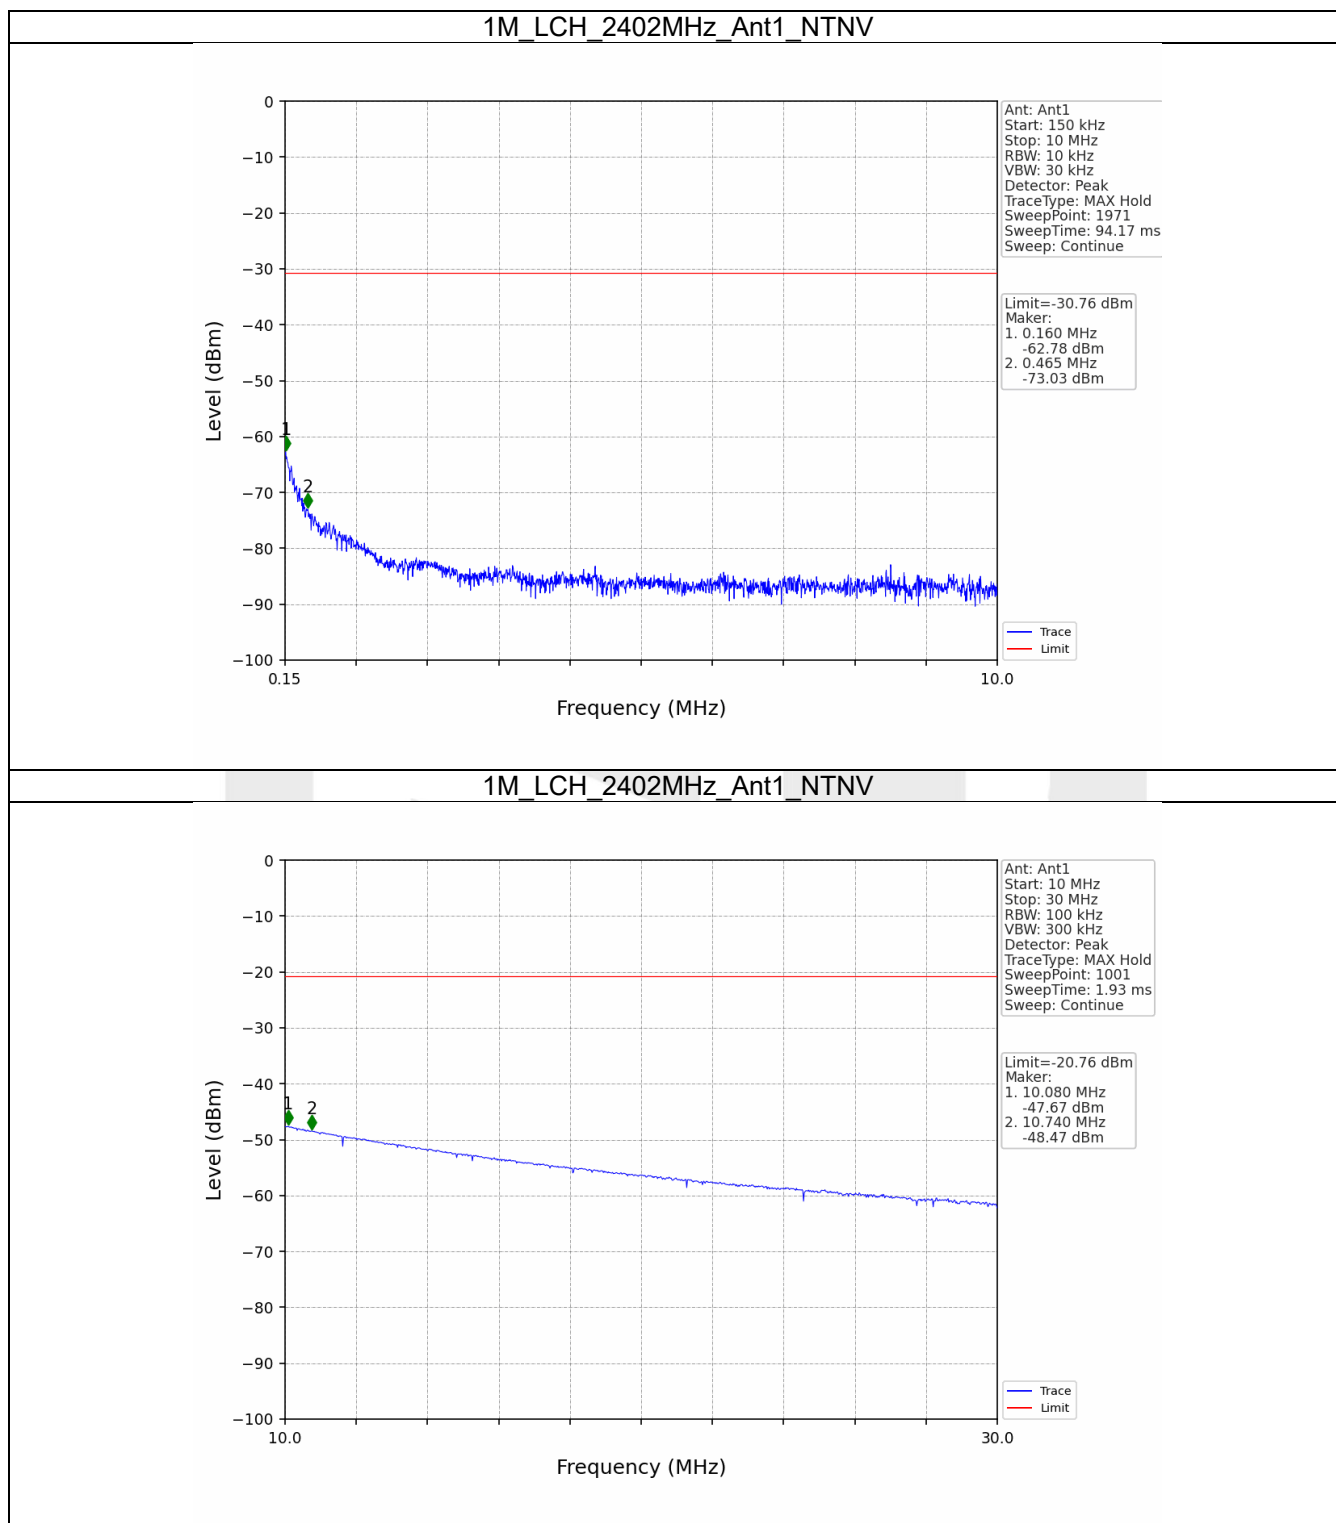


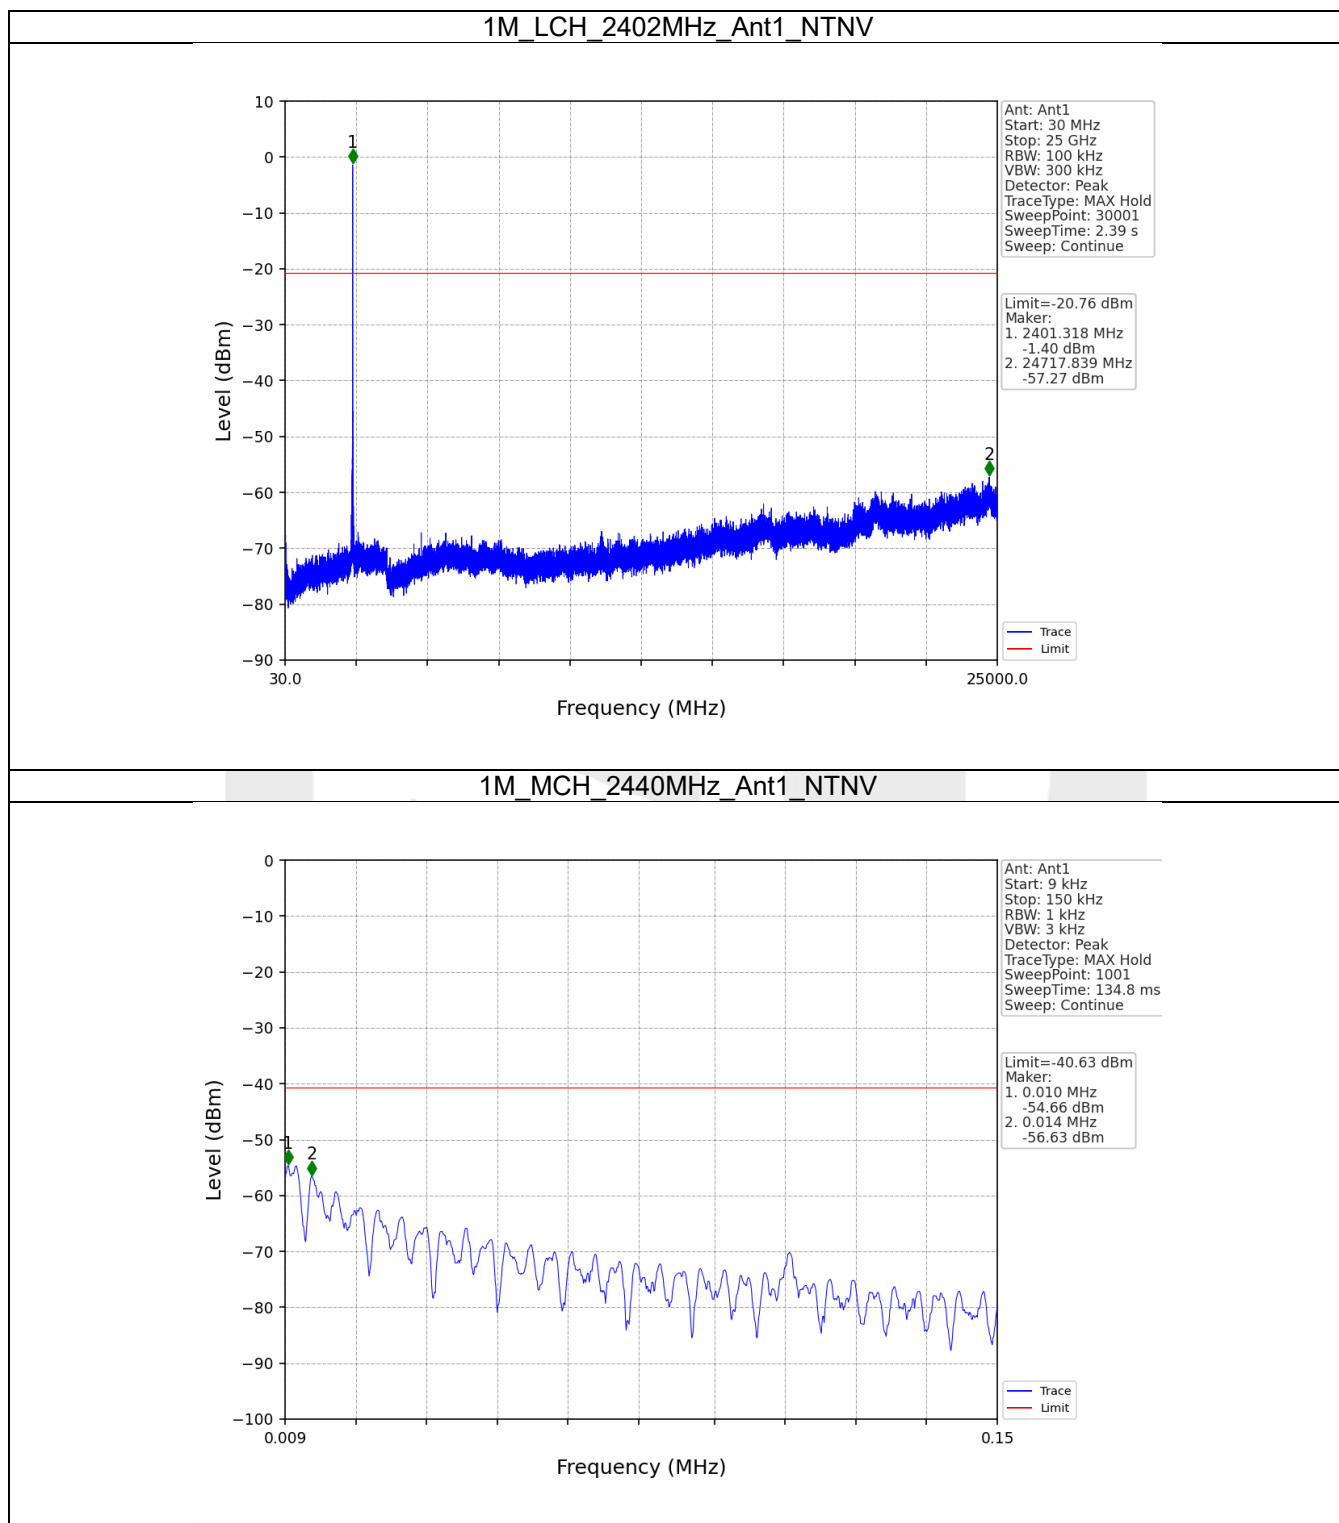

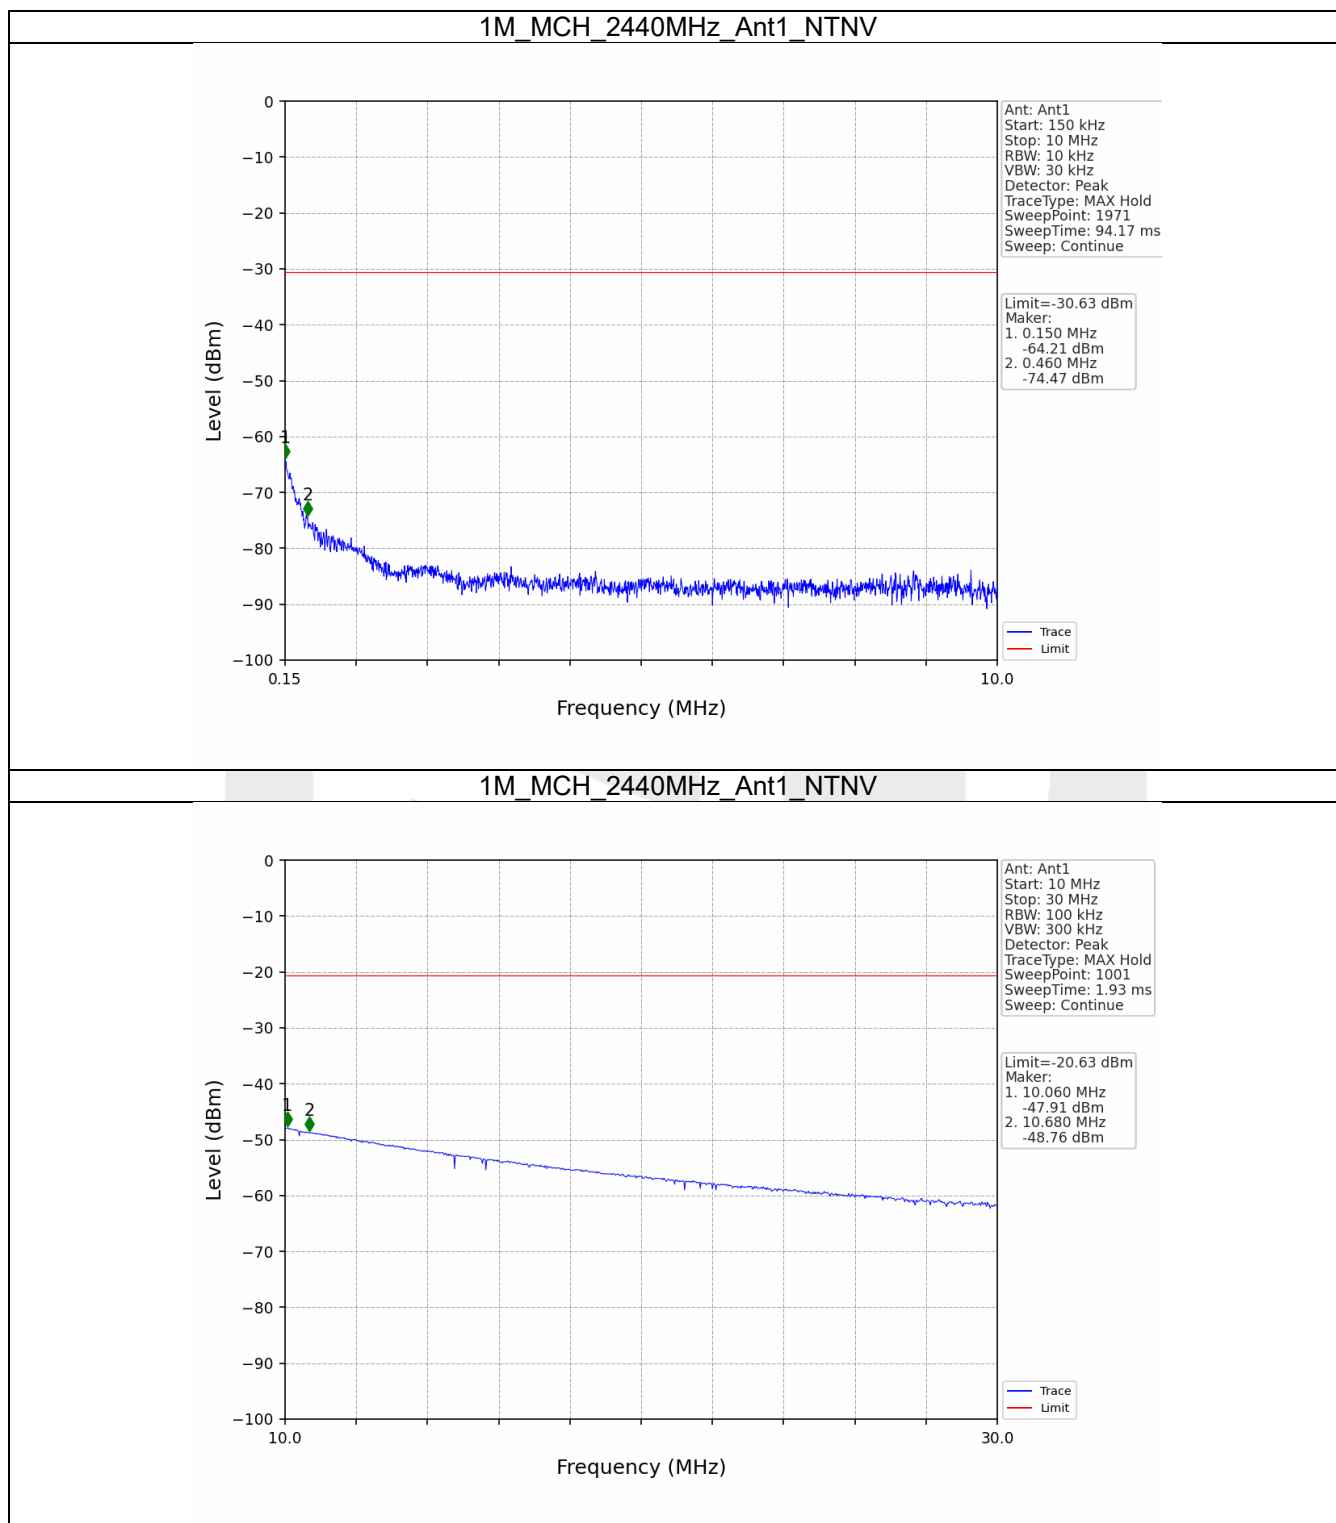

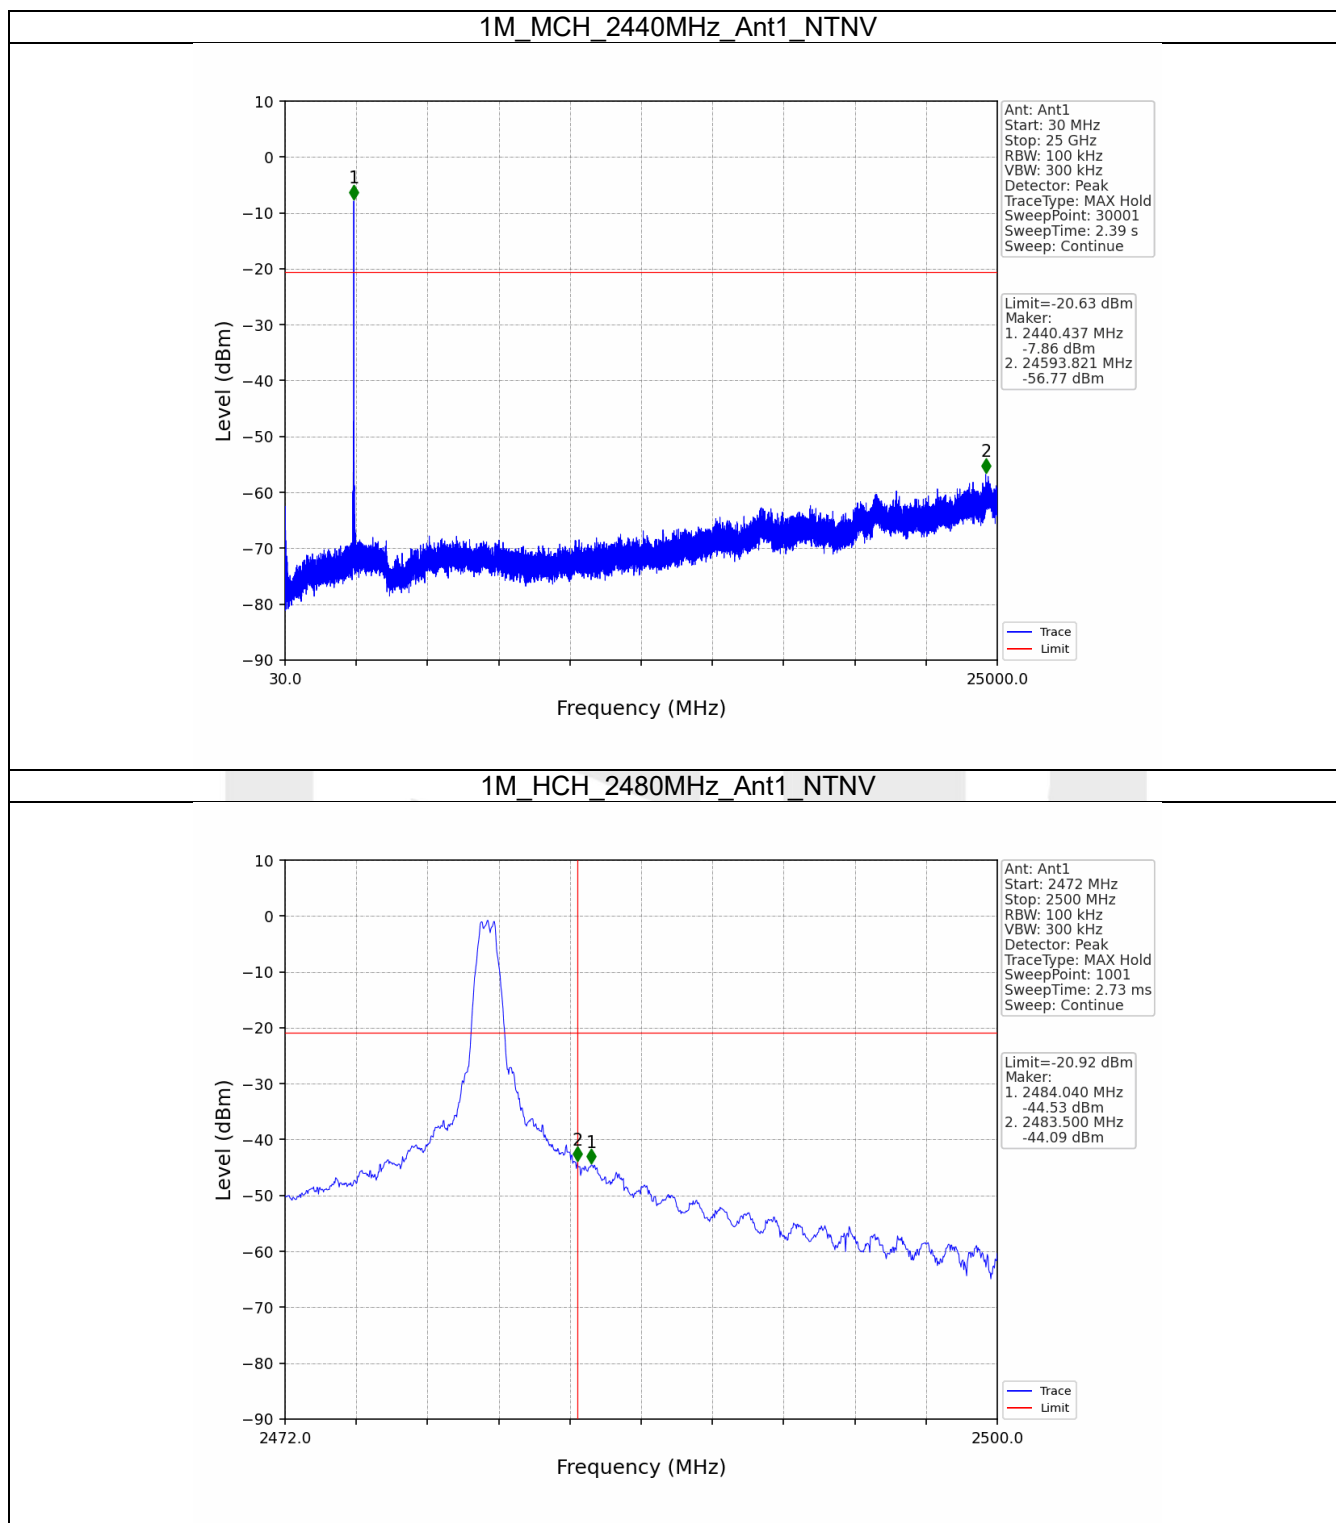

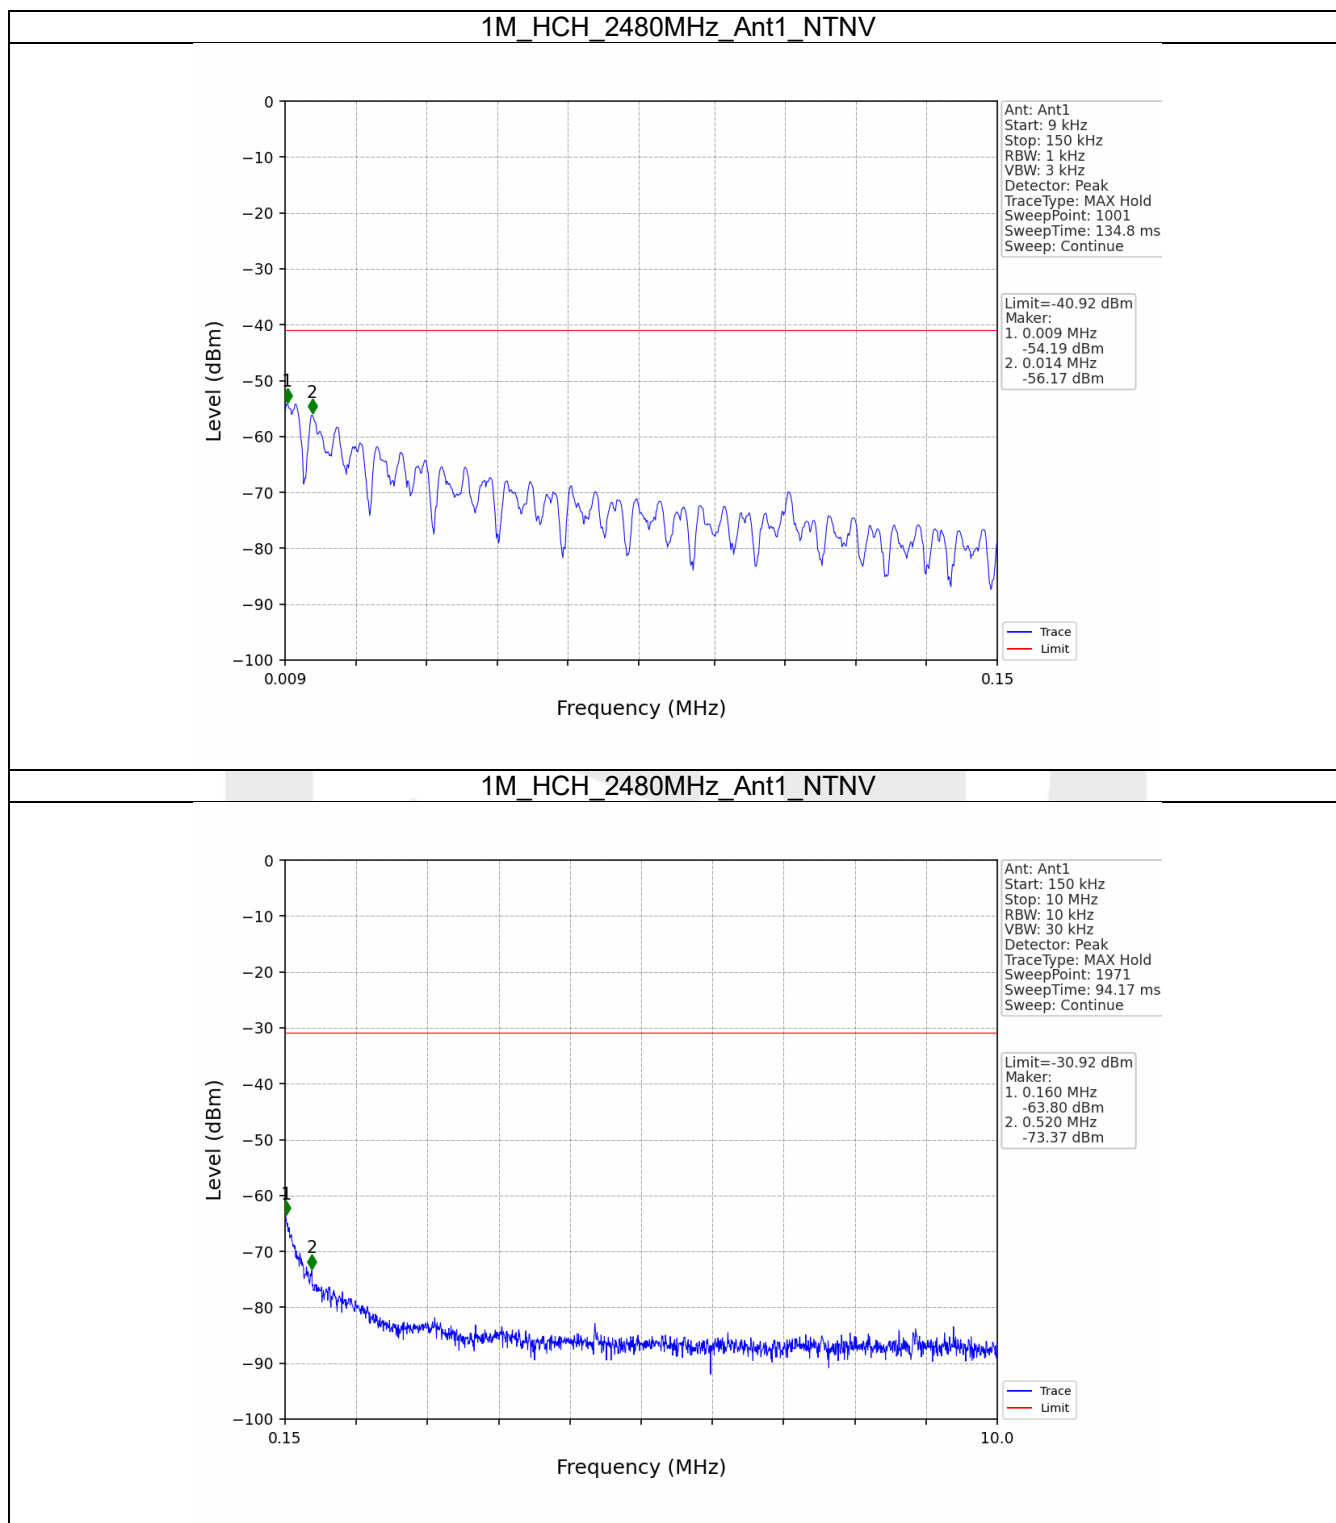

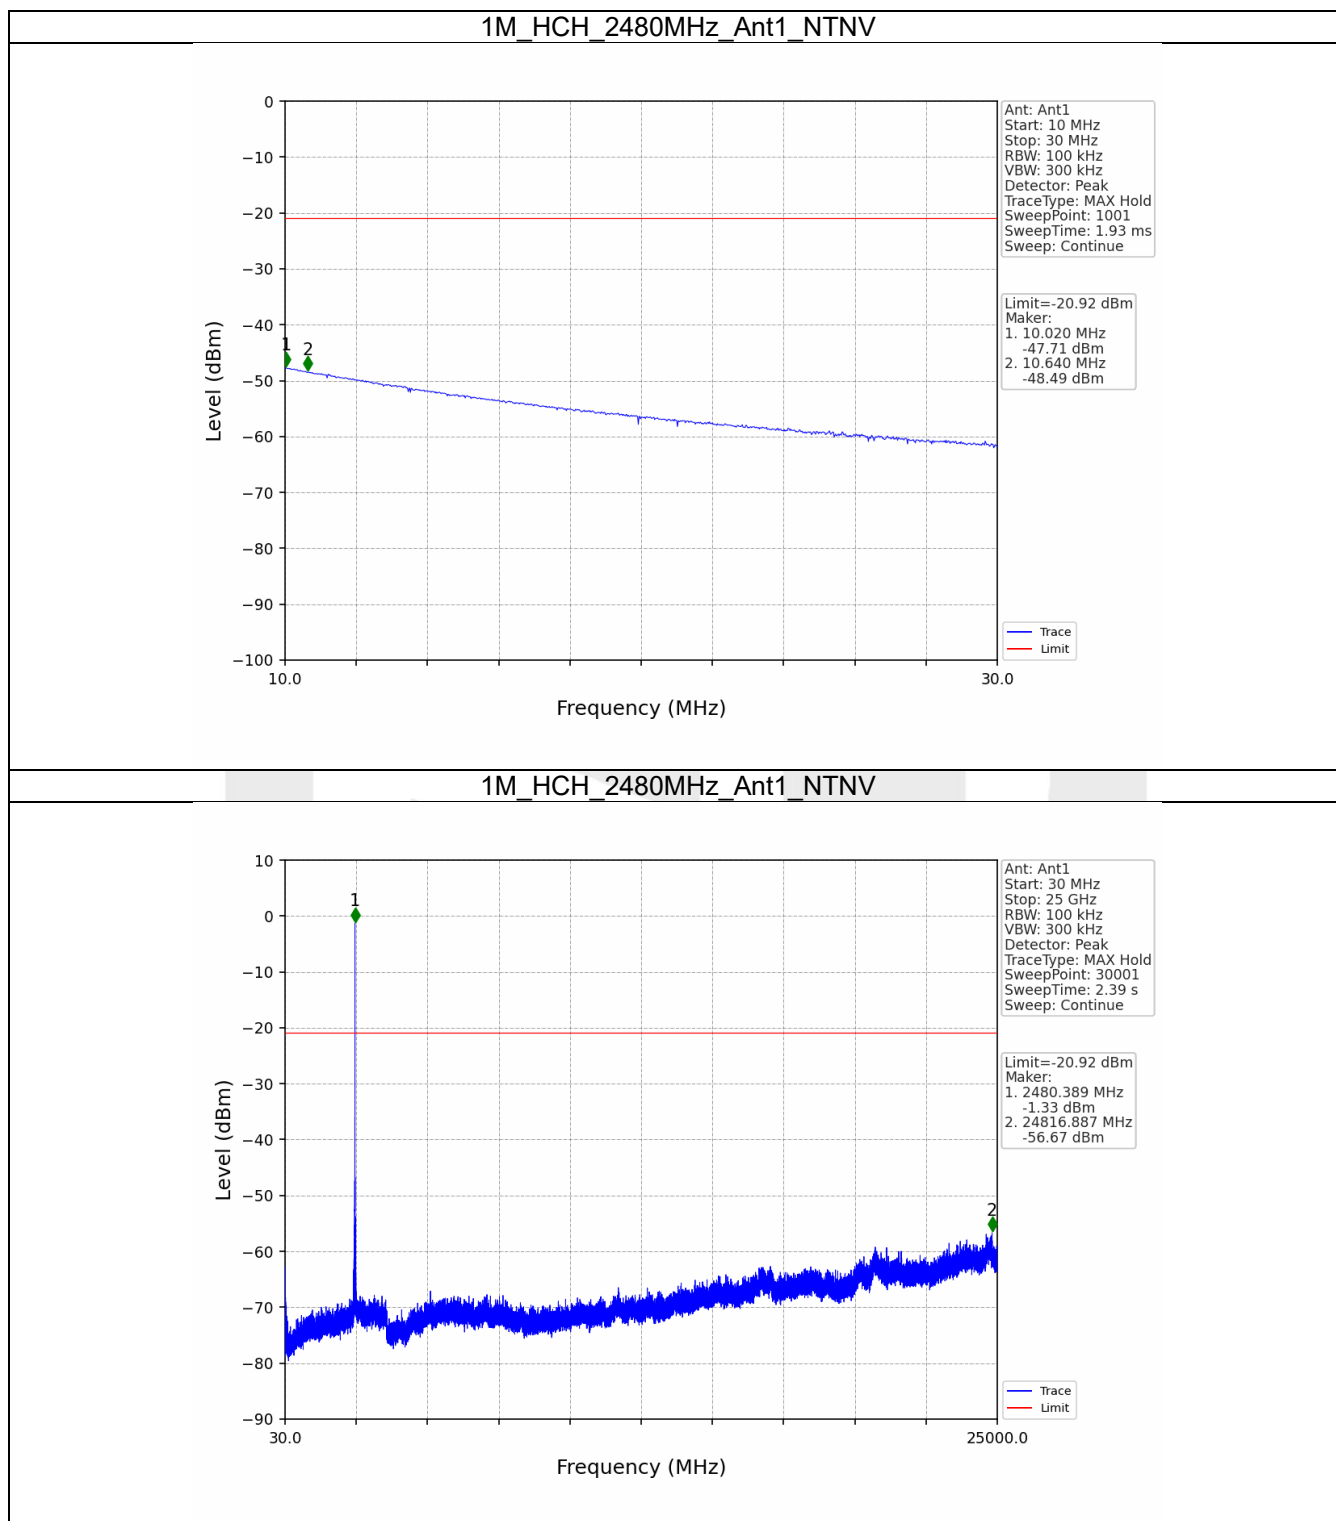

Module 2

1. Duty Cycle


1.1 Test Result


1.1.1 Ant2

Ant2							
Mode	TX Type	Frequency (MHz)	T_on (ms)	Period (ms)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	Max. DC Variation (%)
1M	SISO	2402	0.392	0.625	62.72	2.03	0.06
		2440	0.391	0.625	62.56	2.04	0.05
		2480	0.391	0.624	62.66	2.03	0.02

1.2 Test Graph

1.2.1 Ant2

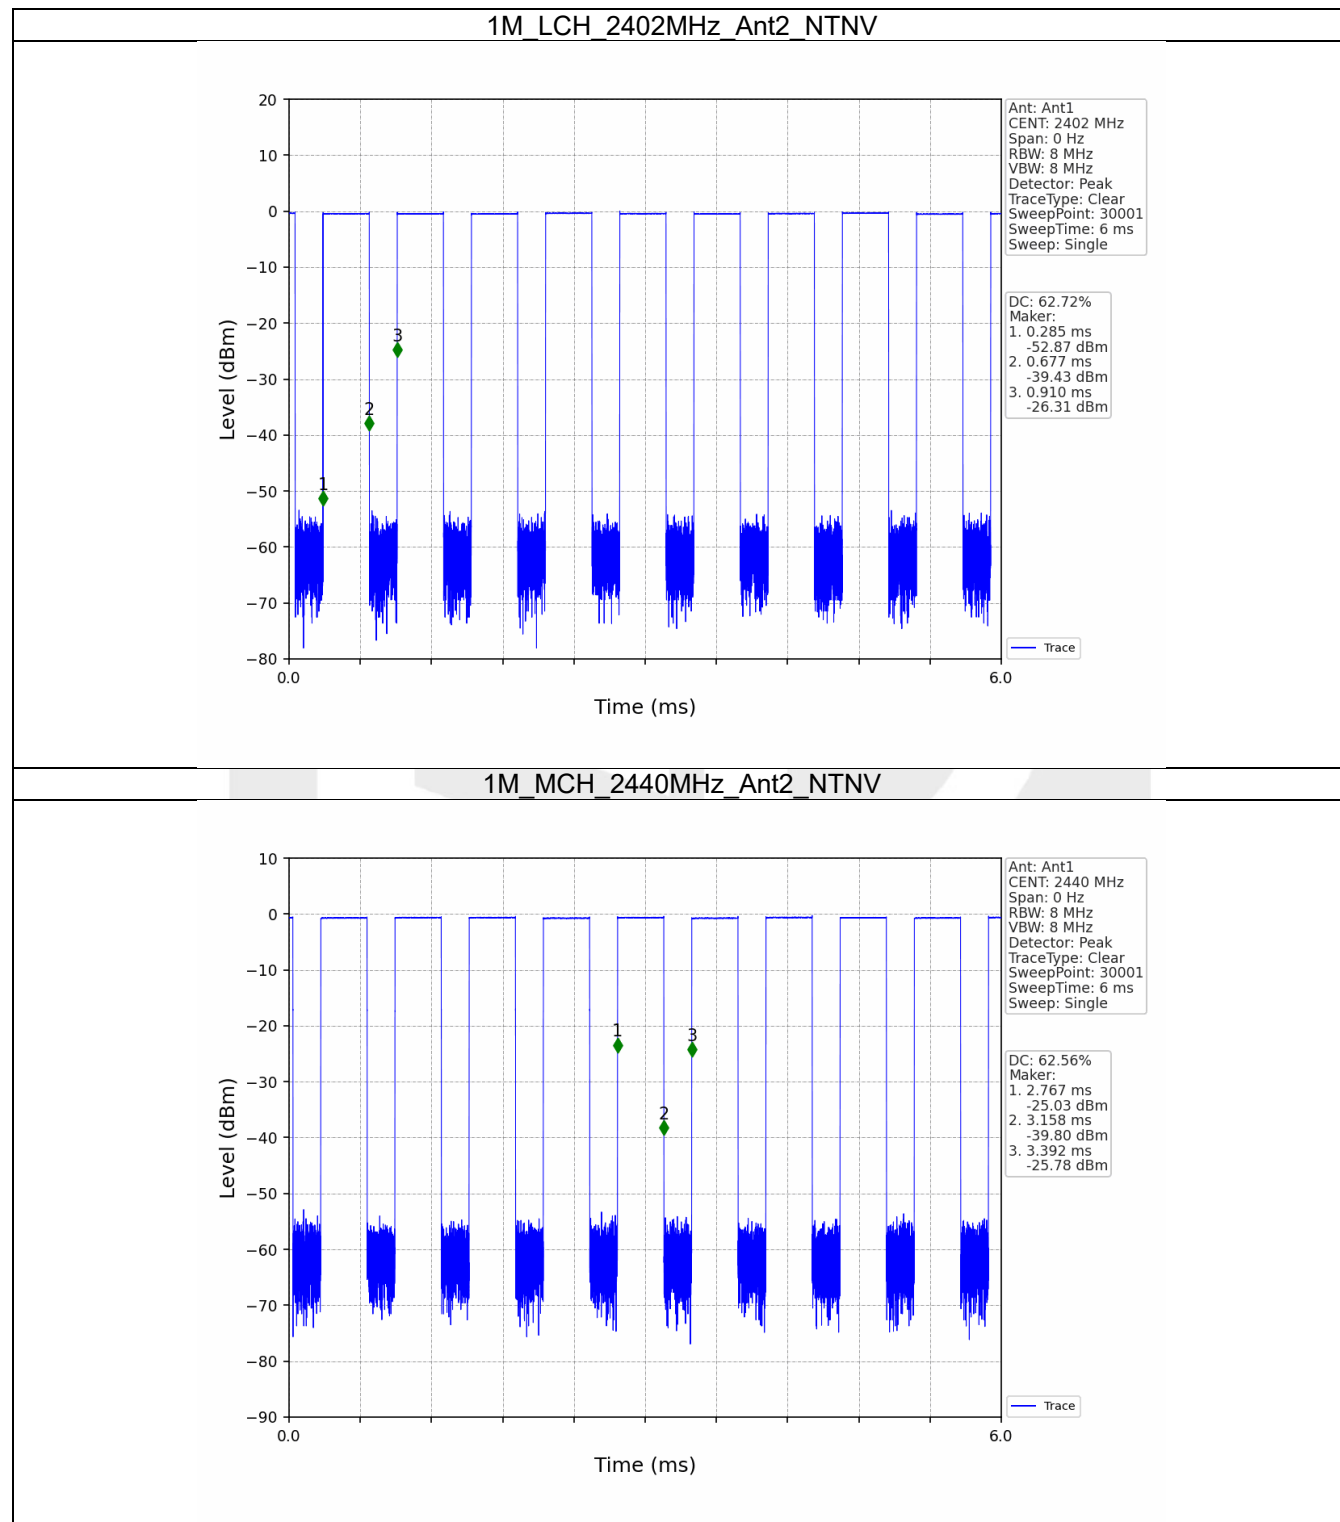

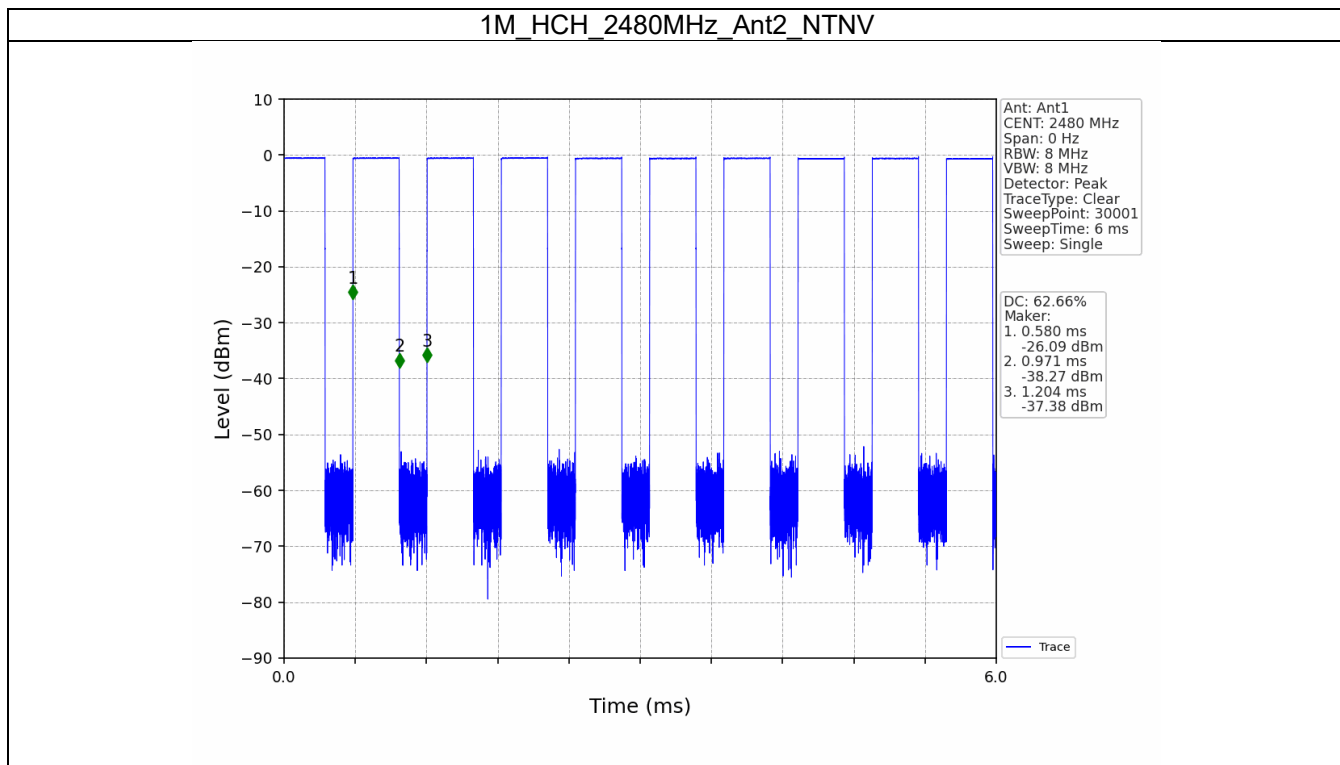

2. Bandwidth

2.1 Test Result

2.1.1 OBW


Mode	TX Type	Frequency (MHz)	ANT	99% Occupied Bandwidth (MHz)		Verdict
				Result	Limit	
1M	SISO	2402	2	1.073	/	Pass
		2440	2	1.080	/	Pass
		2480	2	1.078	/	Pass


2.1.2 6dB BW

Mode	TX Type	Frequency (MHz)	ANT	6dB Bandwidth (MHz)		Verdict
				Result	Limit	
1M	SISO	2402	2	0.728	≥ 0.5	Pass
		2440	2	0.735	≥ 0.5	Pass
		2480	2	0.746	≥ 0.5	Pass


2.2 Test Graph


2.2.1 OBW

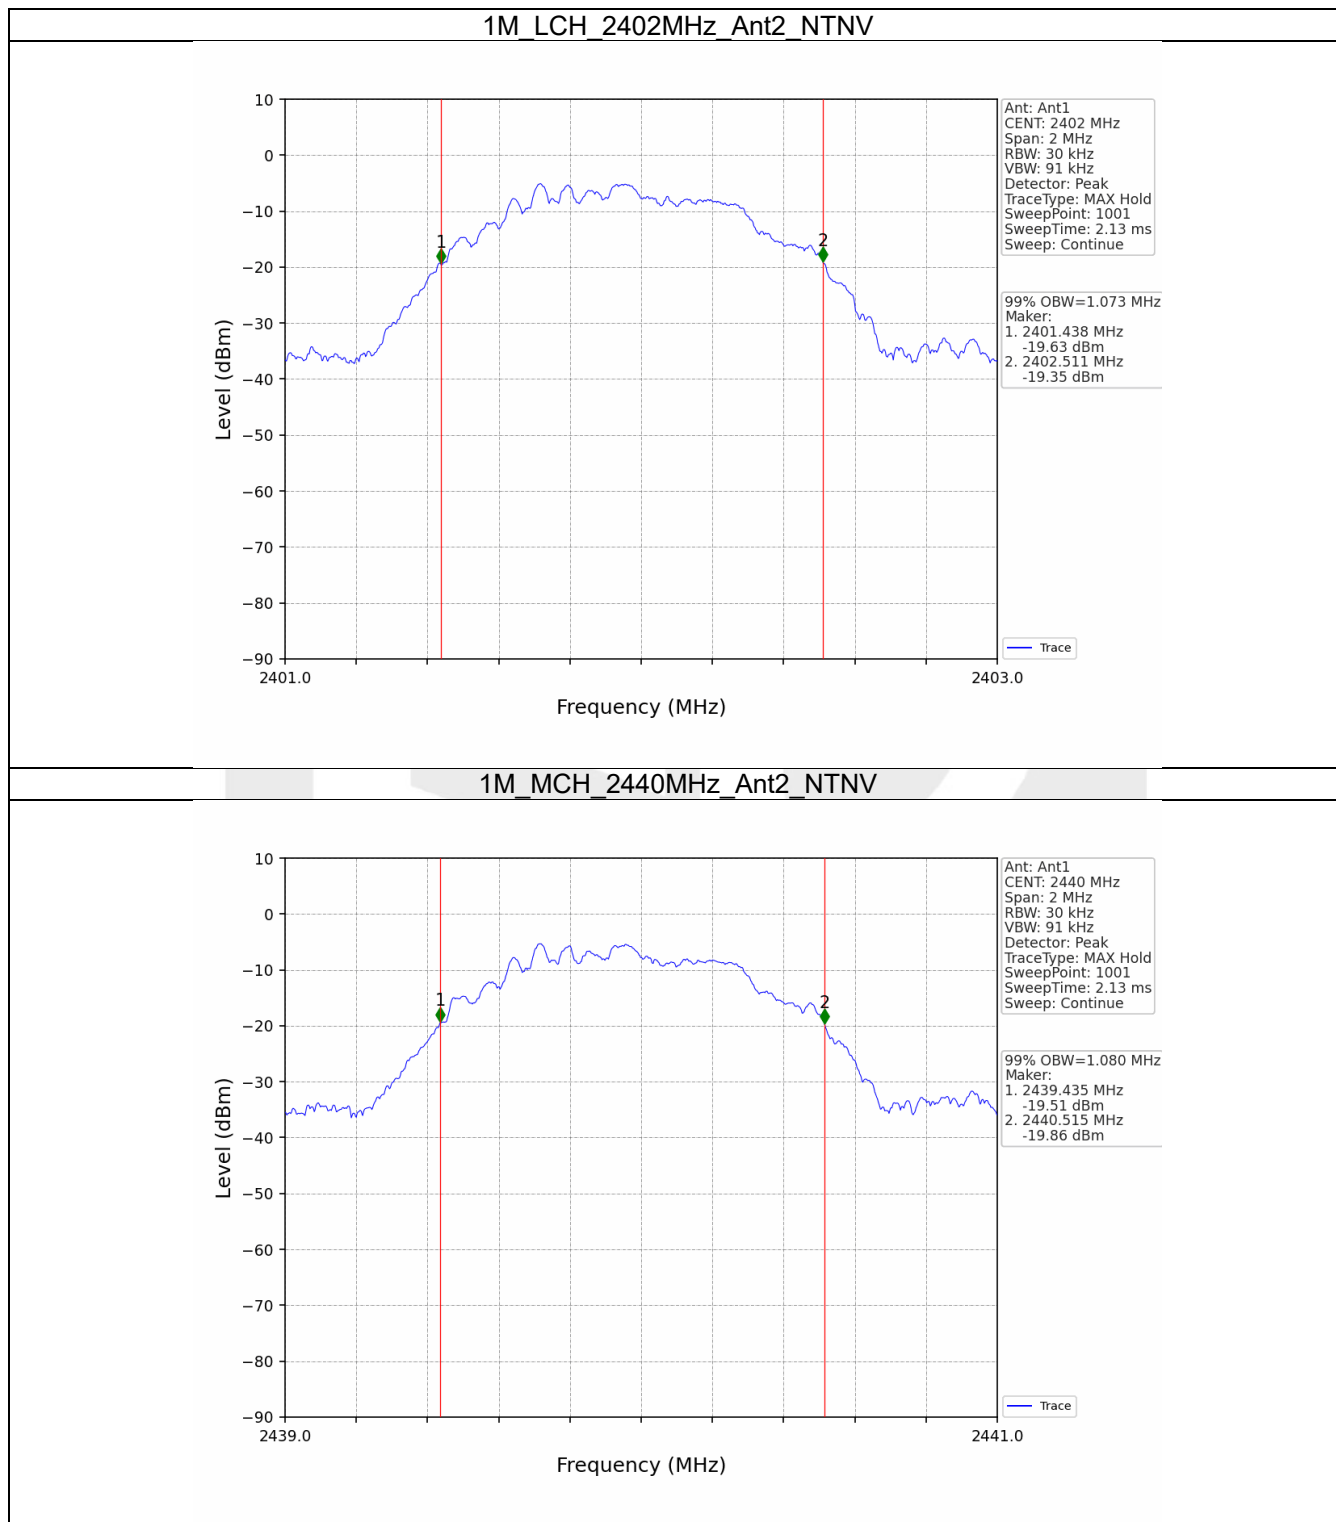

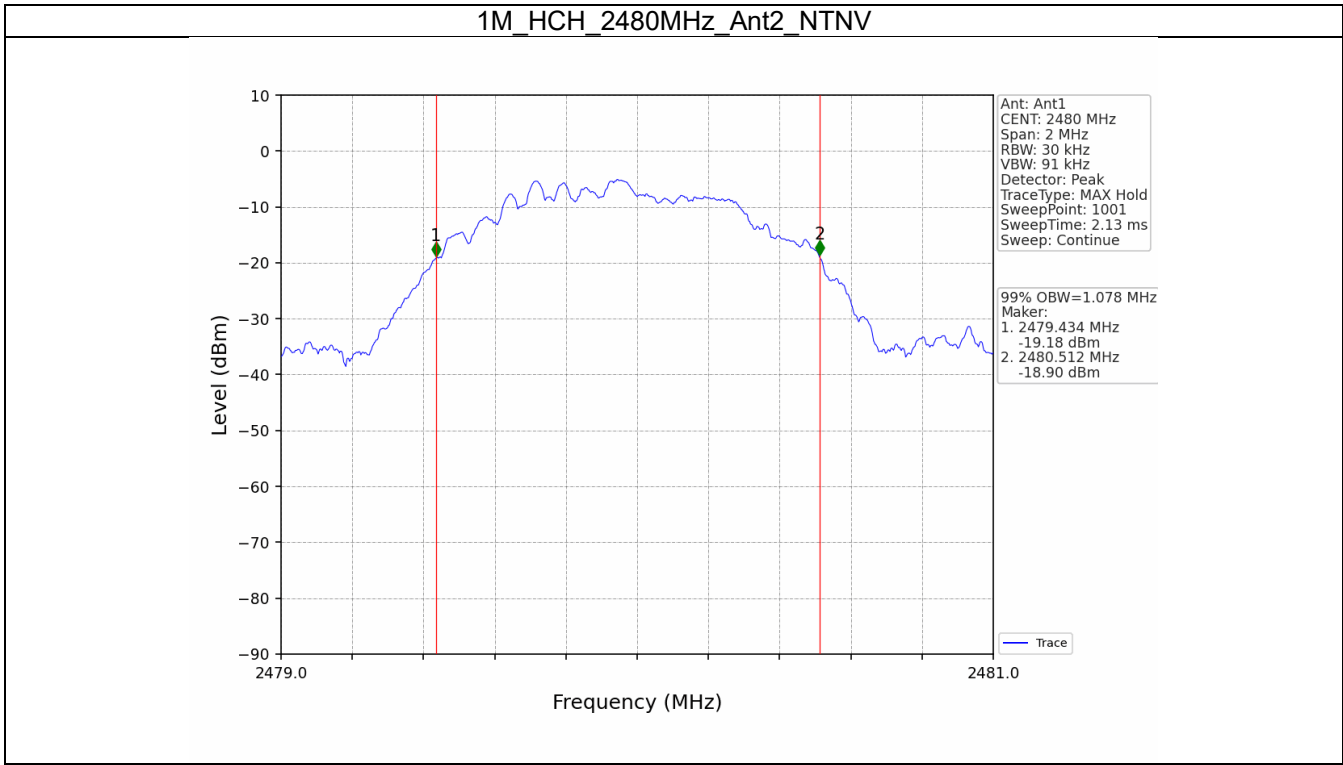

2.2.2 6dB BW

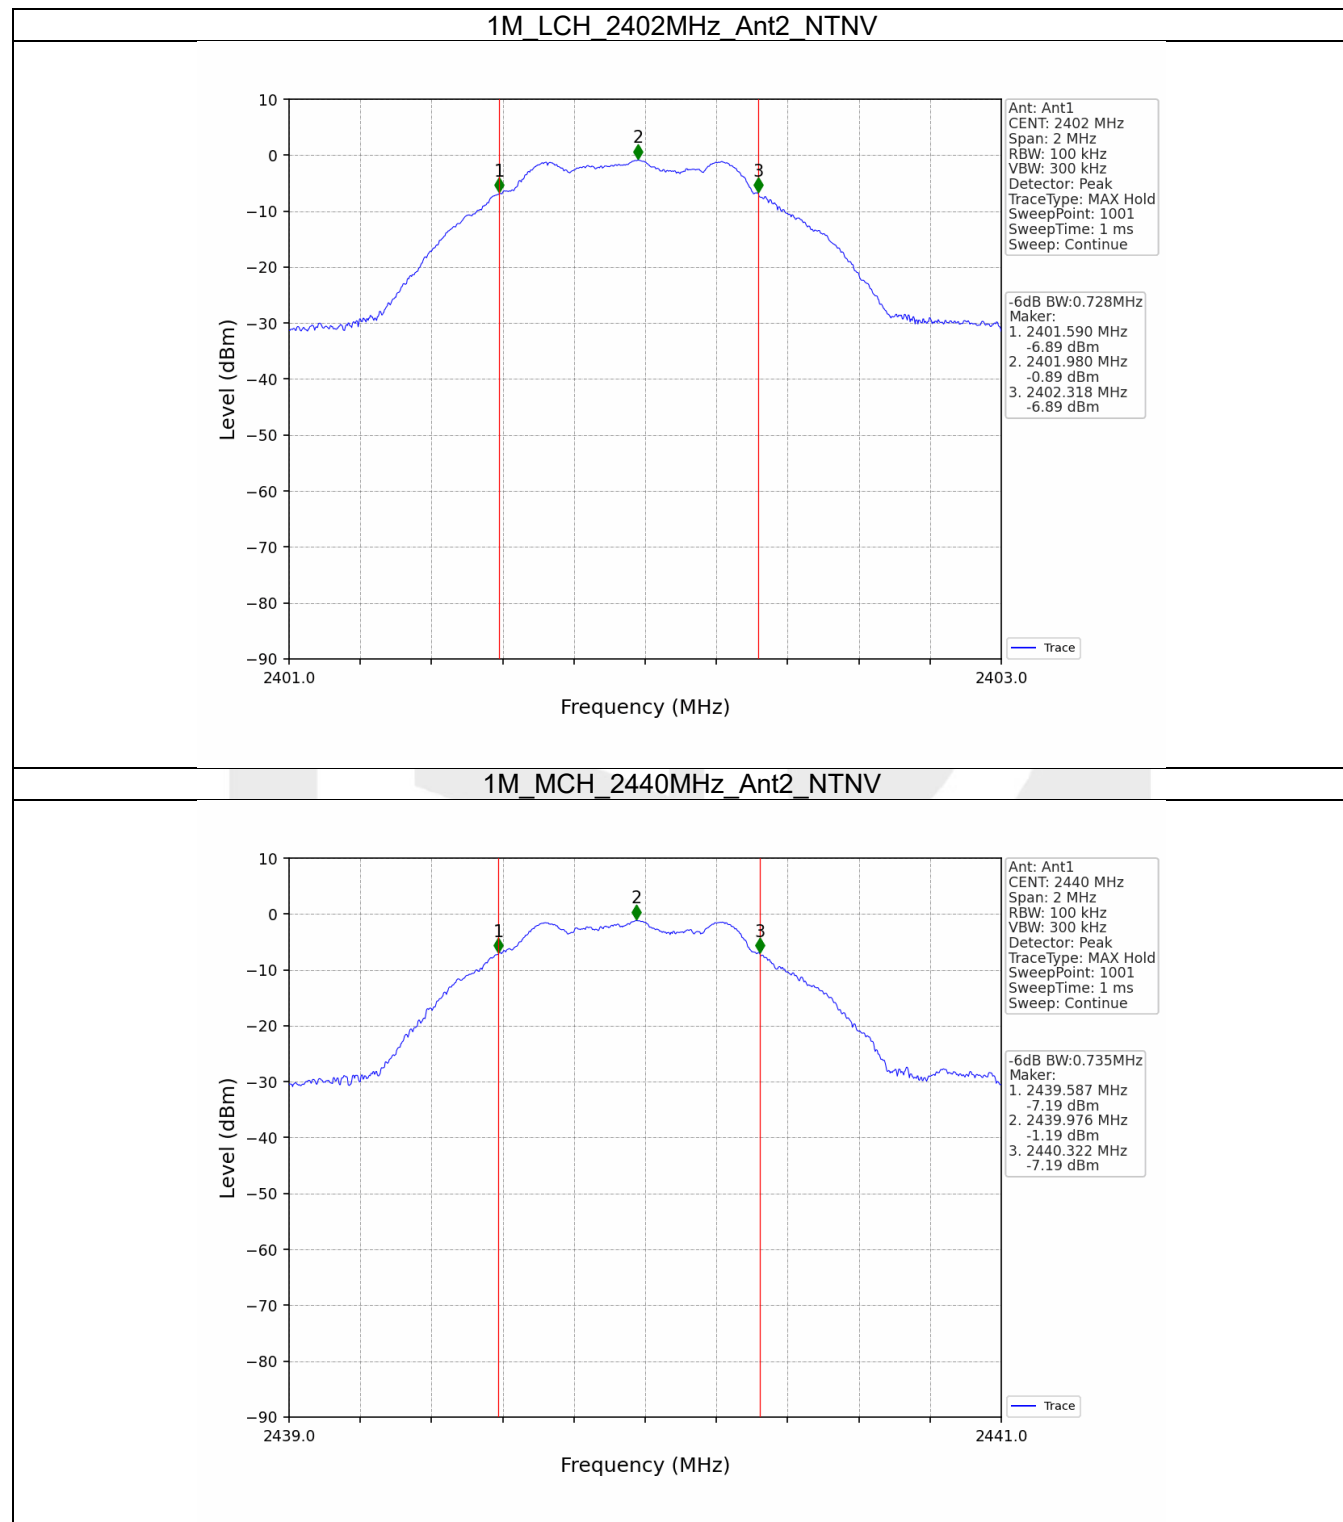

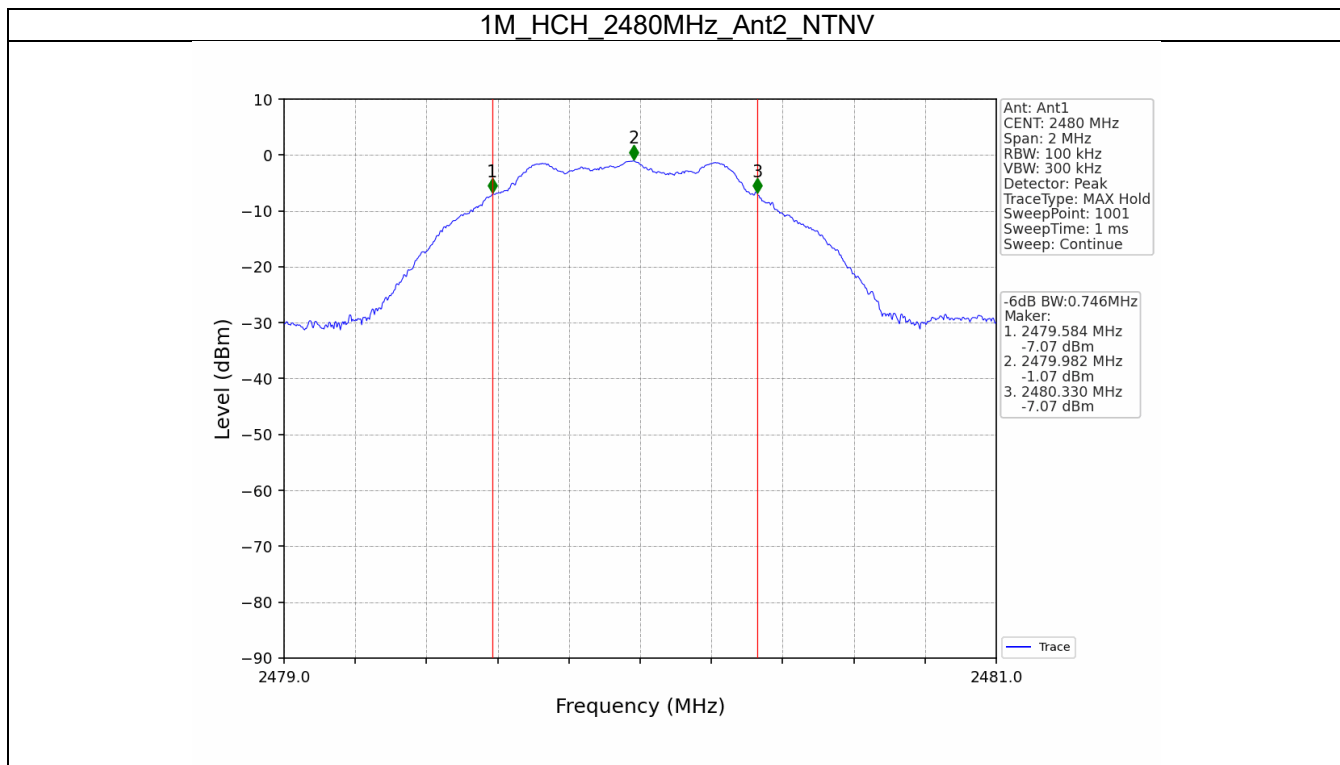

3. Maximum Conducted Output Power

3.1 Test Result

3.1.1 Power

Mode	TX Type	Frequency (MHz)	Maximum Peak Conducted Output Power (dBm)		Verdict
			ANT2	Limit	
1M	SISO	2402	-0.32	<=30	Pass
		2440	-0.59	<=30	Pass
		2480	-0.52	<=30	Pass

4. Maximum Power Spectral Density


4.1 Test Result


4.1.1 PSD

Mode	TX Type	Frequency (MHz)	Maximum PSD (dBm/3kHz)		Verdict
			ANT2	Limit	
1M	SISO	2402	-15.09	<=8	Pass
		2440	-15.41	<=8	Pass
		2480	-15.44	<=8	Pass

4.2 Test Graph

4.2.1 PSD

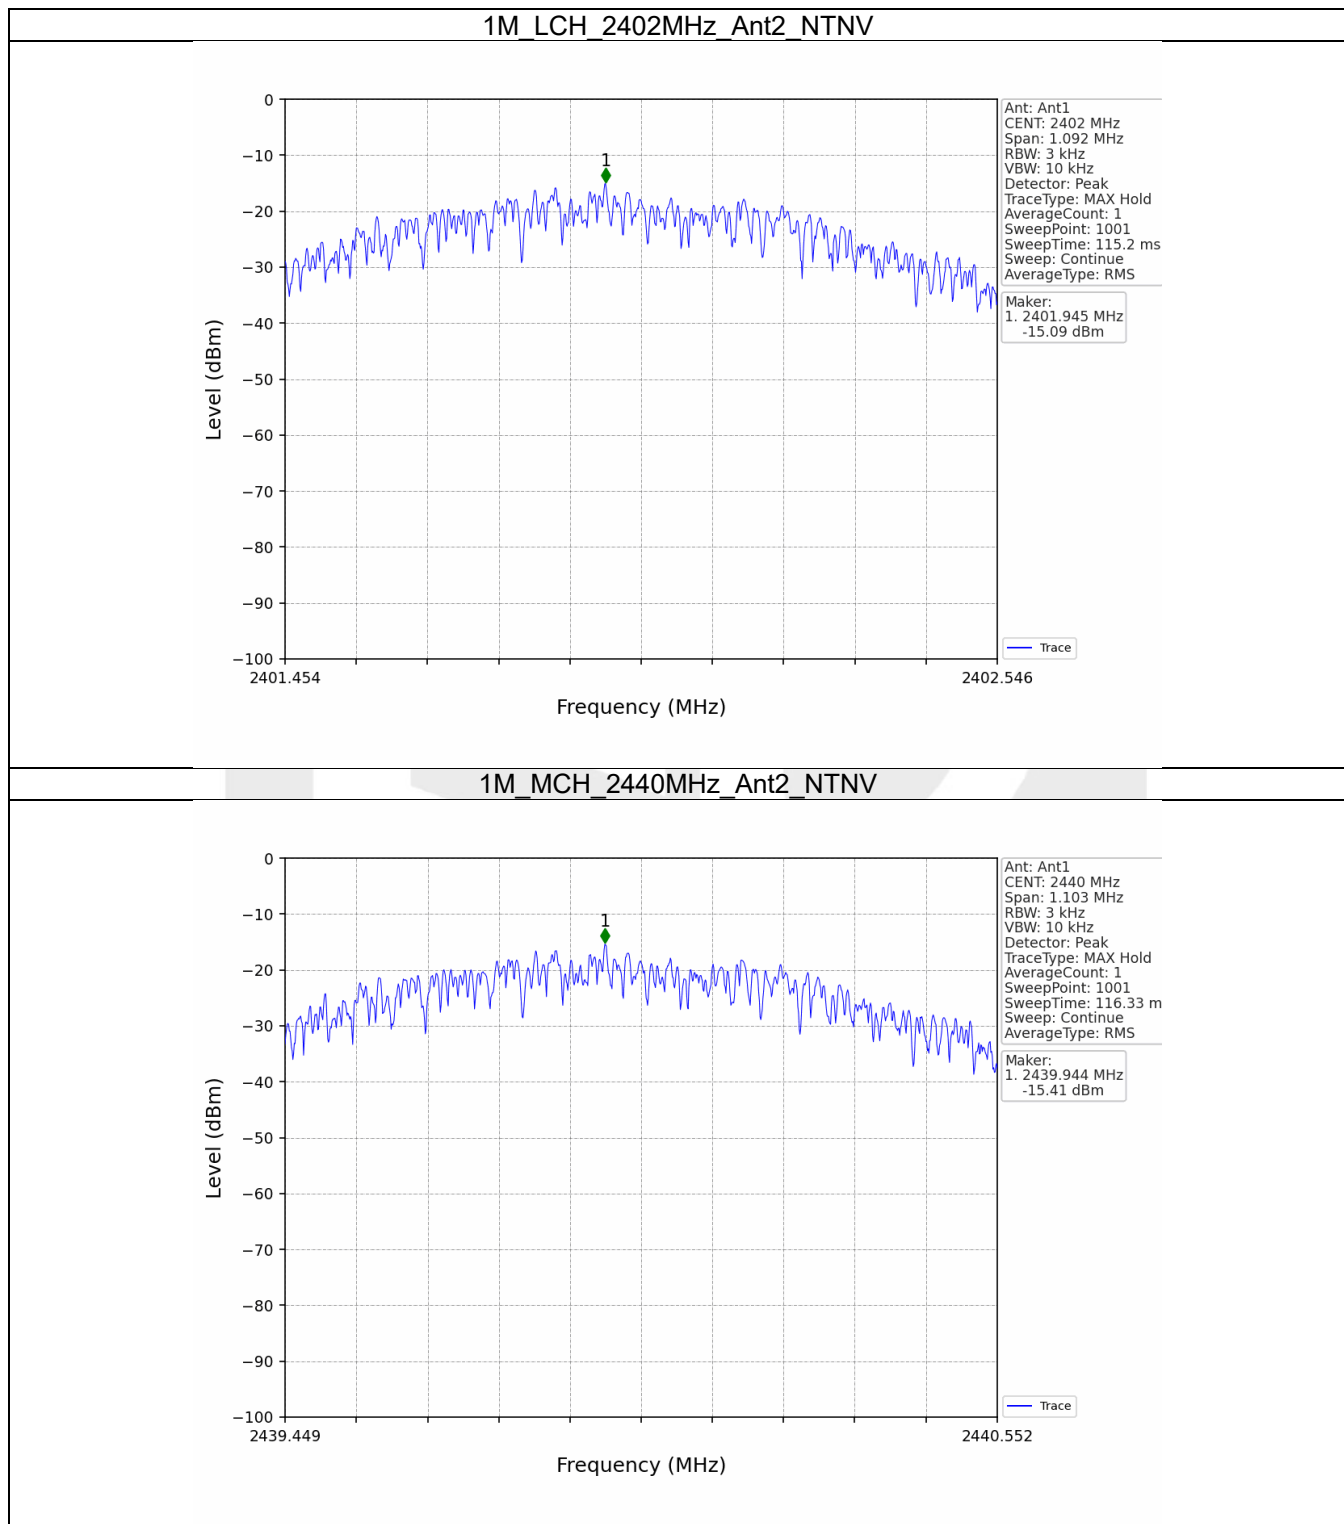

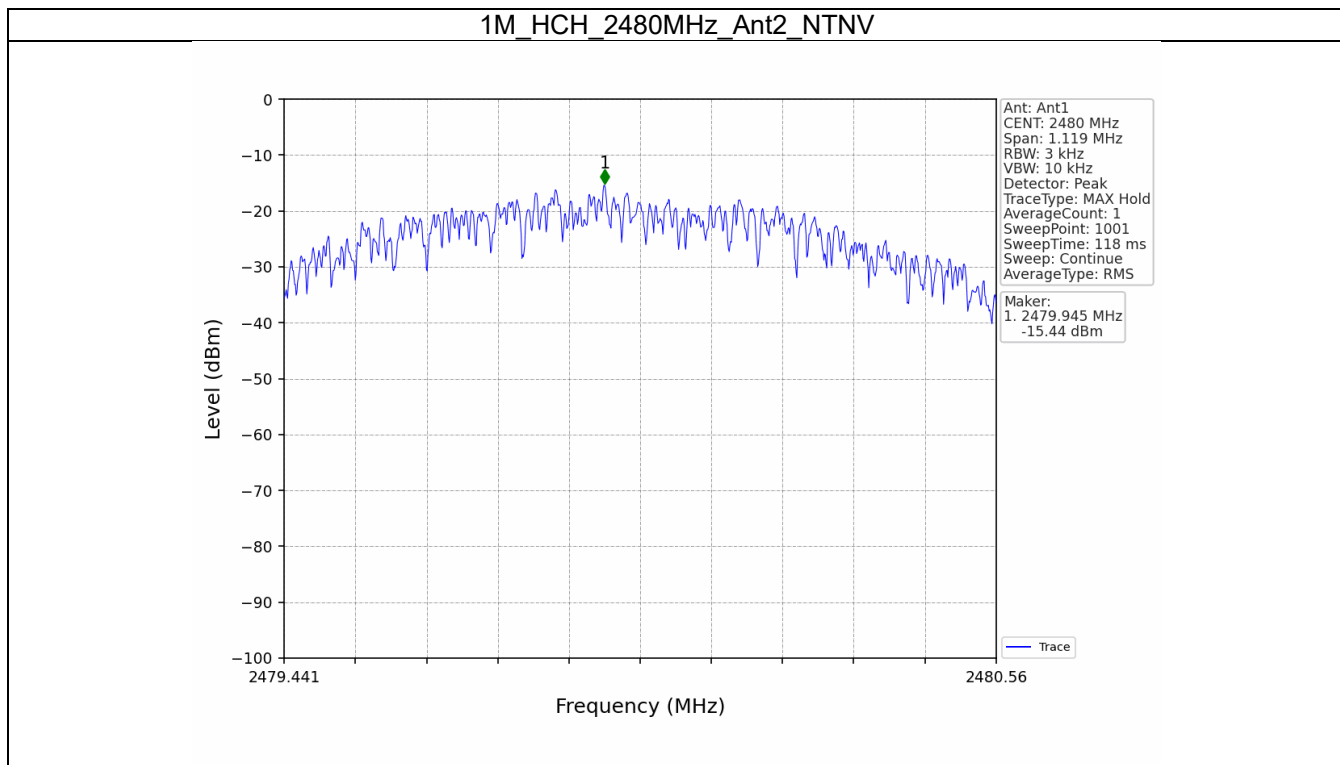

5. Unwanted Emissions In Non-restricted Frequency Bands

5.1 Test Result

5.1.1 Ref


Mode	TX Type	Frequency (MHz)	ANT	Level of Reference (dBm)
1M	SISO	2402	2	-0.85
		2440	2	-1.13
		2480	2	-1.07
Note1: Refer to FCC Part 15.247 (d) and ANSI C63.10-2020, the channel contains the maximum PSD level was used to establish the reference level.				


5.1.2 CSE

Mode	TX Type	Frequency (MHz)	ANT	Level of Reference (dBm)	Limit (dBm)	Verdict
1M	SISO	2402	2	-0.85	-20.85	Pass
		2440	2	-1.13	-21.13	Pass
		2480	2	-1.07	-21.07	Pass
Note1: Refer to FCC Part 15.247 (d) and ANSI C63.10-2020, the channel contains the maximum PSD level was used to establish the reference level.						


5.2 Test Graph


5.2.1 Ref

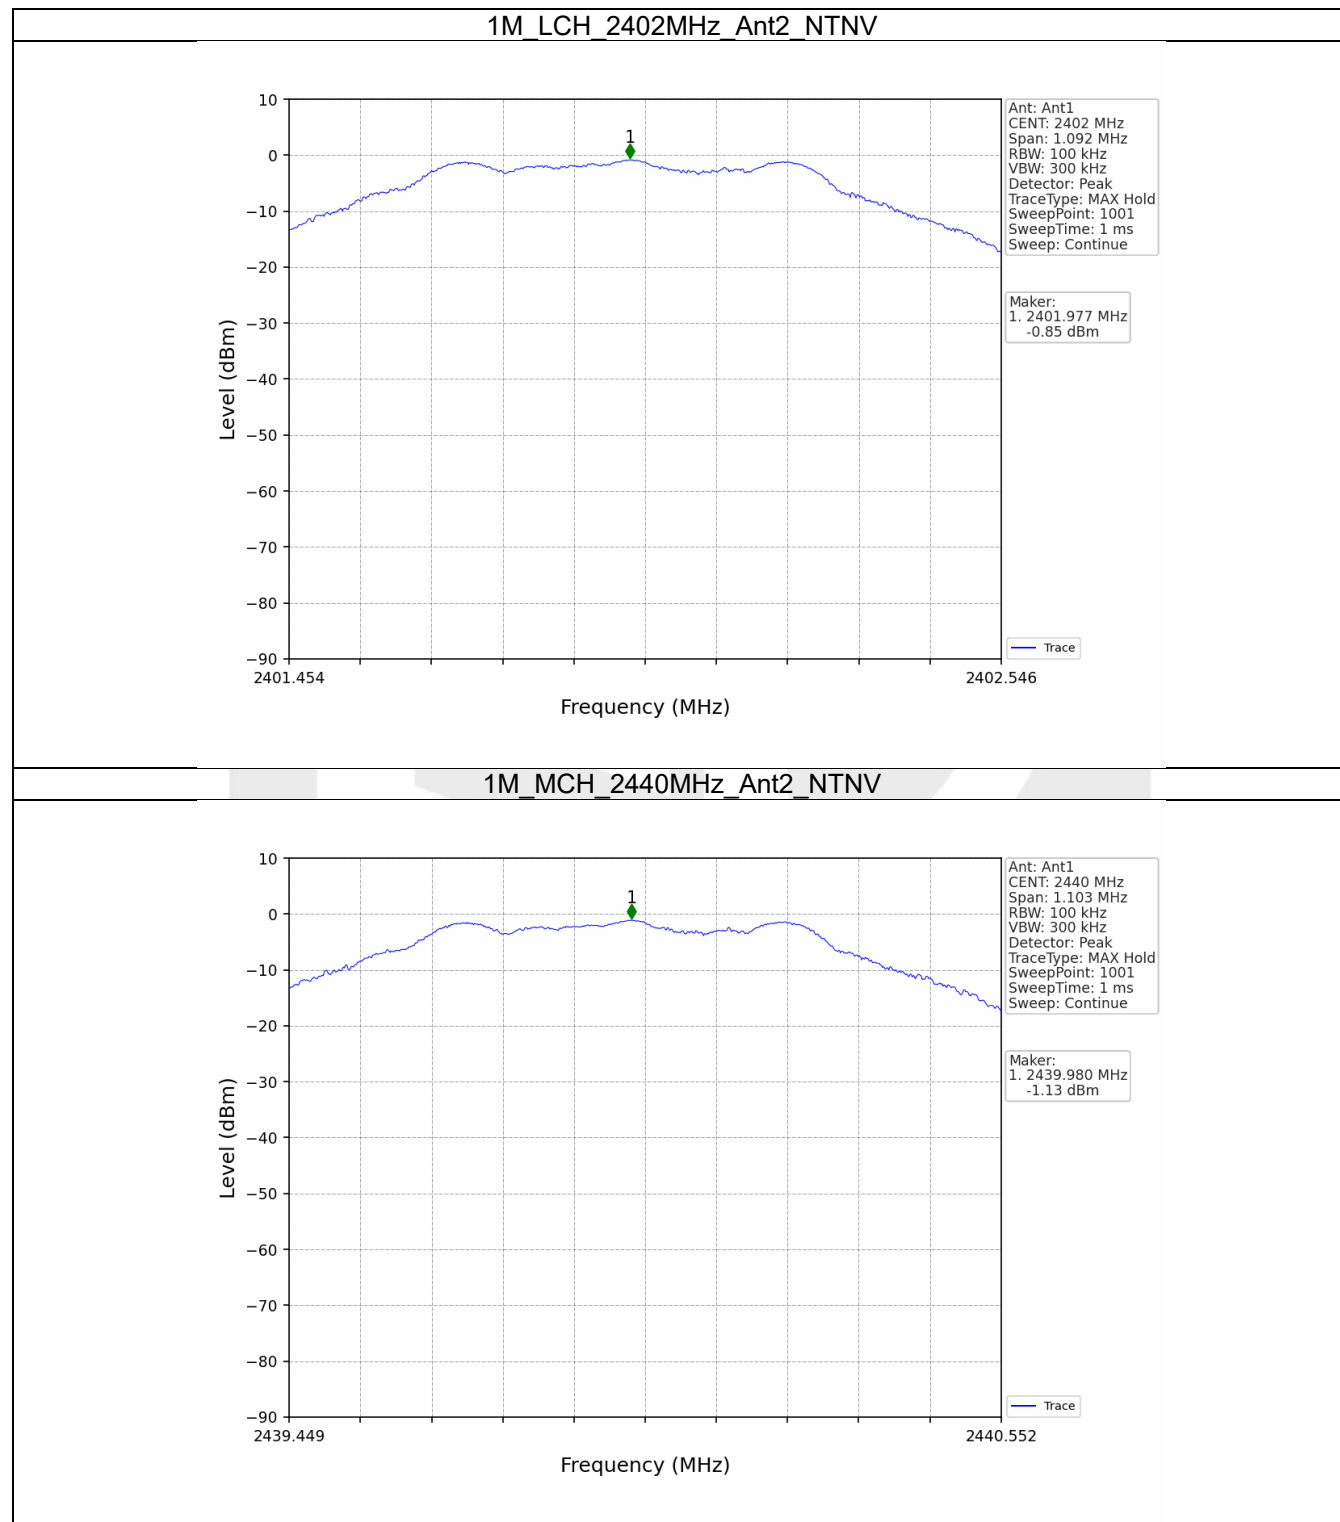


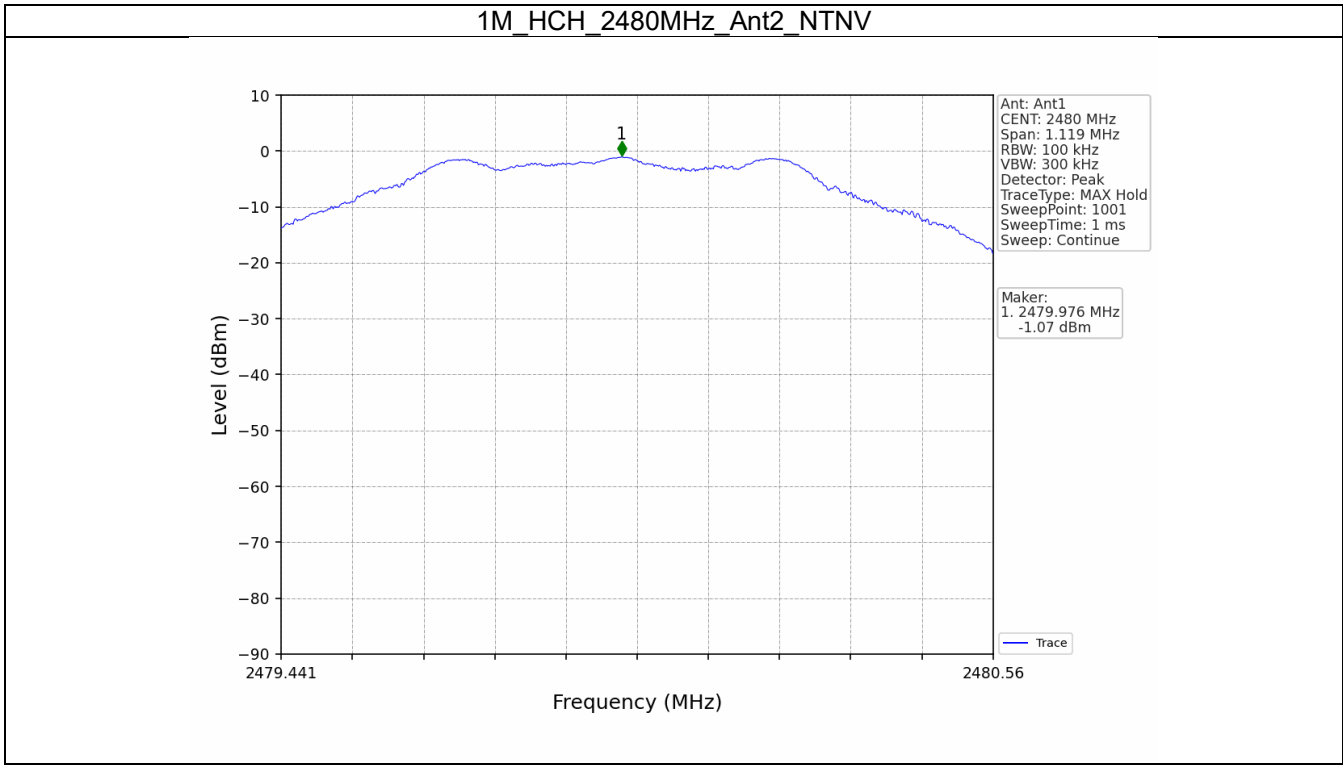



5.2.2 CSE

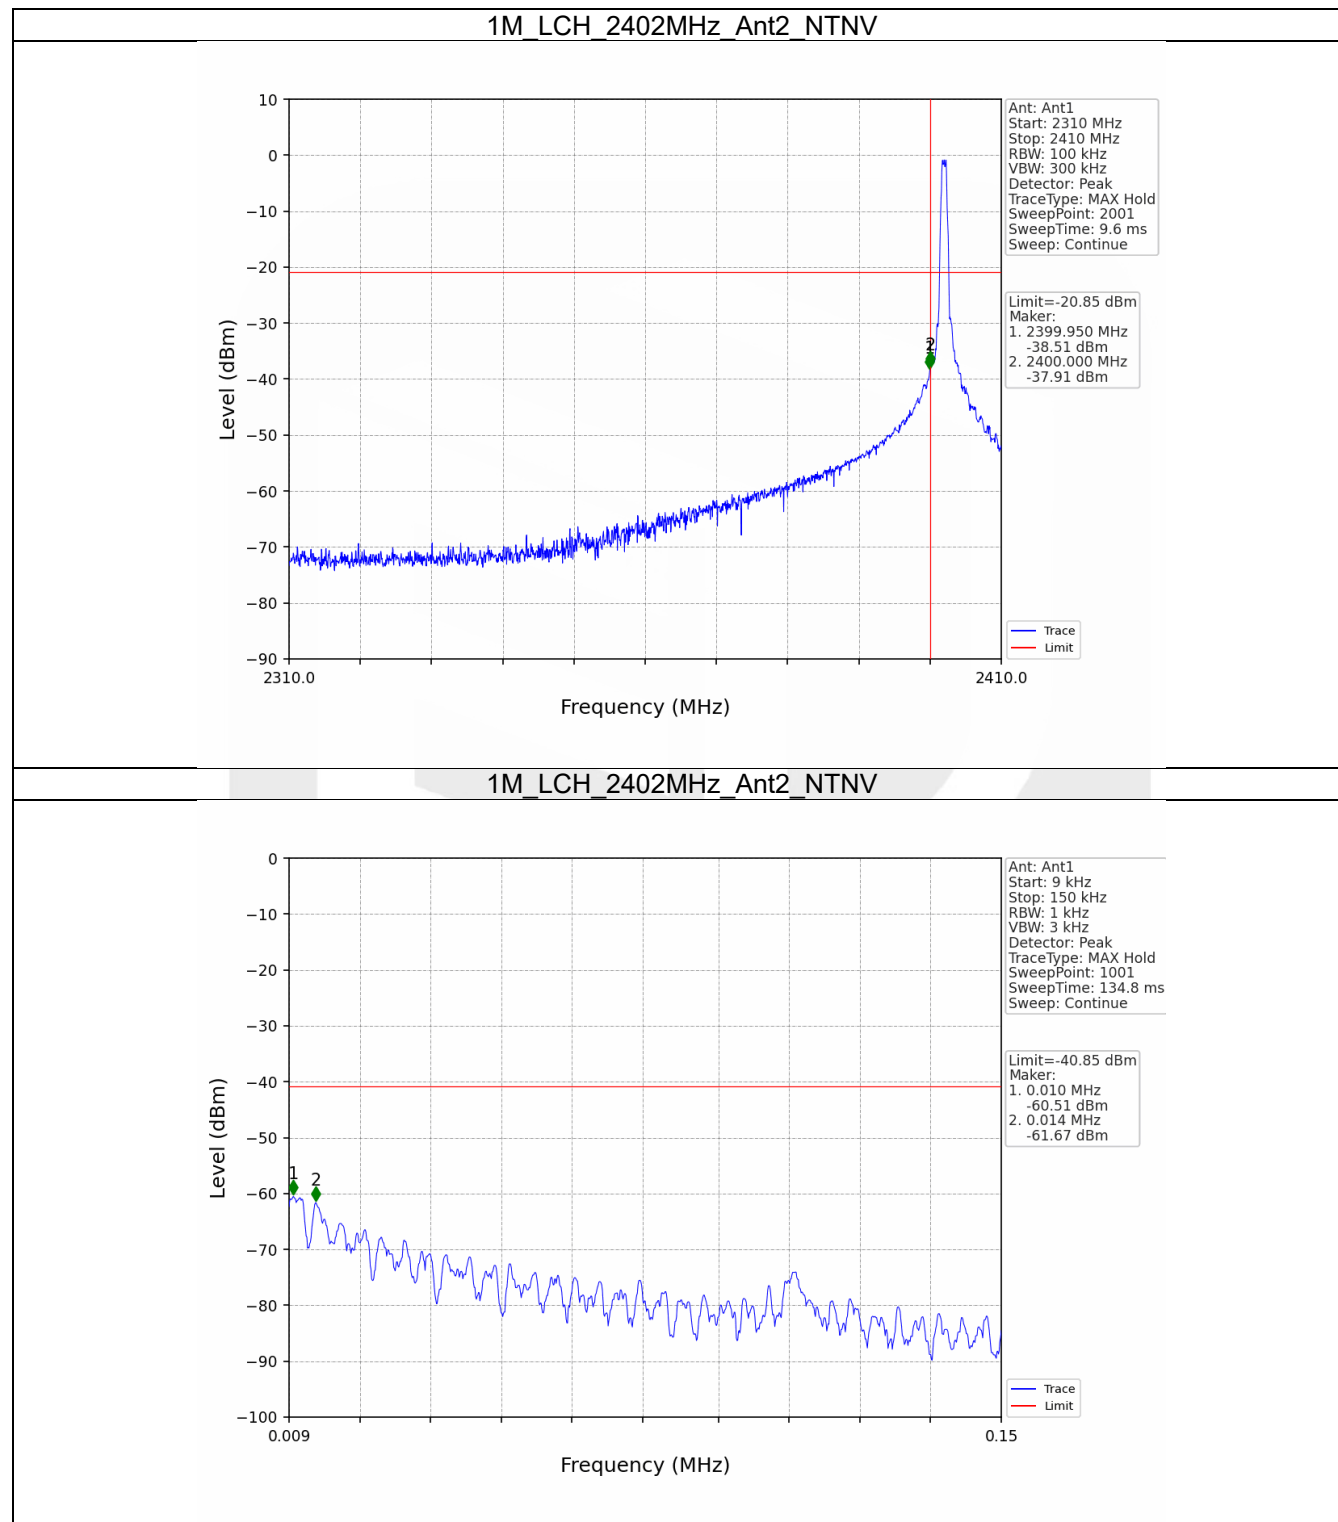


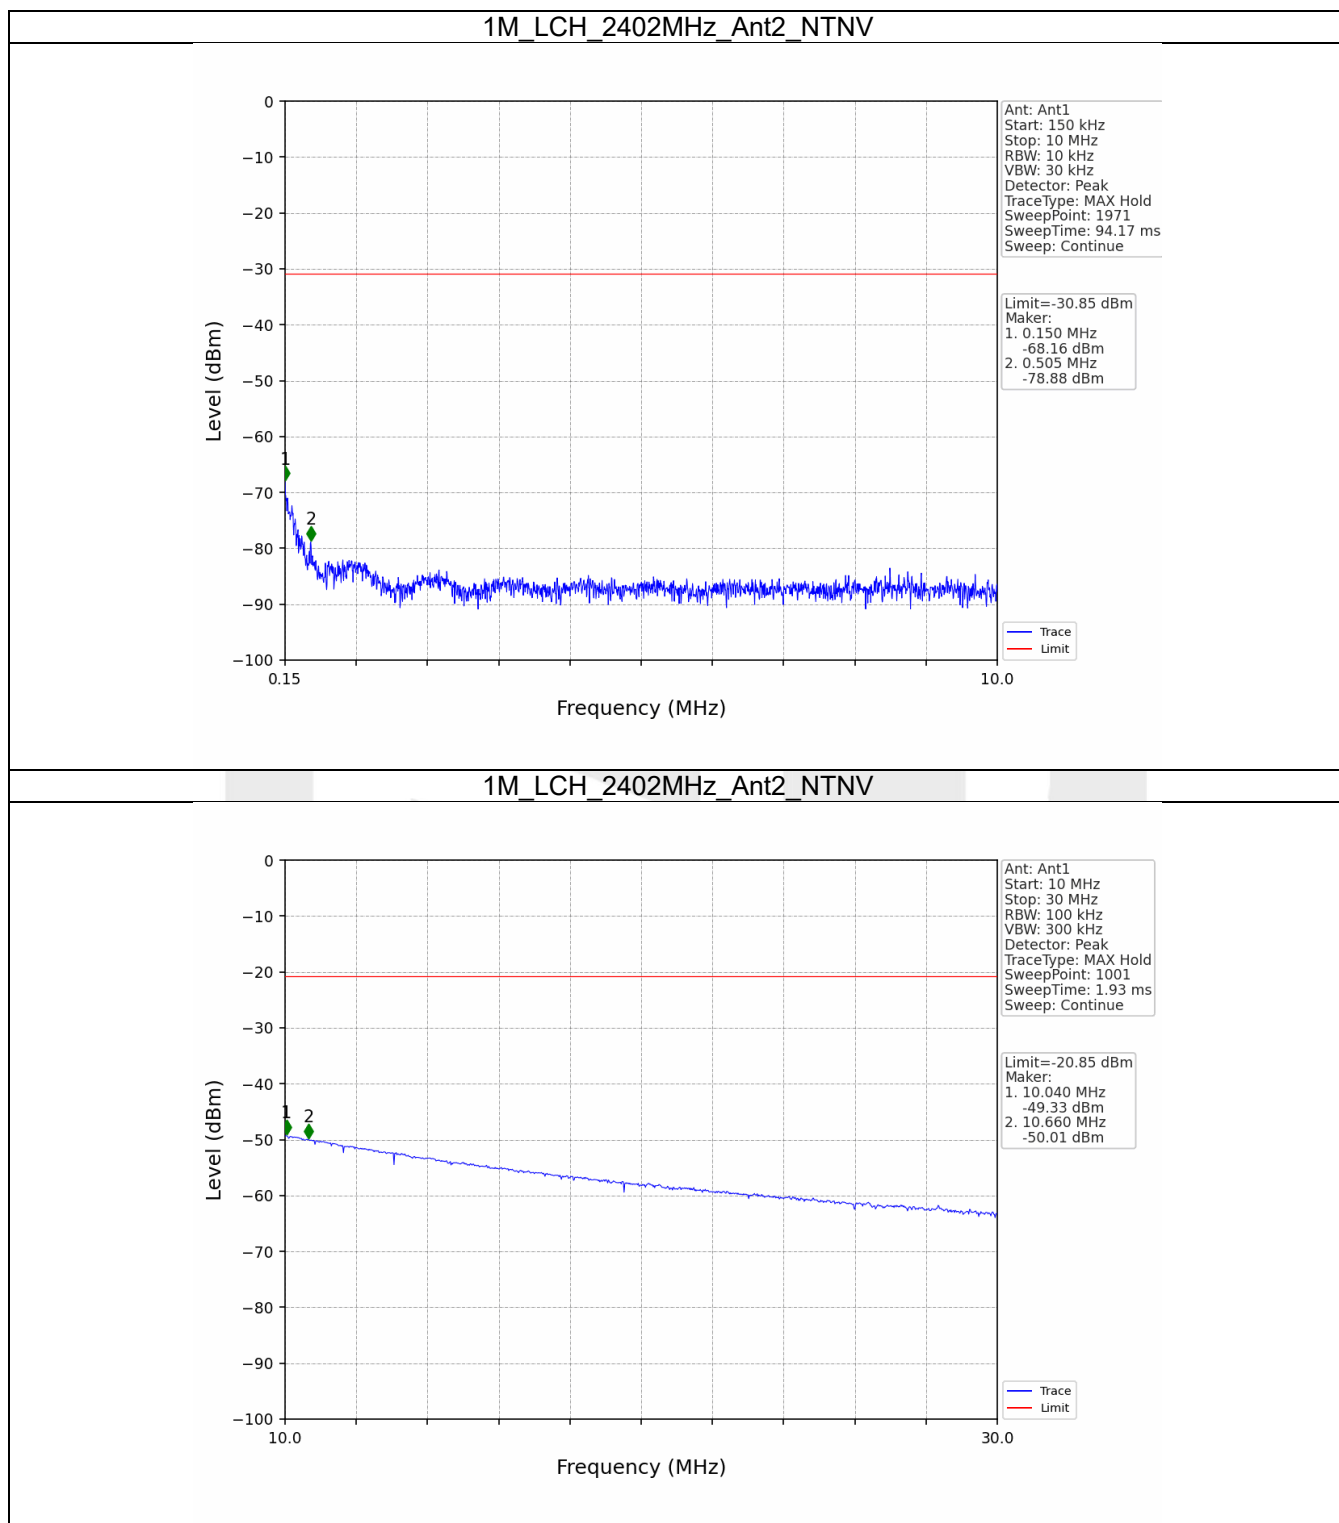


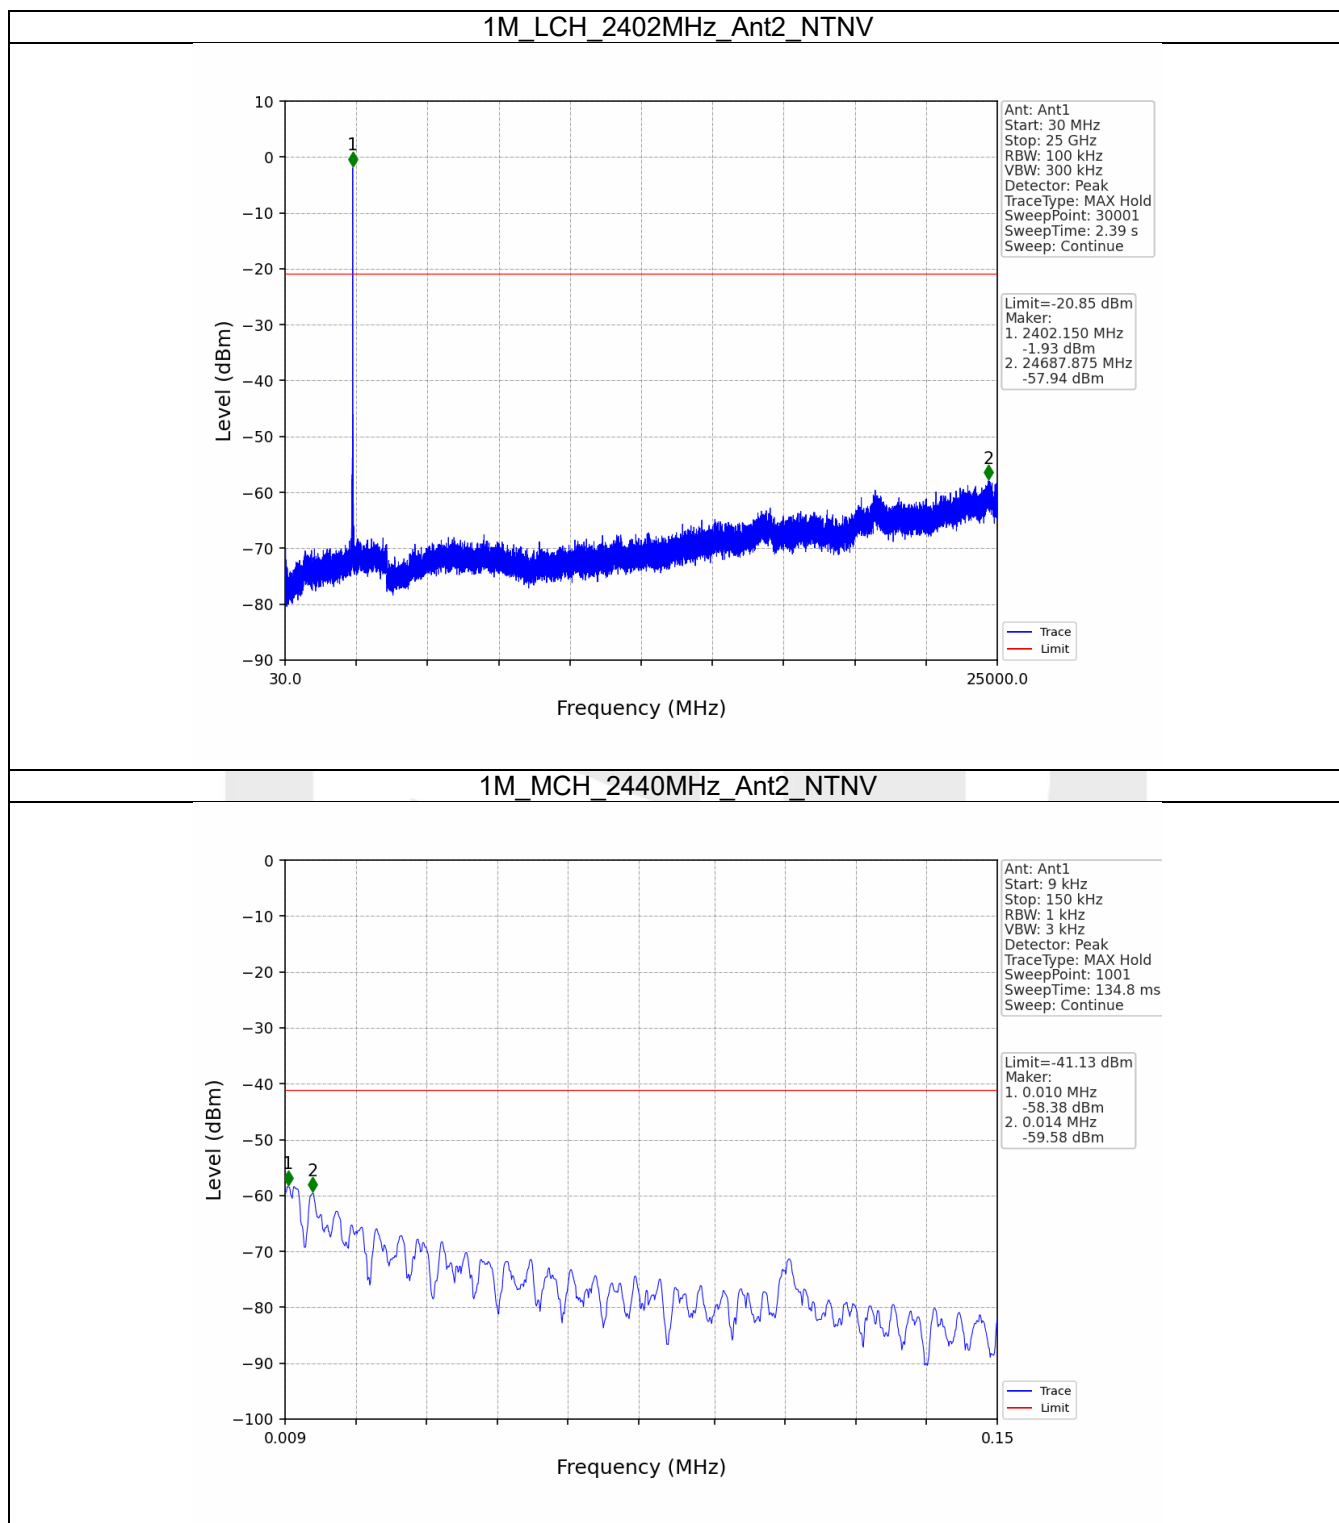

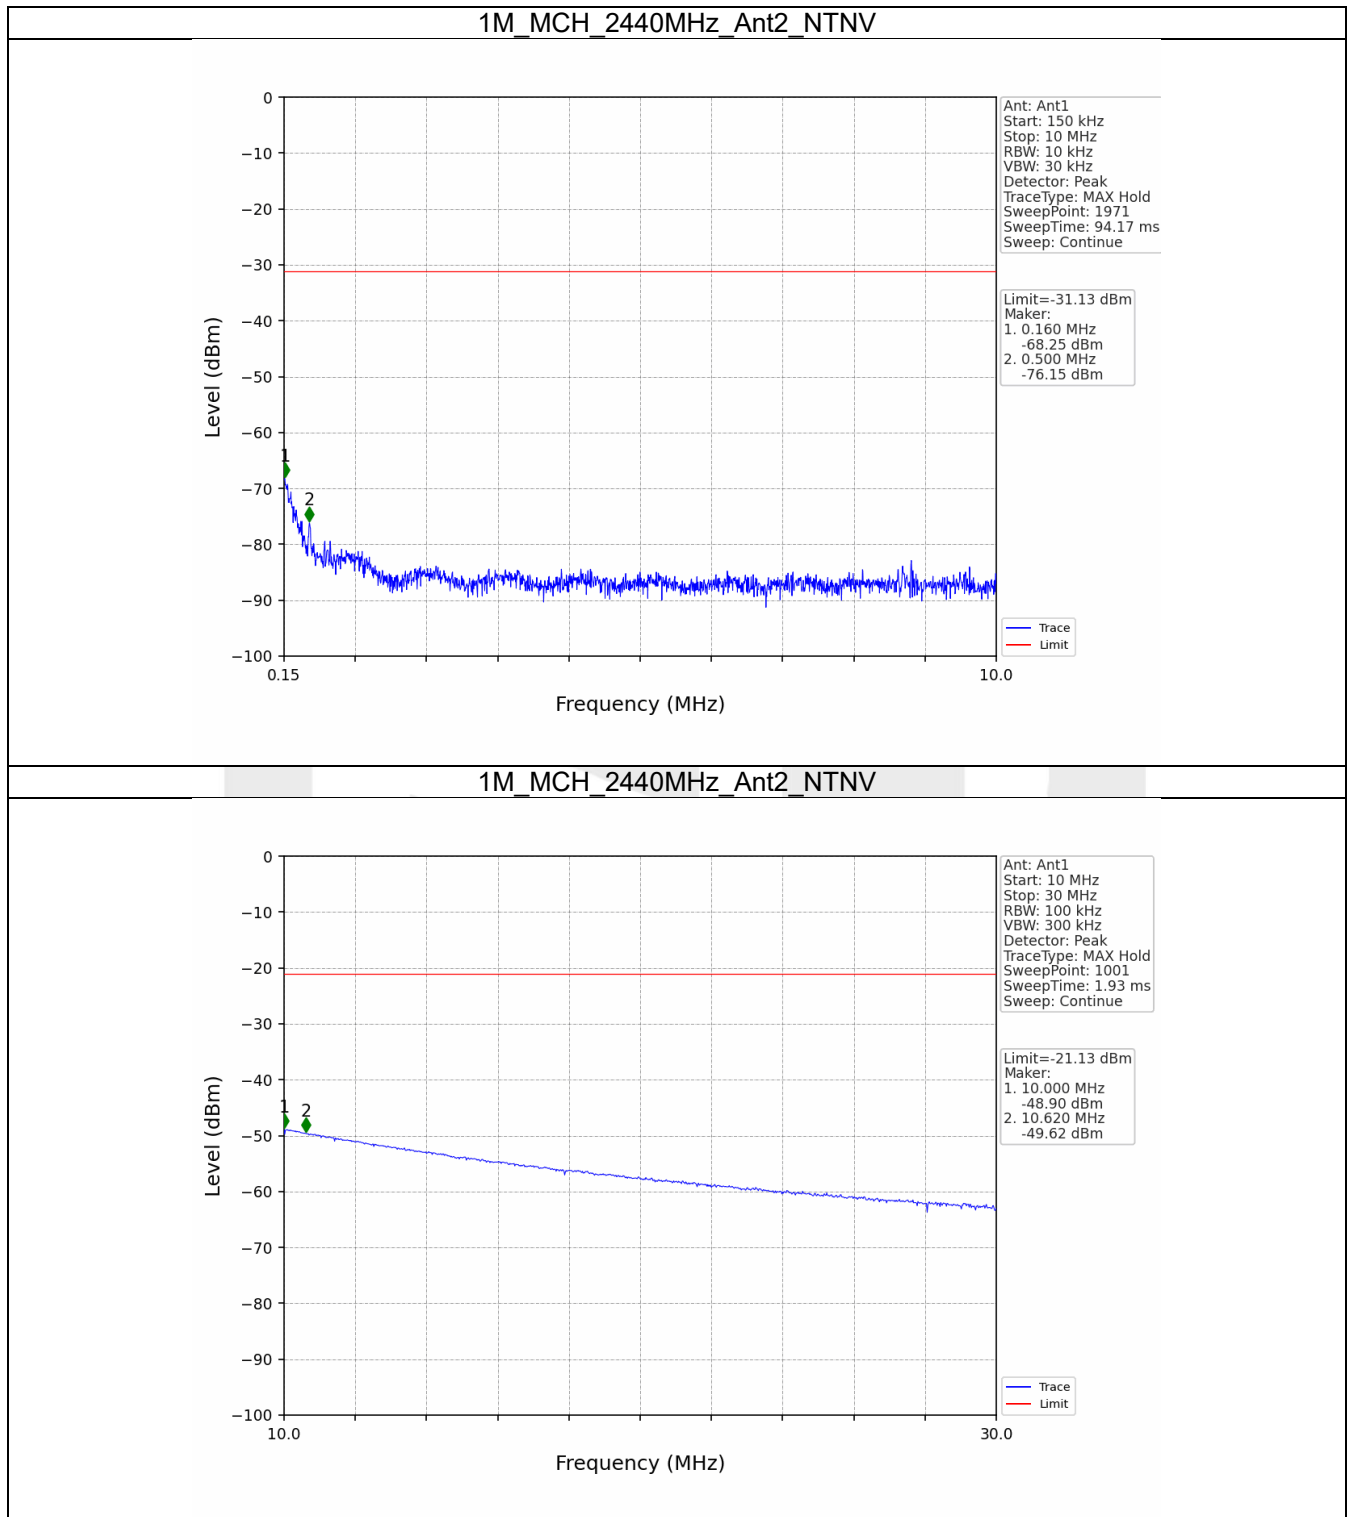

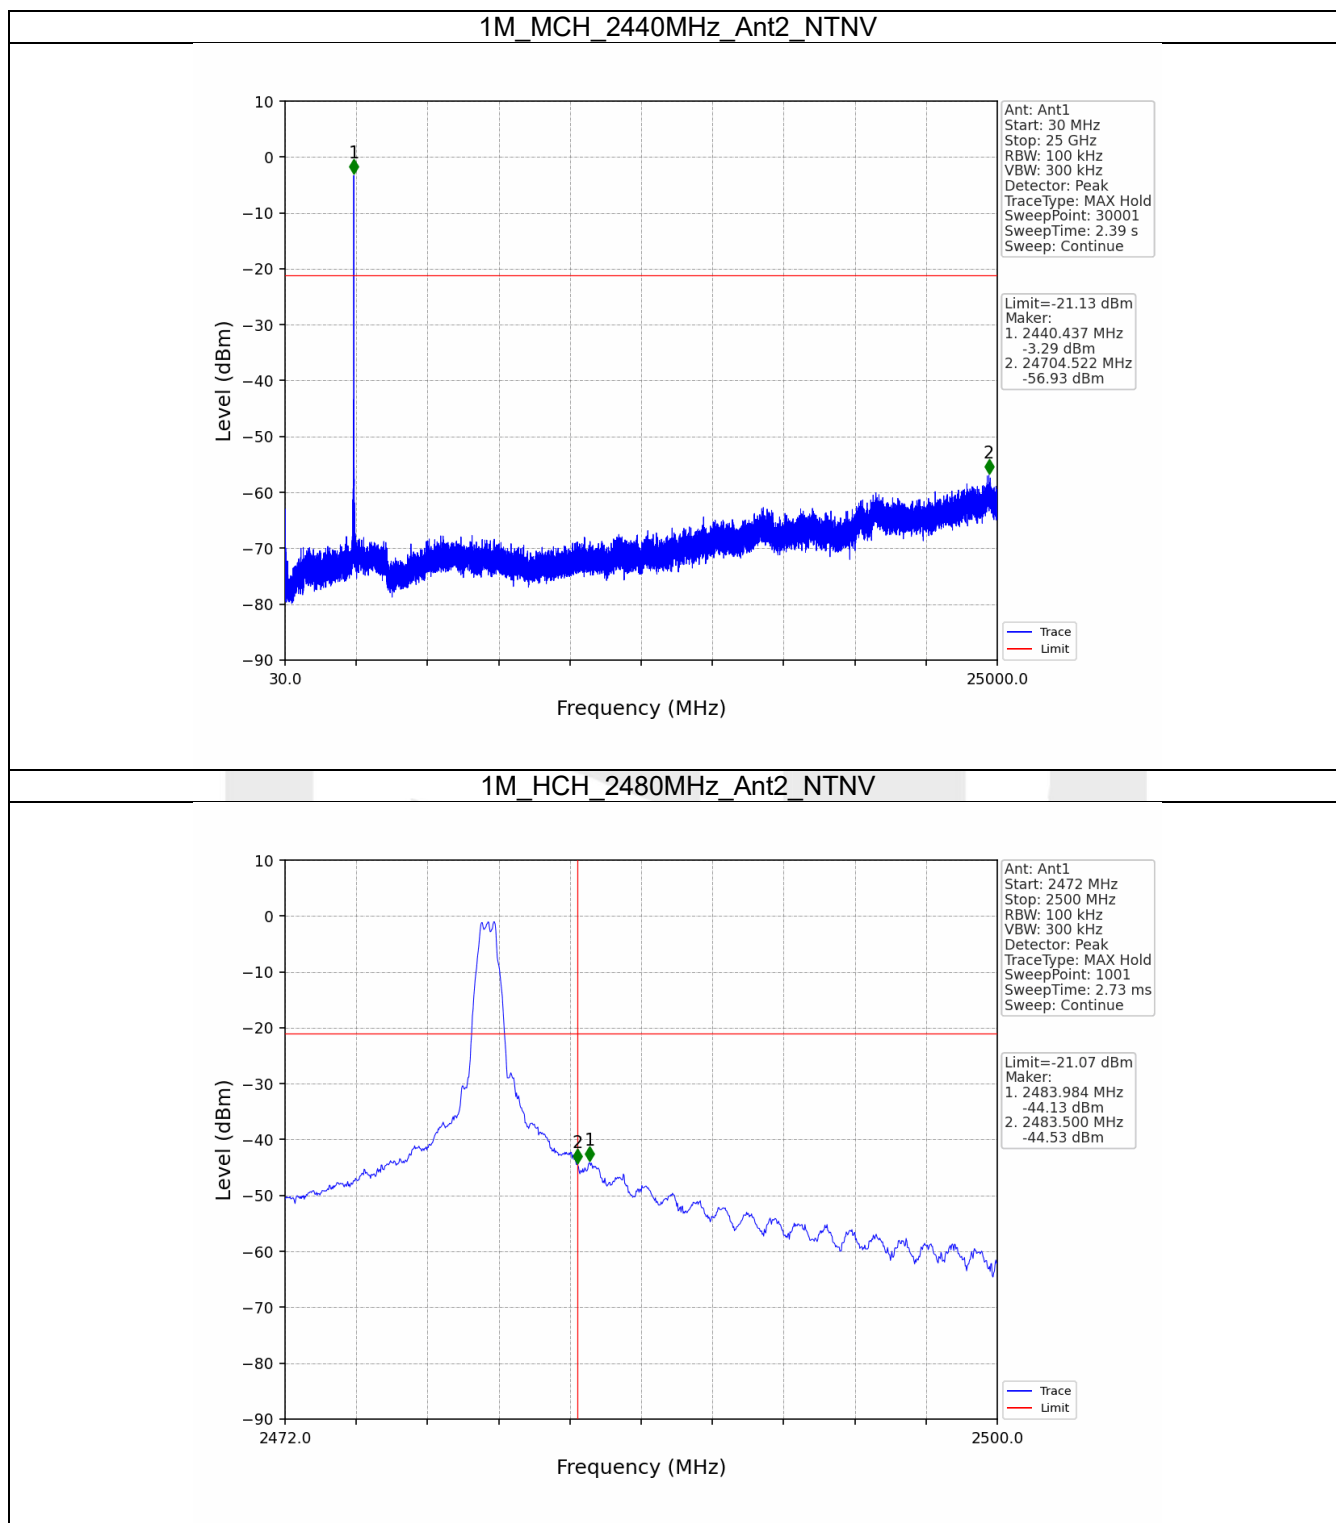

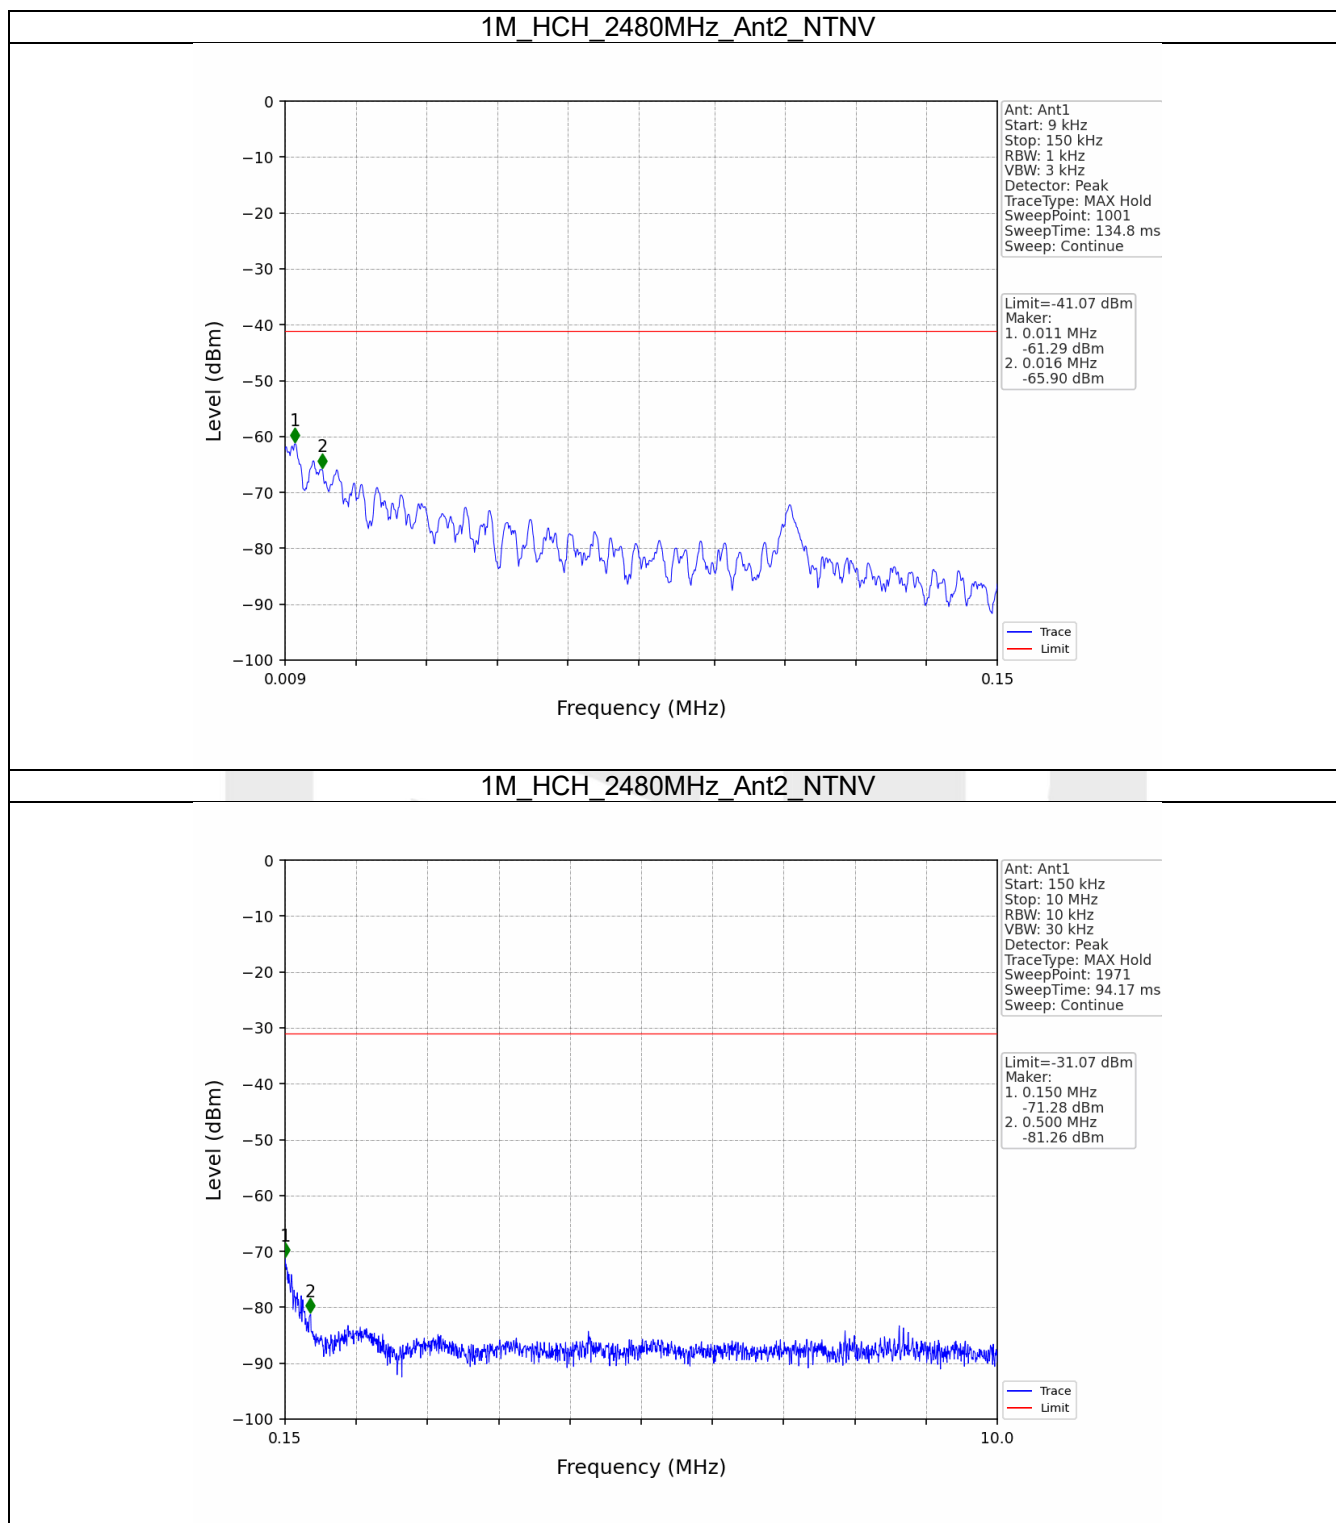

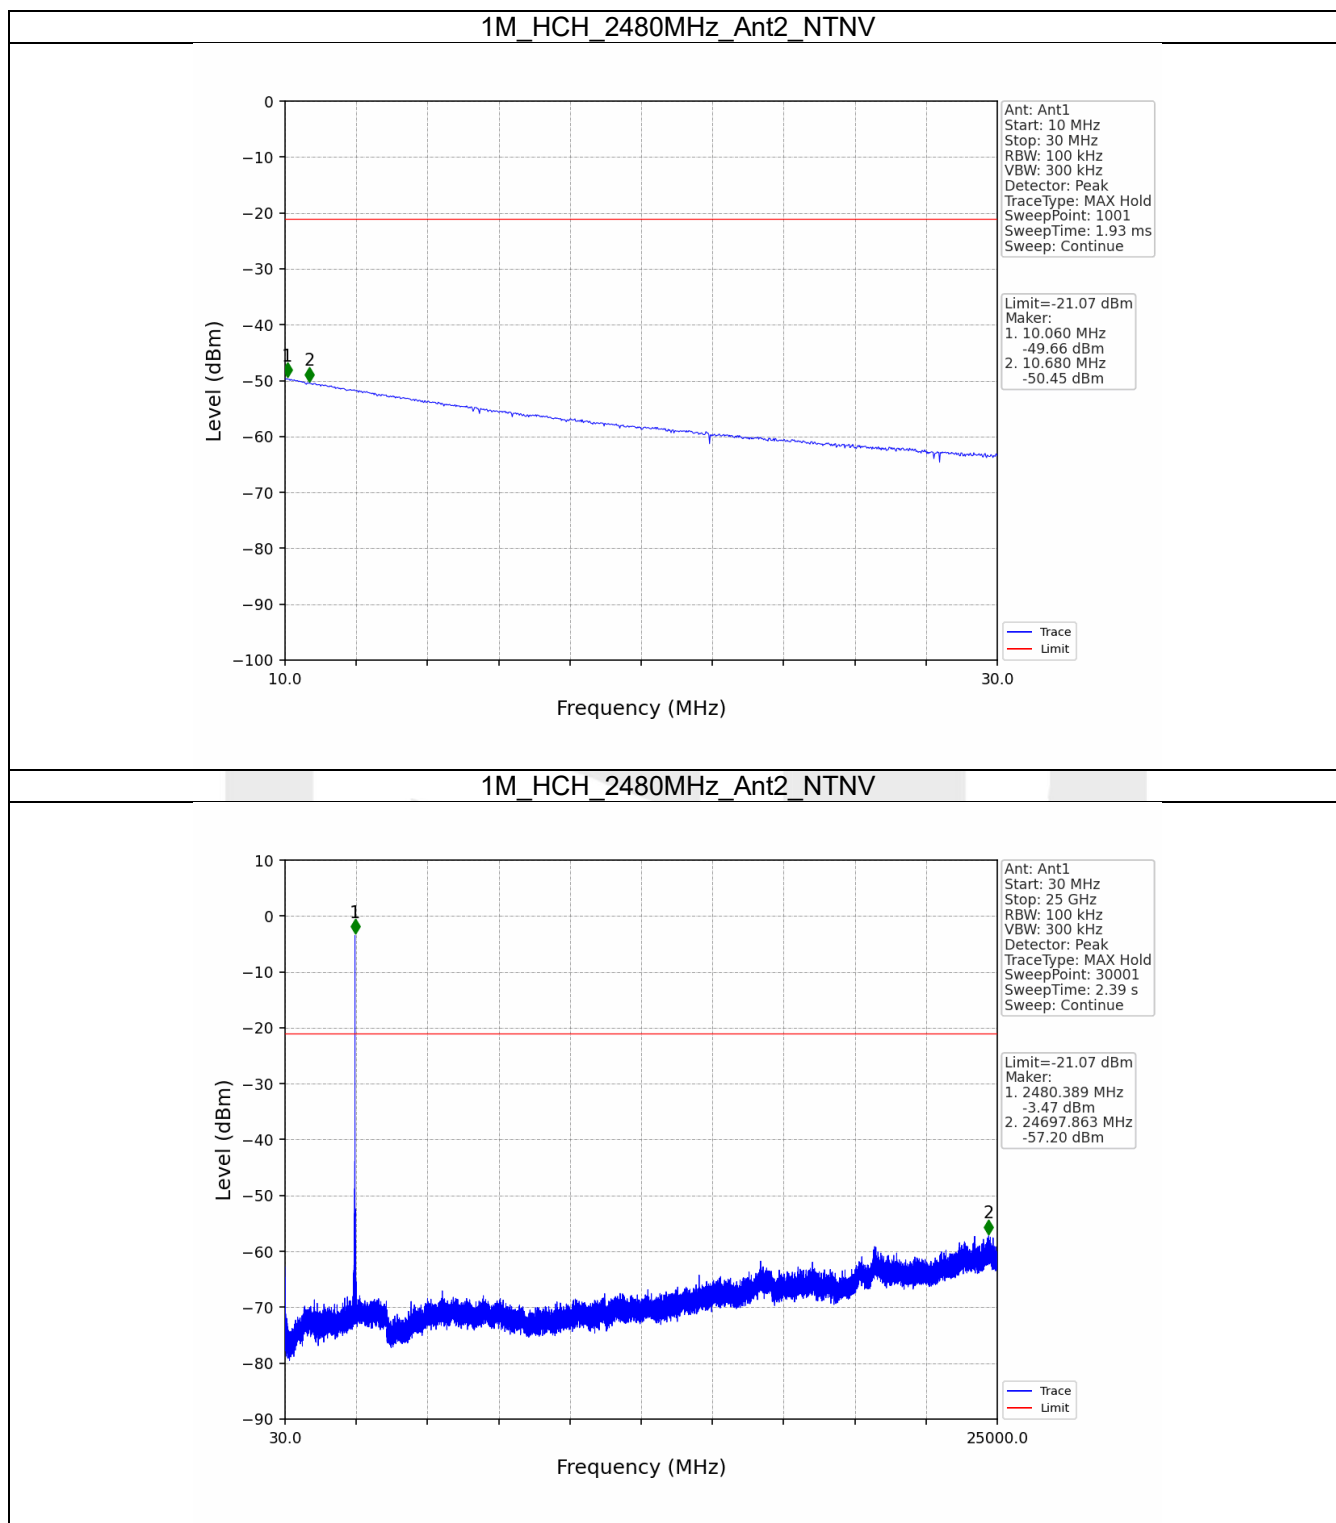

Module 3

1. Duty Cycle


1.1 Test Result


1.1.1 Ant3

Ant3							
Mode	TX Type	Frequency (MHz)	T_on (ms)	Period (ms)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	Max. DC Variation (%)
1M	SISO	2402	0.392	0.625	62.72	2.03	0.02
		2440	0.391	0.625	62.56	2.04	0.06
		2480	0.391	0.625	62.56	2.04	0.03

1.2 Test Graph

1.2.1 Ant3

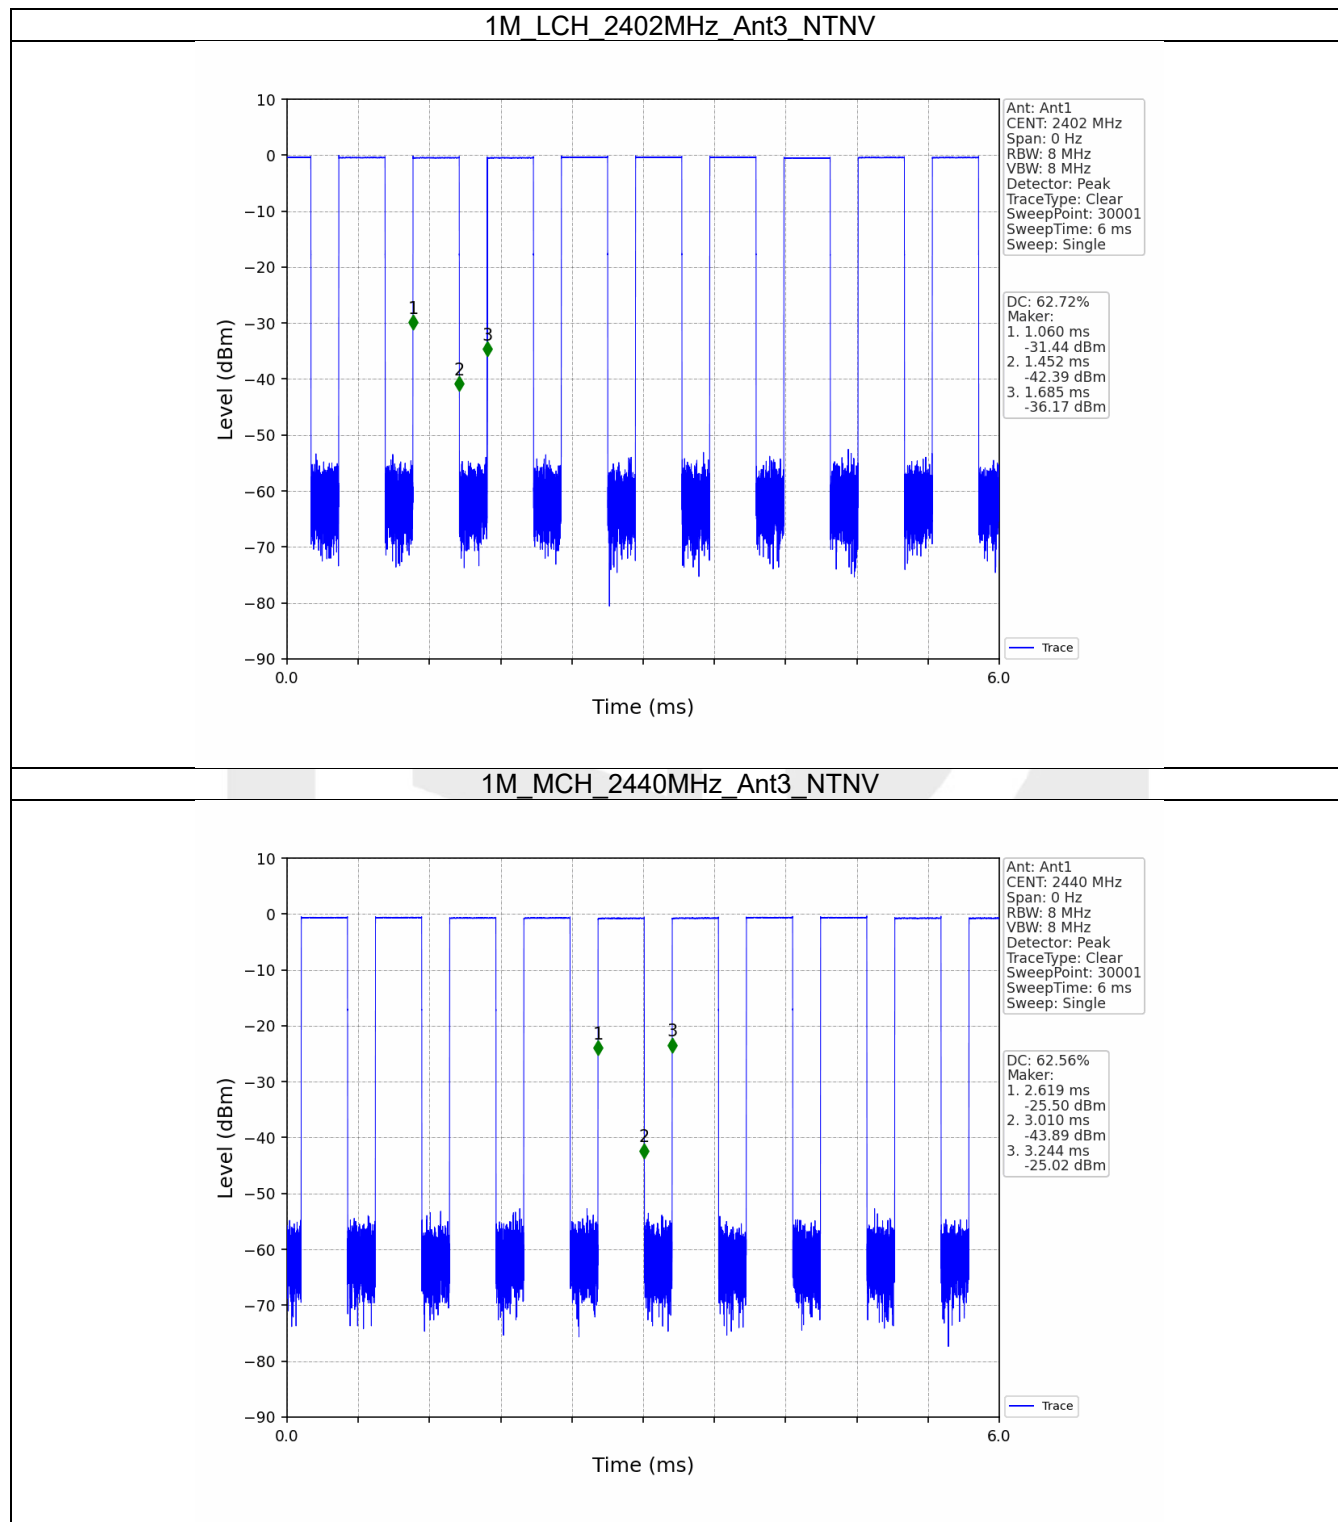

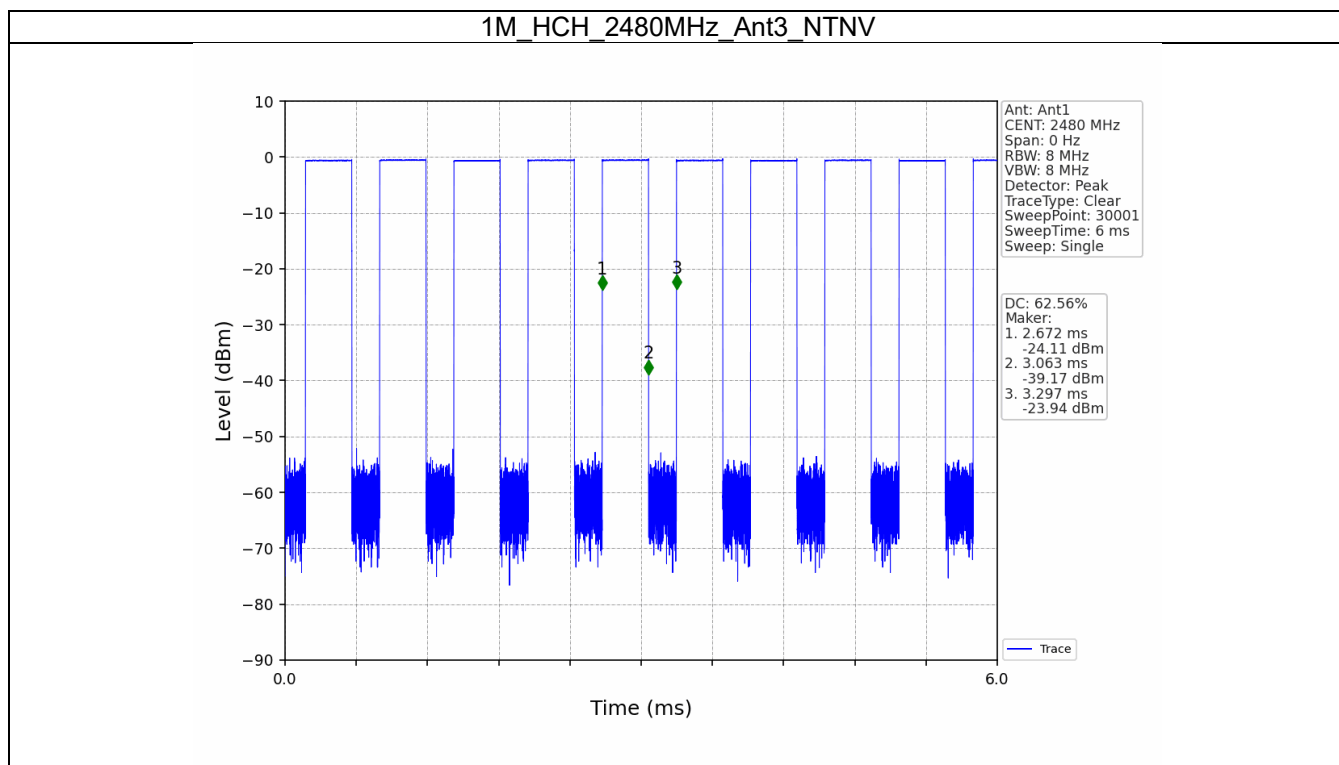

2. Bandwidth

2.1 Test Result

2.1.1 OBW


Mode	TX Type	Frequency (MHz)	ANT	99% Occupied Bandwidth (MHz)		Verdict
				Result	Limit	
1M	SISO	2402	3	1.072	/	Pass
		2440	3	1.080	/	Pass
		2480	3	1.076	/	Pass


2.1.2 6dB BW

Mode	TX Type	Frequency (MHz)	ANT	6dB Bandwidth (MHz)		Verdict
				Result	Limit	
1M	SISO	2402	3	0.725	≥ 0.5	Pass
		2440	3	0.744	≥ 0.5	Pass
		2480	3	0.750	≥ 0.5	Pass


2.2 Test Graph


2.2.1 OBW

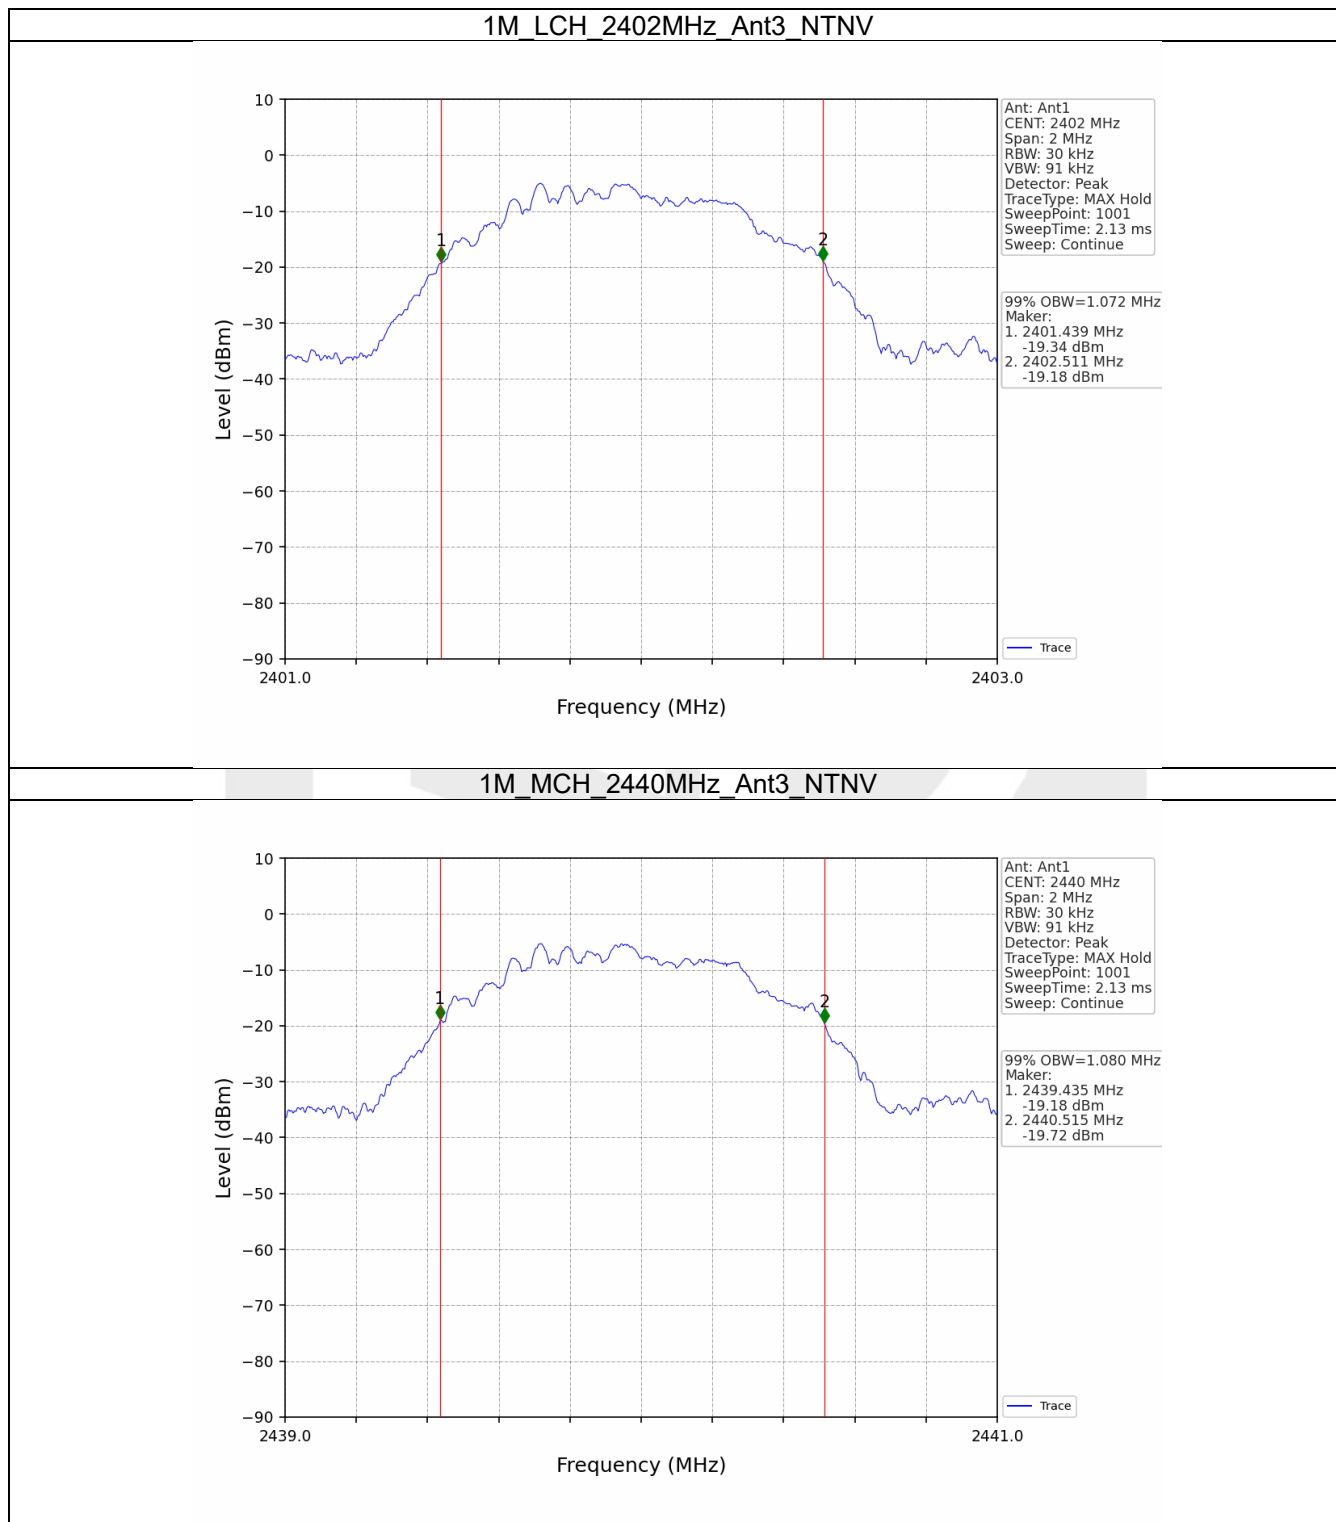

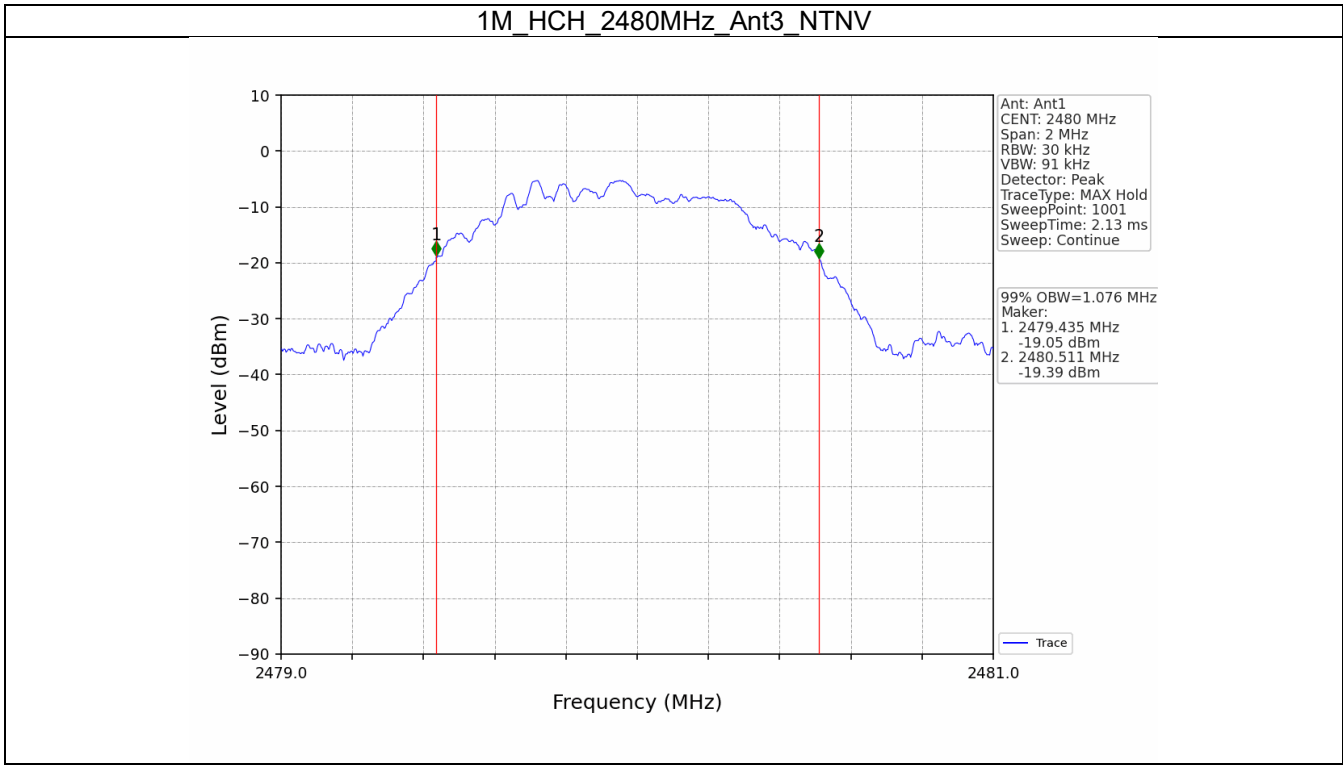

2.2.2 6dB BW

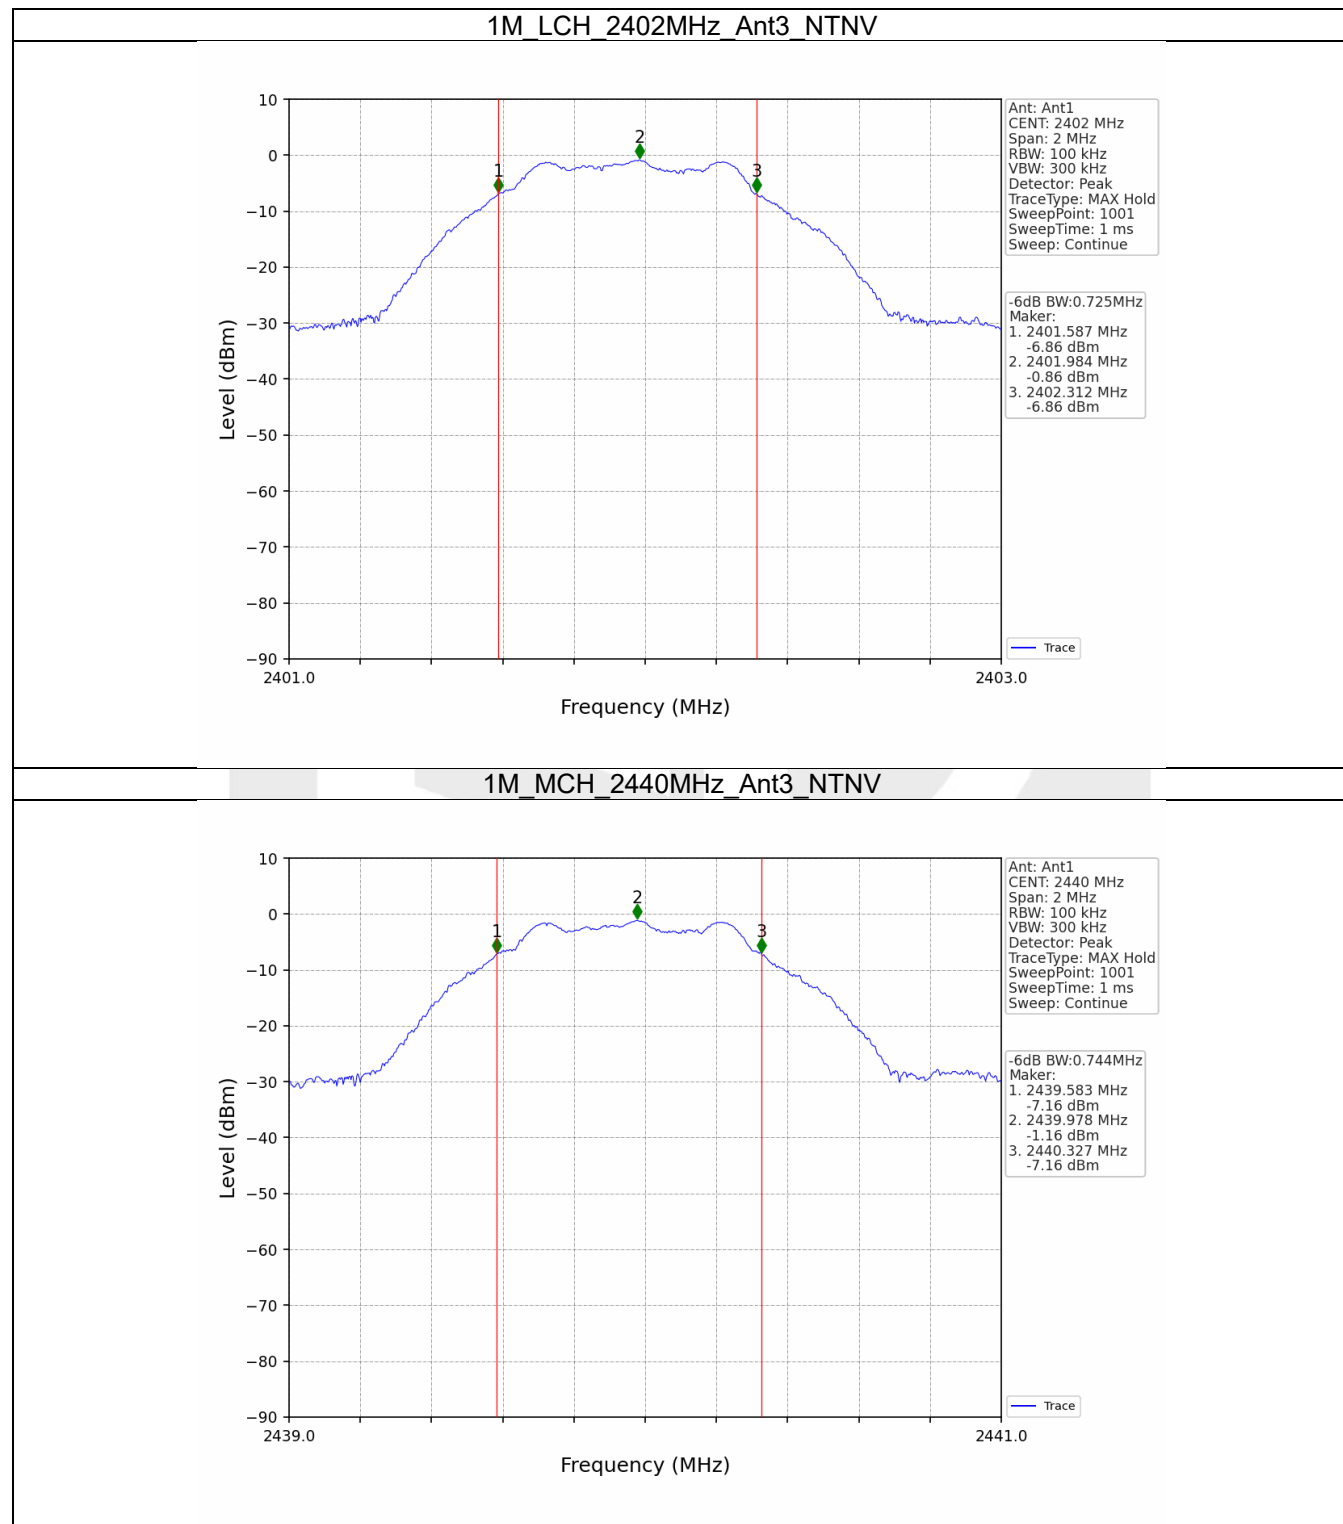

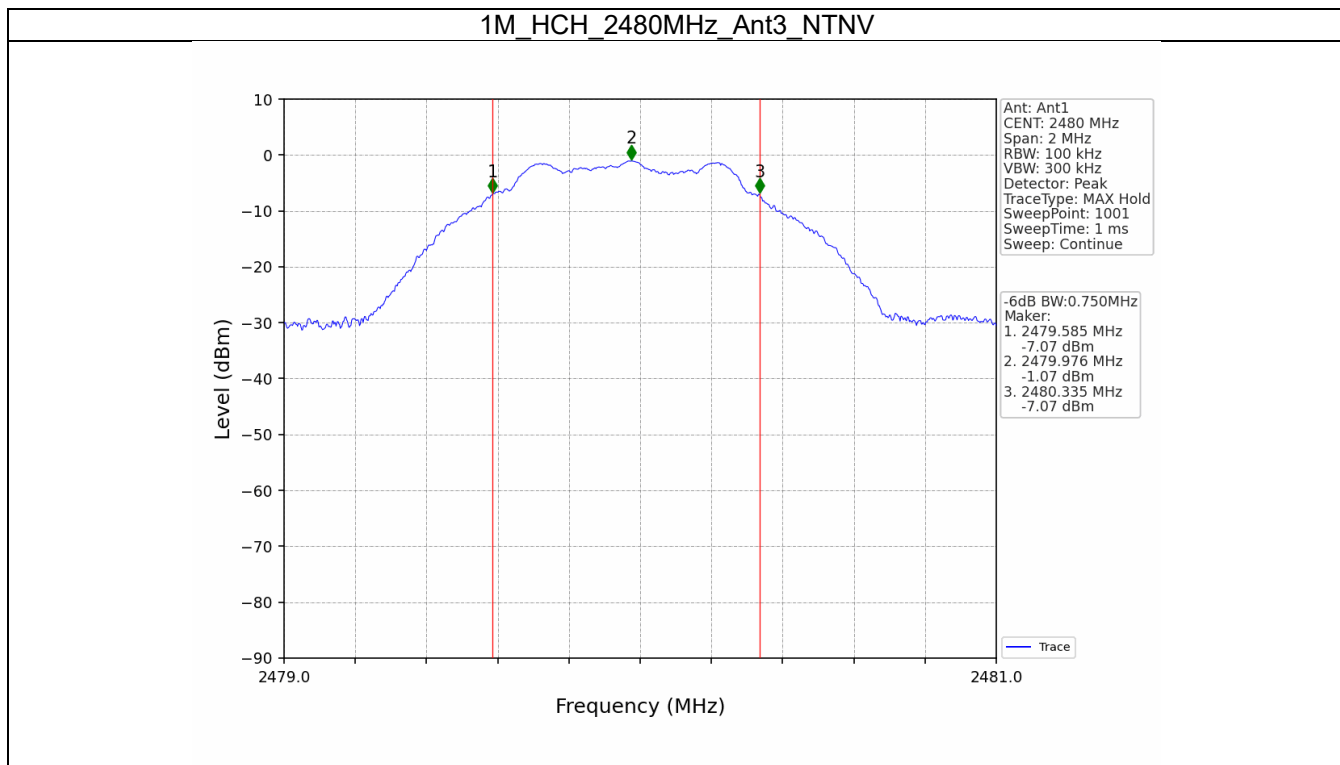

3. Maximum Conducted Output Power

3.1 Test Result

3.1.1 Power

Mode	TX Type	Frequency (MHz)	Maximum Peak Conducted Output Power (dBm)		Verdict
			ANT3	Limit	
1M	SISO	2402	-0.30	<=30	Pass
		2440	-0.59	<=30	Pass
		2480	-0.52	<=30	Pass

4. Maximum Power Spectral Density


4.1 Test Result


4.1.1 PSD

Mode	TX Type	Frequency (MHz)	Maximum PSD (dBm/3kHz)		Verdict
			ANT3	Limit	
1M	SISO	2402	-15.10	<=8	Pass
		2440	-15.37	<=8	Pass
		2480	-15.55	<=8	Pass

4.2 Test Graph

4.2.1 PSD

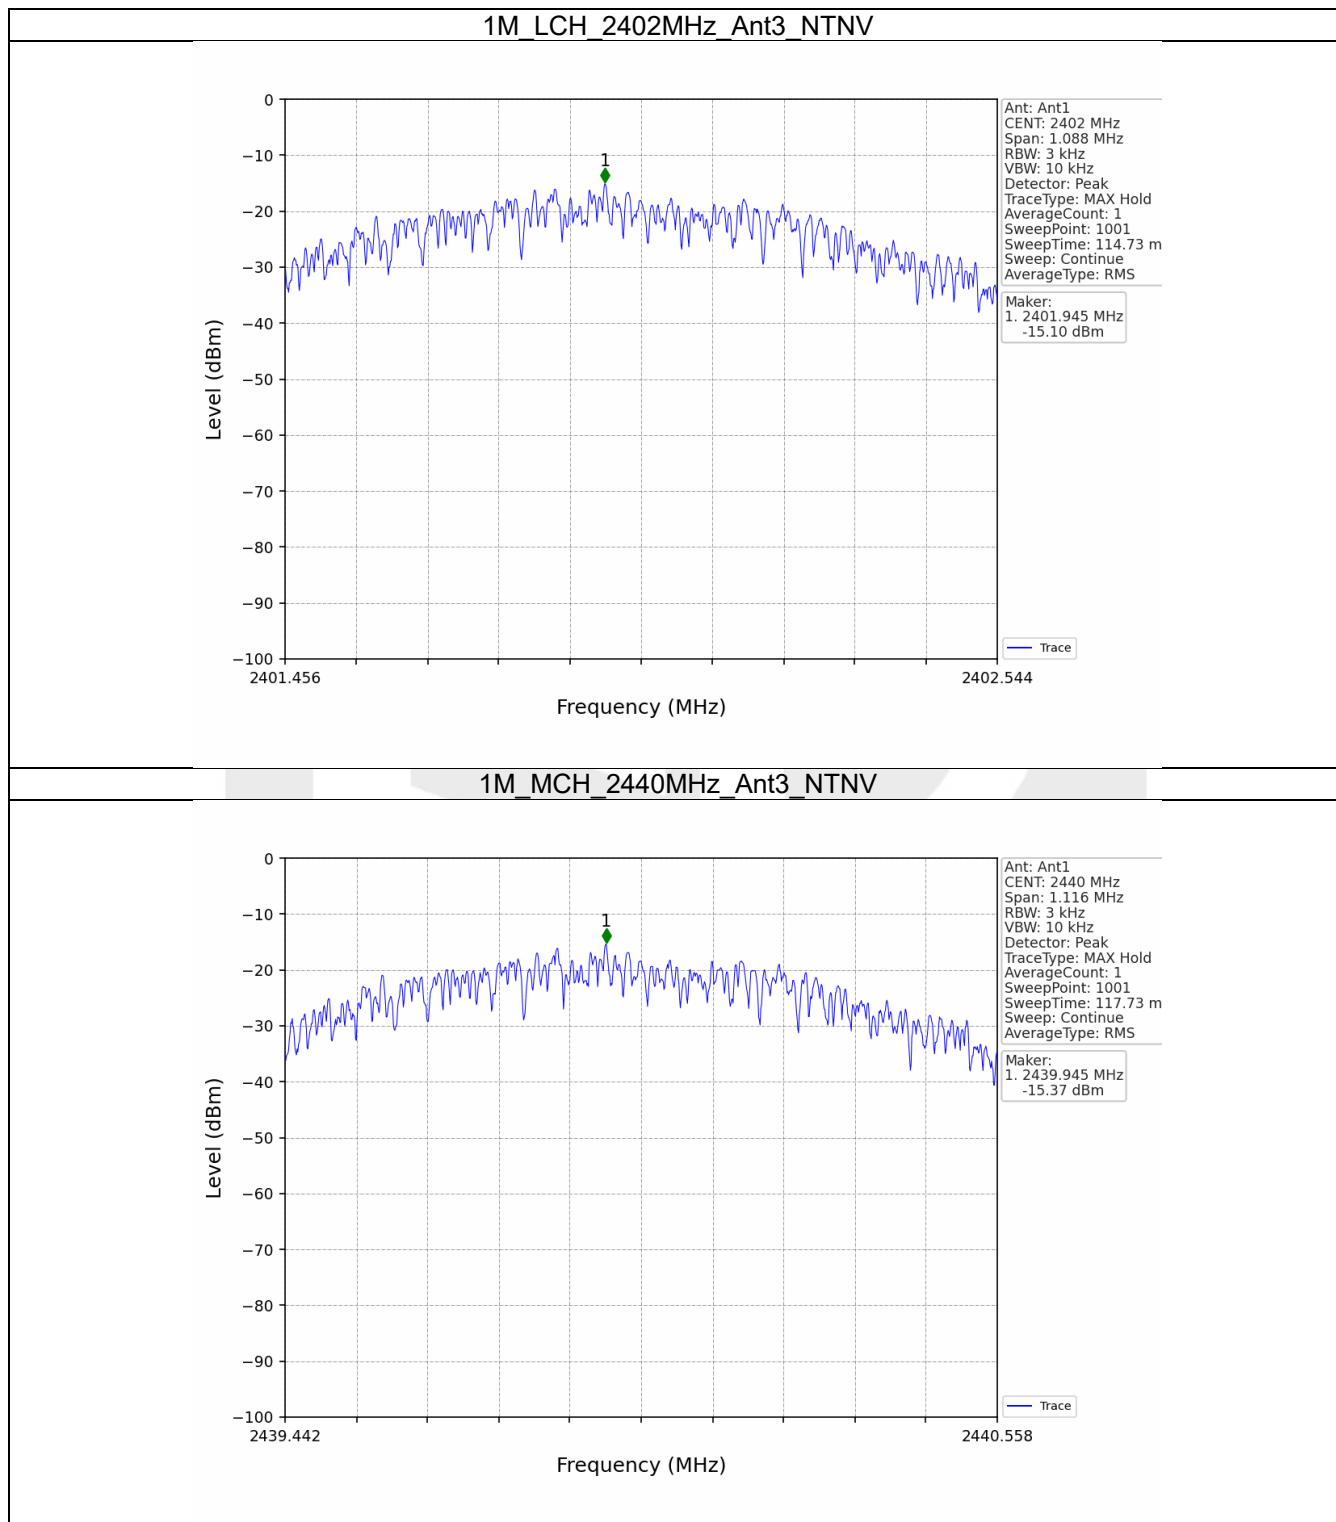

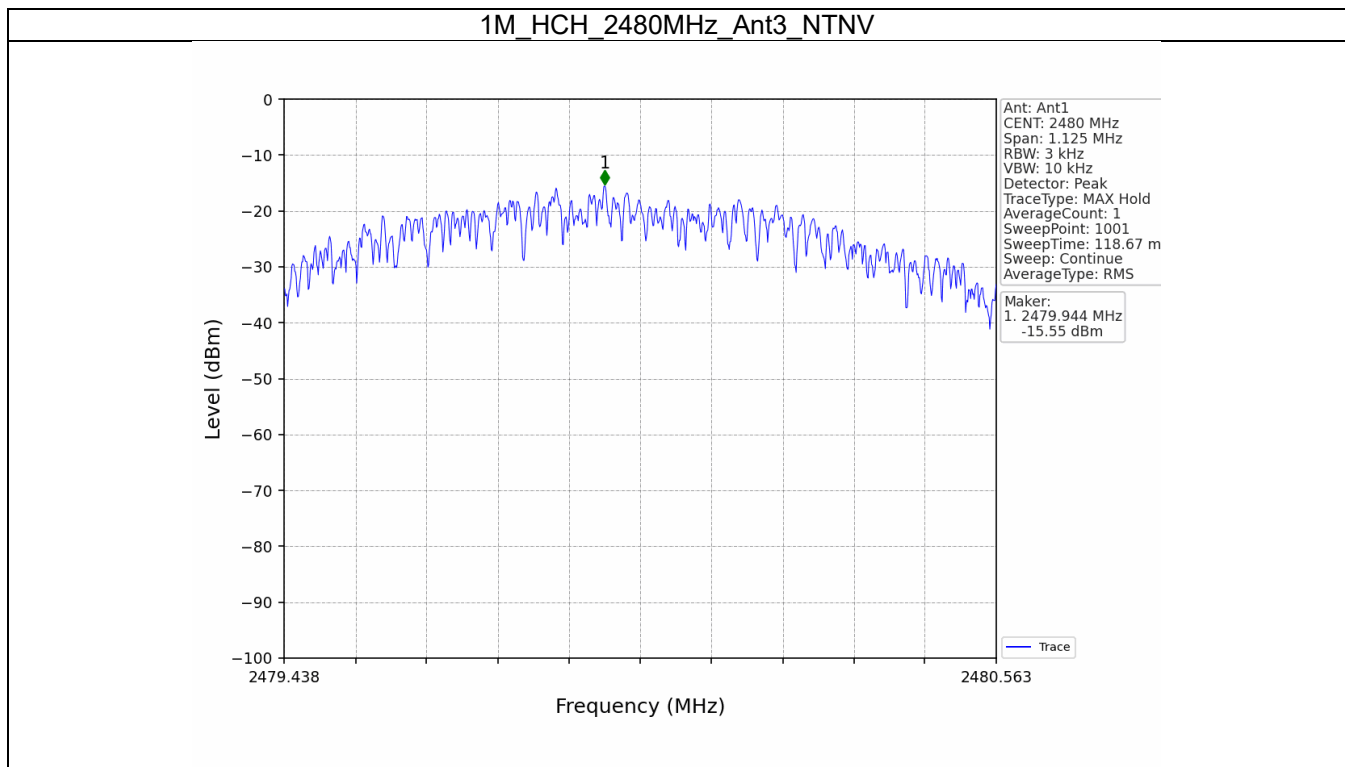

5. Unwanted Emissions In Non-restricted Frequency Bands

5.1 Test Result

5.1.1 Ref


Mode	TX Type	Frequency (MHz)	ANT	Level of Reference (dBm)
1M	SISO	2402	3	-0.83
		2440	3	-1.18
		2480	3	-1.04
Note1: Refer to FCC Part 15.247 (d) and ANSI C63.10-2020, the channel contains the maximum PSD level was used to establish the reference level.				


5.1.2 CSE

Mode	TX Type	Frequency (MHz)	ANT	Level of Reference (dBm)	Limit (dBm)	Verdict
1M	SISO	2402	3	-0.83	-20.83	Pass
		2440	3	-1.18	-21.18	Pass
		2480	3	-1.04	-21.04	Pass
Note1: Refer to FCC Part 15.247 (d) and ANSI C63.10-2020, the channel contains the maximum PSD level was used to establish the reference level.						


5.2 Test Graph


5.2.1 Ref

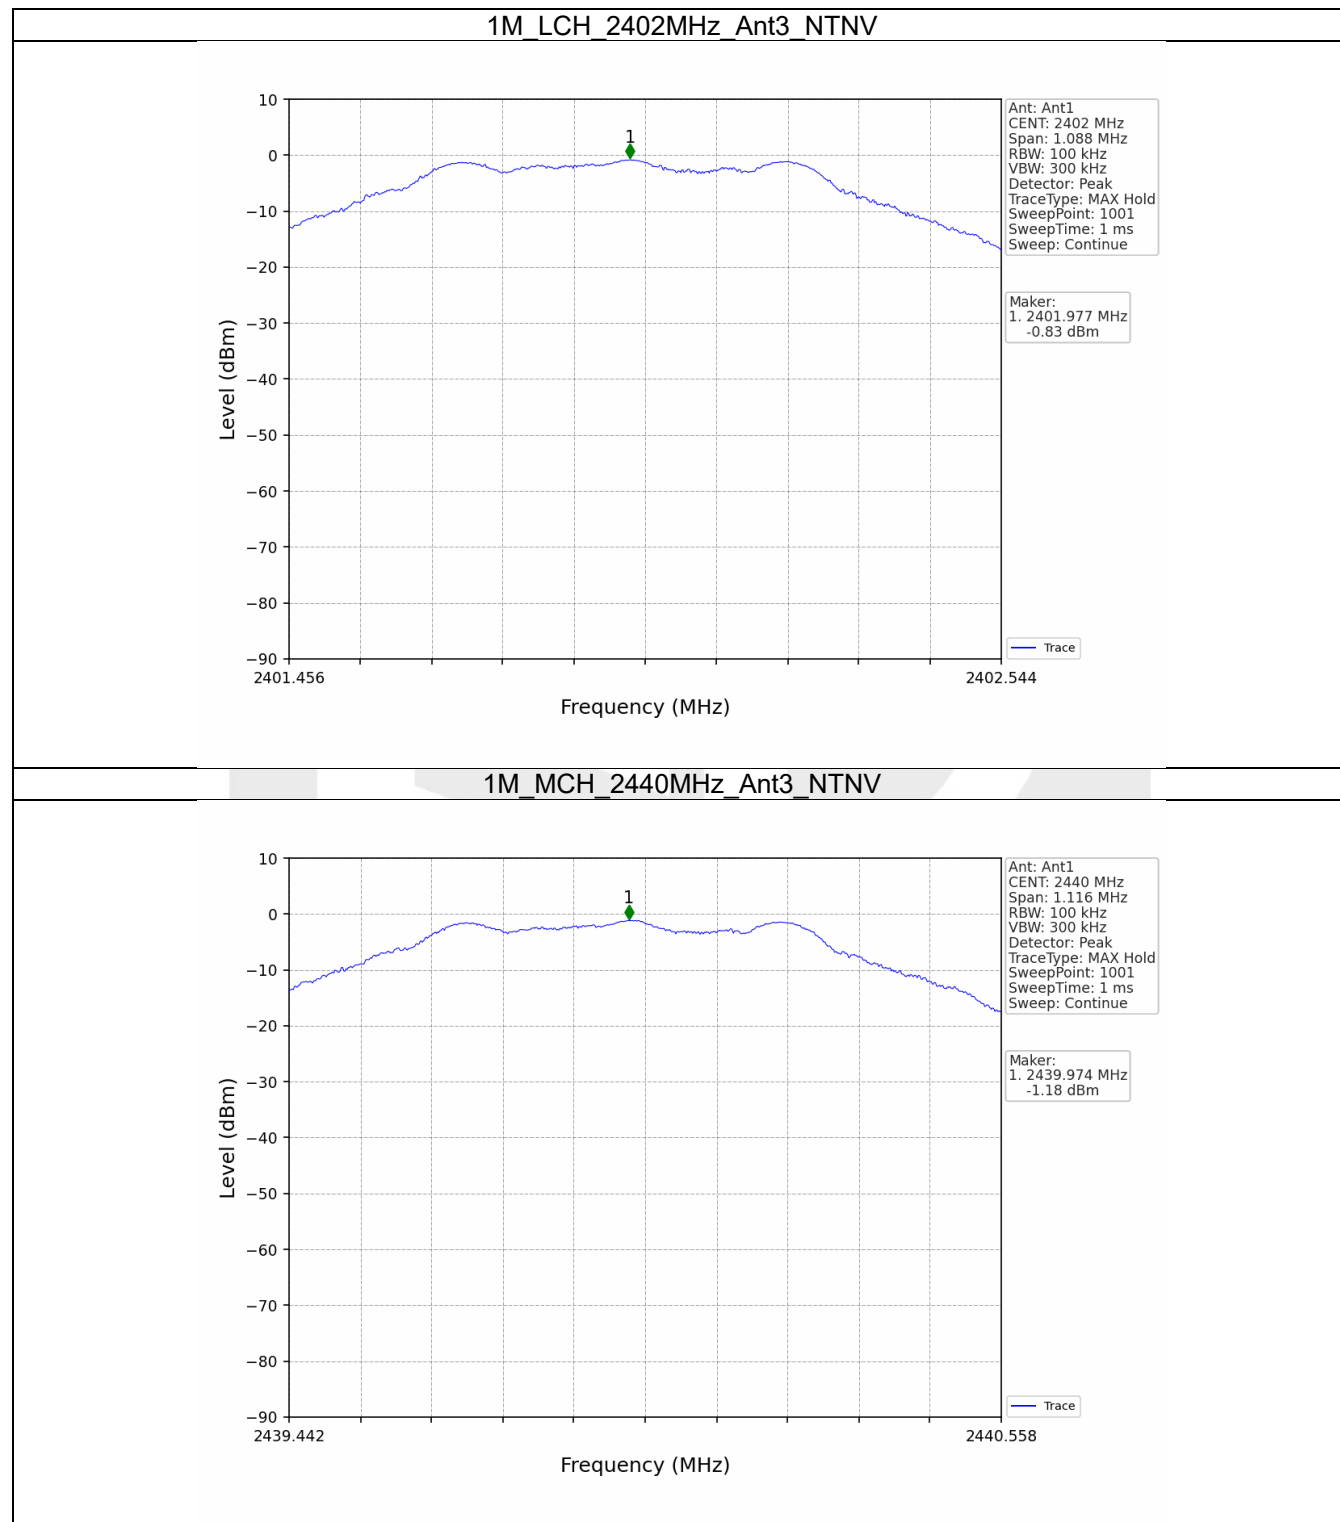


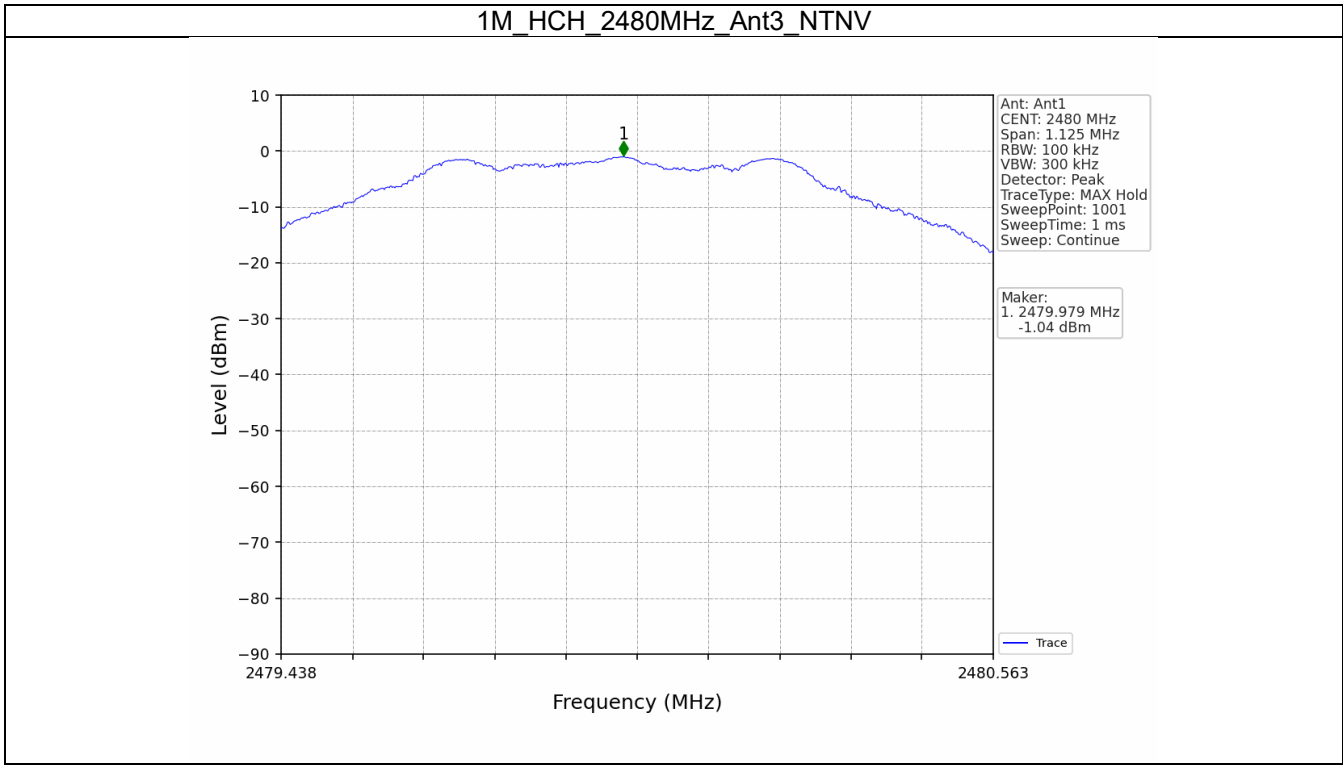



5.2.2 CSE

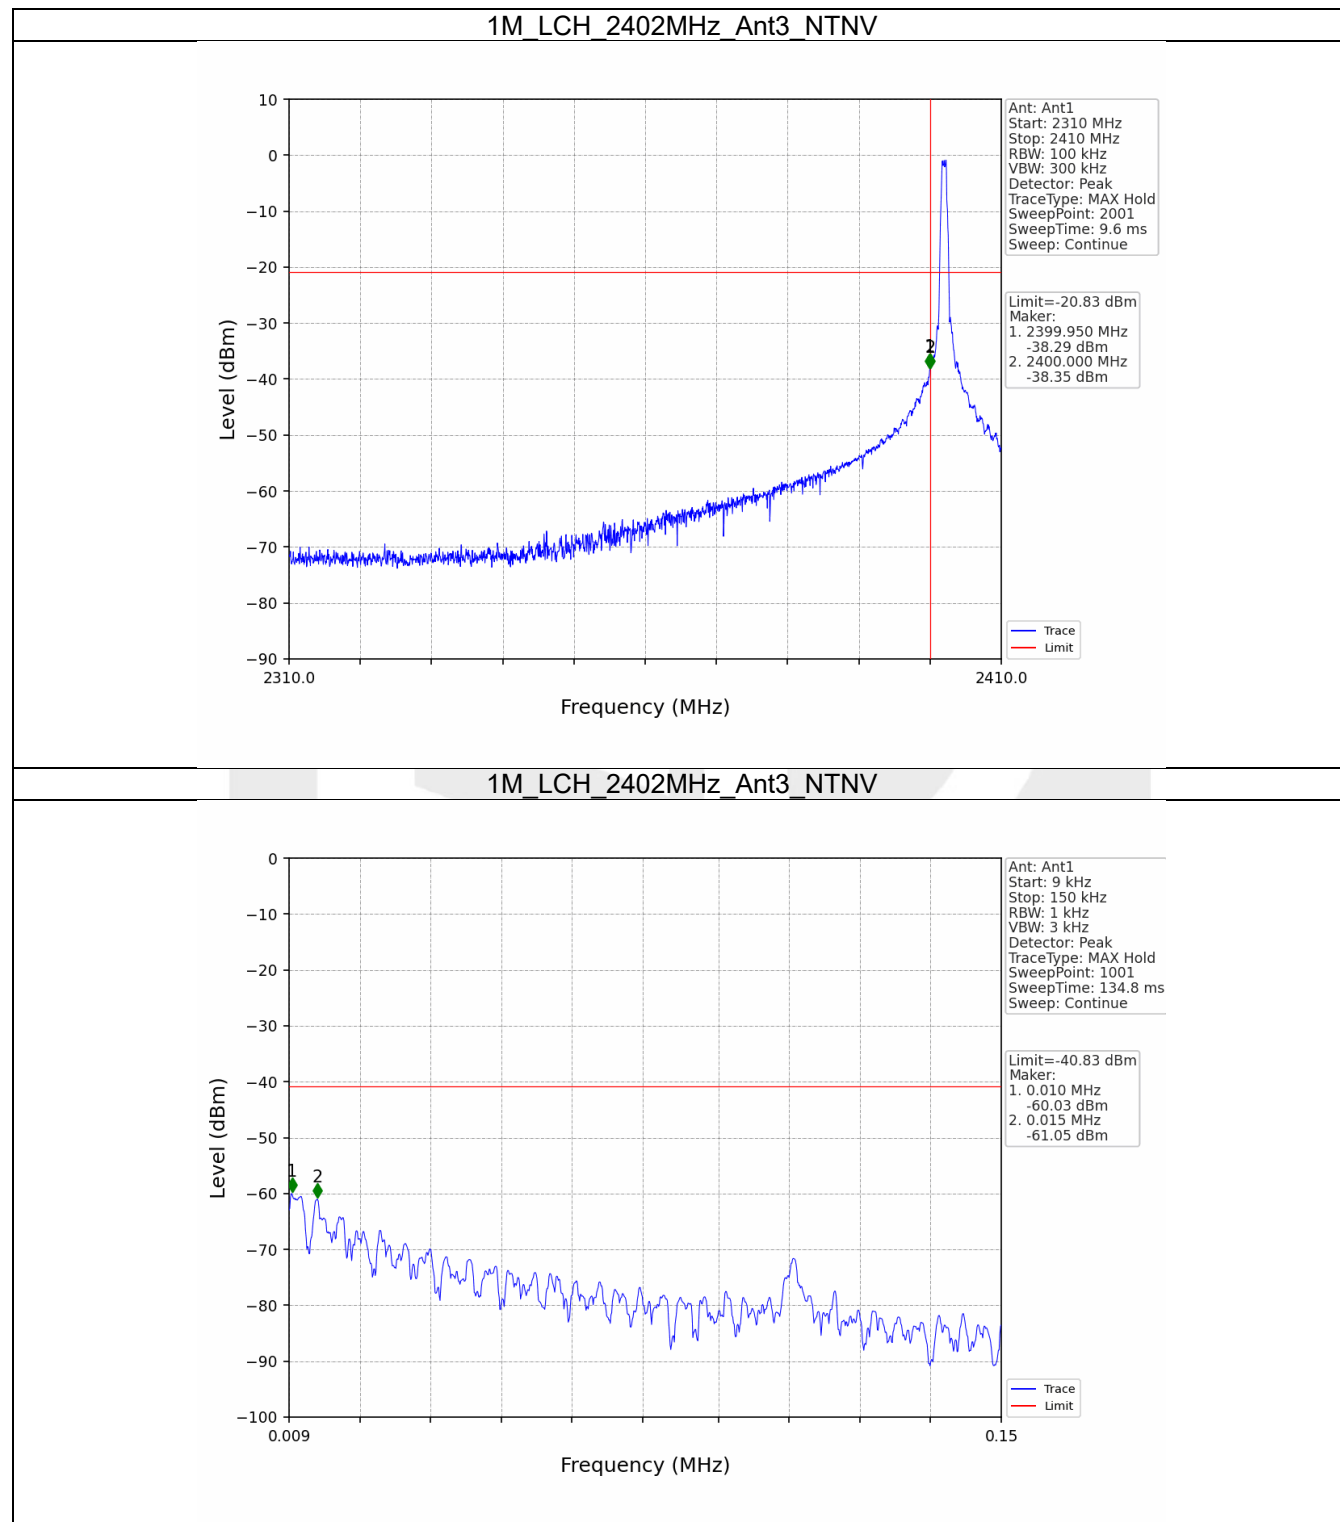


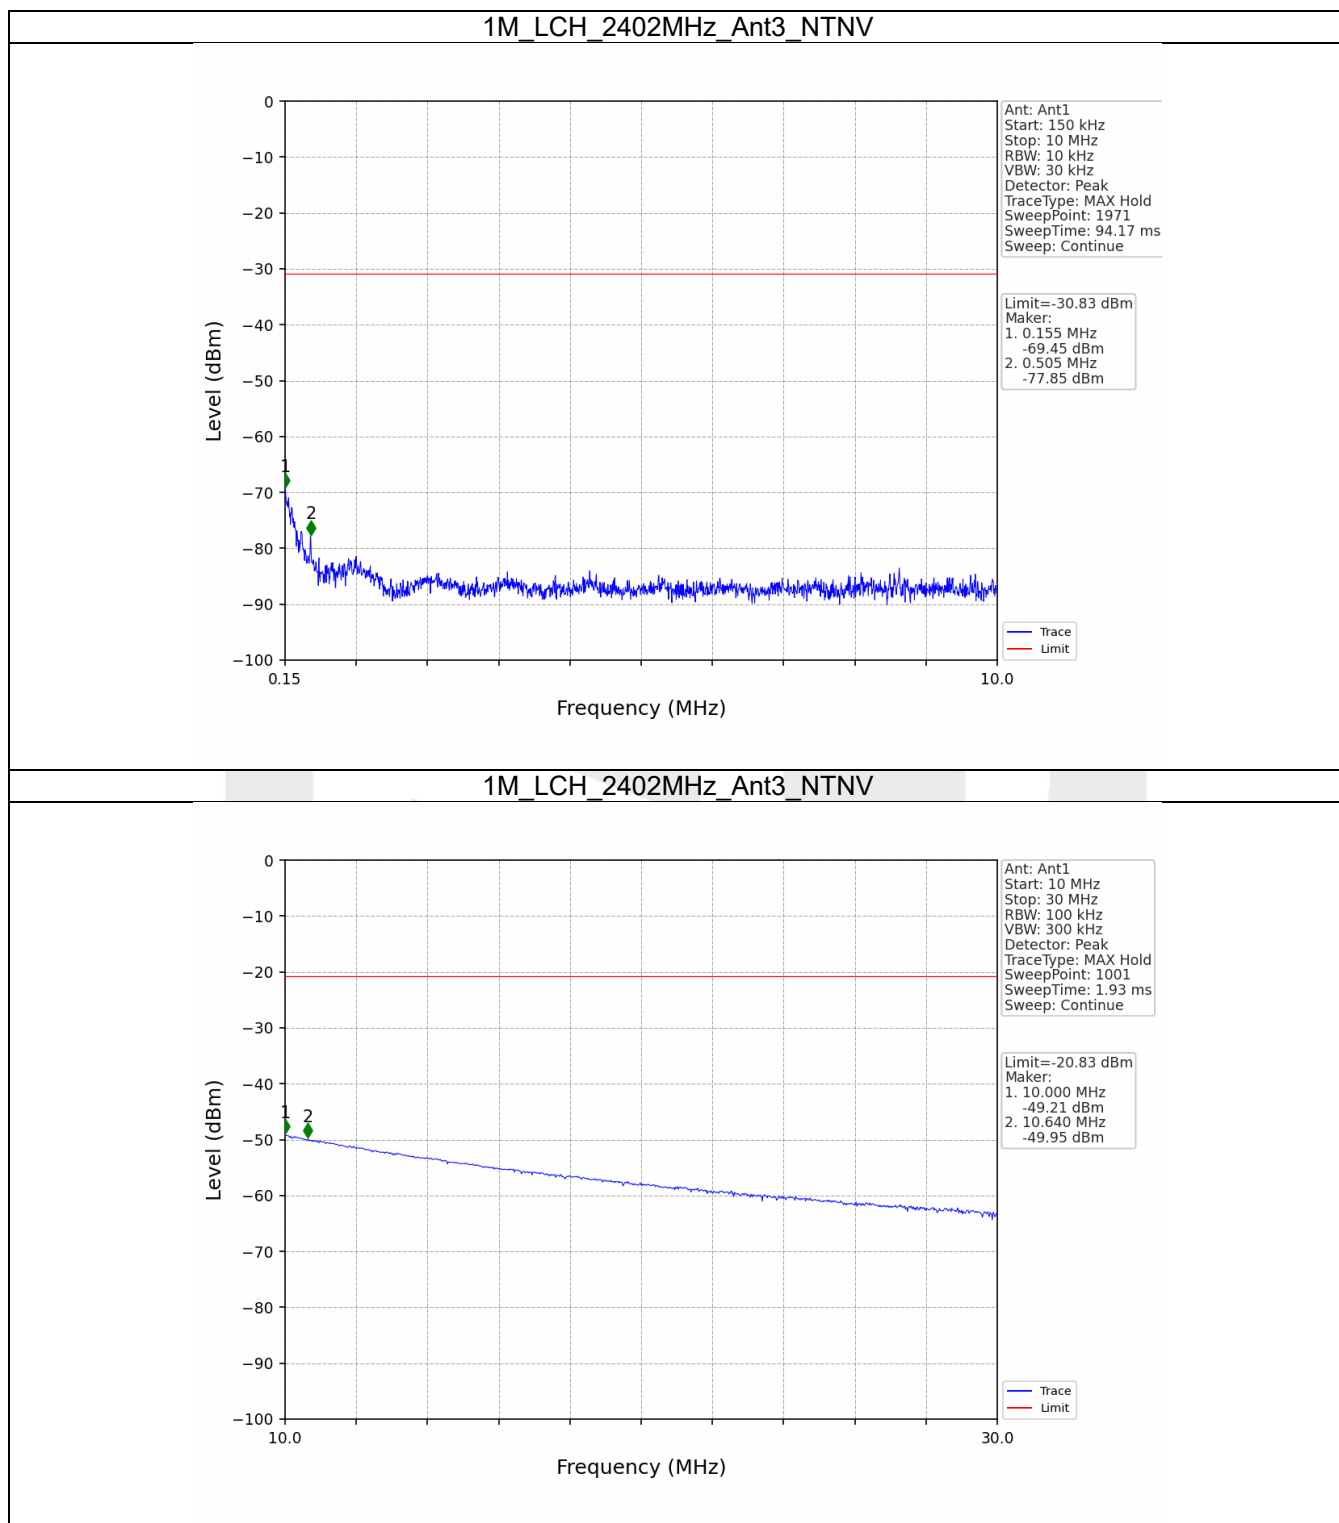


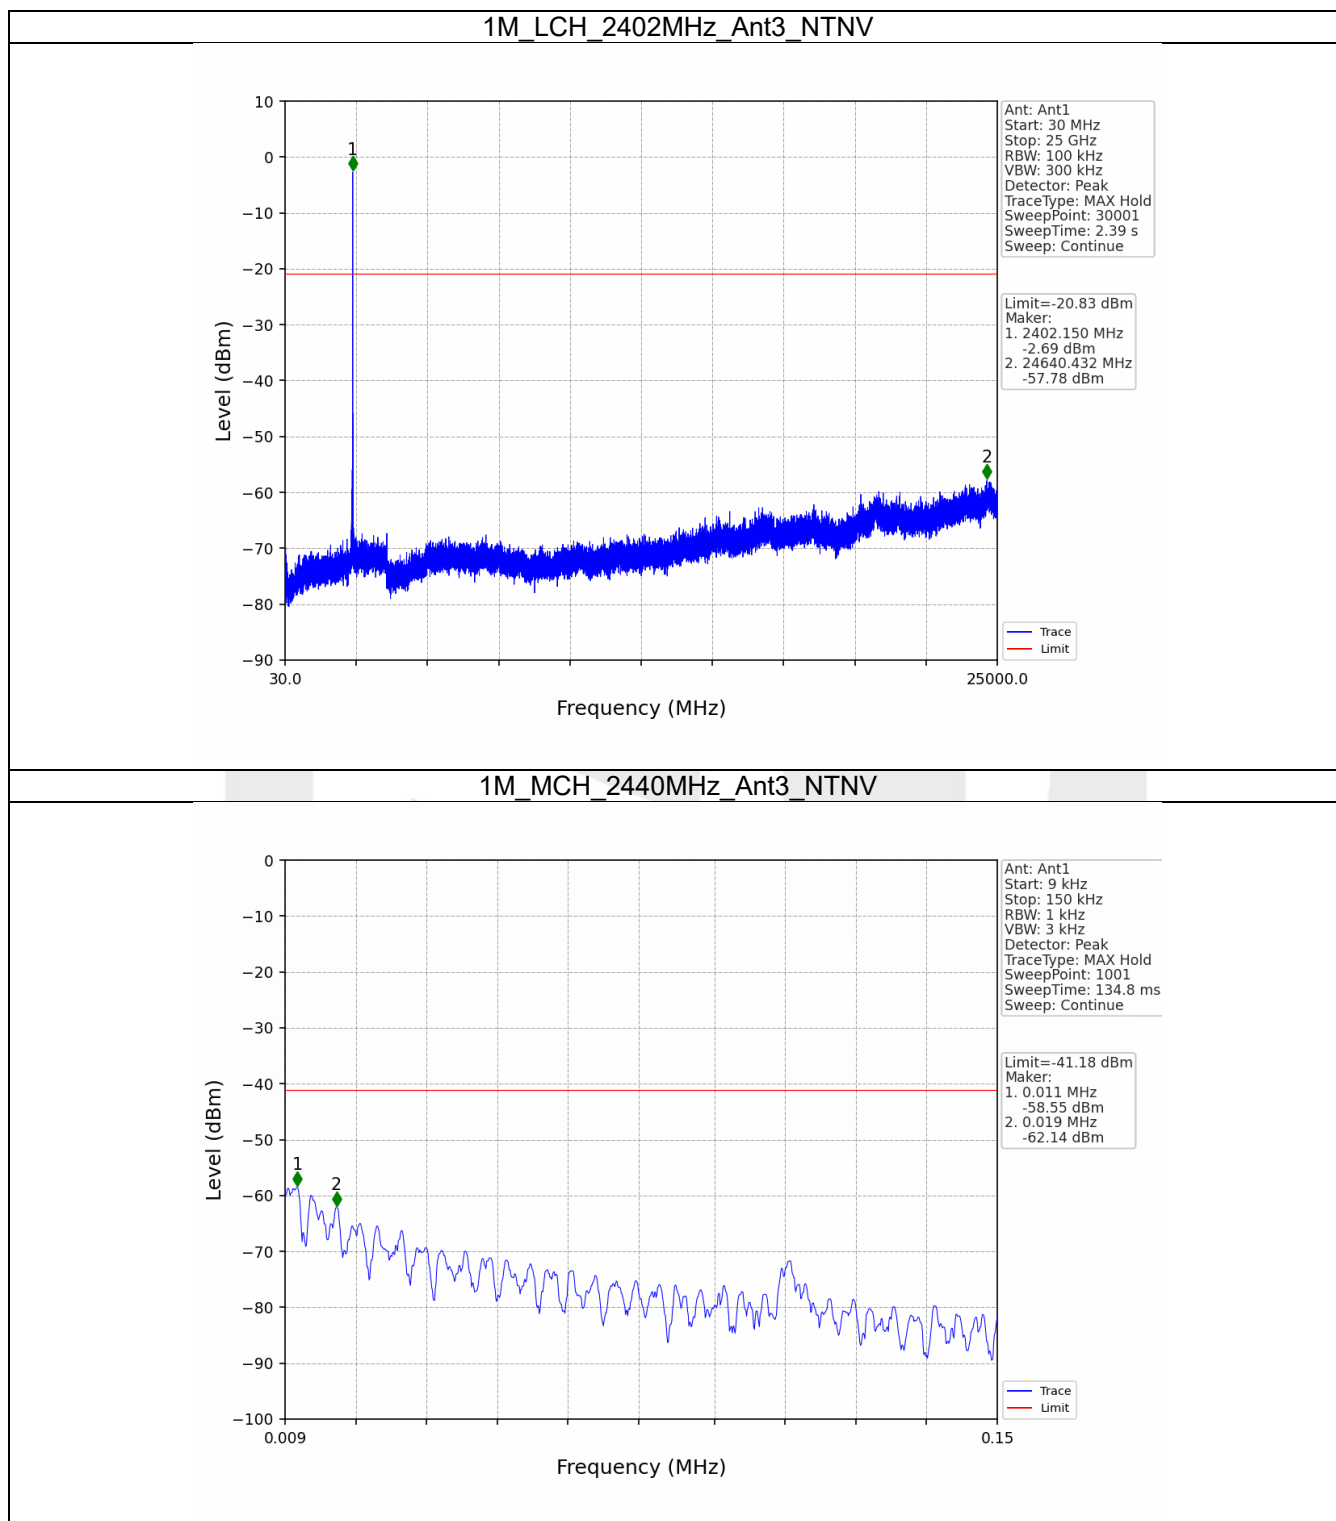

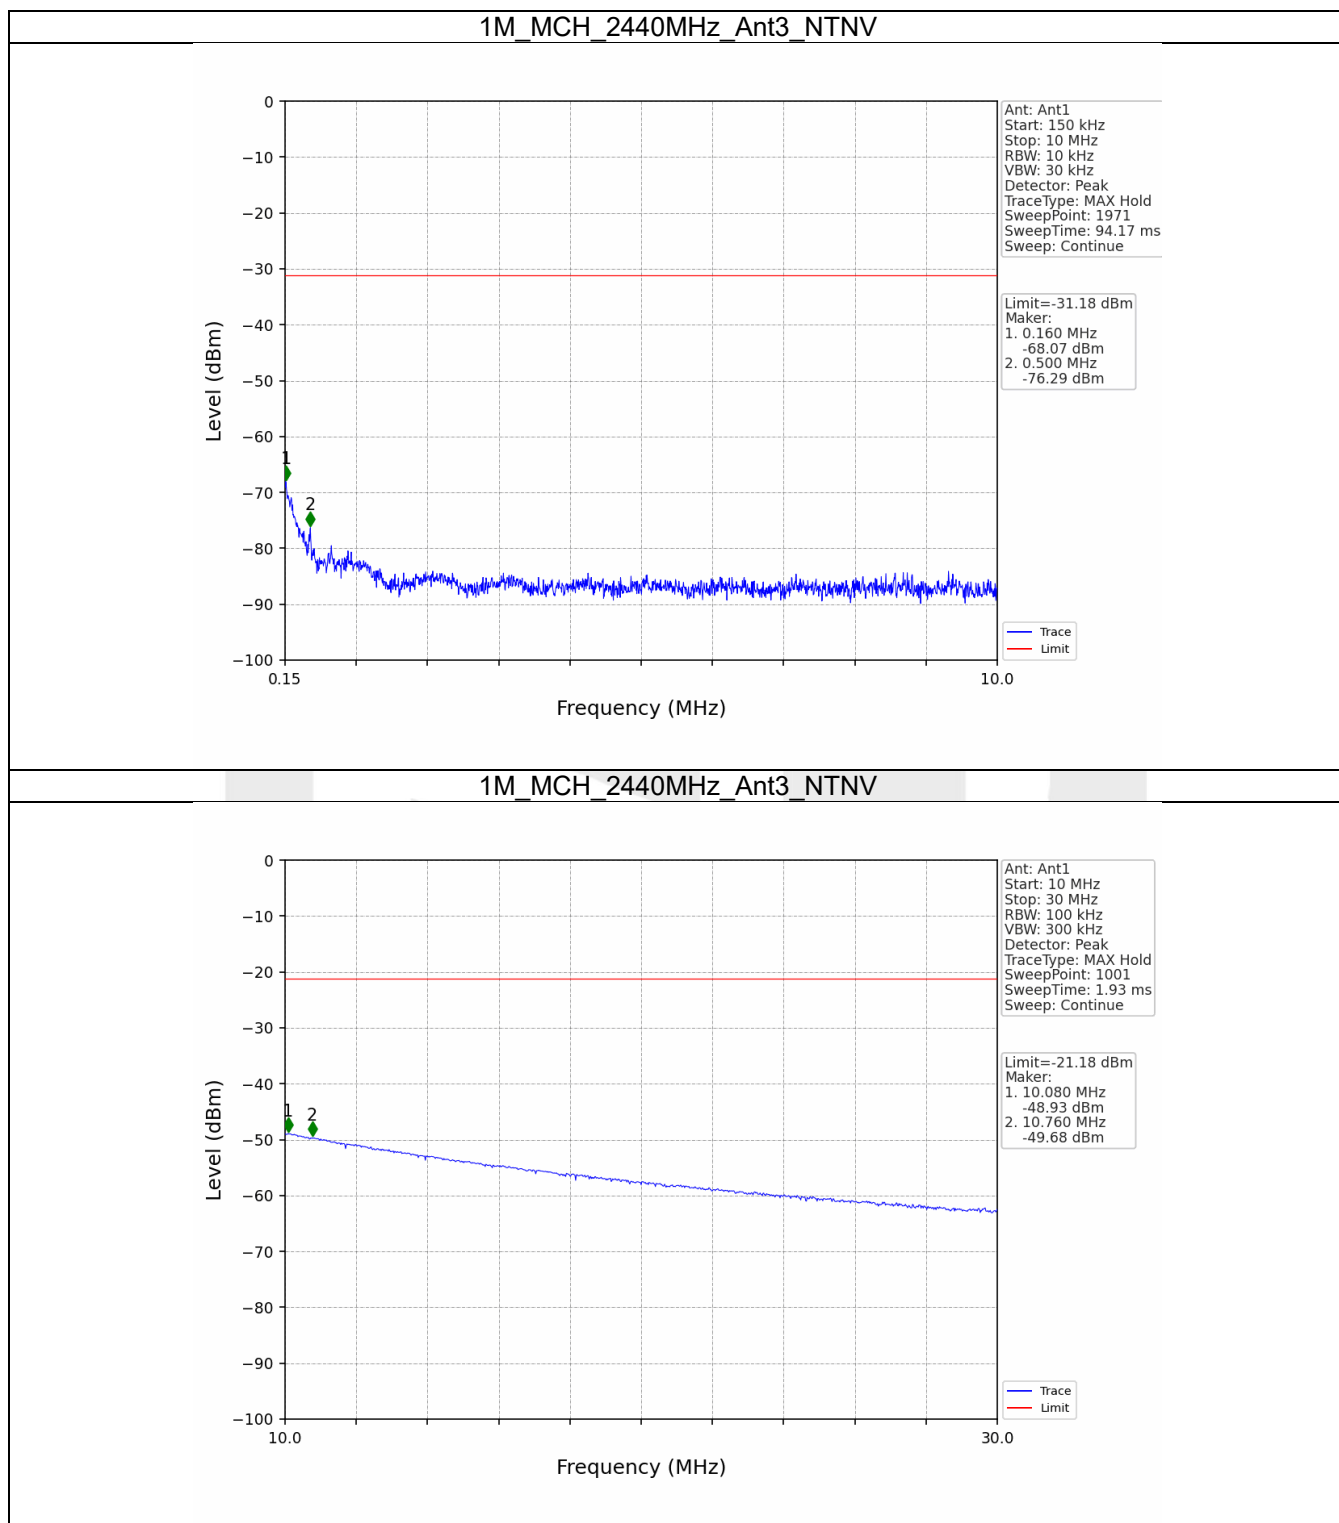

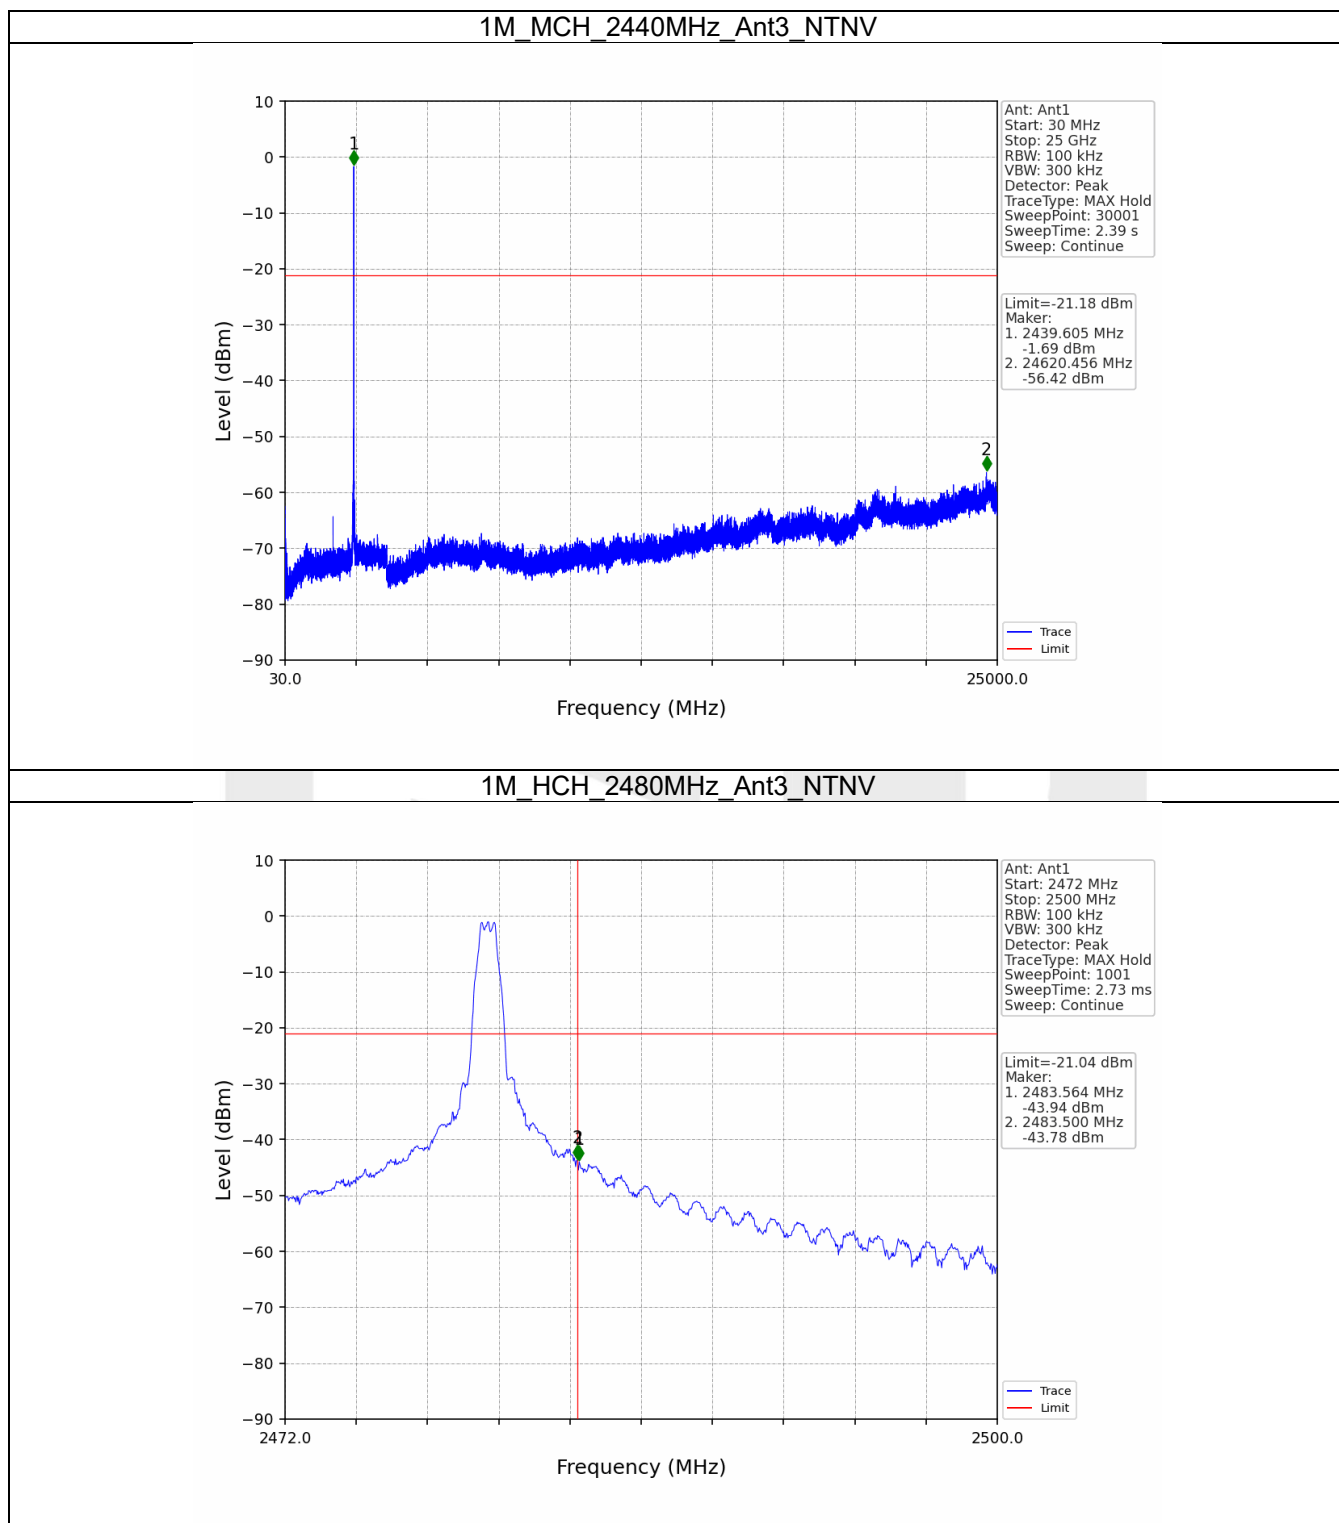

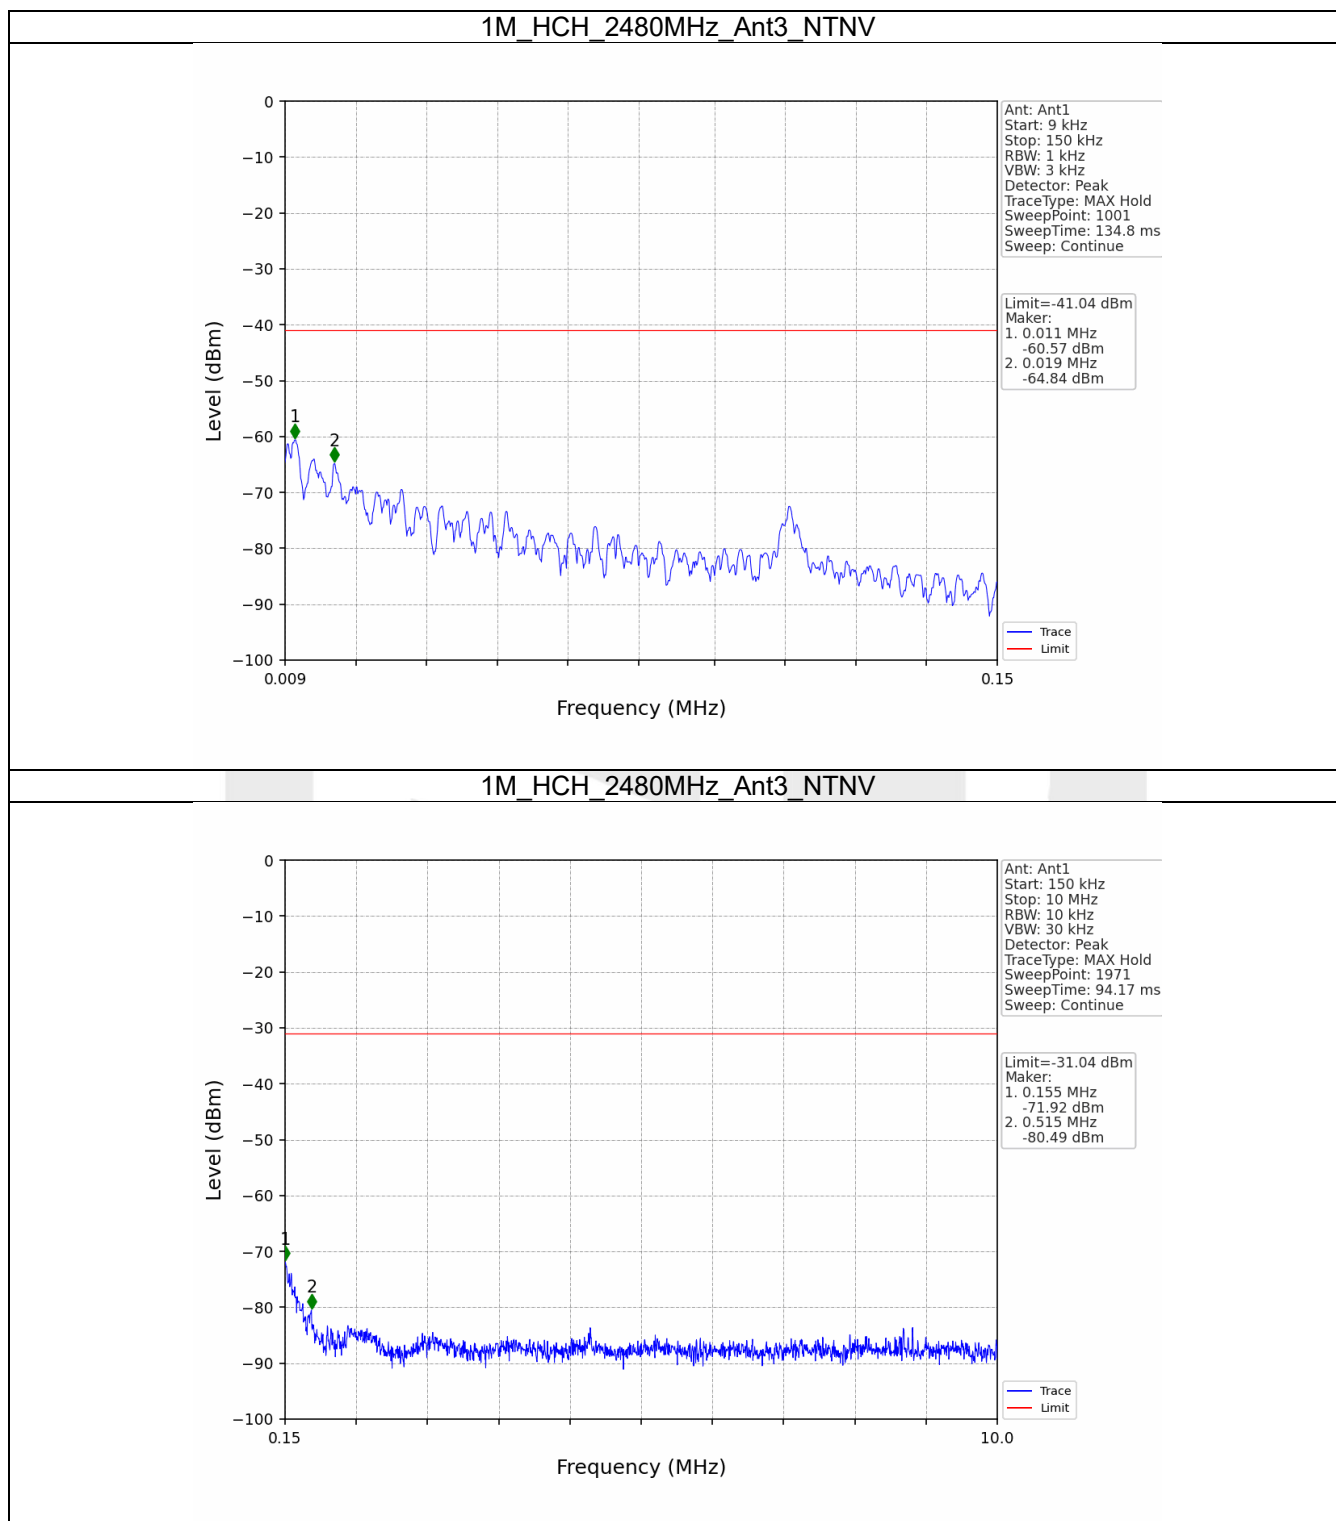

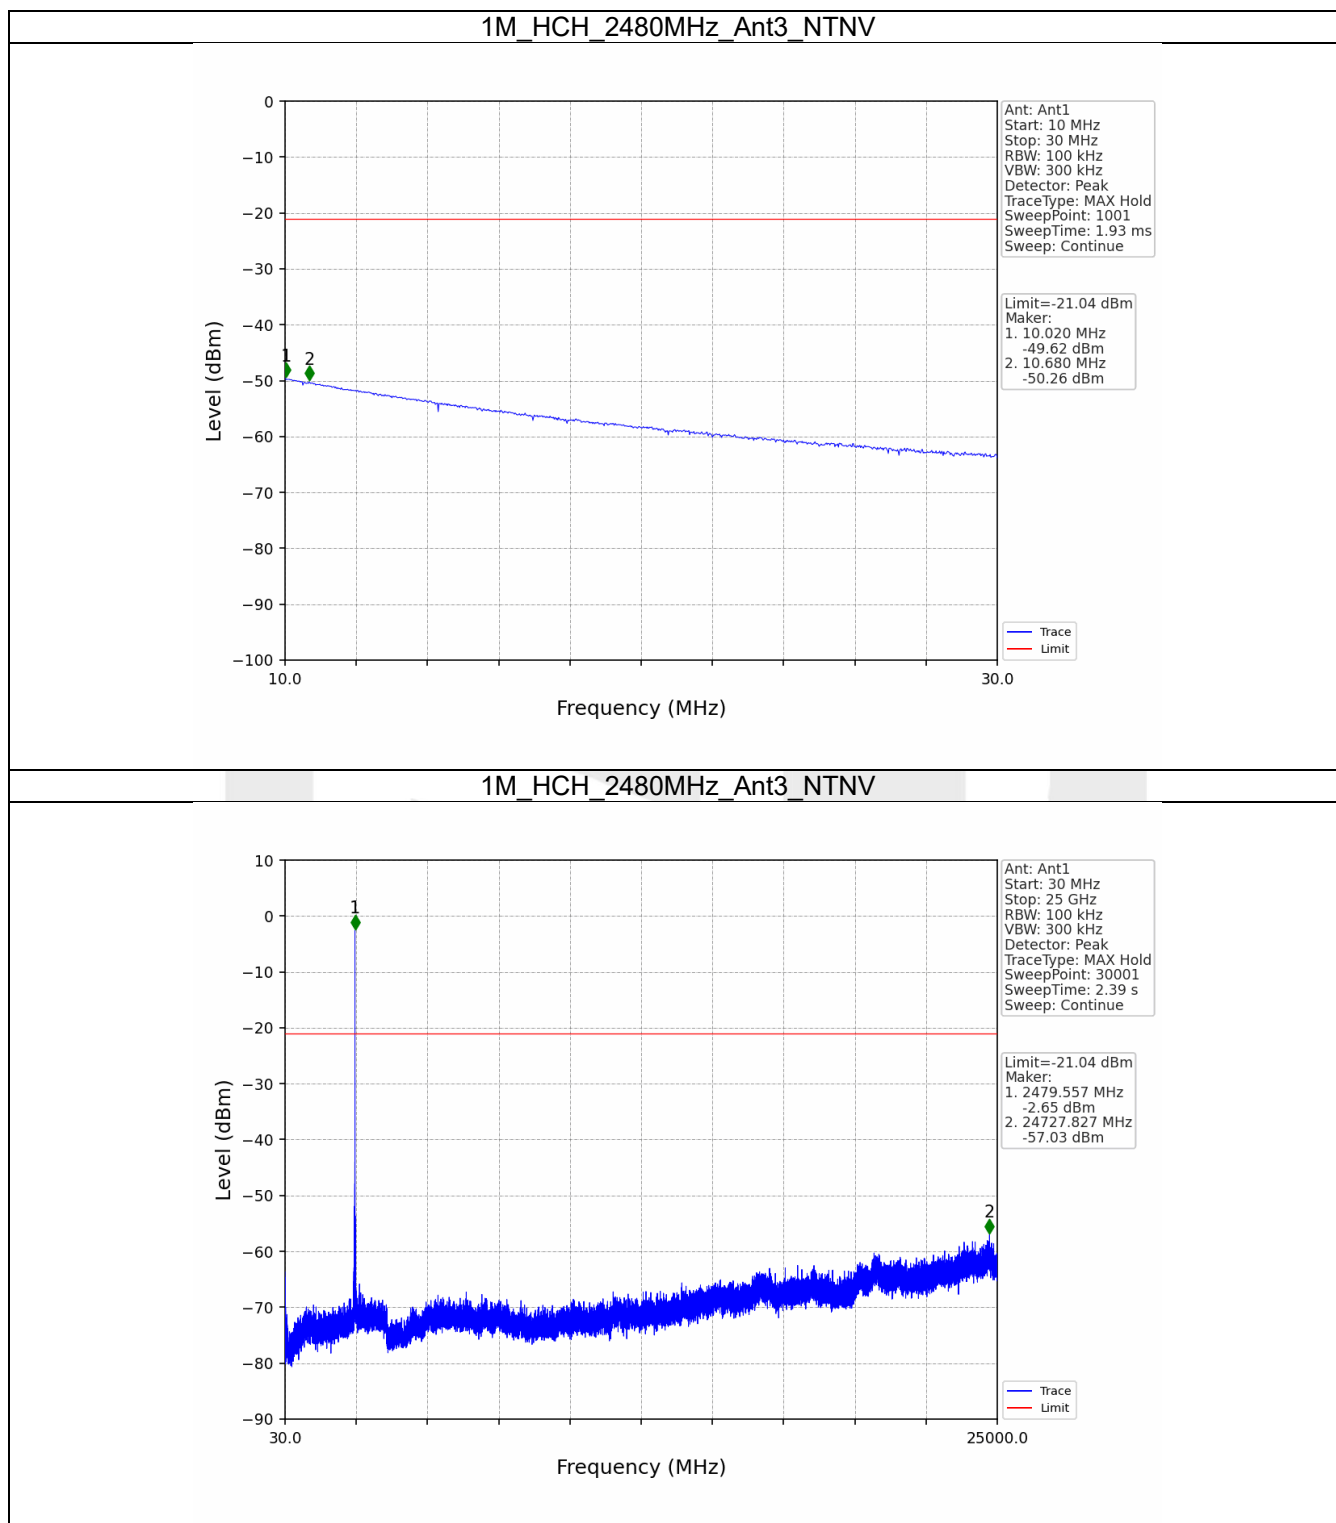

Module 4

1. Duty Cycle


1.1 Test Result


1.1.1 Ant4

Ant4							
Mode	TX Type	Frequency (MHz)	T_on (ms)	Period (ms)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	Max. DC Variation (%)
1M	SISO	2402	0.393	0.625	62.88	2.01	0.03
		2440	0.392	0.625	62.72	2.03	0.02
		2480	0.393	0.625	62.88	2.01	0.05

1.2 Test Graph

1.2.1 Ant4

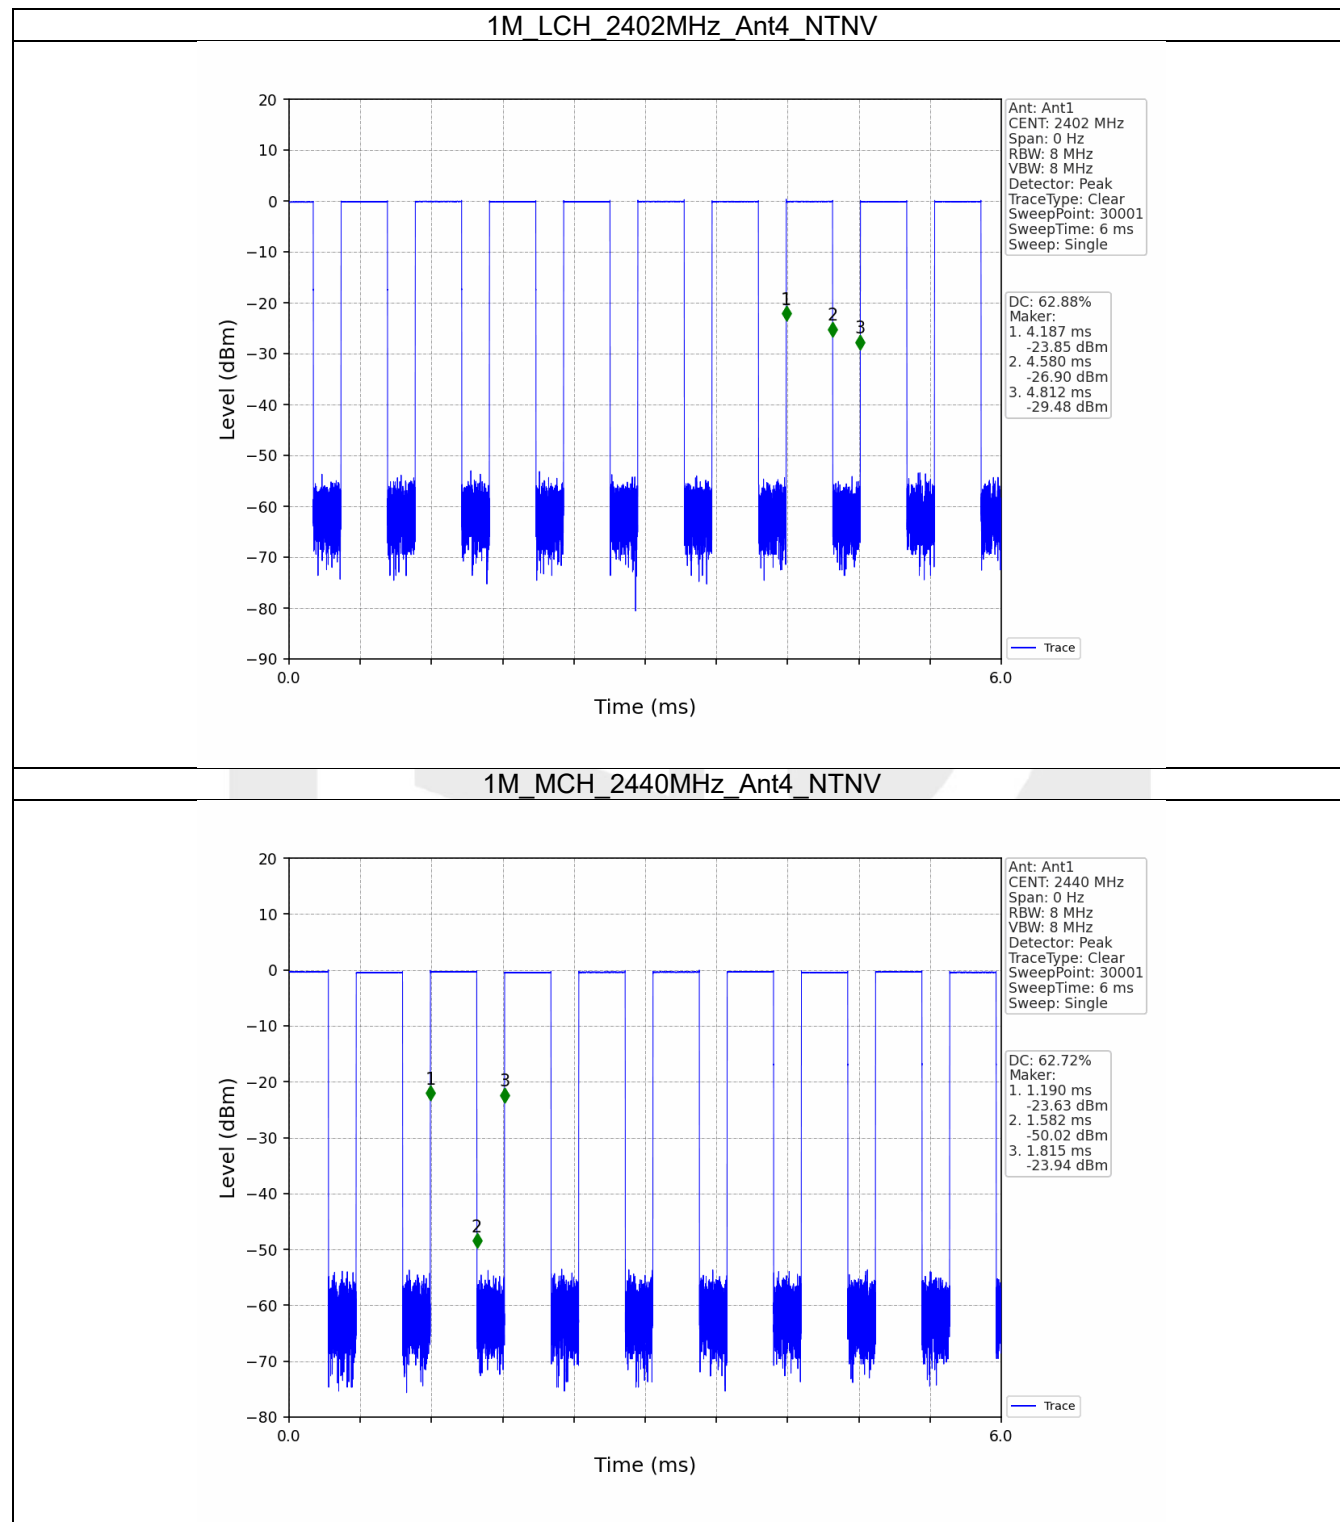

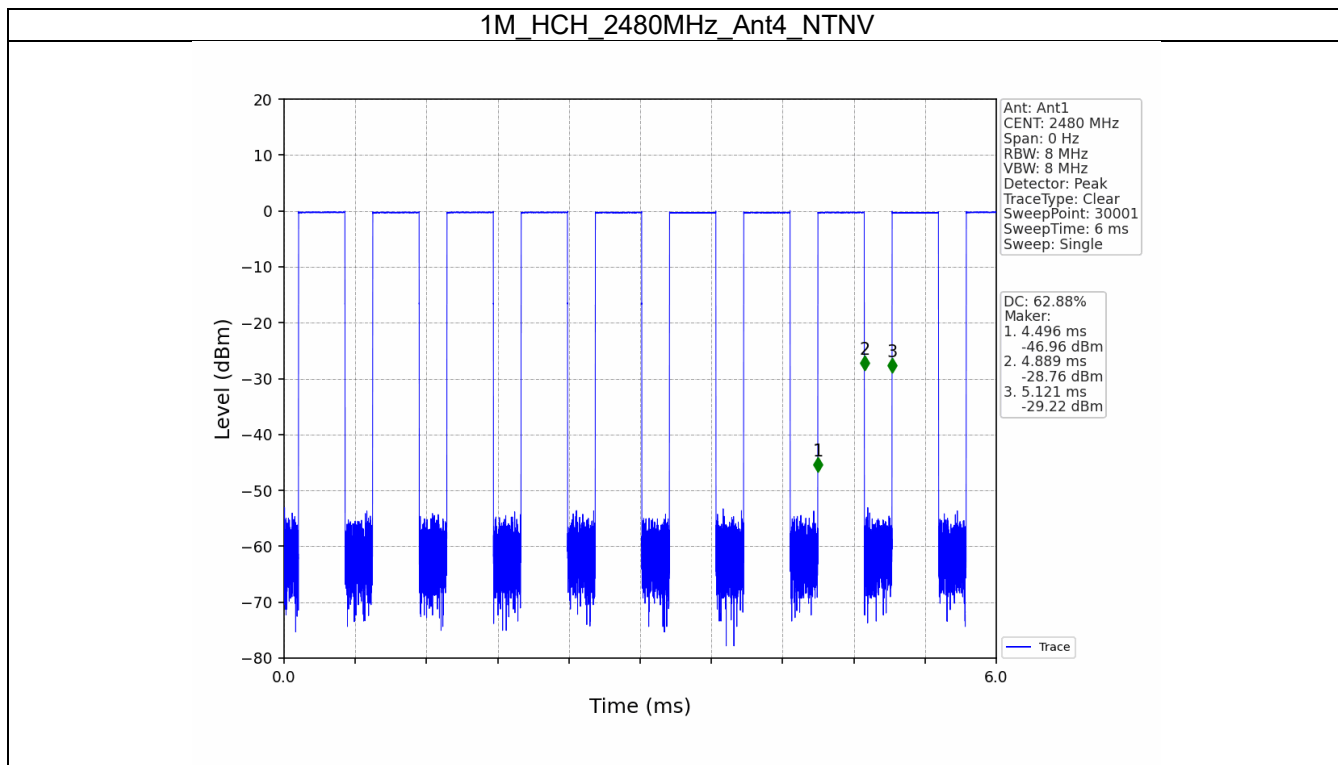

2. Bandwidth

2.1 Test Result

2.1.1 OBW


Mode	TX Type	Frequency (MHz)	ANT	99% Occupied Bandwidth (MHz)		Verdict
				Result	Limit	
1M	SISO	2402	4	1.077	/	Pass
		2440	4	1.078	/	Pass
		2480	4	1.088	/	Pass


2.1.2 6dB BW

Mode	TX Type	Frequency (MHz)	ANT	6dB Bandwidth (MHz)		Verdict
				Result	Limit	
1M	SISO	2402	4	0.720	≥ 0.5	Pass
		2440	4	0.746	≥ 0.5	Pass
		2480	4	0.747	≥ 0.5	Pass


2.2 Test Graph


2.2.1 OBW

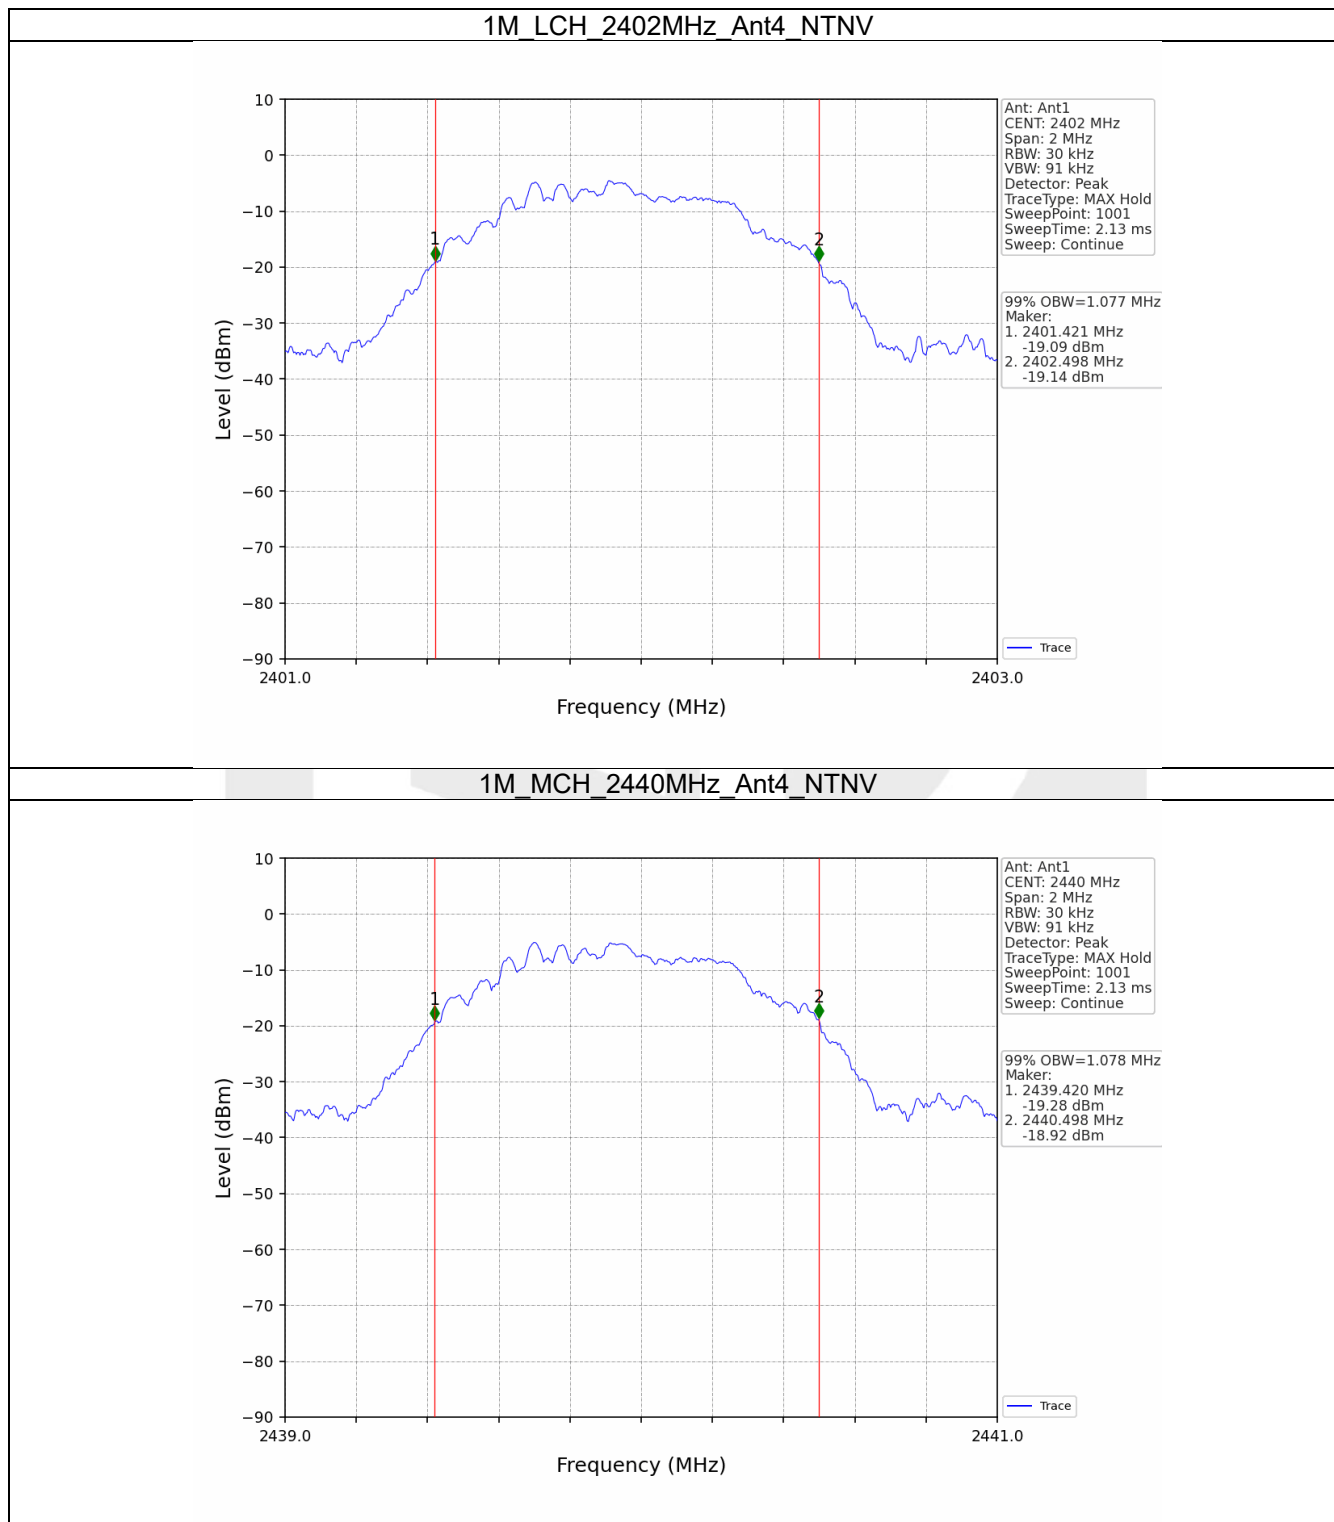

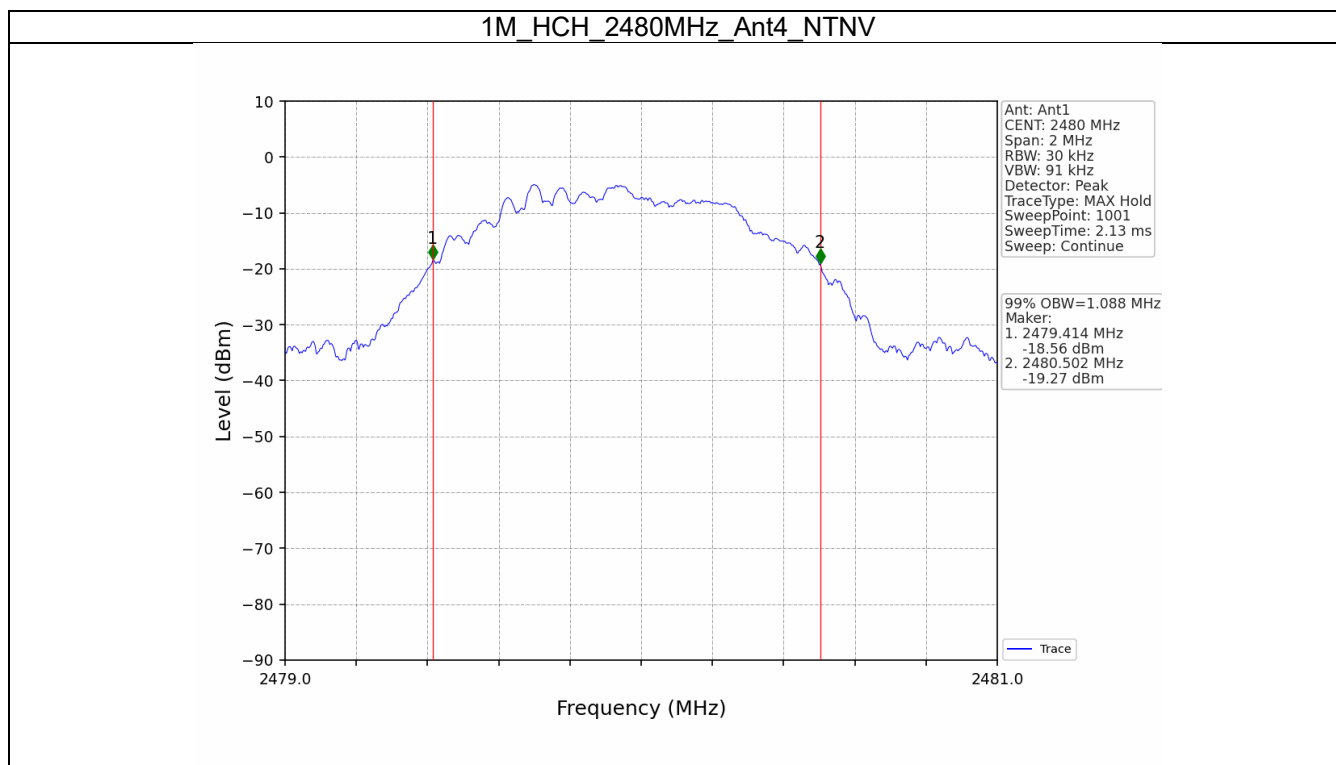

2.2.2 6dB BW

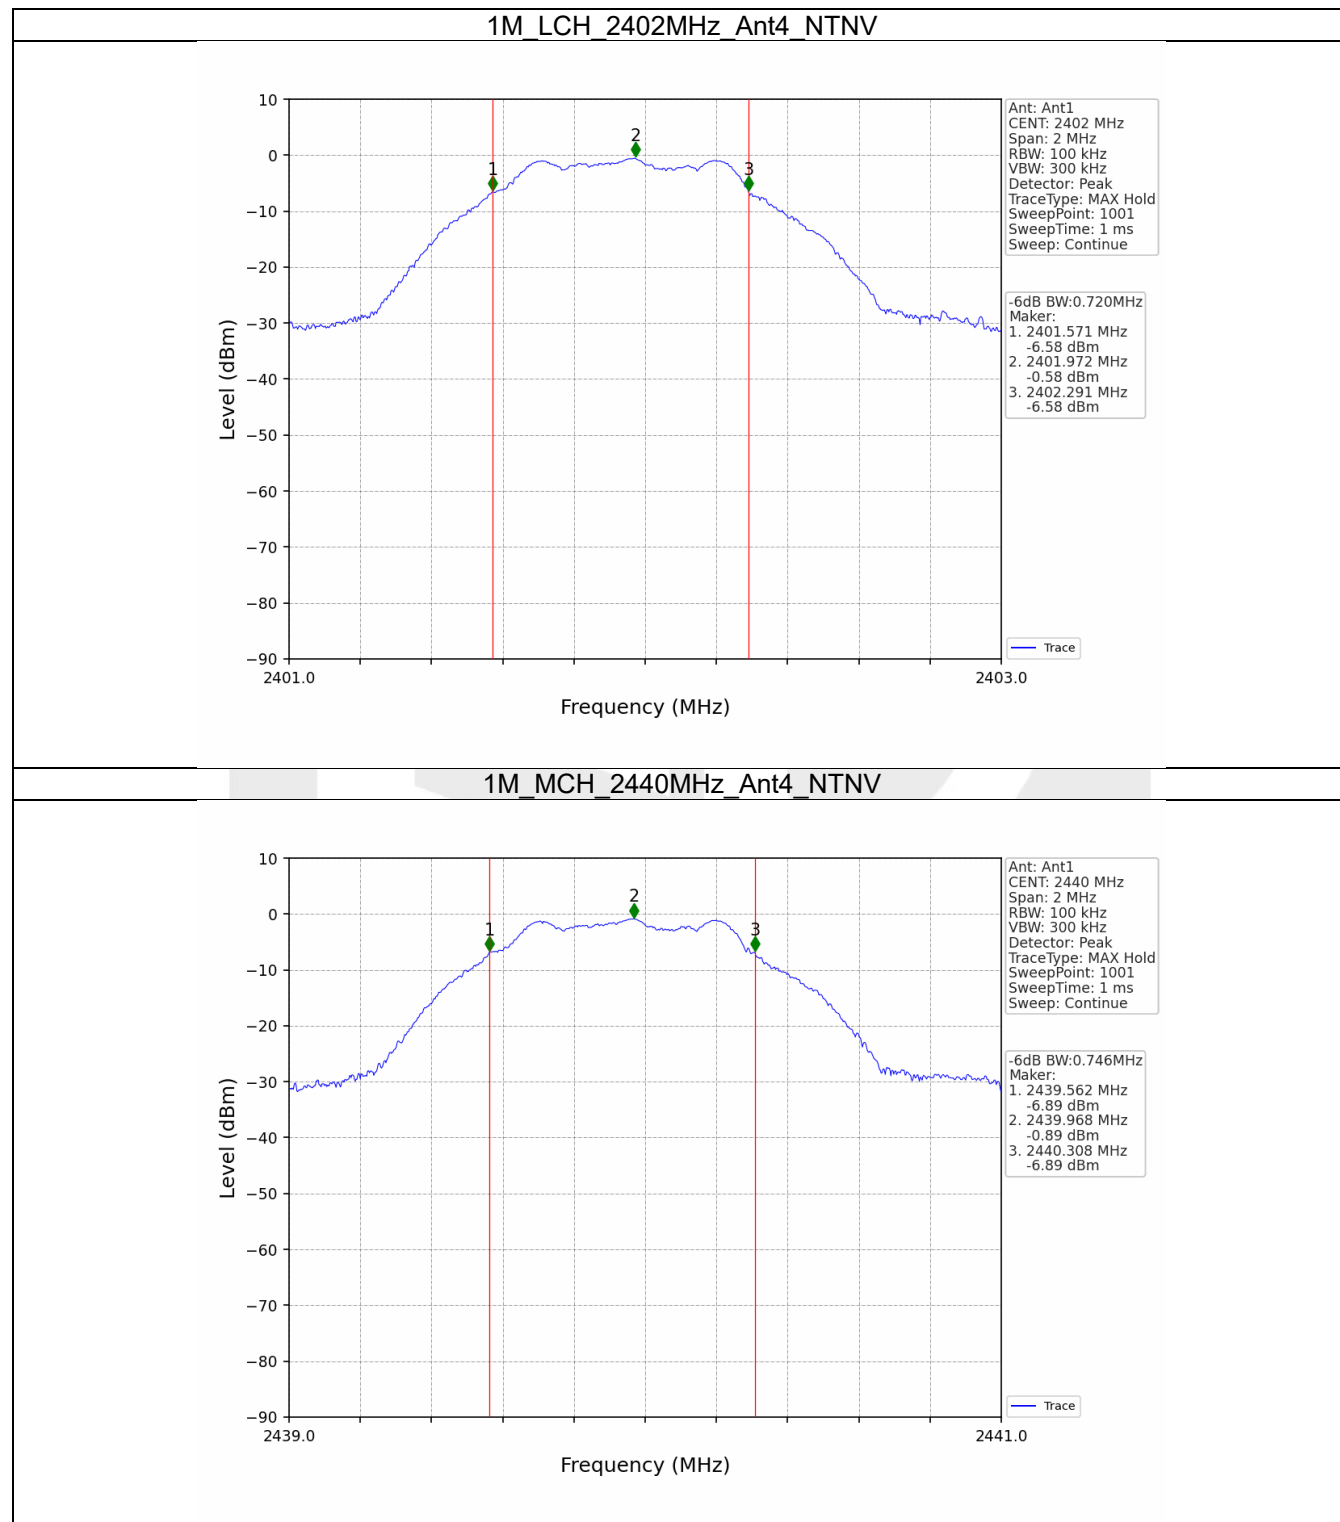

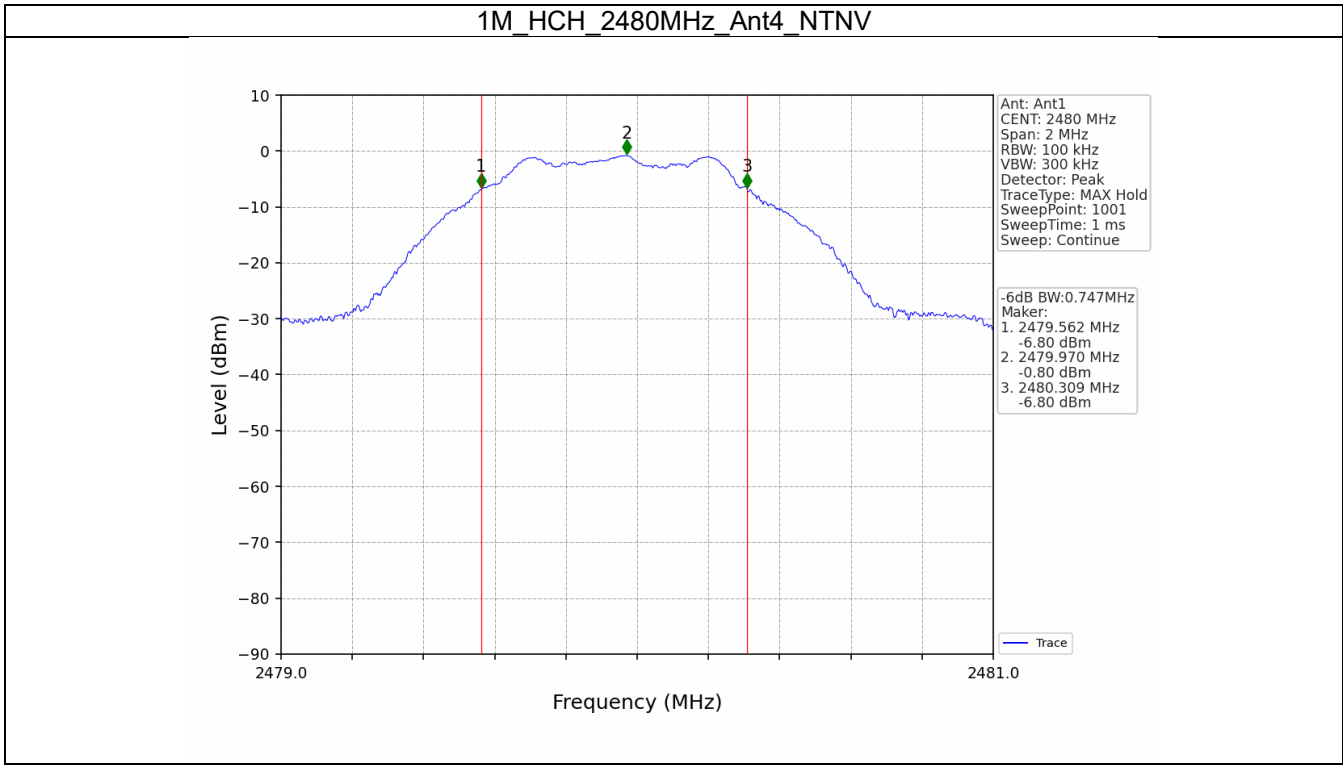

3. Maximum Conducted Output Power

3.1 Test Result

3.1.1 Power

Mode	TX Type	Frequency (MHz)	Maximum Peak Conducted Output Power (dBm)		Verdict
			ANT4	Limit	
1M	SISO	2402	-0.04	<=30	Pass
		2440	-0.30	<=30	Pass
		2480	-0.22	<=30	Pass

4. Maximum Power Spectral Density


4.1 Test Result


4.1.1 PSD

Mode	TX Type	Frequency (MHz)	Maximum PSD (dBm/3kHz)		Verdict
			ANT4	Limit	
1M	SISO	2402	-14.91	<=8	Pass
		2440	-15.12	<=8	Pass
		2480	-14.79	<=8	Pass

4.2 Test Graph

4.2.1 PSD

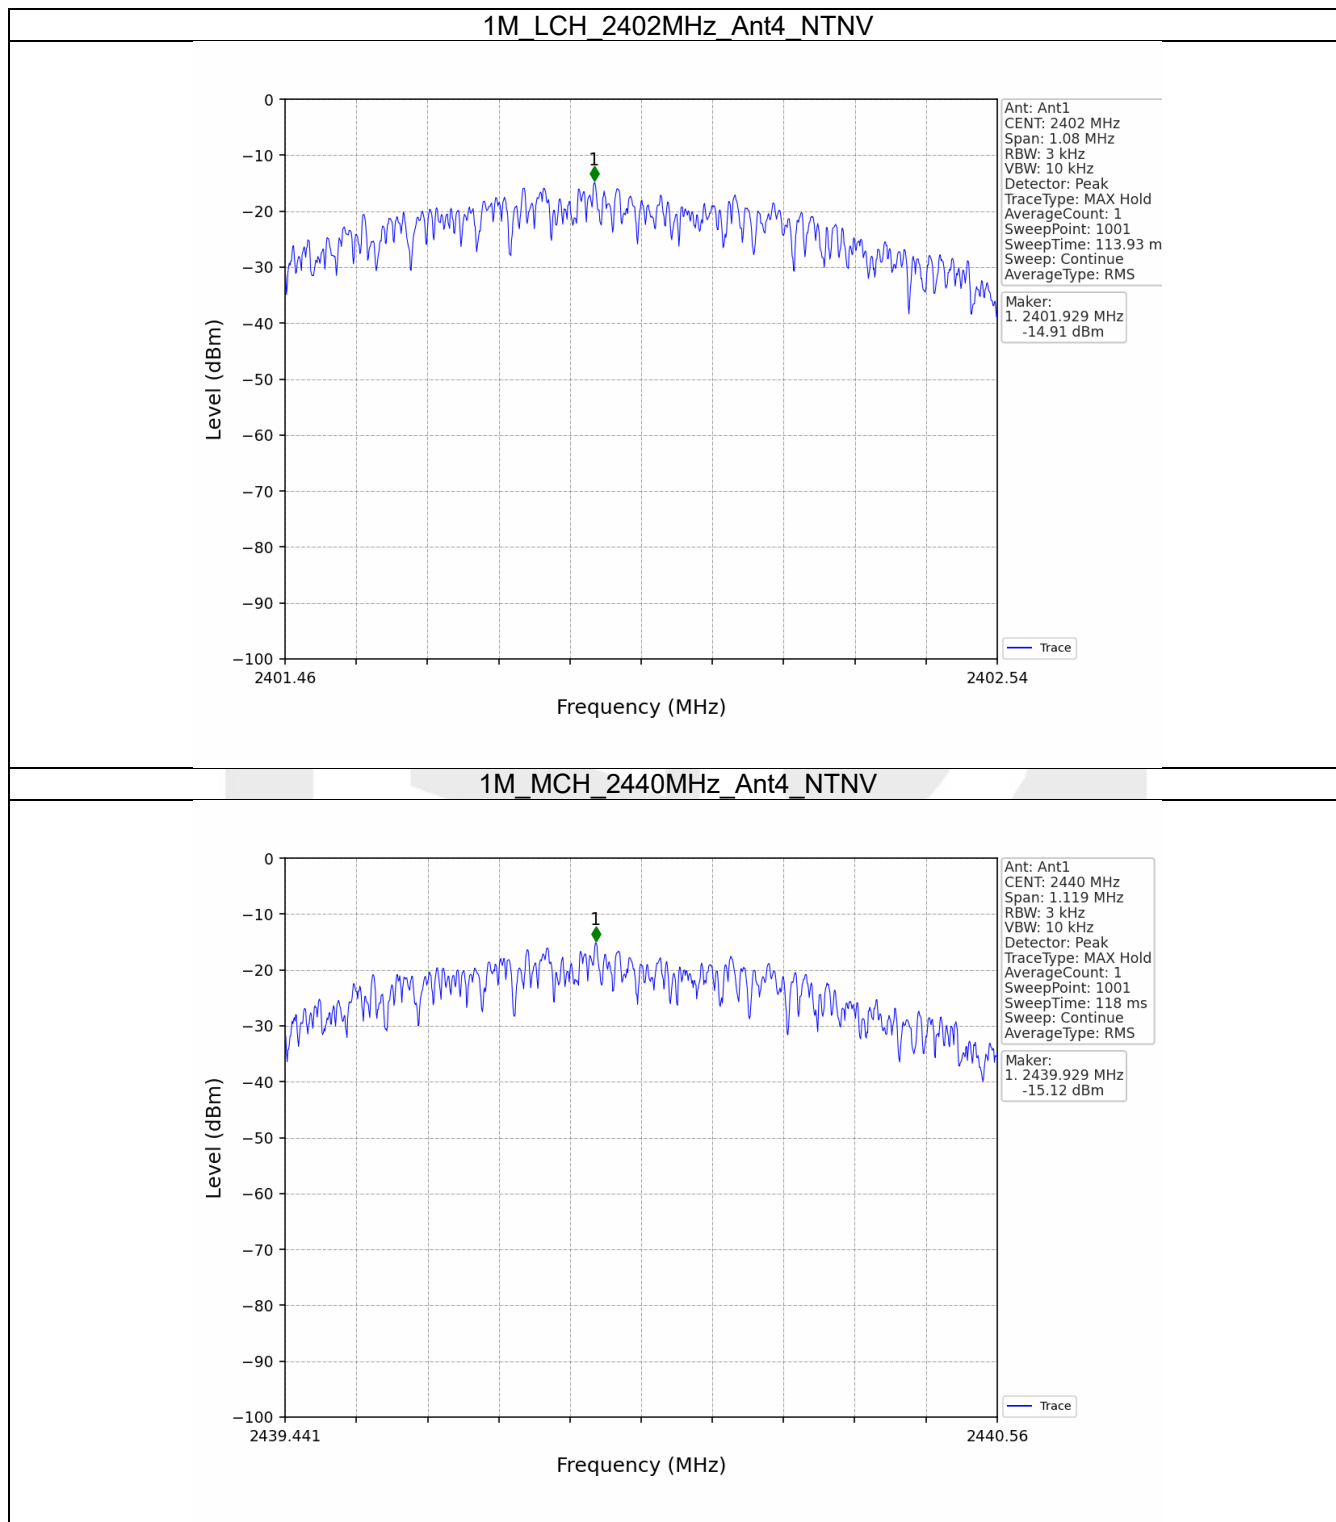

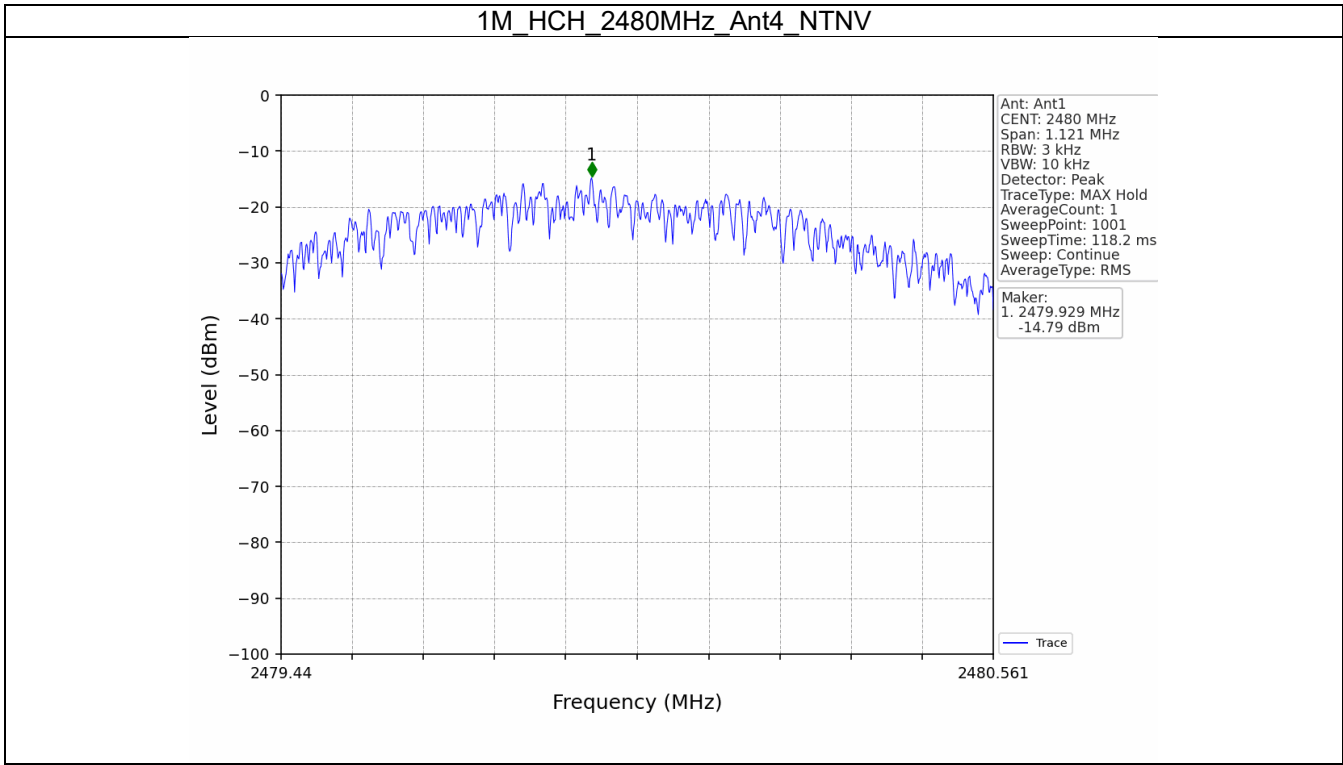

5. Unwanted Emissions In Non-restricted Frequency Bands

5.1 Test Result

5.1.1 Ref


Mode	TX Type	Frequency (MHz)	ANT	Level of Reference (dBm)
1M	SISO	2402	4	-0.60
		2440	4	-0.87
		2480	4	-0.78
Note1: Refer to FCC Part 15.247 (d) and ANSI C63.10-2020, the channel contains the maximum PSD level was used to establish the reference level.				


5.1.2 CSE

Mode	TX Type	Frequency (MHz)	ANT	Level of Reference (dBm)	Limit (dBm)	Verdict
1M	SISO	2402	4	-0.60	-20.60	Pass
		2440	4	-0.87	-20.87	Pass
		2480	4	-0.78	-20.78	Pass
Note1: Refer to FCC Part 15.247 (d) and ANSI C63.10-2020, the channel contains the maximum PSD level was used to establish the reference level.						


5.2 Test Graph


5.2.1 Ref

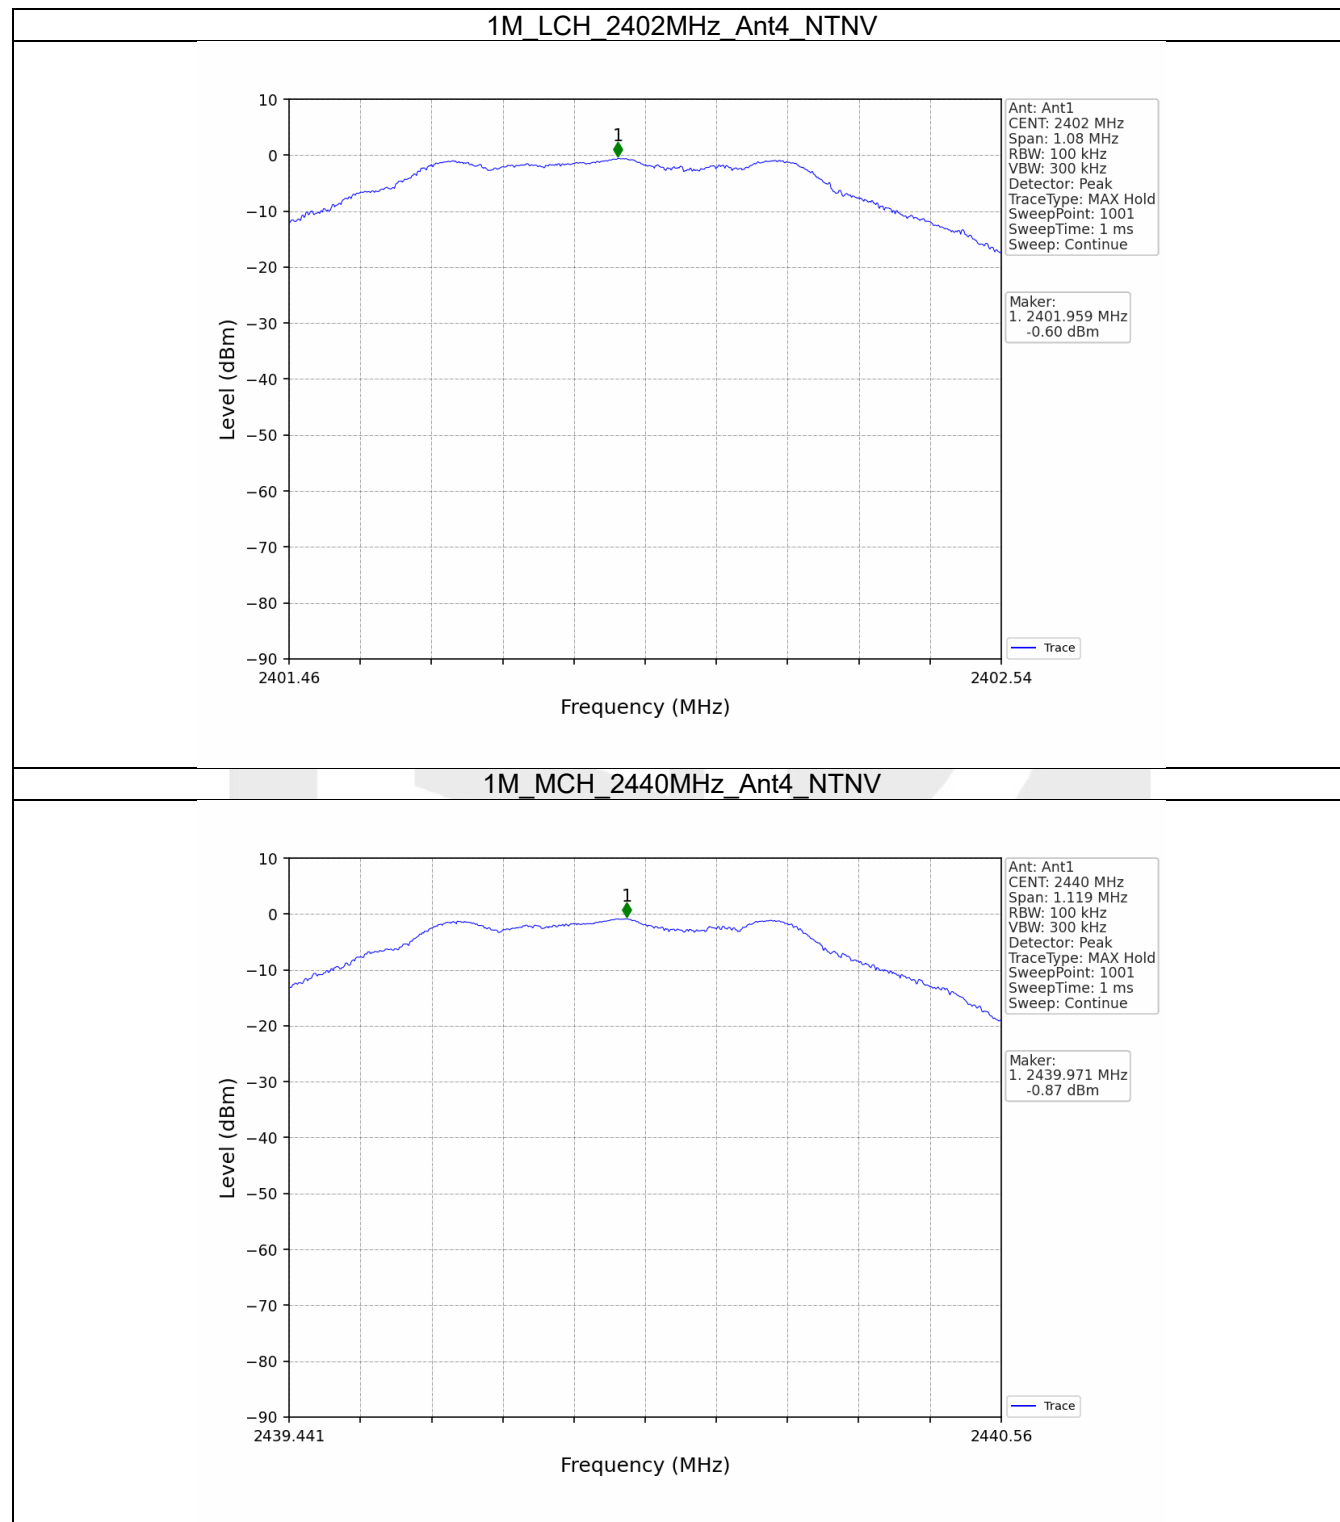


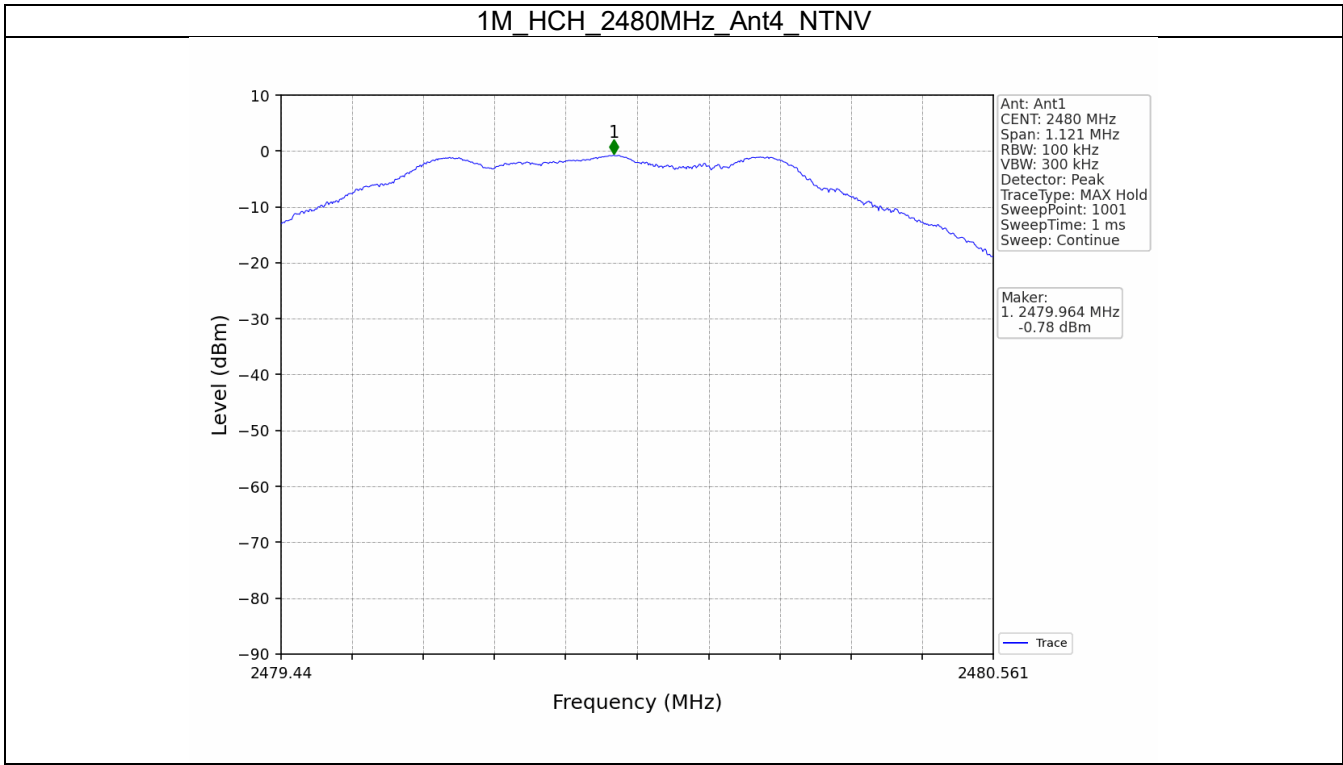



5.2.2 CSE

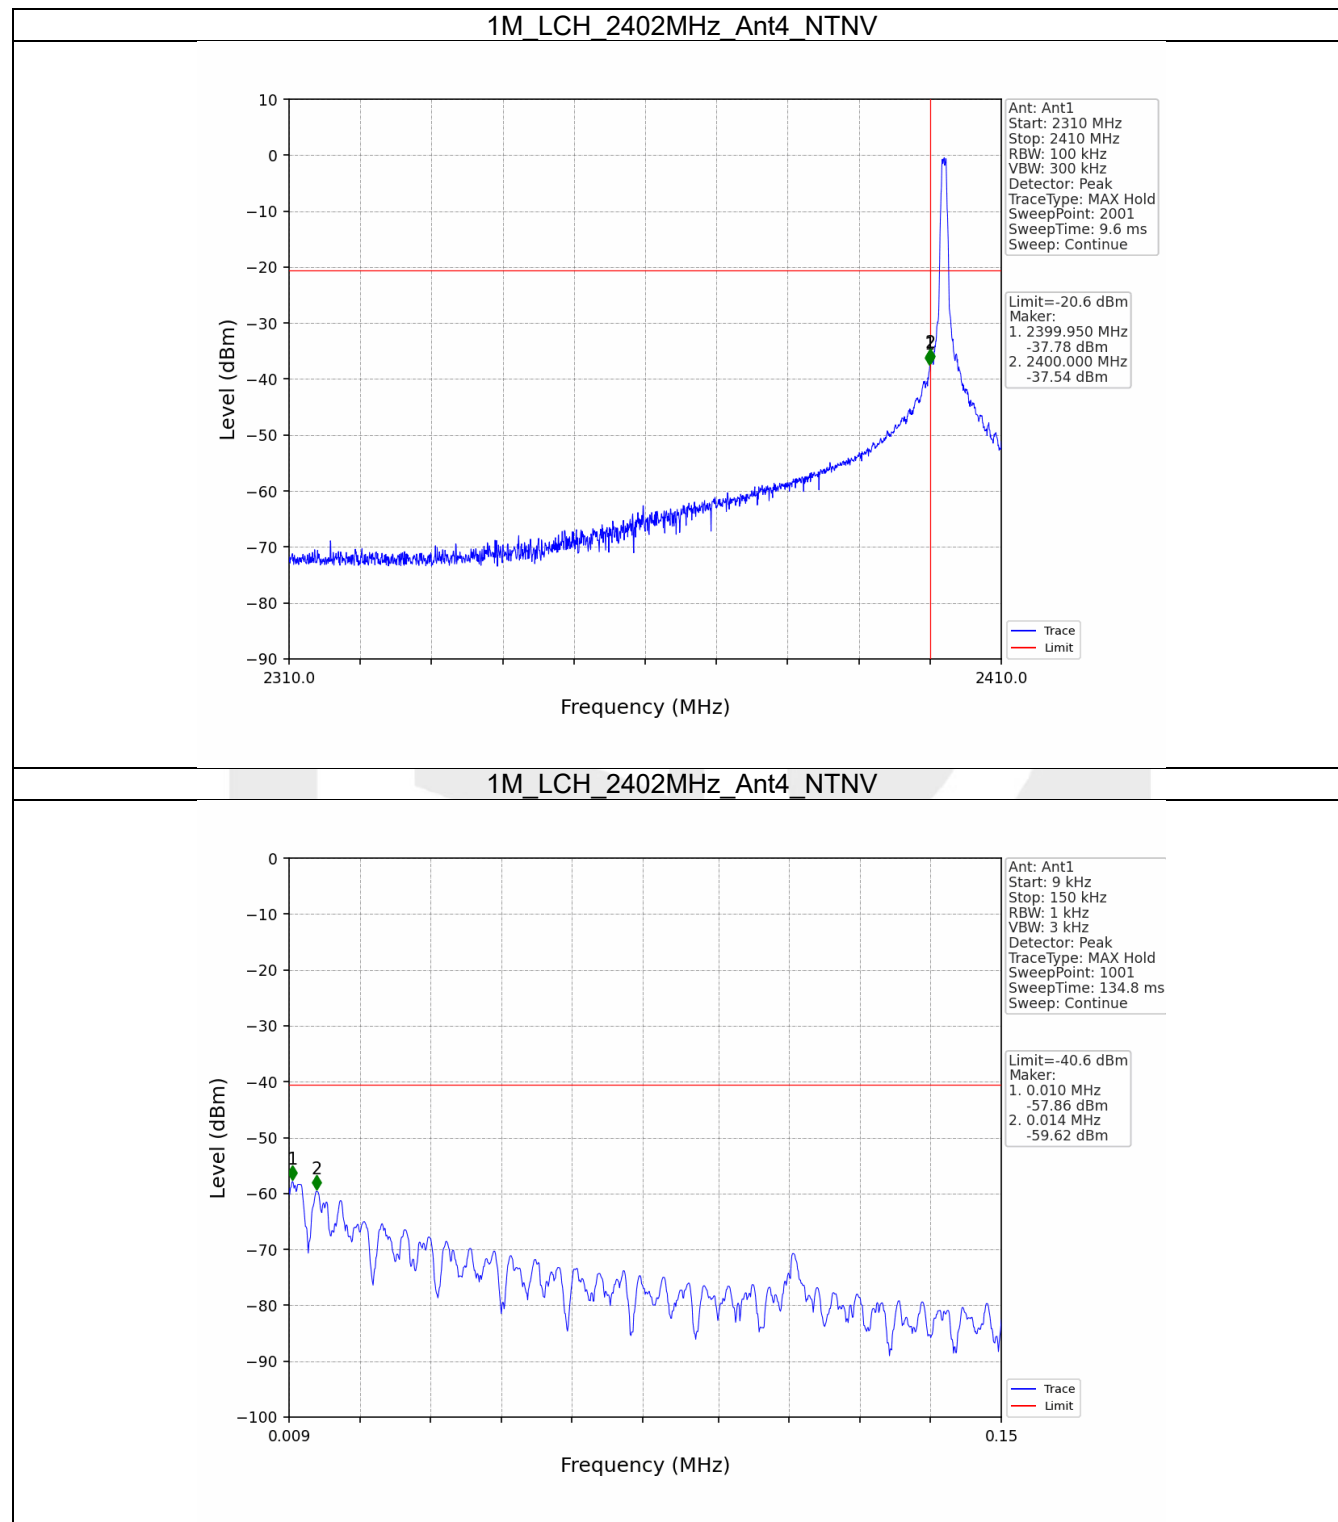


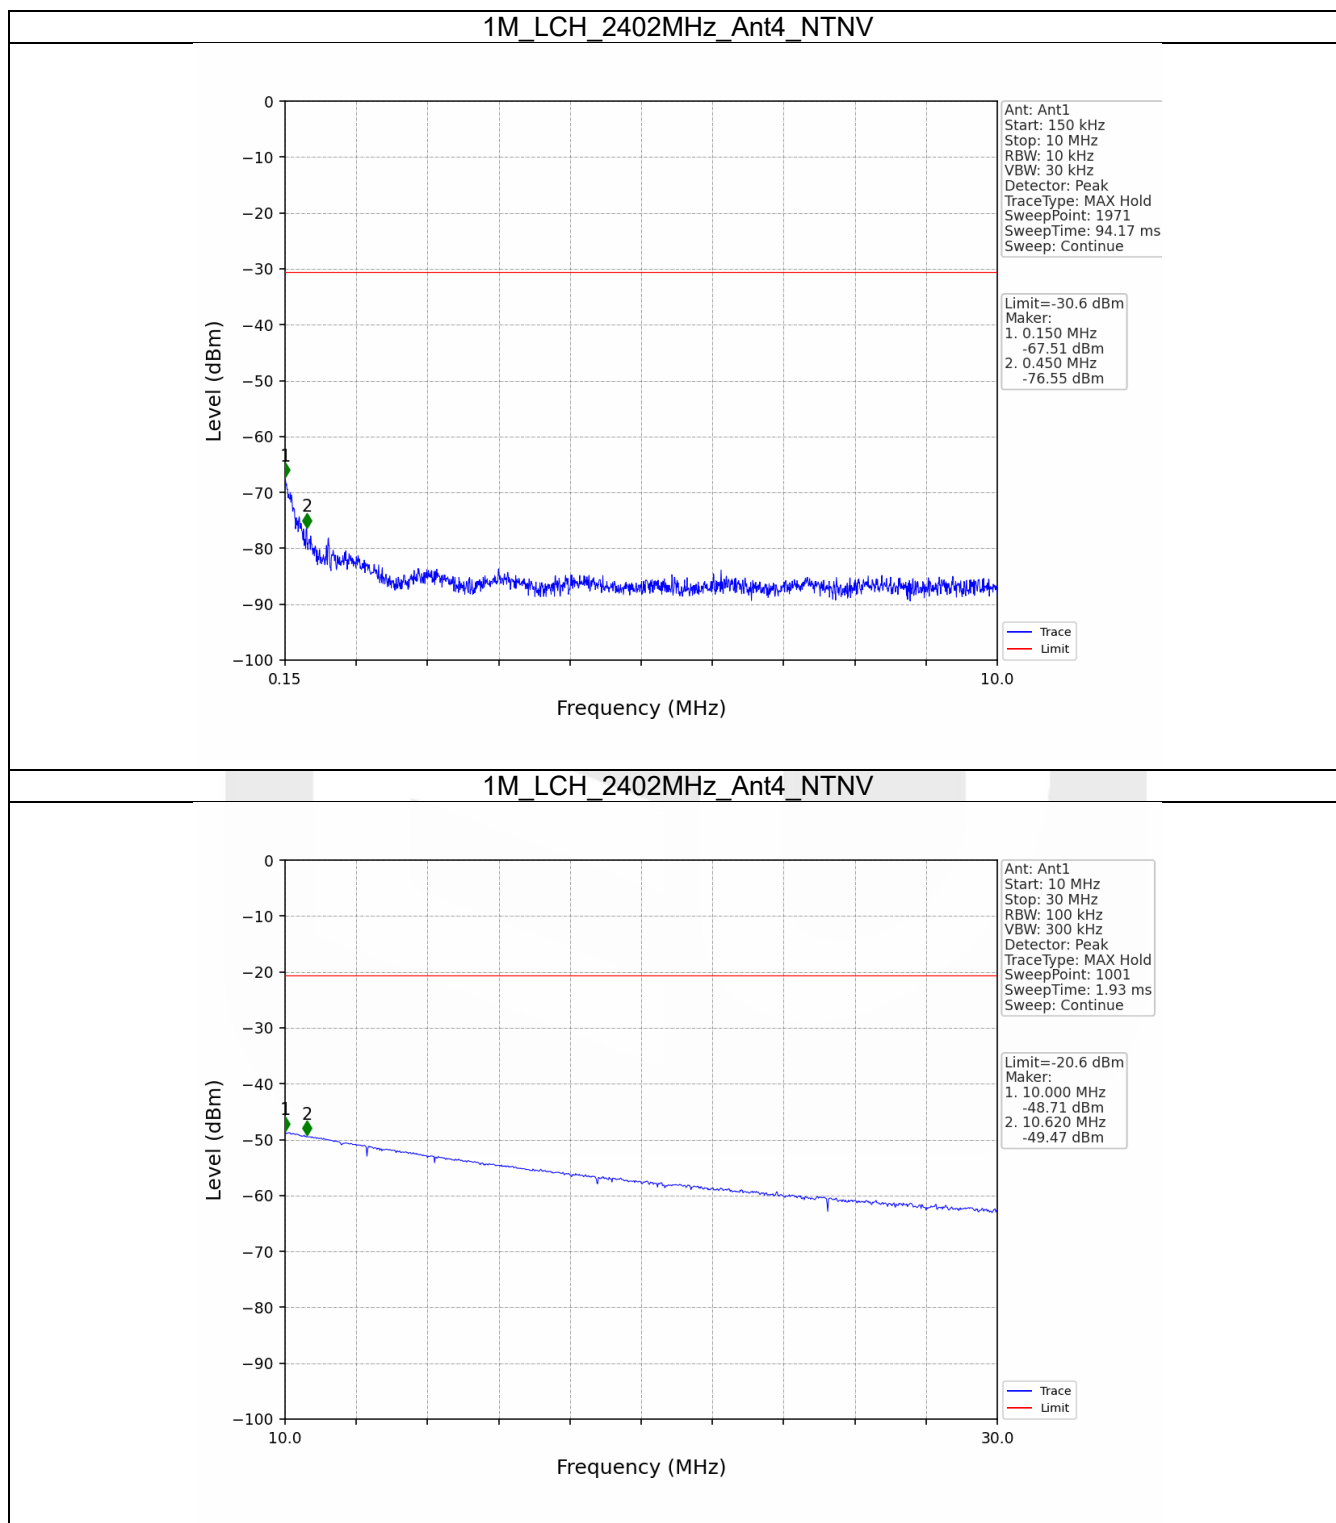


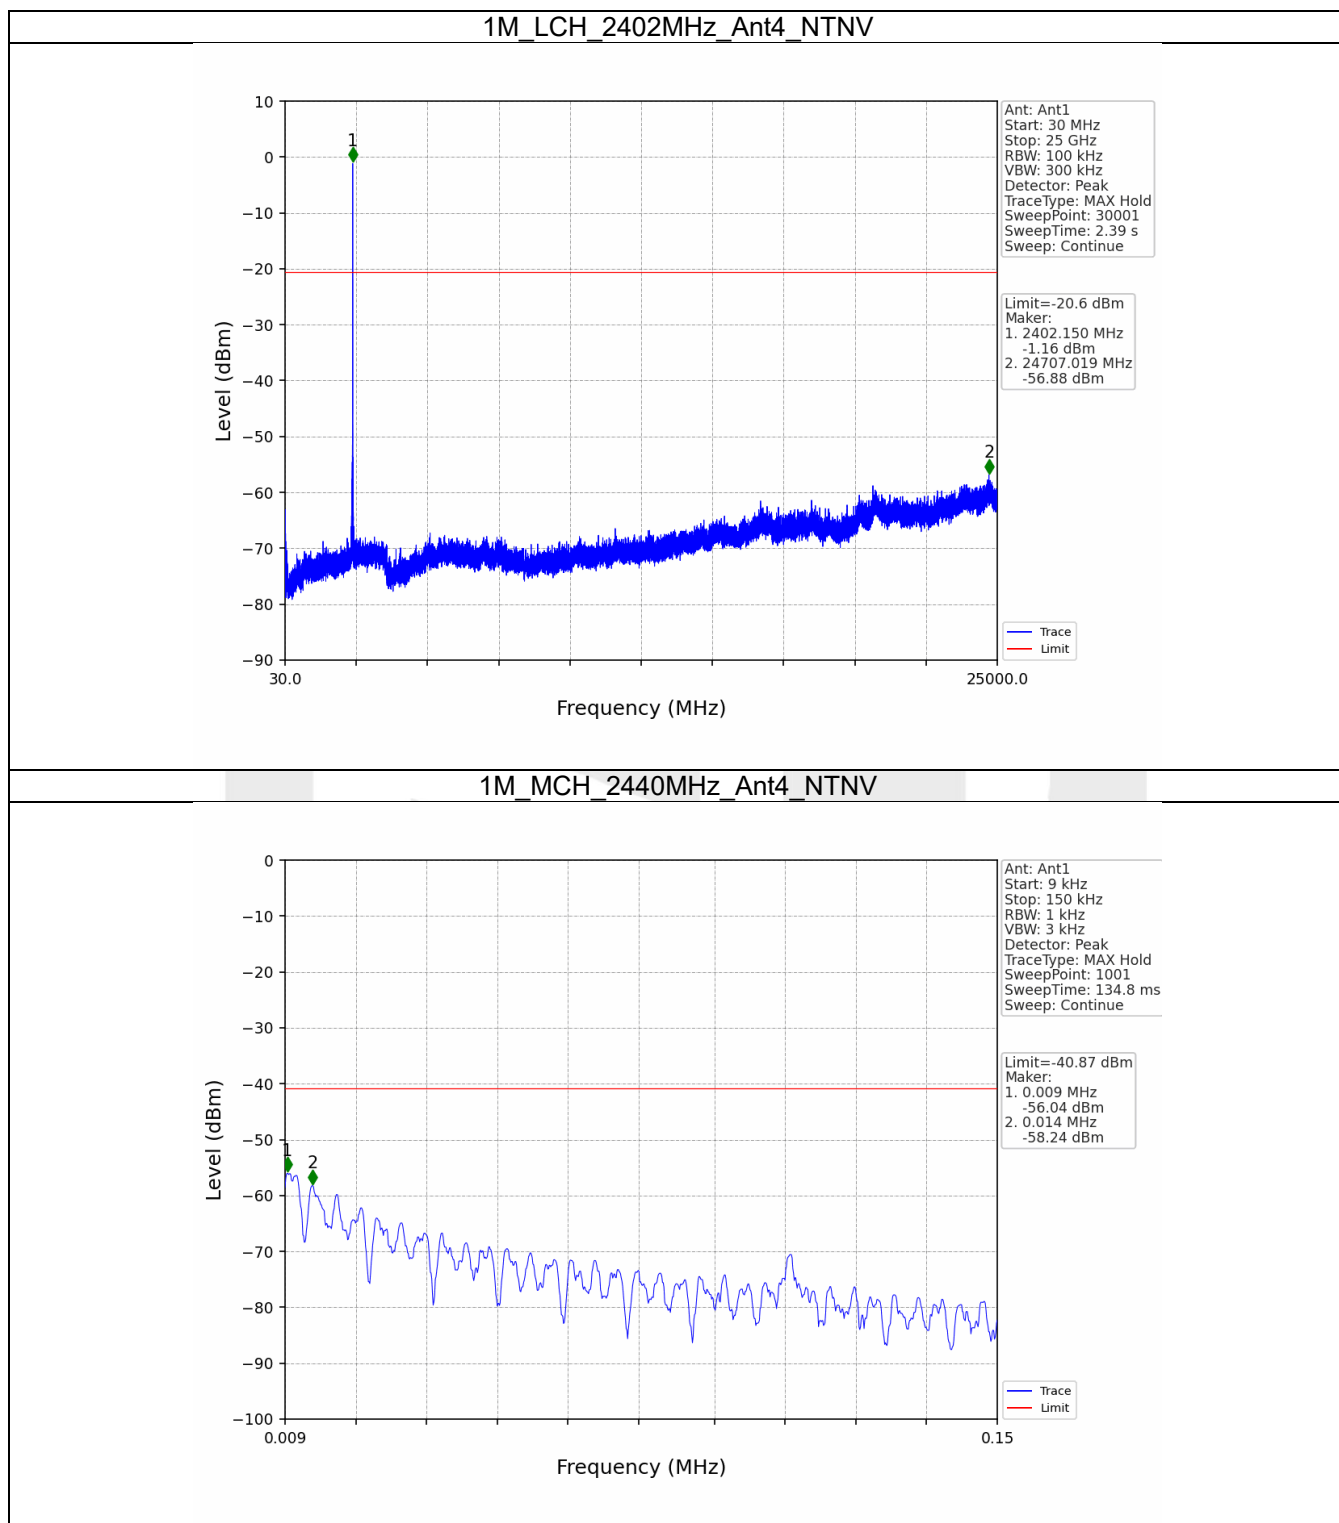

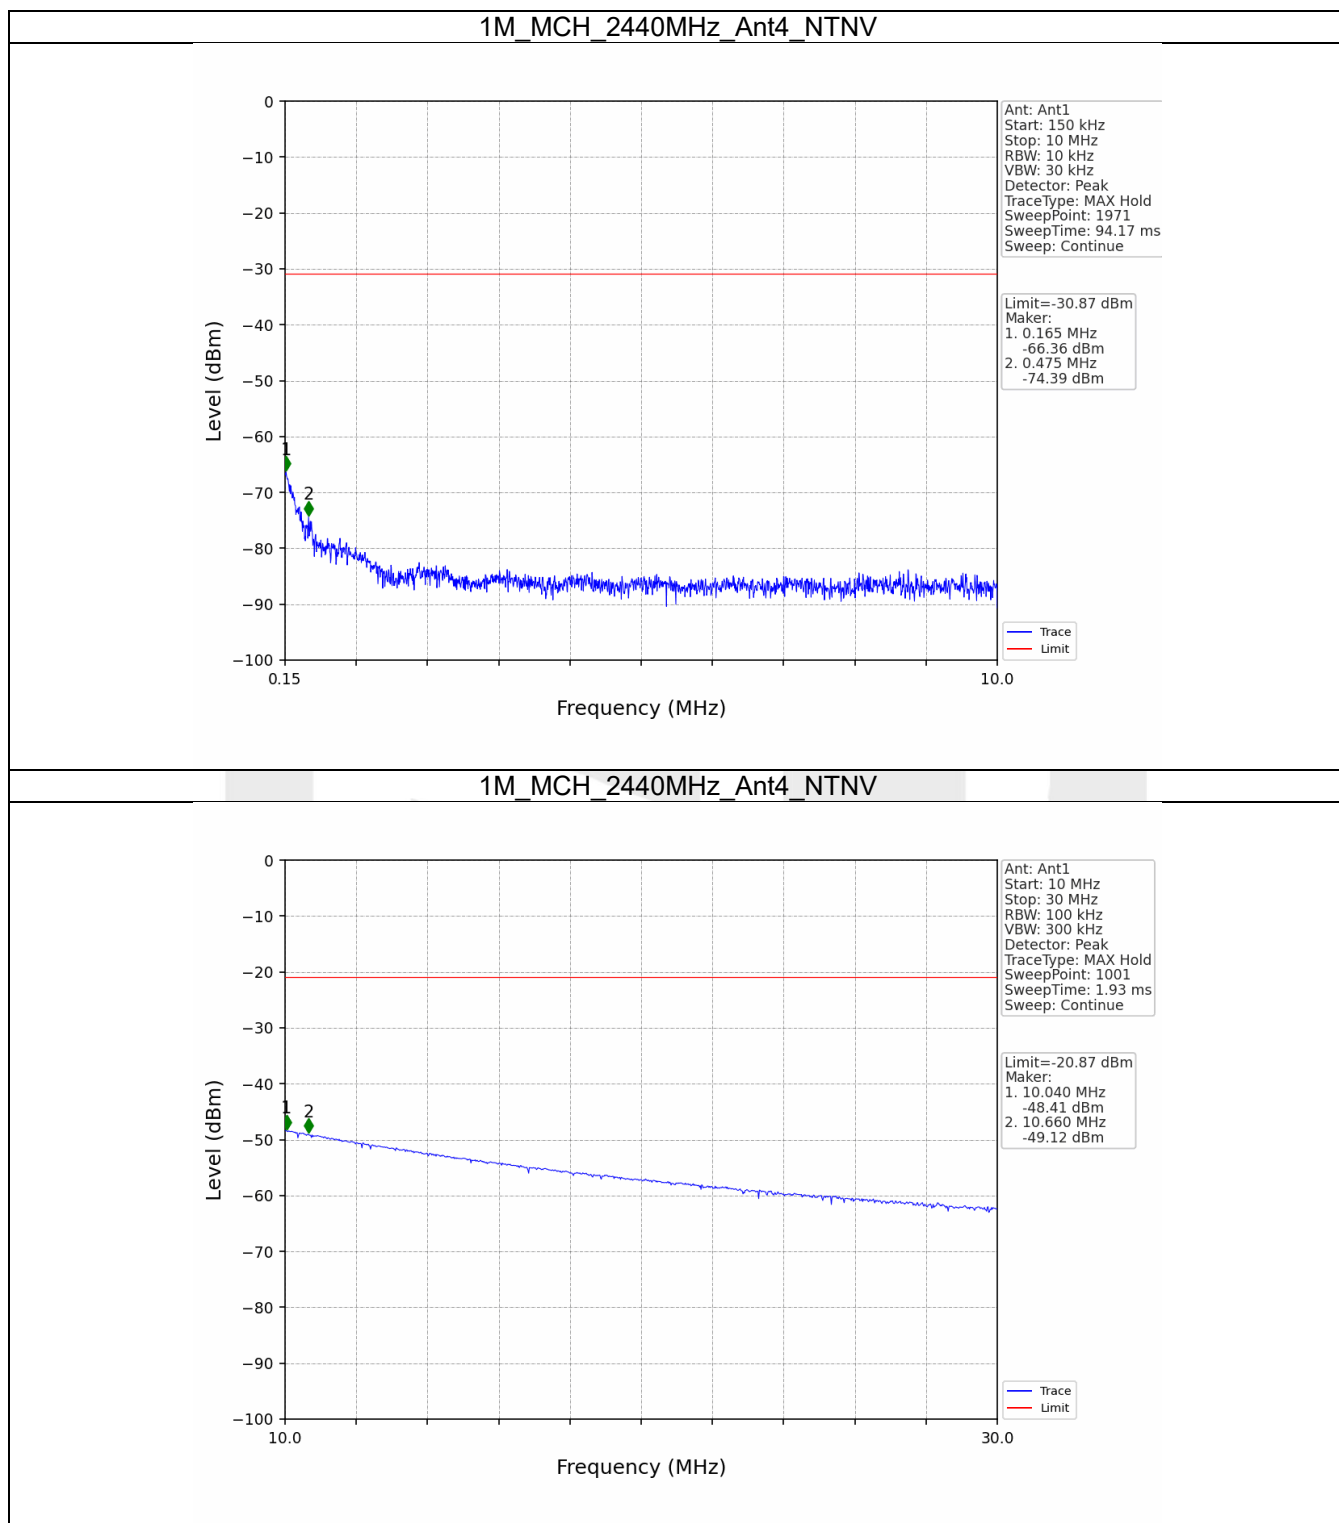

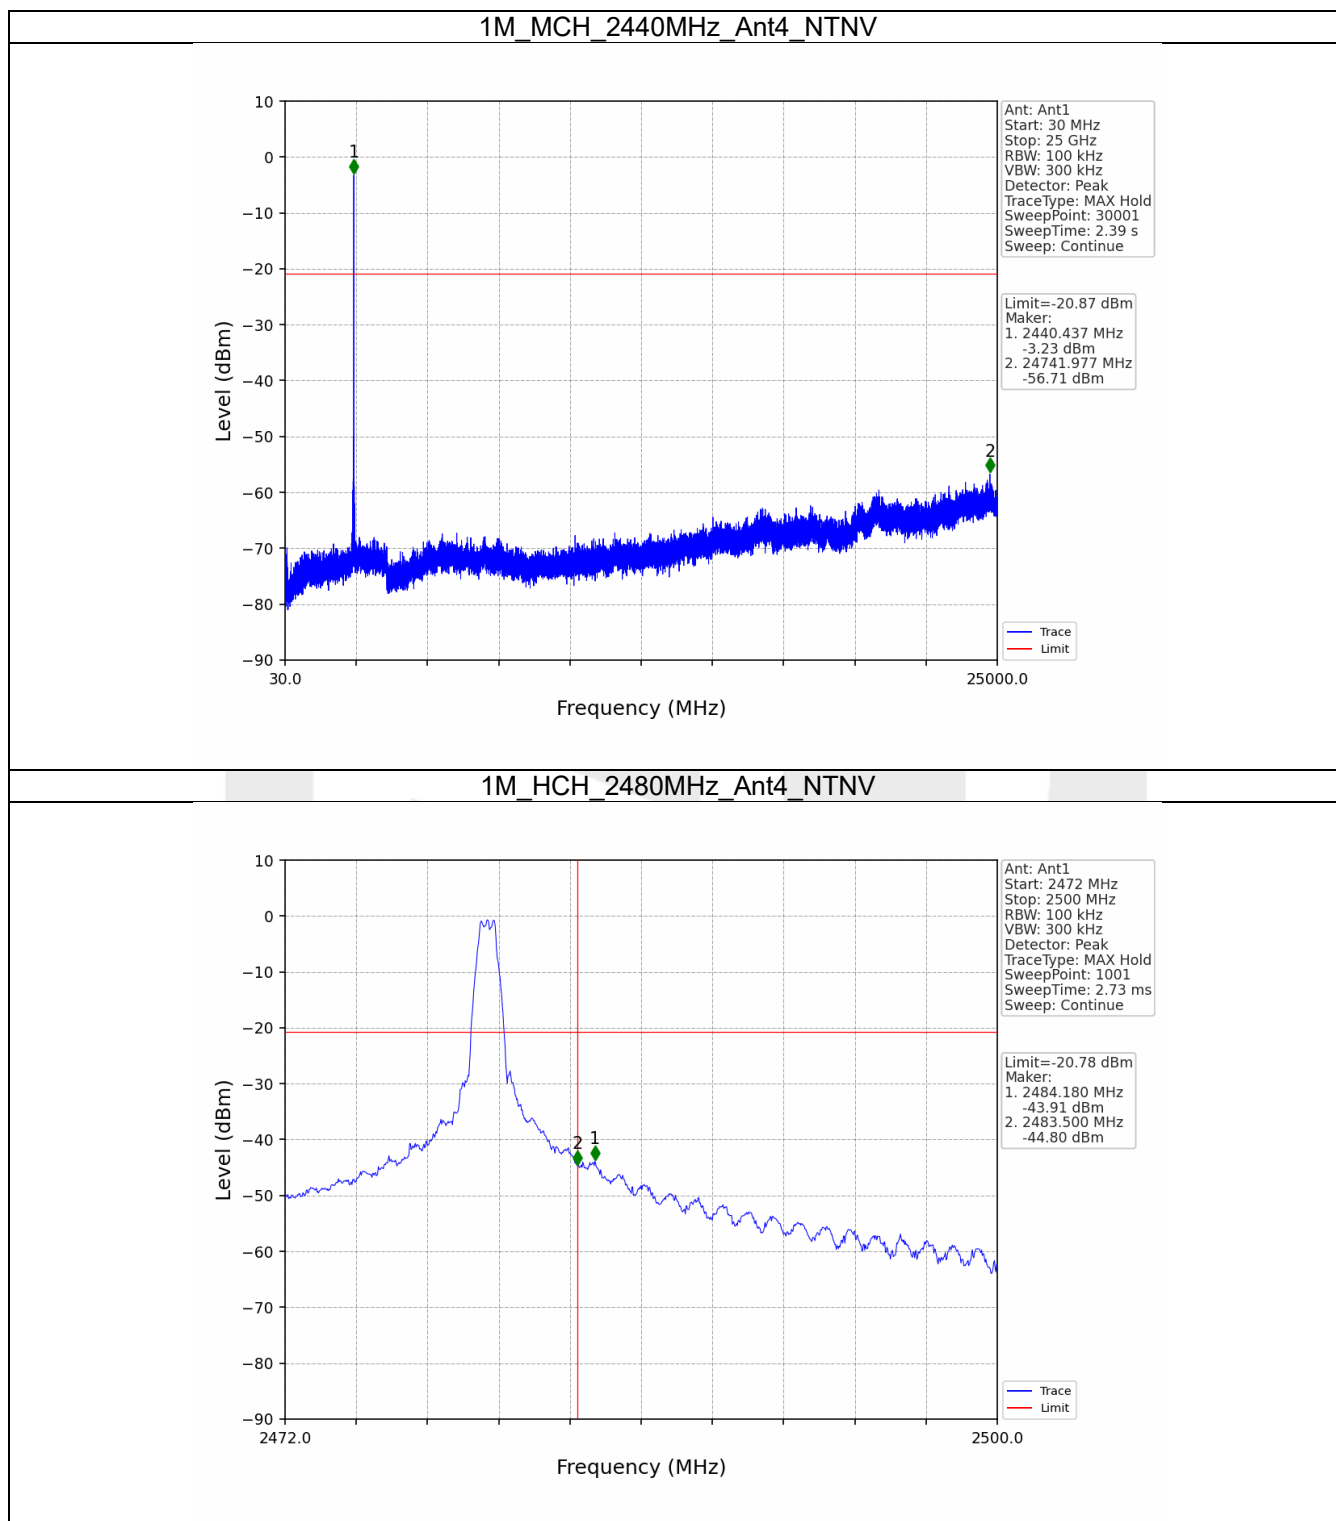

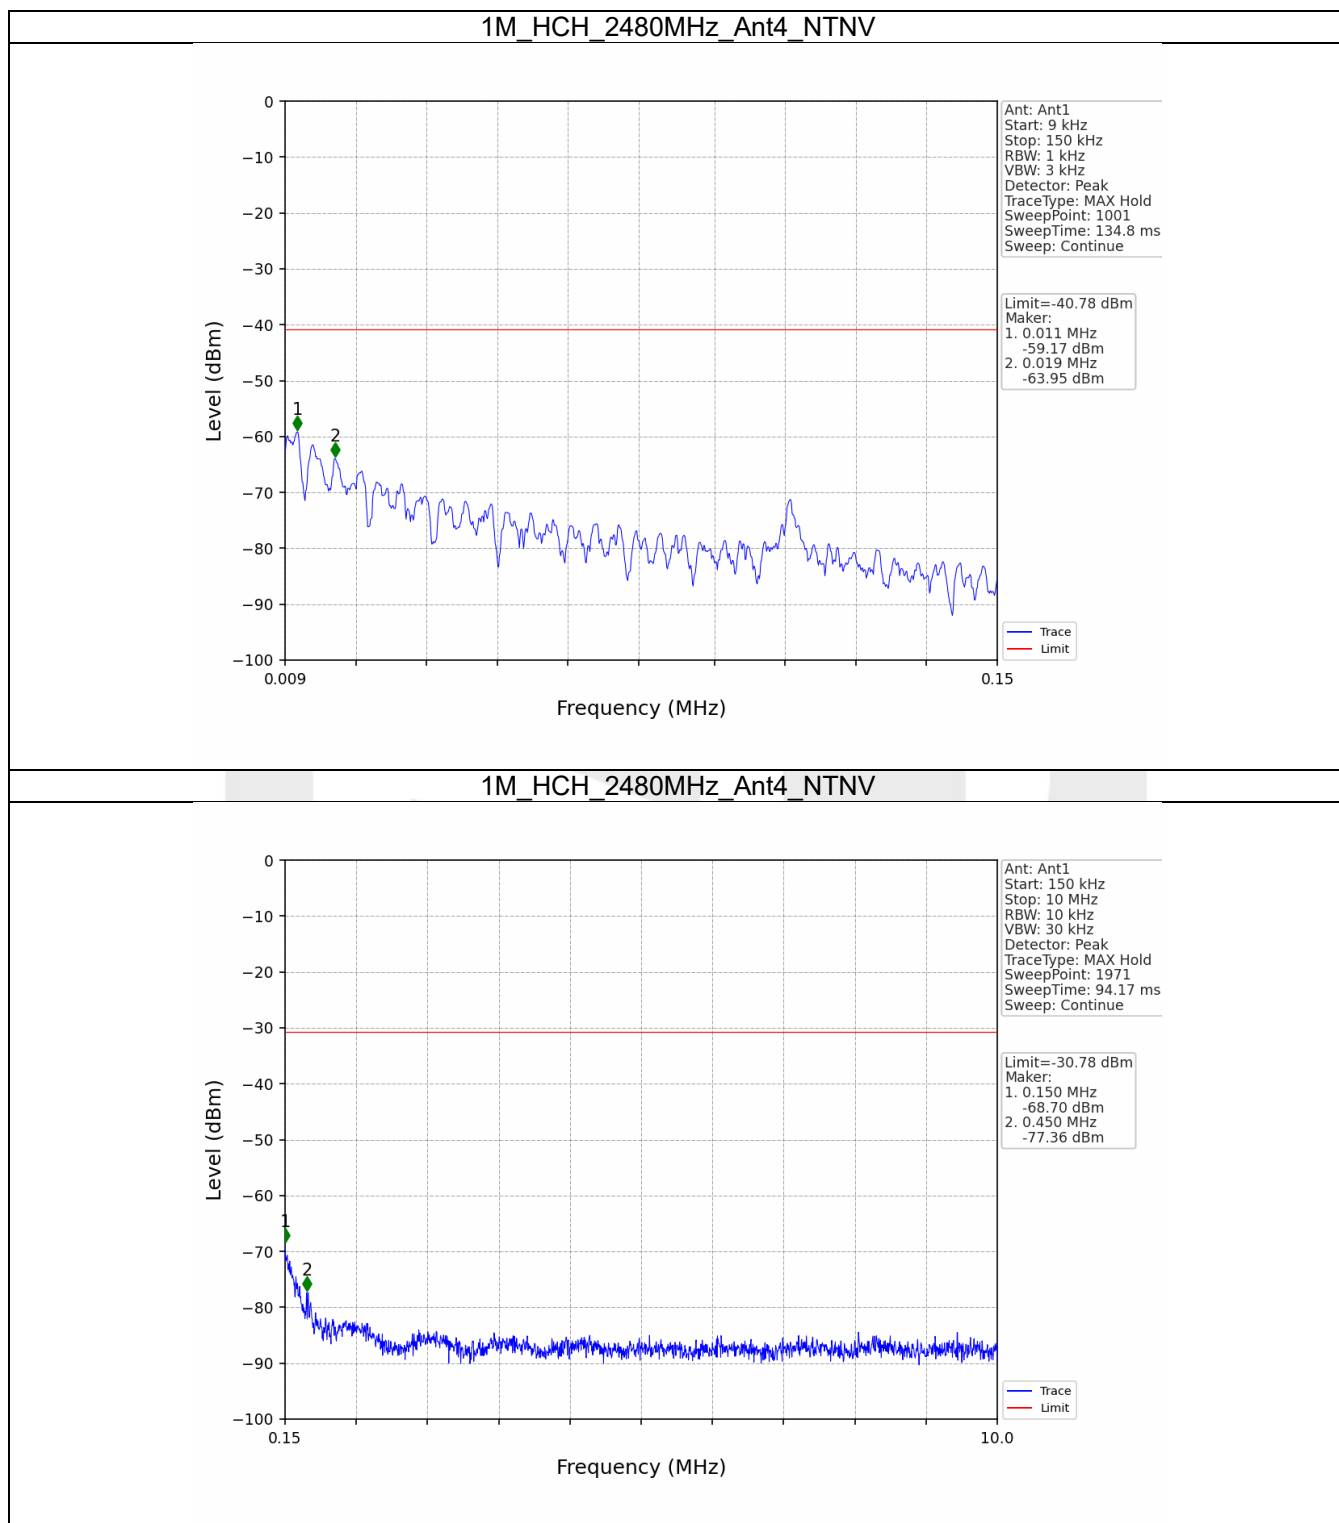

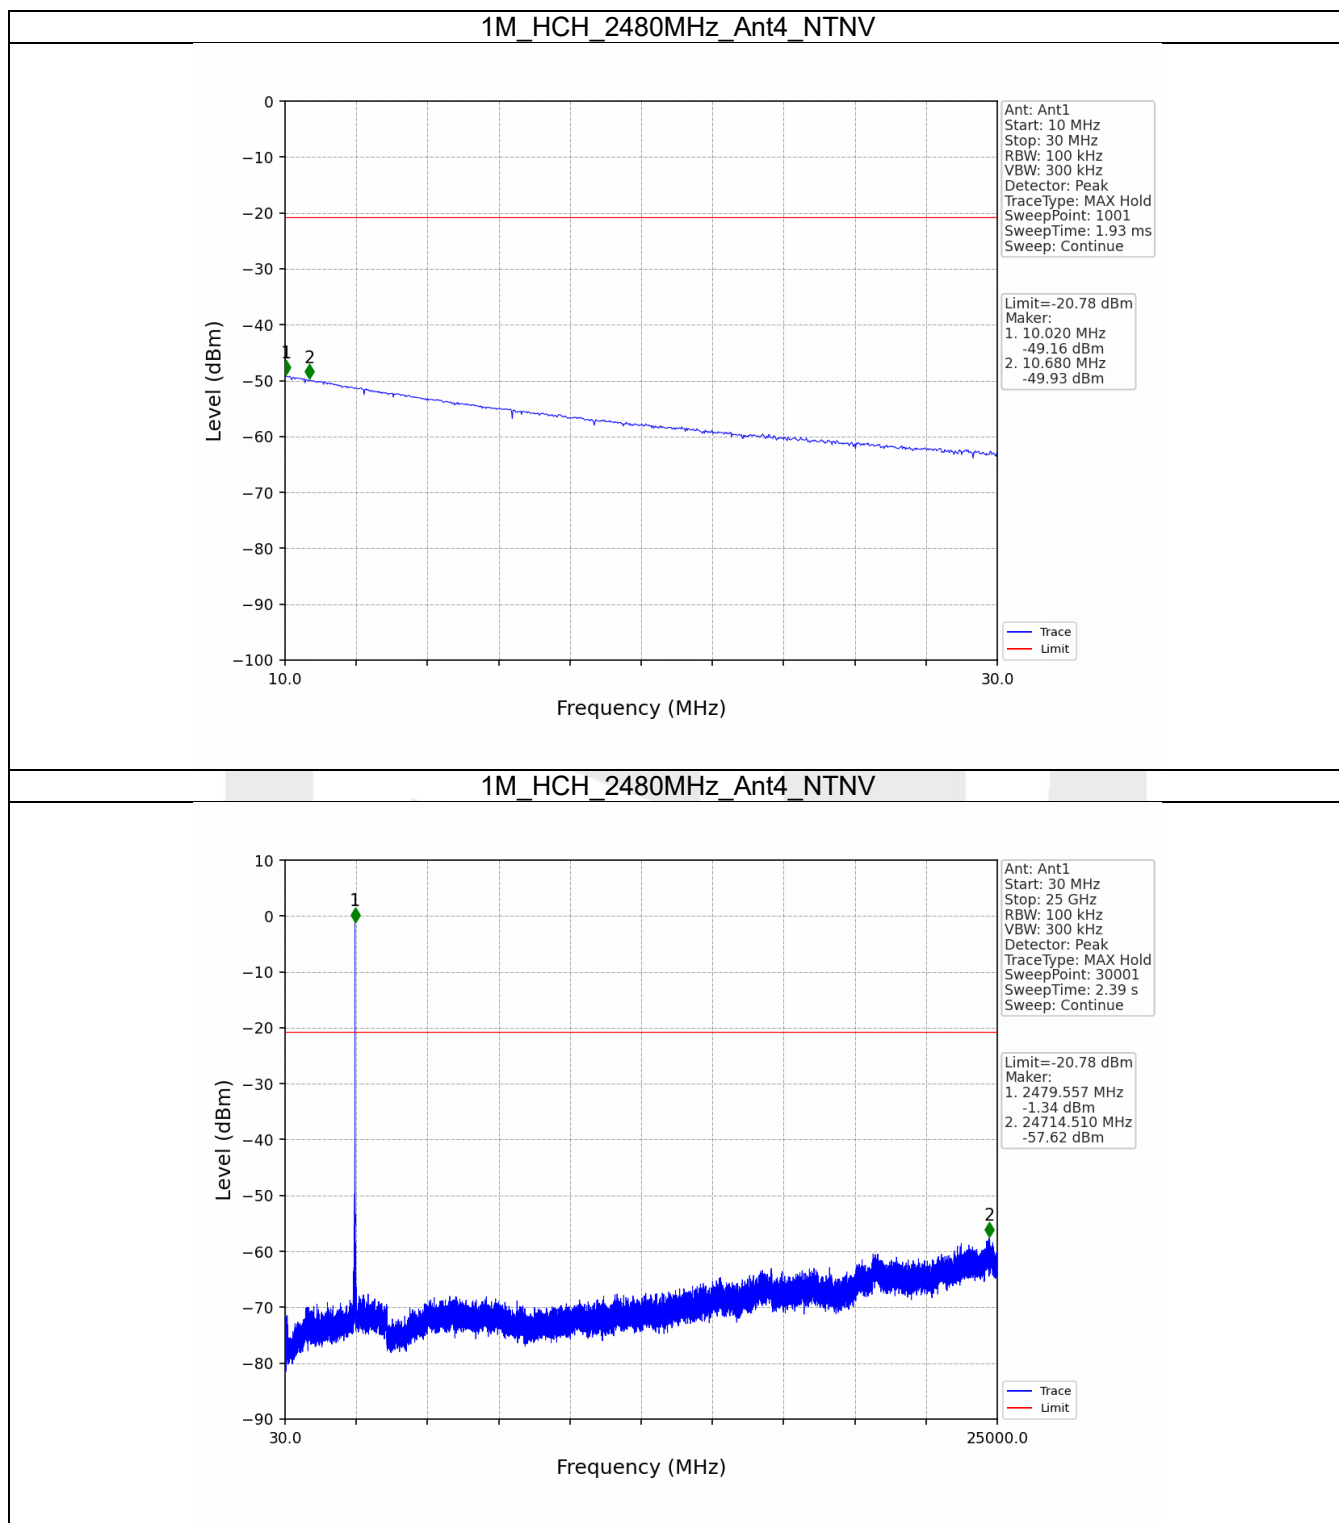

----- End of Report -----