

PRODUCT SPECIFICATION

PRODUCT NAME

PRODUCT NUMBER BH21022


CUSTOMER NUMBER


SHENZHEN HXD COMMUNICATION TECH CO., LTD.

TEL:0755-61123122 FAX:0755-61123480



301, No. 8, Sanhe Overseas Chinese District 2,
Tongsheng Community, Dalang Street, Longhua District, Shenzhen City


Antenna Specification		
Name		B15
Product		Earphone
	1. Bandwidth	2.402GHz ~2.480GHz
	2. impedance	50 Ω
	3. VSWR	
		2. 402GHz ~2. 480GHz 1. 5
	4.GAIN	2. 402GHz ~2. 480GHz GAIN= 3.19 dBi (Typical)
	4. Power	1W
	5temperature	-25~+65℃
	6. humidity	-40~+85℃
Note: The antenna of the left and right earphones are the same, only left side will be tested		

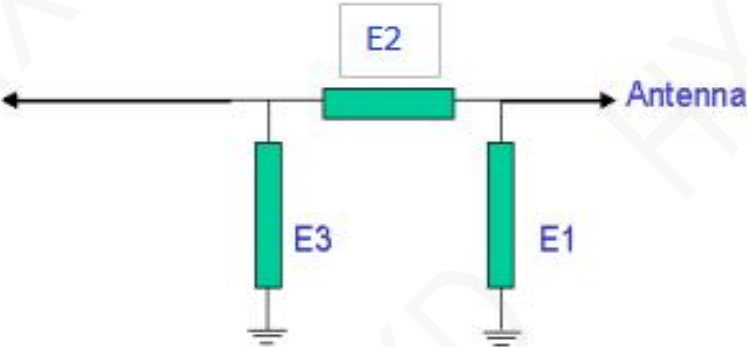Antenna Specification	
Name	B15
Product	Earphone
BLUE TOOTH ANTENNA  E1 E2 E3 NC OR NC	

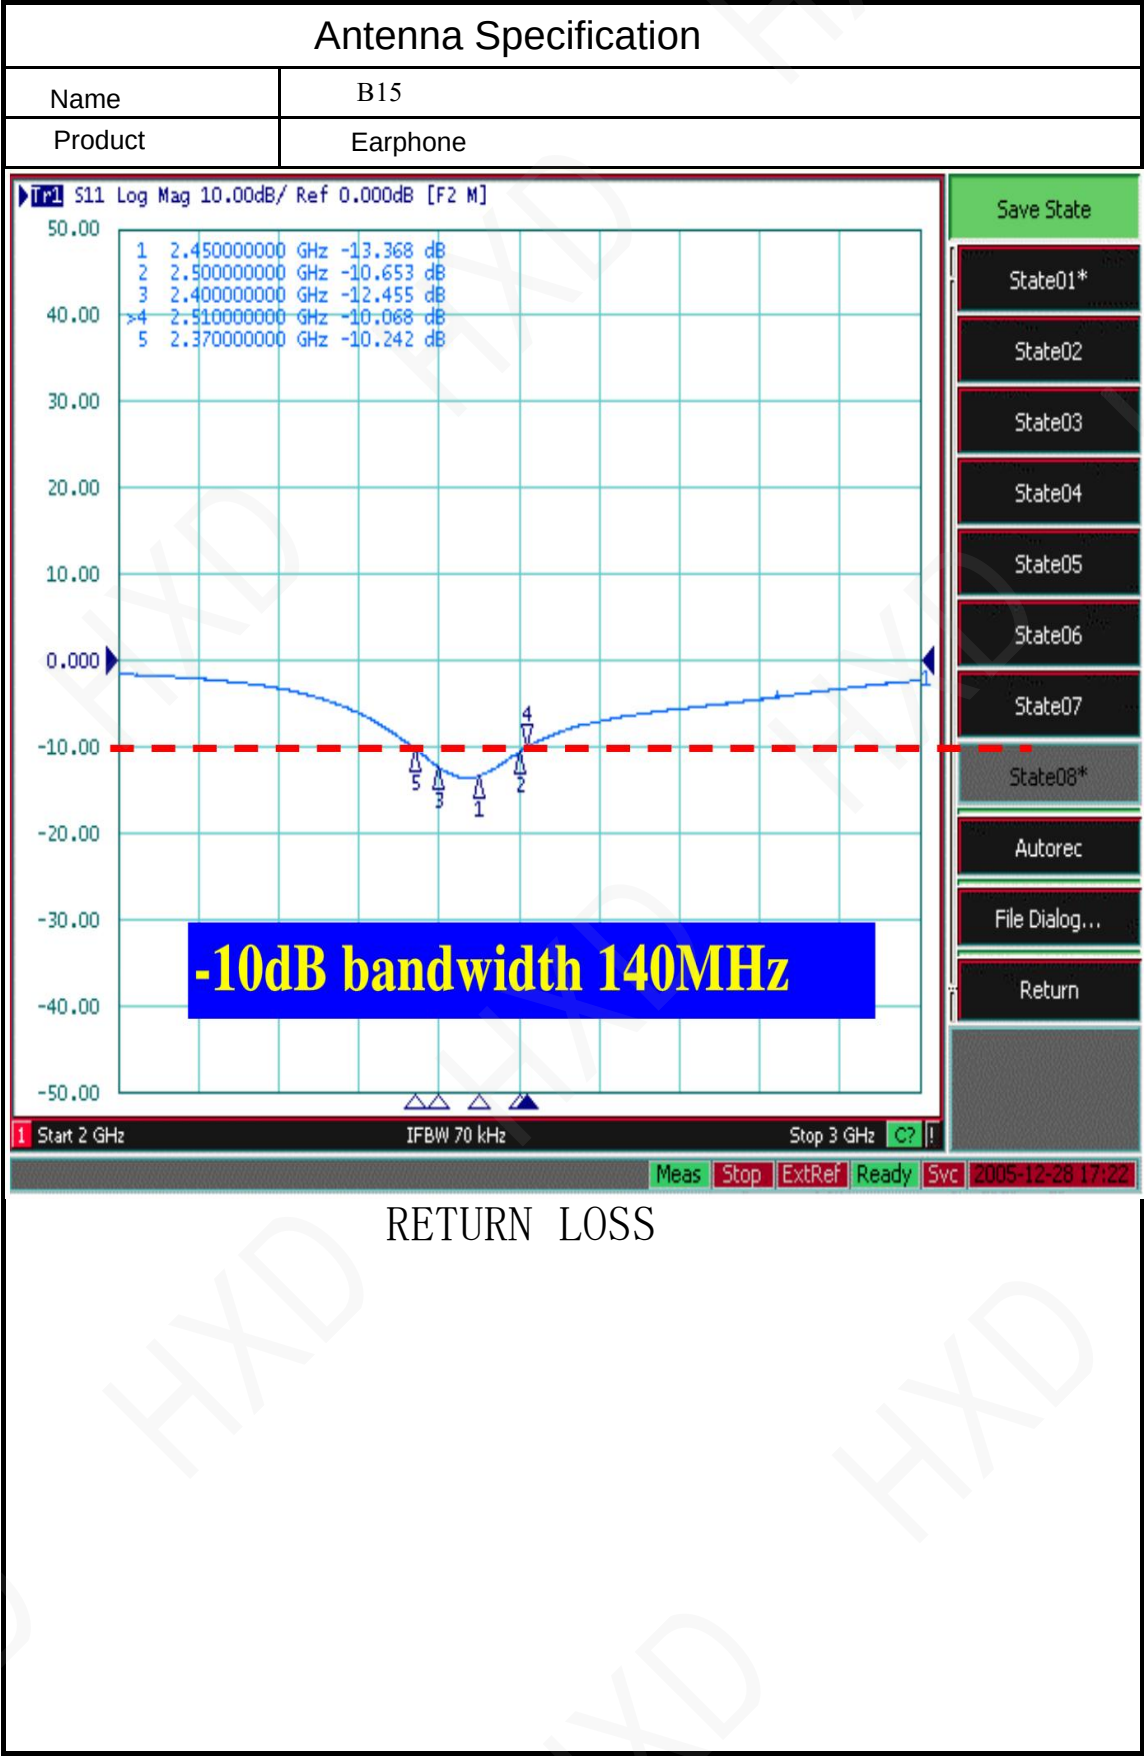

RETURN LOSS

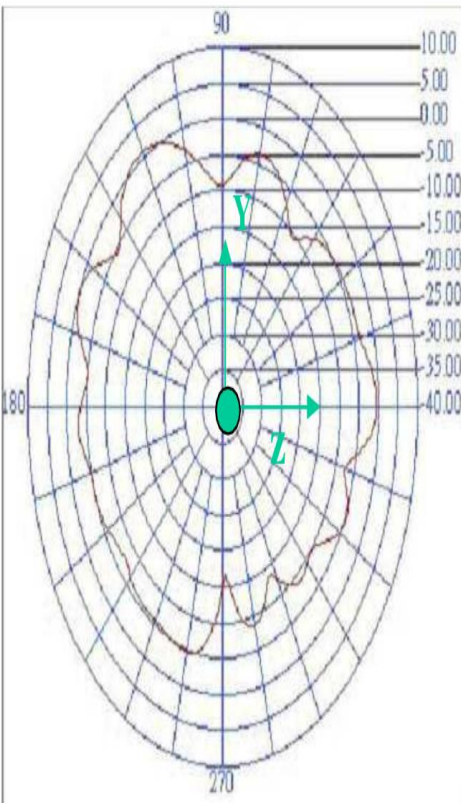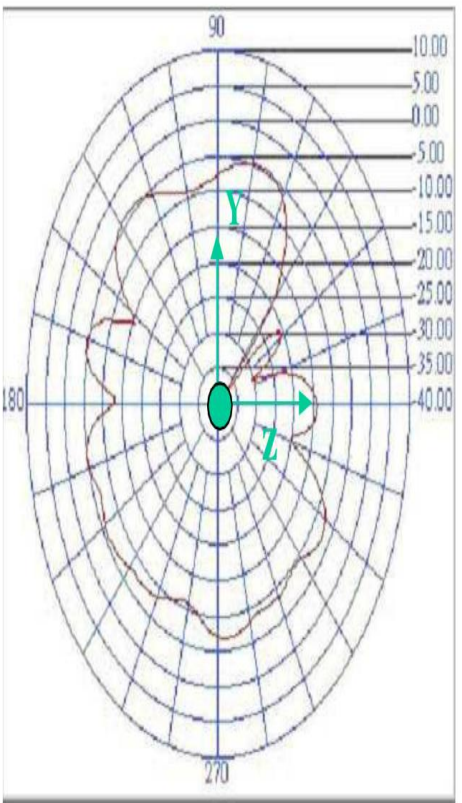Antenna Specification		
Name		B15
Product		Earphone
	Horizontal	Vertical
Y - Z Plane Average Gain= -3.185 dBi	 Frequency: 2450MHz Peak Gain = 0.95dBi Average Gain = -4.26 dBi	 Frequency: 2450MHz Peak Gain= -4.05dBi Average Gain=-8.03 dBi
	Y-Z PLANE	

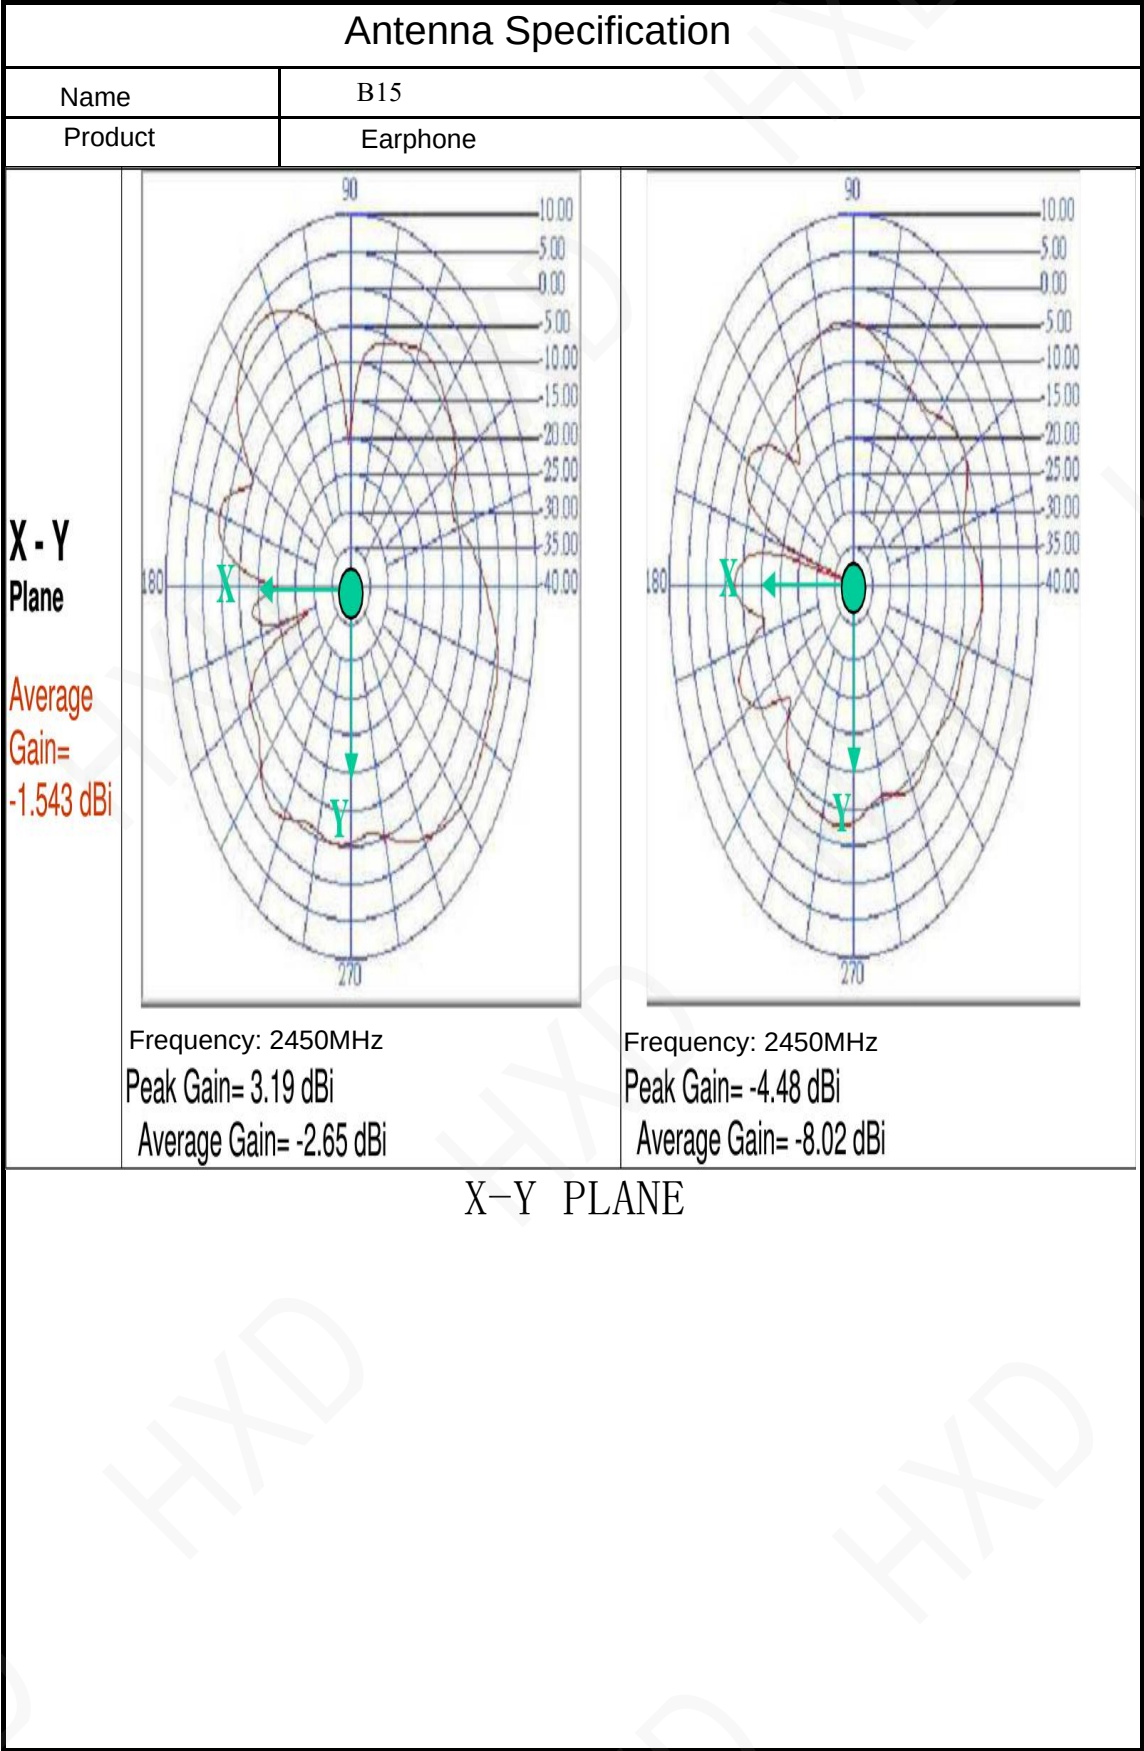


件编

版次

Antenna Specification	
Name	B15
Product	Earphone

**X - Z
Plane**


Average
Gain=
-0.99 dBi

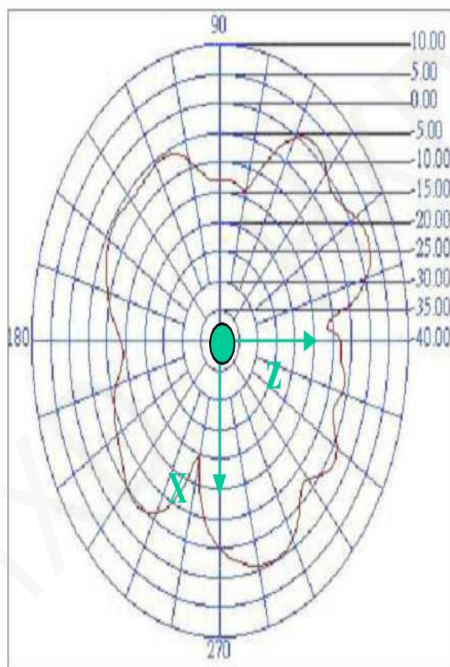

Frequency: 2450MHz

Peak Gain= 3.05 dBi

Average Gain= -4.10dBi

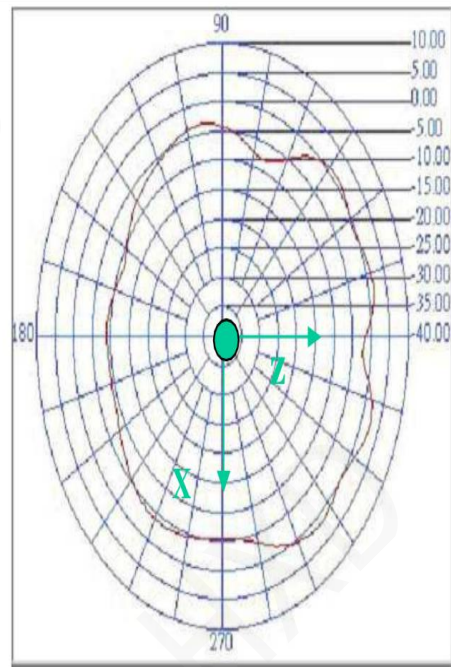

Frequency: 2450MHz

Peak Gain= 2.49 dBi

Average Gain= -2.47 dBi

X-Z PLANE

Antenna Specification							
Name		B15					
Product		Earphone					
1	2	3	4	5	6	7	8



- 1: 表面沉黄金 2μ

- 型号: B15-R 表面过黑油, 丝印亮白色字码

- [illegible]

日期

- 1: 表面沉黄金 2: 4

- 型号: B15-L, 表面过黑油, 丝印亮白色字码

- 3、背板总厚度 300±15mm，弹性在3000MPa以上，无特殊要求，背板与导条连接处必须采用金属背板；
- 4、磁条每根磁条，磁条与导条必须磁，磁条厚度3mm；
- 5、产品表面应经180°背板表面必须经磁条处理；
- 6、导条与背板连接处应 $3\sim5\mu$ ，不可有杂质或杂质，磁条厚度3mm，磁条180°背板与导条连接处，不可有杂质或杂质，不可有杂质或杂质；
- 7、导条与磁条连接处应 $0.03\sim0.05mm$ ，导条与磁条连接处应 $0.1mm$ 以内；
- 8、导条与磁条连接处应 $0.03\sim0.05mm$ ，导条与磁条连接处应 $0.1mm$ 以内；
- 9、导条与磁条连接处应 $0.03\sim0.05mm$ ，导条与磁条连接处应 $0.1mm$ 以内；
- 10、导条与磁条连接处应 $0.03\sim0.05mm$ ，导条与磁条连接处应 $0.1mm$ 以内；
- 11、导条与磁条连接处应 $0.03\sim0.05mm$ ，导条与磁条连接处应 $0.1mm$ 以内；

1