




P/N: HY160808 SRF07, HY160808 SRF08, HY160808 SRF09

✓ Features:


- 1. Surface mounted element with a small dimension of  $1.6 \times 0.8 \times 0.8$  mm meet future miniaturization trend.
- 2. Embedded and LTCC (low temperature co-fired ceramic) technology is able to integrate with system design as well as beatifying the housing of final product.
- 3. Miniaturization, wideband, high stability, low ESR, and low tolerance.
- 4. Dual-band resonances in the dominant and harmonic modes enables multiband operations.
- 5. Novel ground-radiation technique enables radiation from both the antenna and the ground plane.

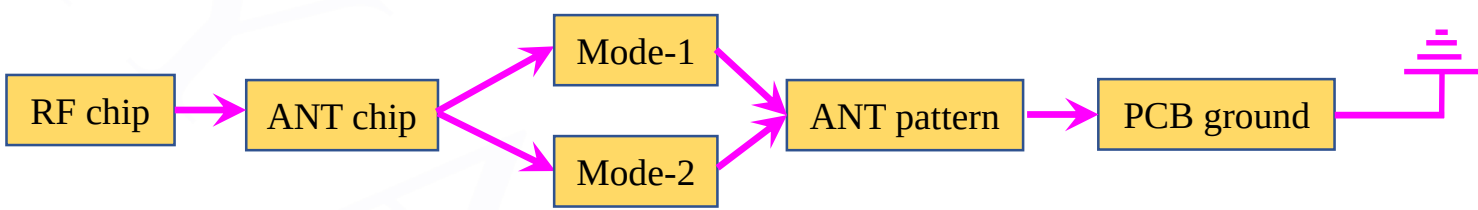

✓ Applications:


- 1. Bluetooth
- 2. Dual-band WLAN
- 3. ISM and UWB

✓ Dimensions (Unit: mm)

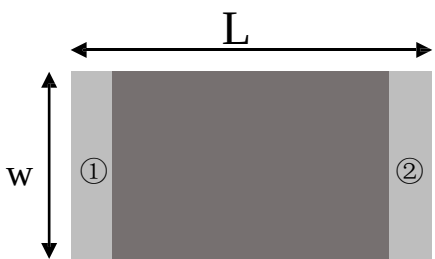


( Top View )

| Number | Terminal Name |
|--------|---------------|
| ①      | INPUT         |
| ②      | NC            |

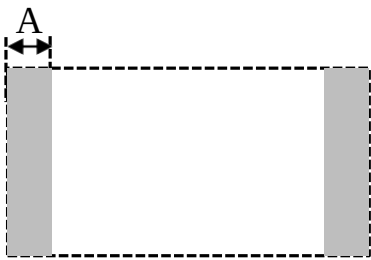

( Bottom View )



( Side View )

| Symbols    | L               | W               | T               | A               |
|------------|-----------------|-----------------|-----------------|-----------------|
| Dimensions | $1.60 \pm 0.20$ | $0.80 \pm 0.20$ | $0.80 \pm 0.20$ | $0.30 \pm 0.10$ |


Hanyang Antenna Design Co. Ltd. has possession of proprietary information provided in this report and this proprietary information shall be kept in strict confidence and not disclosed to any person or firm without the prior written consent of Hanyang Antenna Design Co. Ltd.




P/N: HY160808 SRF07, HY160808 SRF08, HY160808 SRF09

✓ Layout-1 (3.5mm×6.5mm)


Top layer:

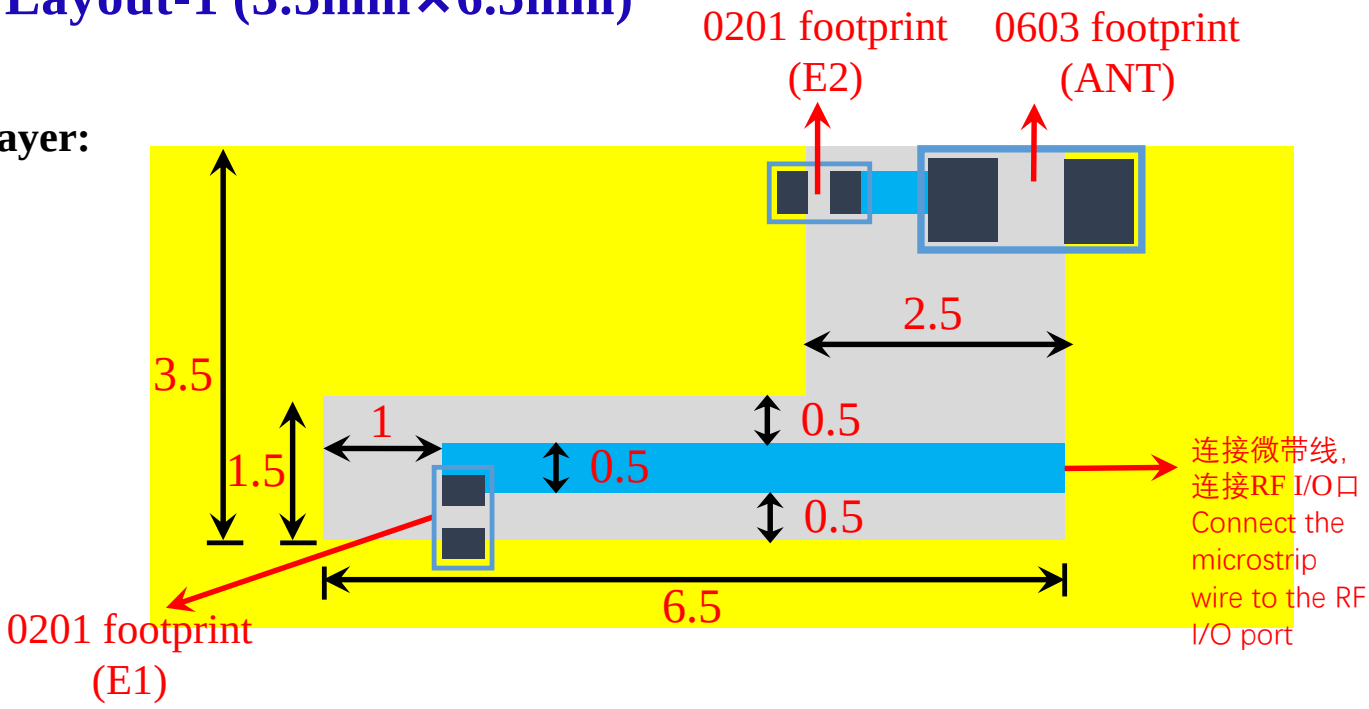

Bottom layer:

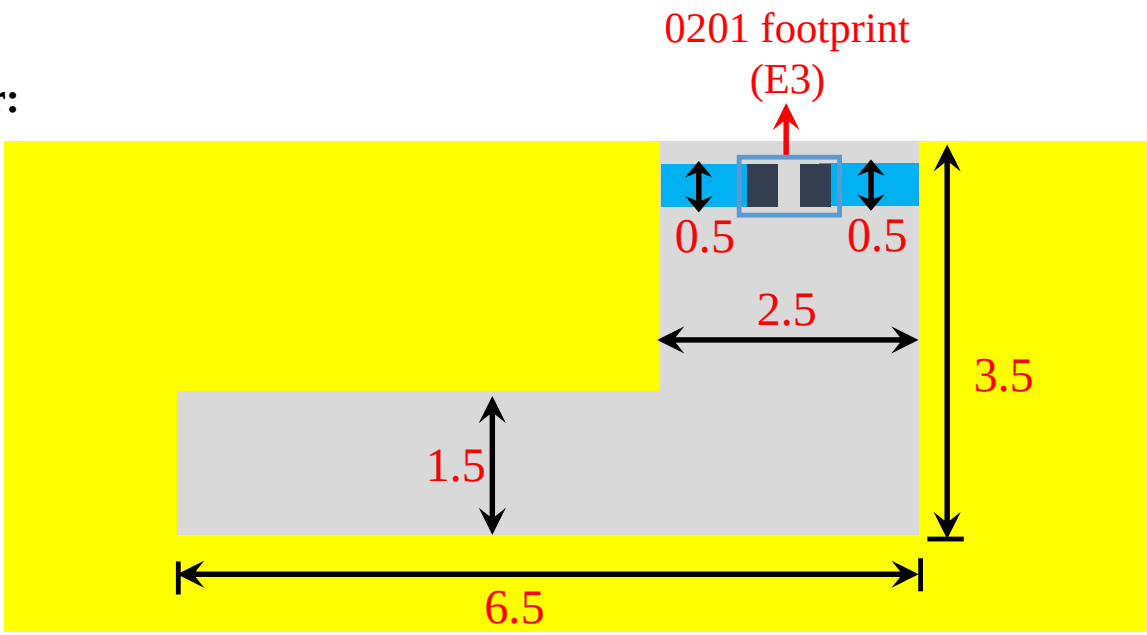

Equivalent circuit:

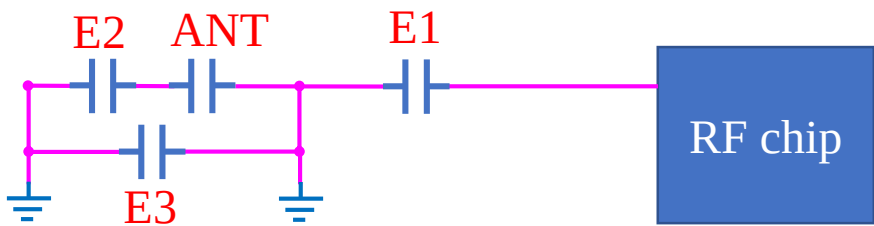





P/N: HY160808 SRF07, HY160808 SRF08, HY160808 SRF09

✓ Layout-2 (1.5mm×10mm)

Top layer:

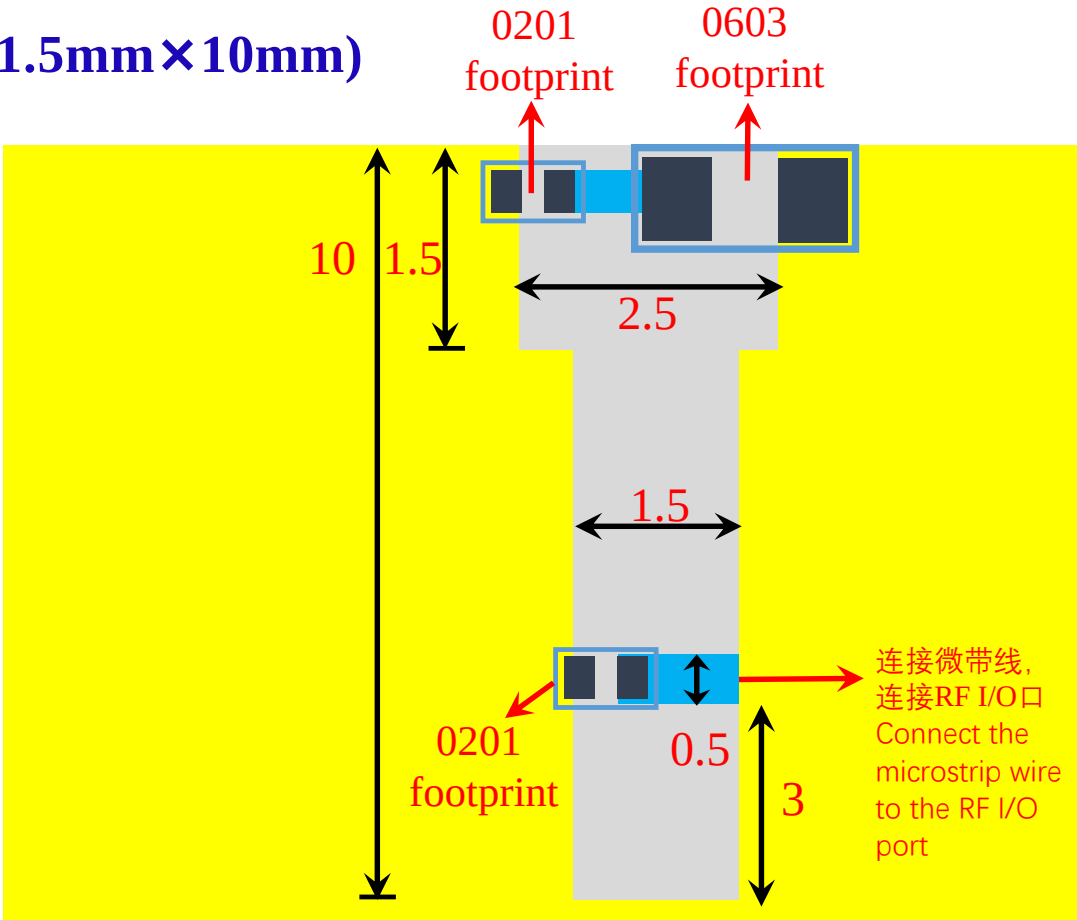


Bottom layer:

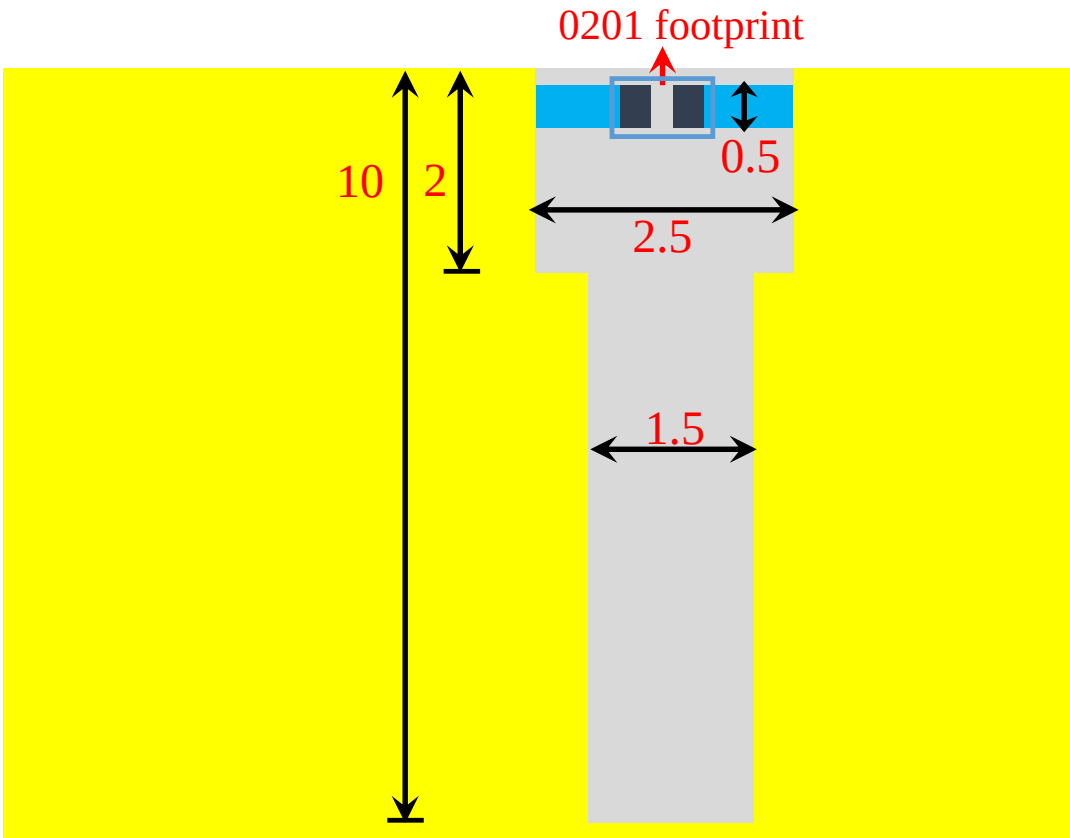




P/N: HY160808 SRF07, HY160808 SRF08, HY160808 SRF09

### ✓ Layout-3 (5mm×7mm)

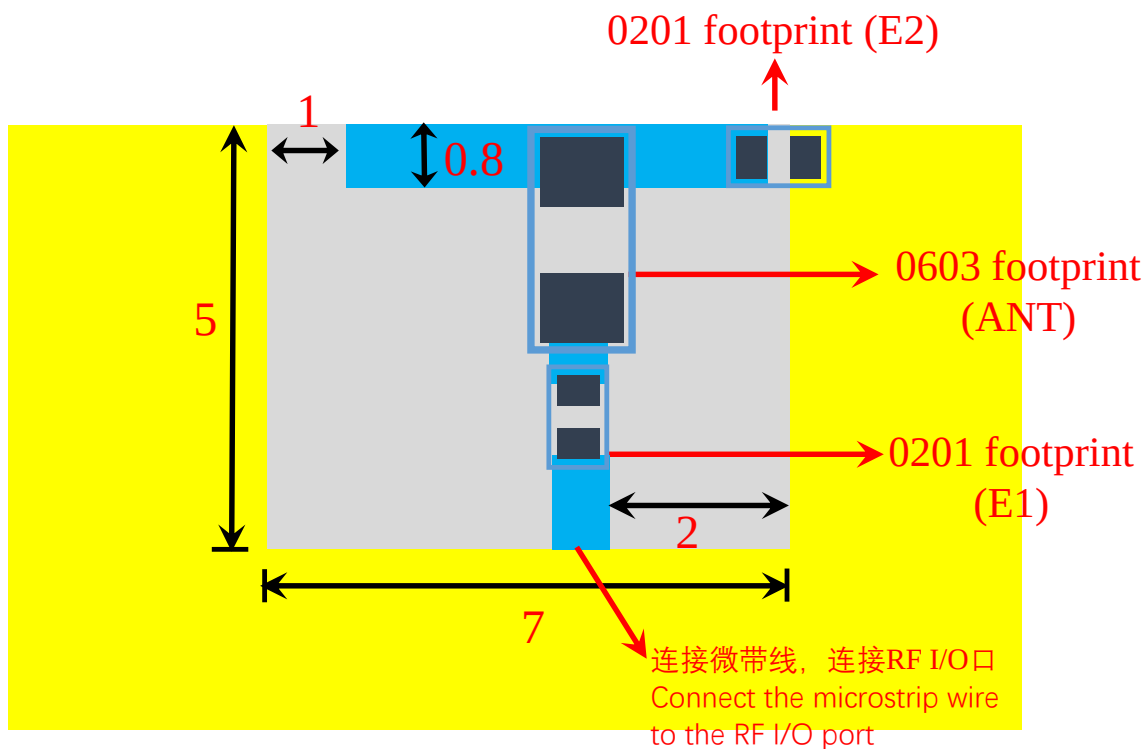

### ✓ Layout-4 (5mm×10mm)

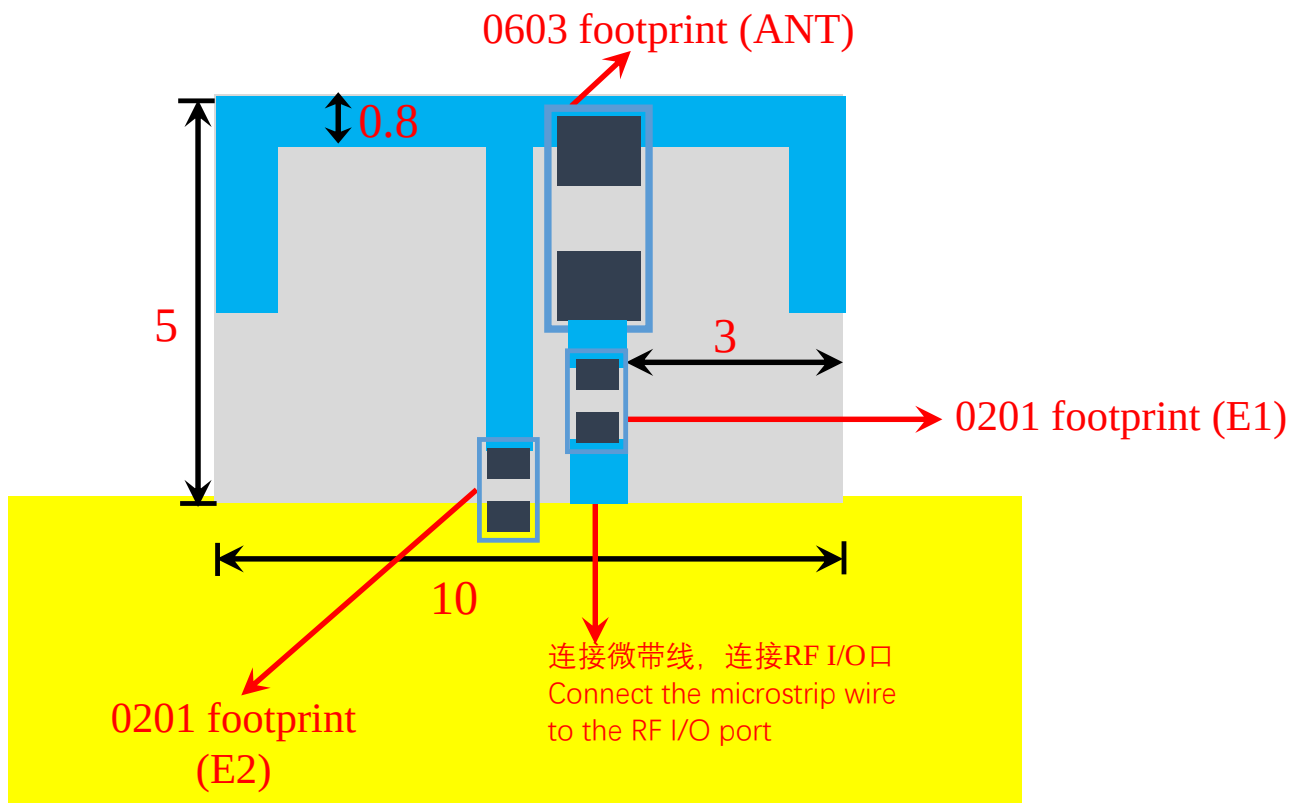




P/N: HY160808 SRF07, HY160808 SRF08, HY160808 SRF09

✓ **Electrical Characteristics:**

|   | Feature           | Specification   |
|---|-------------------|-----------------|
| 1 | Central frequency | 2.4GHz&5.5GHz   |
| 2 | Bandwidth         | >150MHz         |
| 3 | Peak gain         | ≥3dBi           |
| 4 | VSWR              | <2              |
| 5 | Antenna type      | SMD             |
| 6 | Azimuth beamwidth | Omnidirectional |
| 7 | Impedance         | 50 Ω            |

✓ **Characteristic Curves:**




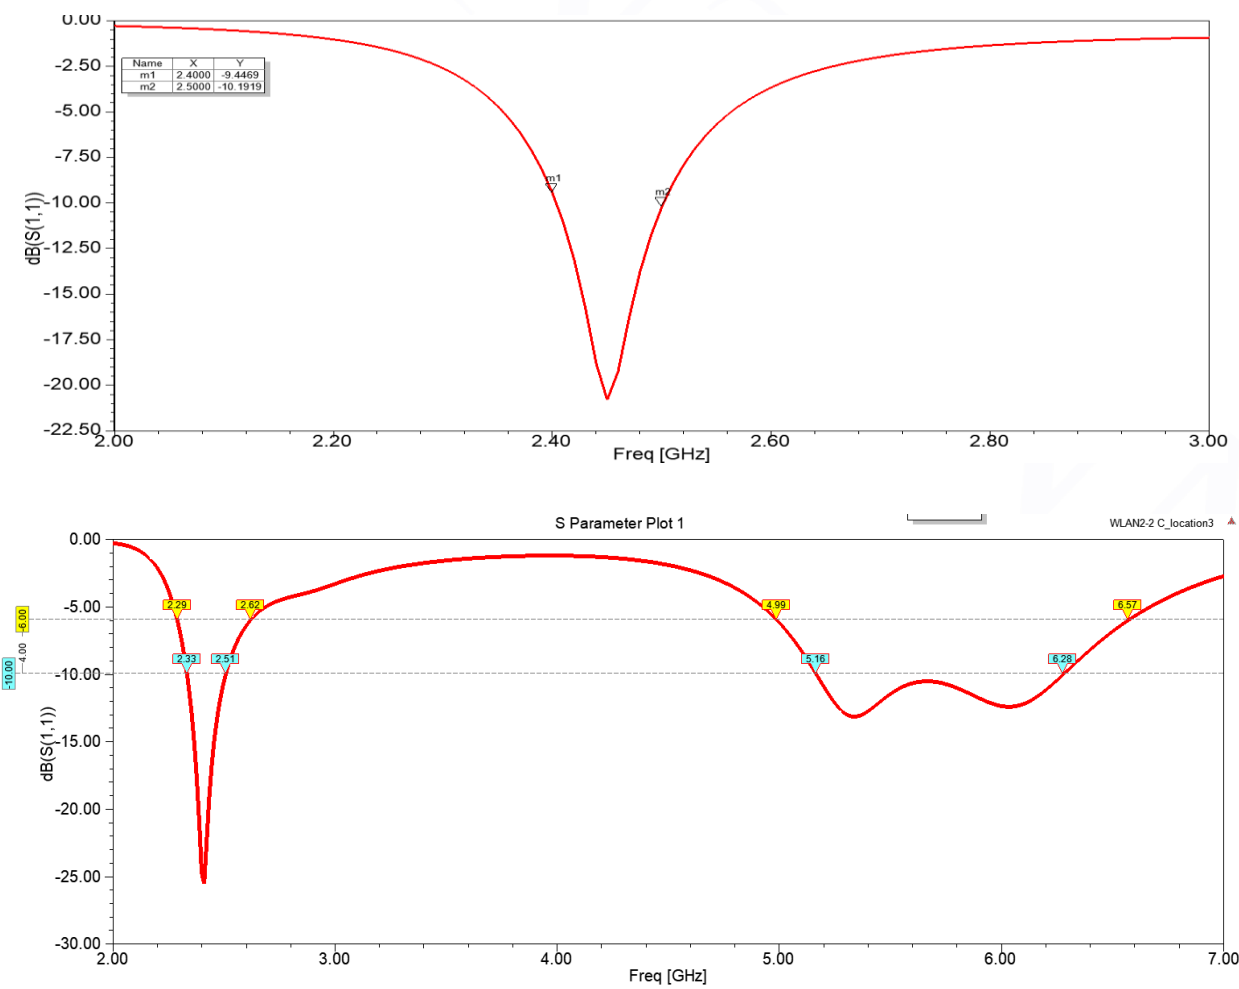


Hanyang Antenna Design Co. Ltd. has possession of proprietary information provided in this report and this proprietary information shall be kept in strict confidence and not disclosed to any person or firm without the prior written consent of Hanyang Antenna Design Co. Ltd.



**P/N: HY160808 SRF07, HY160808 SRF08, HY160808 SRF09**

✓ **Radiation Pattern:** Other frequencies have been tested, and only the maximum value is recorded in the specification.

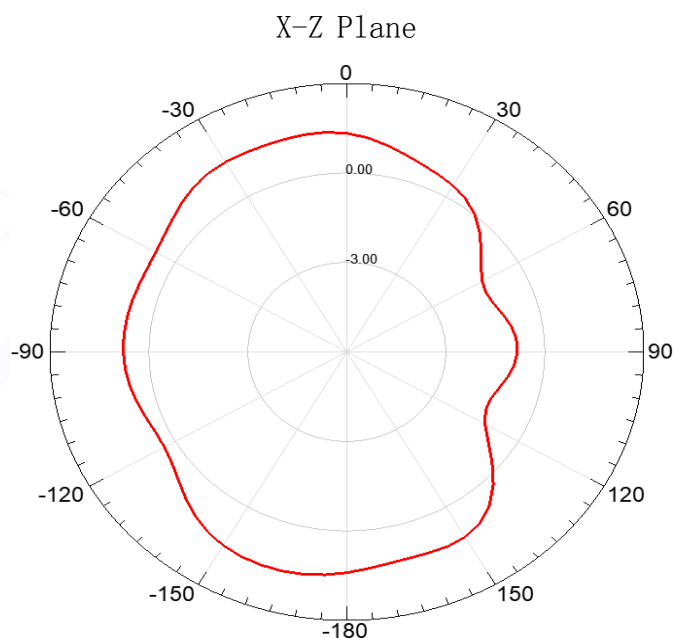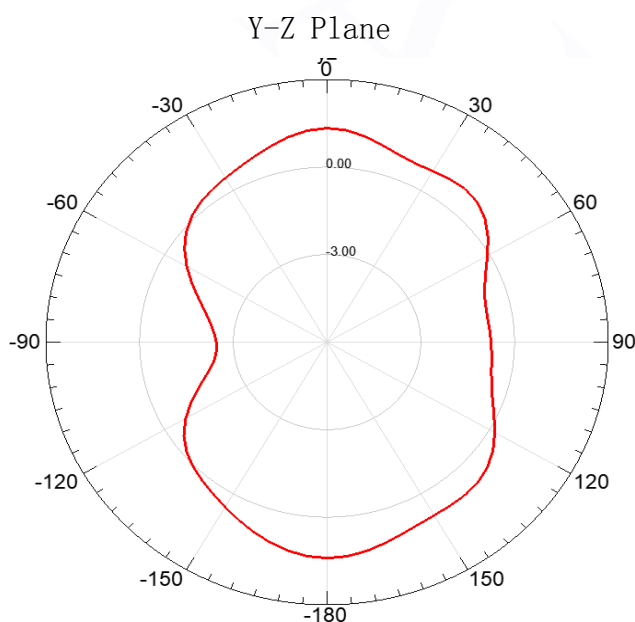

✓ **Radiation Performance:**

| Frequency  | 2450MHz | 5500MHz |
|------------|---------|---------|
| Avg. gain  | -0.85   | -1.30   |
| Peak gain  | 3.0     | 3.5     |
| Efficiency | 82%     | 78%     |



**P/N: HY160808 SRF07, HY160808 SRF08, HY160808 SRF09**

## ✓ Dependability Test

|                       |                |
|-----------------------|----------------|
| Test Temperature      | 25°C ± 5°C     |
| Operating Temperature | -25°C ~ +125°C |
| Temperature           | 5~40°C         |
| Relative Humidity     | 20~70%         |


## ✓ Moisture Proof

Temperature: 40 ± 2°C Humidity: 90~95%RH  
Duration: 500h  
Recovery conditions: Room temperature Recovery Time: 24h (Class1) or 48h (Class2)

## ✓ Solderability


At least 95% of the terminal electrode is covered by new solder.  
Preheating conditions: 80 to 120°C; 10~30s.  
Solder Temperature: 235 ± 5°C Duration: 2 ± 0.5s, Solder Temperature: 245 ± 5°C Duration: 2 ± 0.5s

## ✓ Optimum Solder Amount for Reflow Soldering

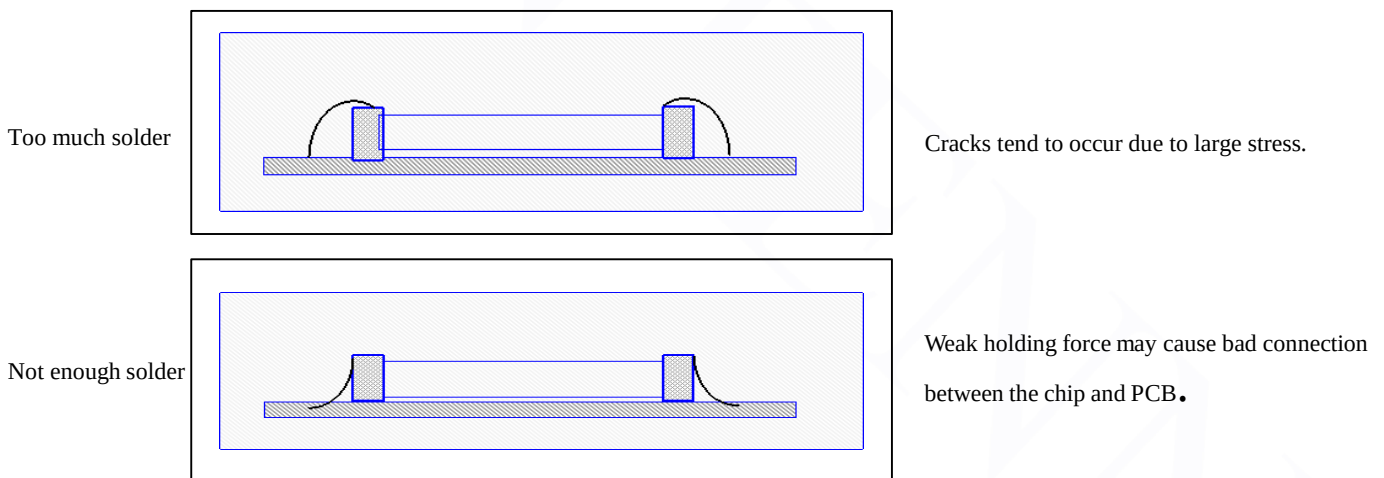


## ✓ Recommended Soldering Amounts

The optimal solder fillet amounts for re-flow soldering

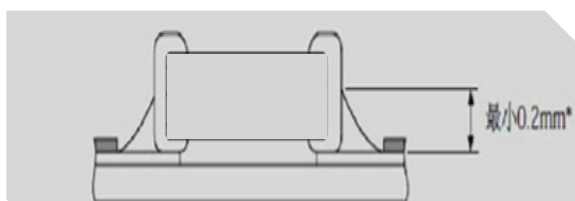

Other frequencies have been tested, and only the maximum value is recorded in the specification.

The optimal solder fillet amounts for wave soldering

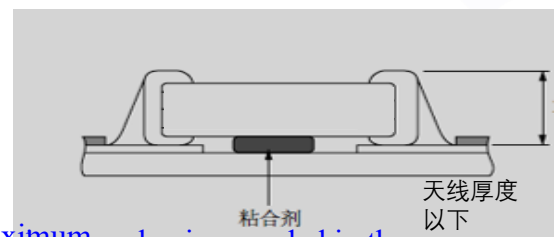

Hanyang Antenna Design Co. Ltd. has possession of proprietary information provided in this report and this proprietary information shall be kept in strict confidence and not disclosed to any person or firm without the prior written consent of Hanyang Antenna Design Co. Ltd.



**P/N: HY160808 SRF07, HY160808 SRF08, HY160808 SRF09**

---


## ✓ Temperature Cycle Test

10±1S Applied Force: 5N Duration: 10±1S  
Preheating conditions: up-category temperature, 1h  
Recovery time: 24±1h  
Initial Measurement  
Cycling Times: 5 times, 1 cycle, 4 steps:

## ✓ Resistance to Soldering Heat

Preheating 80 to 120°C; 10~30s. Solder Temperature: 235±5°C; Duration: 2±0.5s; Solder Temperature: 245±5°C  
Duration: 2±0.5s; Preheating 100 to 200°C; 10±2min.  
Solder Temperature: 265±5°C; Duration: 10±1s  
Clean the capacitor with solvent and examine it with a 10X(min.) microscope.  
Recovery Time: 24±2h  
Recovery condition: Room temperature

## ✓ Resistance to Flexure of Substrate

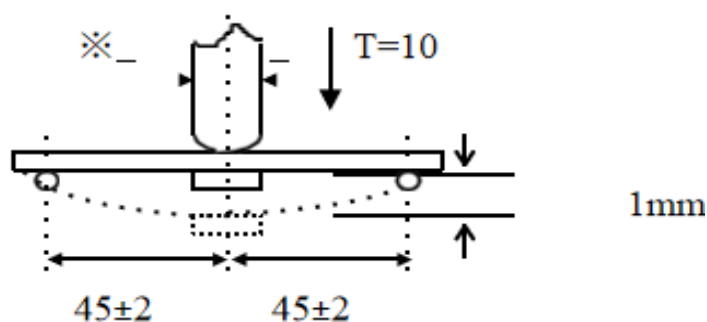

Test Board: Al<sub>2</sub>O<sub>3</sub> or PCB Warp: 1mm Speed: 0.5mm/sec.  
Unit: mm

The measurement should be made with the board in the bending position.






P/N: HY160808 SRF07, HY160808 SRF08, HY160808 SRF09

The temperature profile for soldering


Re-flow soldering

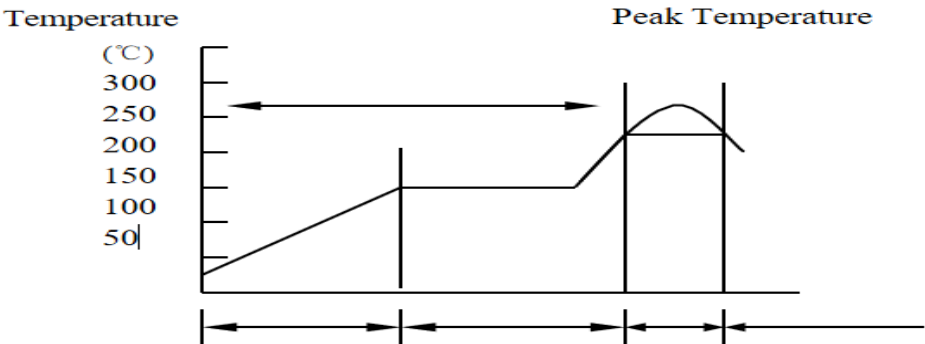

|                          |                             |                             |
|--------------------------|-----------------------------|-----------------------------|
|                          | Pb-Sn 焊接<br>Pb-Sn soldering | 无铅焊接<br>Lead-free soldering |
| 尖峰温度<br>Peak temperature | 230℃～250℃                   | 240℃～260℃                   |

While in preheating, please keep the temperature difference between soldering temperature and surface temperature of chips as:  $T \leq 150^{\circ}\text{C}$ .

Wave soldering

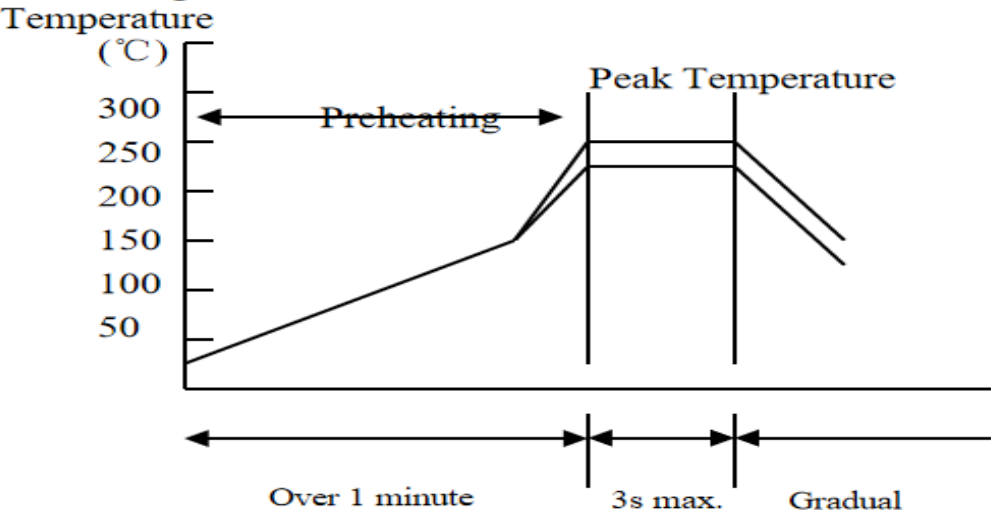


|                          |                             |                             |
|--------------------------|-----------------------------|-----------------------------|
|                          | Pb-Sn 焊接<br>Pb-Sn soldering | 无铅焊接<br>Lead-free soldering |
| 尖峰温度<br>Peak temperature | 230℃～260℃                   | 240℃～270℃                   |



P/N: HY160808 SRF07, HY160808 SRF08, HY160808 SRF09

✓ **Dimensions of paper taping**

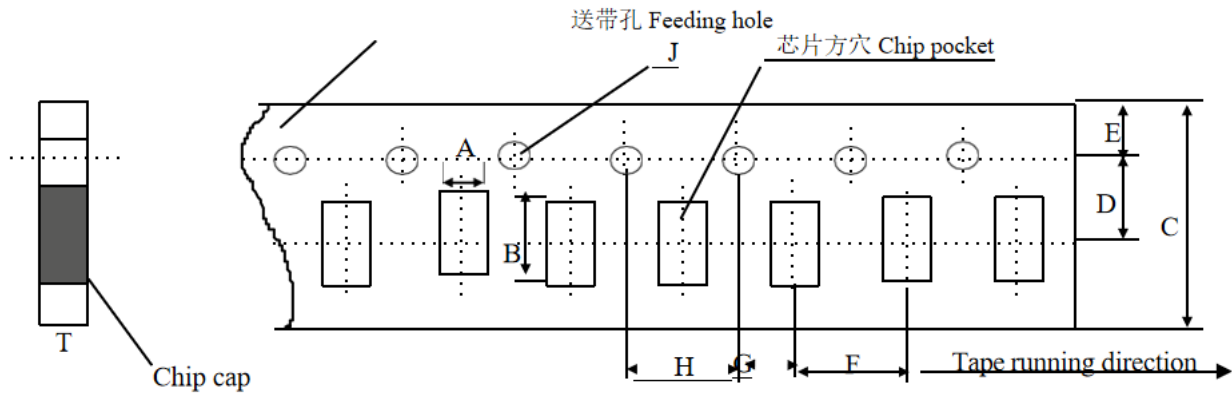


Unit: mm

| 代号Code<br>纸带规格<br>papersize | A             | B             | C             | D*            | E             | F             | G*            | H             | J                | T           |
|-----------------------------|---------------|---------------|---------------|---------------|---------------|---------------|---------------|---------------|------------------|-------------|
| 尺寸                          | 1.10<br>±0.10 | 1.90<br>±0.10 | 8.00<br>±0.10 | 3.50<br>±0.05 | 1.75<br>±0.10 | 4.00<br>±0.10 | 2.00<br>±0.10 | 4.00<br>±0.10 | 1.50<br>-0/+0.10 | 1.10<br>Max |

Reel (4000 pcs/Reel)

**EMBOSED TAPING**

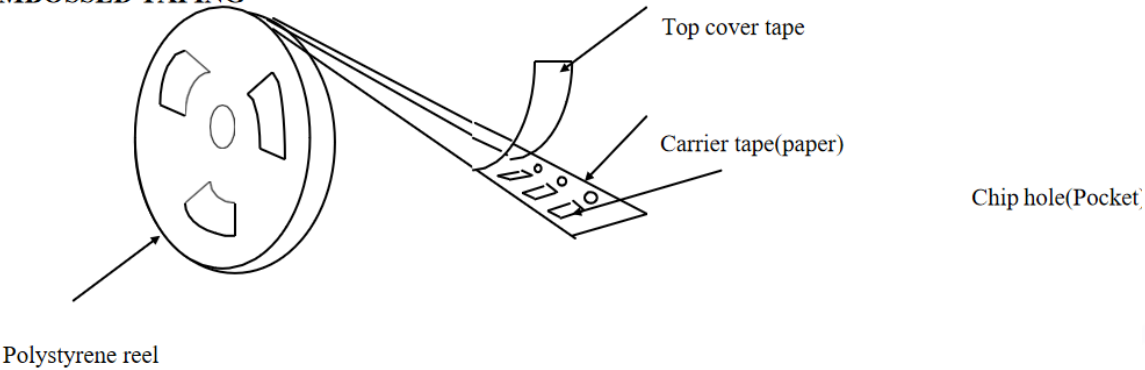

✓ **Storage Period**

The guaranteed period for solderability is 6 months (Under deliver package condition).  
Temperature:5~40℃ /Relative Humidity:20~70%

Hanyang Antenna Design Co. Ltd. has possession of proprietary information provided in this report and this proprietary information shall be kept in strict confidence and not disclosed to any person or firm without the prior written consent of Hanyang Antenna Design Co. Ltd.