

FCC Radio Test Report

FCC ID: 2BH7FC230


Report No. : BTL-FCCP-1-2409G011
Equipment : Pan/Tilt AI Home Security Wi-Fi Camera
Model Name : Tapo C230
Brand Name : tp-link, tapo
Applicant : TP-Link Systems Inc.
Address : 10 Mauchly, Irvine, CA 92618
Manufacturer : TP-Link Systems Inc.
Address : 10 Mauchly, Irvine, CA 92618


Radio Function : WLAN 2.4 GHz

FCC Rule Part(s) : FCC CFR Title 47, Part 15, Subpart C (15.247)
Measurement Procedure(s) : ANSI C63.10-2013

Date of Receipt : 2024/8/7
Date of Test : 2024/8/7 ~ 2024/9/10
Issued Date : 2024/11/26

The above equipment has been tested and found in compliance with the requirement of the above standards by BTL Inc.

Prepared by : 
Poken Huang, Engineer

Approved by : 
Peter Chen, Manager

**BTL Inc.**

No.18, Ln. 171, Sec. 2, Jiuzong Rd., Neihu Dist., Taipei City 114, Taiwan

Tel: +886-2-2657-3299 Fax: +886-2-2657-3331 Web: www.newbtl.com Service mail: btl_qa@newbtl.com

Declaration

BTL represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

BTL's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** assumes no responsibility for the data provided by the Customer, any statements, inferences or generalizations drawn by the customer or others from the reports issued by **BTL**.

This report is the confidential property of the client. As a mutual protection to the clients, the public and ourselves, the test report shall not be reproduced, except in full, without our written approval.

BTL's laboratory quality assurance procedures are in compliance with the **ISO/IEC 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

BTL is not responsible for the sampling stage, so the results only apply to the sample as received.

The information, data and test plan are provided by manufacturer which may affect the validity of results, so it is manufacturer's responsibility to ensure that the apparatus meets the essential requirements of applied standards and in all the possible configurations as representative of its intended use.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Please note that the measurement uncertainty is provided for informational purpose only and are not use in determining the Pass/Fail results.

CONTENTS

1	SUMMARY OF TEST RESULTS	6
1.1	TEST FACILITY	7
1.2	MEASUREMENT UNCERTAINTY	7
1.3	TEST ENVIRONMENT CONDITIONS	7
1.4	DUTY CYCLE	8
2	GENERAL INFORMATION	9
2.1	DESCRIPTION OF EUT	9
2.2	TEST MODES	10
2.3	TABLE OF PARAMETERS OF TEXT SOFTWARE SETTING	10
2.4	BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	11
2.5	SUPPORT UNITS	11
3	AC POWER LINE CONDUCTED EMISSIONS TEST	12
3.1	LIMIT	12
3.2	TEST PROCEDURE	12
3.3	DEVIATION FROM TEST STANDARD	12
3.4	TEST SETUP	13
3.5	TEST RESULT	13
4	RADIATED EMISSIONS TEST	14
4.1	LIMIT	14
4.2	TEST PROCEDURE	15
4.3	DEVIATION FROM TEST STANDARD	15
4.4	TEST SETUP	15
4.5	EUT OPERATING CONDITIONS	16
4.6	TEST RESULT – 9KHZ TO 30 MHZ	17
4.7	TEST RESULT – 30 MHZ TO 1 GHZ	17
4.8	TEST RESULT – ABOVE 1 GHZ	17
5	BANDWIDTH TEST	18
5.1	LIMIT	18
5.2	TEST PROCEDURE	18
5.3	DEVIATION FROM TEST STANDARD	18
5.4	TEST SETUP	18
5.5	EUT OPERATING CONDITIONS	18
5.6	TEST RESULT	18
6	OUTPUT POWER TEST	19
6.1	LIMIT	19
6.2	TEST PROCEDURE	19
6.3	DEVIATION FROM TEST STANDARD	19
6.4	TEST SETUP	19
6.5	EUT OPERATING CONDITIONS	19
6.6	TEST RESULT	19
7	POWER SPECTRAL DENSITY	20
7.1	LIMIT	20
7.2	TEST PROCEDURE	20
7.3	DEVIATION FROM TEST STANDARD	20
7.4	TEST SETUP	20
7.5	EUT OPERATING CONDITIONS	20
7.6	TEST RESULT	20

8	ANTENNA CONDUCTED SPURIOUS EMISSIONS TEST	21
8.1	LIMIT	21
8.2	TEST PROCEDURE	21
8.3	DEVIATION FROM TEST STANDARD	21
8.4	TEST SETUP	21
8.5	EUT OPERATING CONDITIONS	21
8.6	TEST RESULT	21
9	LIST OF MEASURING EQUIPMENTS	22
10	EUT TEST PHOTO	24
11	EUT PHOTOS	24
APPENDIX A	AC POWER LINE CONDUCTED EMISSIONS	25
APPENDIX B	RADIATED EMISSIONS - 9 KHZ TO 30 MHZ	30
APPENDIX C	RADIATED EMISSIONS - 30 MHZ TO 1 GHZ	33
APPENDIX D	RADIATED EMISSIONS - ABOVE 1 GHZ	36
APPENDIX E	BANDWIDTH	63
APPENDIX F	OUTPUT POWER	67
APPENDIX G	POWER SPECTRAL DENSITY	69
APPENDIX H	ANTENNA CONDUCTED SPURIOUS EMISSIONS	72

REVISION HISTORY

Report No.	Version	Description	Issued Date	Note
BTL-FCCP-1-2409G011	R00	Original Report.	2024/11/18	Invalid
BTL-FCCP-1-2409G011	R01	Modified the test model name in chapter 2.1.	2024/11/26	Valid

1 SUMMARY OF TEST RESULTS

Test procedures according to the technical standards.

Standard(s) Section	Description	Test Result	Judgement	Remark
15.207	AC Power Line Conducted Emissions	APPENDIX A	Pass	-----
15.205 15.209 15.247(d)	Radiated Emissions	APPENDIX B APPENDIX C APPENDIX D	Pass	-----
15.247(a)	Bandwidth	APPENDIX E	Pass	-----
15.247(b)	Output Power	APPENDIX F	Pass	-----
15.247(e)	Power Spectral Density	APPENDIX G	Pass	-----
15.247(d)	Antenna conducted Spurious Emission	APPENDIX H	Pass	-----
15.203	Antenna Requirement	-----	Pass	-----

NOTE:

- (1) "N/A" denotes test is not applicable in this Test Report.
- (2) The report format version is TP.1.1.1.

1.1 TEST FACILITY

The test locations stated below are under the TAF Accreditation Number 0659.

The test location(s) used to collect the test data in this report are:

(FCC DN: TW0659)

No.64, Ln. 169, Sec. 2, Datong Rd., Xizhi Dist., New Taipei City 221, Taiwan (R.O.C.)

☒ CB20 ☒ TR01 ☒ C01

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k = 2$, providing a level of confidence of approximately **95 %**.

The measurement instrumentation uncertainty considerations contained in CISPR 16-4-2. The BTL measurement uncertainty is less than the CISPR 16-4-2 U_{cispr} requirement.

A. AC power line conducted emissions test:

Test Site	Method	Measurement Frequency Range	U (dB)
C01	CISPR	150 kHz ~ 30MHz	2.4498

B. Radiated emissions test :

Test Site	Measurement Frequency Range	U (dB)
CB20	0.03 GHz ~ 0.2 GHz	4.17
	0.2 GHz ~ 1 GHz	4.72
	1 GHz ~ 6 GHz	5.21
	6 GHz ~ 18 GHz	5.51
	18 GHz ~ 26 GHz	3.69
	26 GHz ~ 40 GHz	4.23

C. Conducted test :

Test Item	U
Occupied Bandwidth	86 %
Output power	0.8412 dB
Power Spectral Density	0.8602 dB
Conducted Spurious emissions	1.8304 dB
Conducted Band edges	1.8338 dB

NOTE:

Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

1.3 TEST ENVIRONMENT CONDITIONS


Test Item	Environment Condition	Test Voltage	Tested by
AC Power Line Conducted Emissions	25°C, 70%	AC 120V	Cheng Tsai
Radiated emissions below 1 GHz	25°C, 65%	AC 120V	Ken Lu
Radiated emissions above 1 GHz	25°C, 65%	AC 120V	Ken Lu
Bandwidth	25°C, 70%	AC 120V	Cheng Tsai
Output Power	25°C, 70%	AC 120V	Cheng Tsai
Power Spectral Density	25°C, 70%	AC 120V	Cheng Tsai
Antenna conducted Spurious Emission	25°C, 70%	AC 120V	Cheng Tsai

1.4 DUTY CYCLE

If duty cycle is $\geq 98\%$, duty factor is not required.

If duty cycle is $< 98\%$, duty factor shall be considered.

Remark	Delta 1			Delta 2	On Time/Period	10 log(1/Duty Cycle)	1/On Time (B)
Mode	ON (ms)	Numbers (ON)	On Time (B) (ms)	Period (ON+OFF) (ms)	Duty Cycle (%)	Duty Factor (dB)	1/B Minimum VBW (kHz)
IEEE 802.11b	8.502	1	8.502	8.658	98.20%	0.00	0.010
IEEE 802.11g	1.415	1	1.415	1.505	94.02%	0.27	0.707
IEEE 802.11n (HT20)	1.325	1	1.325	1.450	91.38%	0.39	0.755

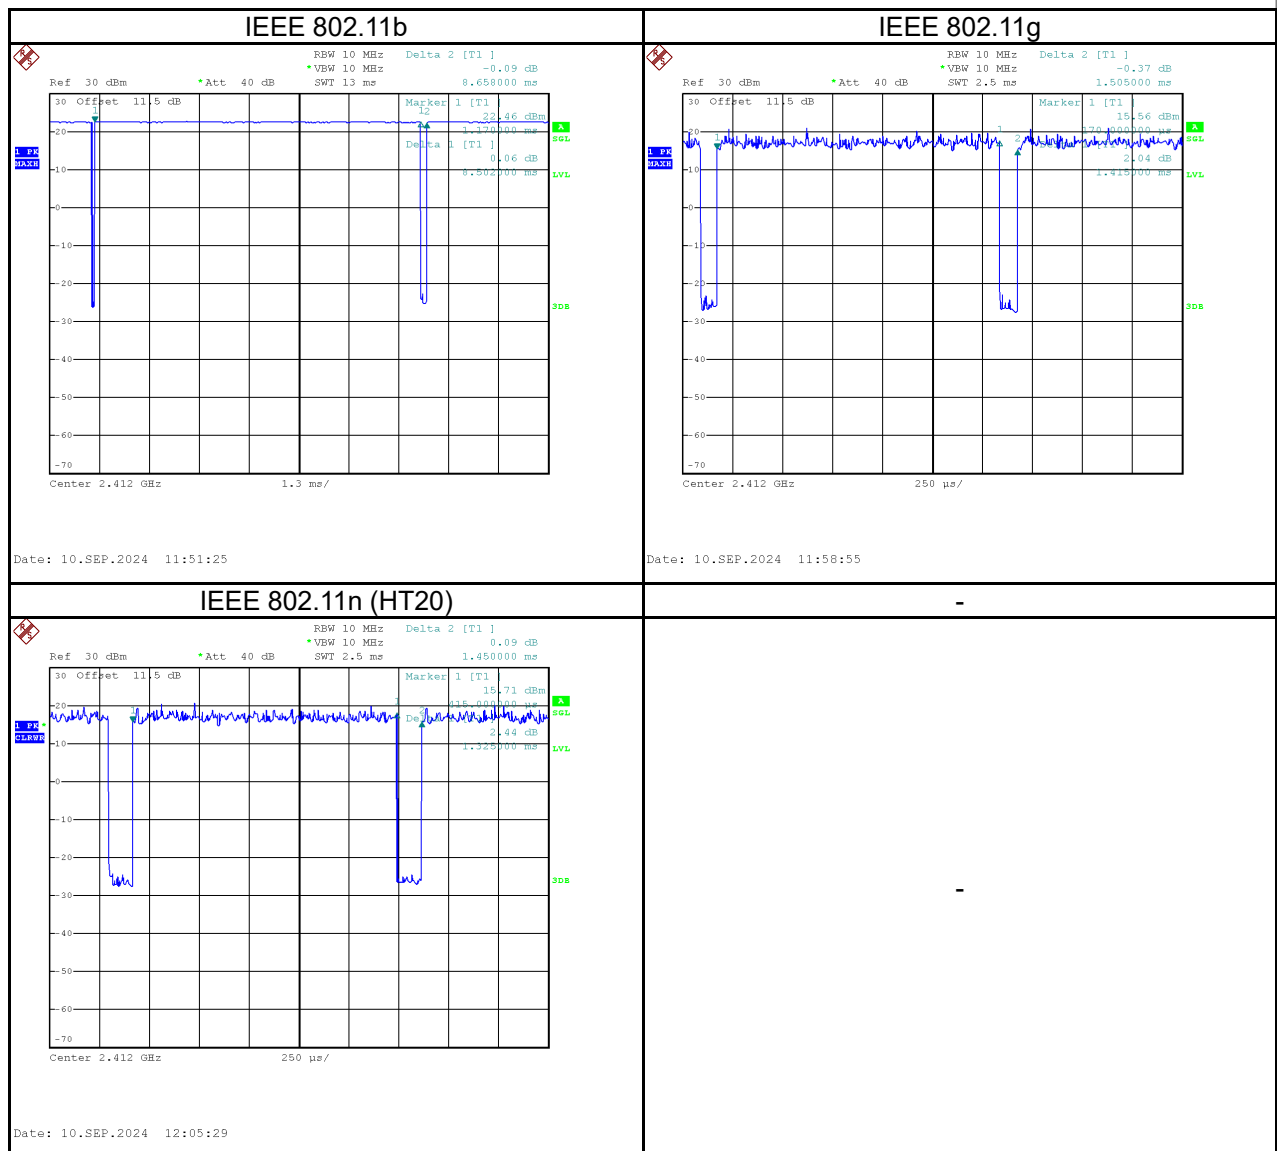

2 GENERAL INFORMATION

2.1 DESCRIPTION OF EUT

Equipment	Pan/Tilt AI Home Security Wi-Fi Camera
Model Name	Tapo C230
Brand Name	tp-link, tapo
Model Difference	N/A
Power Source	DC Voltage supplied from AC adapter. Model: T090060-2B1
Power Rating	Input: 100-240V~ 50/60Hz 0.3A Output: 9V $\overline{\sim}$ 0.6A
HW Version	1.0
SW Version	1.X
Operation Band	2400 MHz ~ 2483.5 MHz
Operation Frequency	2412 MHz ~ 2462 MHz
Modulation Technology	IEEE 802.11b: DSSS IEEE 802.11g: OFDM IEEE 802.11n: OFDM
Transfer Rate	IEEE 802.11b: 11/5.5/2/1 Mbps IEEE 802.11g: 54/48/36/24/18/12/9/6 Mbps IEEE 802.11n: up to 72.2 Mbps
Maximum Output Power	IEEE 802.11b: 24.57 dBm (0.2864 W) IEEE 802.11g: 21.64 dBm (0.1459 W) IEEE 802.11n (HT20): 22.22 dBm(0.1667 W)
Test Software Version	MP819xVC_20180913
Test Model	Tapo C230
Sample Status	Engineering Sample
EUT Modification(s)	N/A

NOTE:

(1) The above EUT information is declared by manufacturer and for more detailed features description, please refers to the manufacturer's specifications or user's manual.

(2) Channel List:

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
01	2412	05	2432	09	2452
02	2417	06	2437	10	2457
03	2422	07	2442	11	2462
04	2427	08	2447		

(3) Table for Filed Antenna:

Antenna	Manufacture	Model Name	Type	Connector	Gain (dBi)
1	TP-LINK CORPORATION PTE. LTD.	TapoC222-ANT1	IFA	N/A	2.00

(4) The above Antenna information are derived from the antenna data sheet provided by manufacturer and for more detailed features description, please refer to the manufacturer's specifications, the laboratory shall not be held responsible.

2.2 TEST MODES

Test Items	Test mode	Channel	Note
AC power line conducted emissions	Normal/Idle	-	-
Transmitter Radiated Emissions (below 1GHz)	IEEE 802.11b	11	-
Transmitter Radiated Emissions (above 1GHz)	IEEE 802.11b	01/11	Bandedge
	IEEE 802.11g		
	IEEE 802.11n (HT20)		
Transmitter Radiated Emissions (above 1GHz)	IEEE 802.11b	01/06/11	Harmonic
	IEEE 802.11g		
	IEEE 802.11n (HT20)		
Transmitter Radiated Emissions (above 18GHz)	IEEE 802.11b	11	-
Bandwidth & Output Power & Power Spectral Density & Antenna conducted Spurious Emission	IEEE 802.11b	01/06/11	-
	IEEE 802.11g		
	IEEE 802.11n (HT20)		

NOTE:


- (1) For radiated emission band edge test, both Vertical and Horizontal are evaluated, but only the worst case (Vertical) is recorded.
- (2) All X, Y and Z axes are evaluated, but only the worst case (X axis) is recorded.
- (3) For radiated emission below 1 GHz and above 18GHz test, the IEEE 802.11b Mode Channel 11 is found to be the worst case and recorded.

2.3 TABLE OF PARAMETERS OF TEXT SOFTWARE SETTING

Test Software Version	MP819xVC_20180913		
Frequency (MHz)	2412	2437	2462
IEEE 802.11b	51	48	48
IEEE 802.11g	51	48	48
IEEE 802.11n(HT20)	51	48	48

2.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

Equipment letters and Cable numbers refer to item numbers described in the tables of clause 2.4.

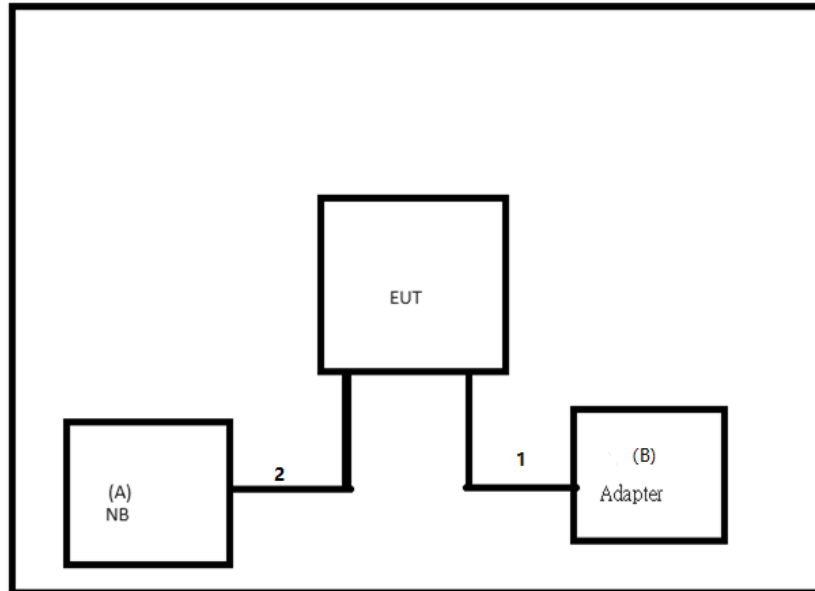

2.5 SUPPORT UNITS

Item	Equipment	Brand	Model No.	Series No.	Remarks
A	NB	Lenovo	ThinkBook 14 G4 IAP	MP28KHAH	Furnished by test lab
B	Adapter	tp-link	T090060-2B1	N/A	Supplied by test requester

Item	Shielded	Ferrite Core	Length	Cable Type	Remarks
1	NO	NO	1.8m	DC Cable	Supplied by test requester
2	NO	NO	0.5m	USB Cable	Furnished by test lab

3 AC POWER LINE CONDUCTED EMISSIONS TEST

3.1 LIMIT

Frequency (MHz)	Limit (dBμV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56 *	56 - 46 *
0.50 - 5.0	56	46
5.0 - 30.0	60	50

NOTE:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.
- (3) The test result calculated as following:
 Measurement Value = Reading Level + Correct Factor
 Correct Factor = Insertion Loss + Cable Loss + Attenuator Factor (if use)
 Margin Level = Measurement Value – Limit Value
 Calculation example:

Reading Level (dBμV)		Correct Factor (dB)		Measurement Value (dBμV)
38.22	+	3.45	=	41.67

Measurement Value (dBμV)		Limit Value (dBμV)		Margin Level (dB)
41.67	-	60	=	-18.33

The following table is the setting of the receiver.

Receiver Parameter	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 KHz

3.2 TEST PROCEDURE

- a. The EUT was placed 0.8 m above the horizontal ground plane with the EUT being connected to the power mains through a line impedance stabilization network (LISN).
 All other support equipment were powered from an additional LISN(s).
 The LISN provides 50 Ohm/50uH of impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle to keep the cable above 40 cm.
- c. Excess I/O cables that are not connected to a peripheral shall be bundled in the center.
 The end of the cable will be terminated, using the correct terminating impedance.
 The overall length shall not exceed 1 m.
- d. The LISN is spaced at least 80 cm from the nearest part of the EUT chassis.
- e. For the actual test configuration, please refer to the related Item - EUT TEST PHOTO.


NOTE:

- (1) In the results, each reading is marked as Peak, QP or AVG per the detector used.
 BW=9 kHz (6 dB Bandwidth)
- (2) All readings are Peak unless otherwise stated QP or AVG in column of Note. Both the QP and the AVG readings must be less than the limit for compliance.

3.3 DEVIATION FROM TEST STANDARD

No deviation.

3.4 TEST SETUP

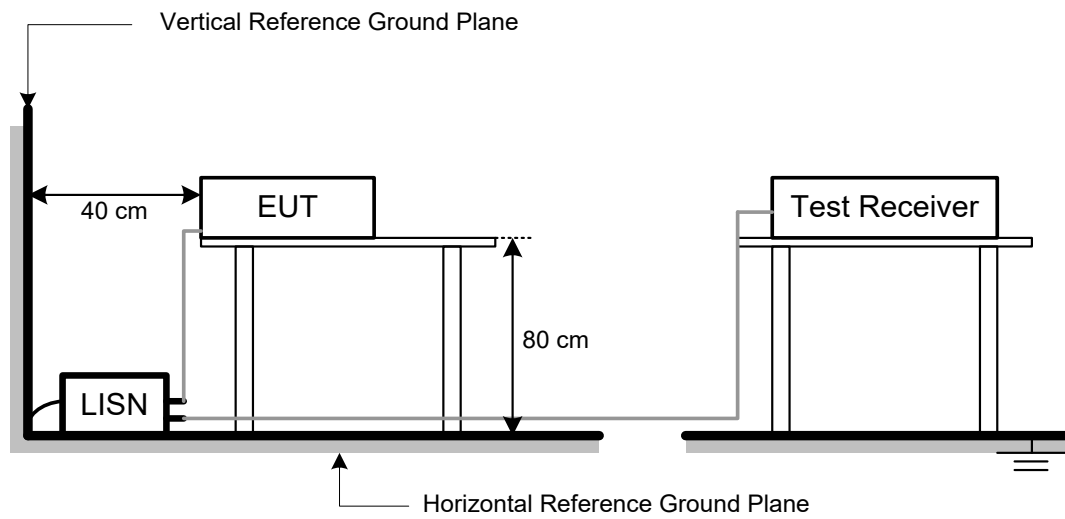

3.5 TEST RESULT

Please refer to the APPENDIX A.

4 RADIATED EMISSIONS TEST

4.1 LIMIT

In case the emission fall within the restricted band specified on 15.205, then the 15.209 limit in the table below has to be followed.

LIMITS OF RADIATED EMISSIONS MEASUREMENT (9 kHz to 1000 MHz)

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
960~1000	500	3

LIMITS OF RADIATED EMISSIONS MEASUREMENT (Above 1000 MHz)

Frequency (MHz)	Radiated Emissions (dBuV/m)		Measurement Distance (meters)
	Peak	Average	
Above 1000	74	54	3

NOTE:

- (1) The limit for radiated test was performed according to FCC Part 15, Subpart C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).
- (4) The test result calculated as following:

Measurement Value = Reading Level + Correct Factor

Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain(if use)

Margin Level = Measurement Value - Limit Value

Calculation example:

Reading Level (dBuV)		Correct Factor (dB/m)		Measurement Value (dBuV/m)
19.11	+	2.11	=	21.22

Measurement Value (dBuV/m)		Limit Value (dBuV/m)		Margin Level (dB)
21.22	-	54	=	-32.78

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RBW / VBW (Emission in restricted band)	1MHz / 3MHz for Peak, 1MHz / 1/T for Average

Spectrum Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9KHz~90KHz for PK/AVG detector
Start ~ Stop Frequency	90KHz~110KHz for QP detector
Start ~ Stop Frequency	110KHz~490KHz for PK/AVG detector
Start ~ Stop Frequency	490KHz~30MHz for QP detector
Start ~ Stop Frequency	30MHz~1000MHz for QP detector


4.2 TEST PROCEDURE

- The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1GHz)
- The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1GHz)
- The height of the equipment or of the substitution antenna shall be 0.8 m or 1.5 m, the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights find the maximum reading (used Bore sight function).
- The receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1GHz.
- The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform. (below 1GHz)
- All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform. (above 1GHz)
- For the actual test configuration, please refer to the related Item – EUT TEST PHOTO.


4.3 DEVIATION FROM TEST STANDARD

No deviation.


4.4 TEST SETUP

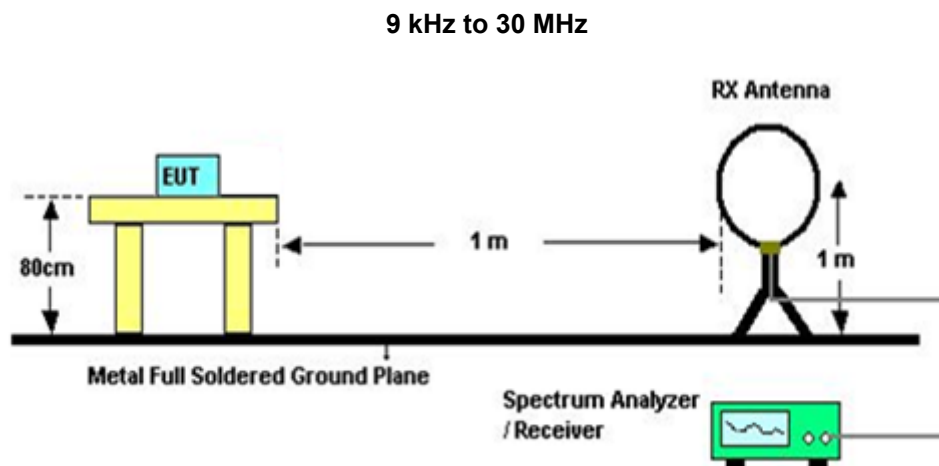

30 MHz to 1 GHz

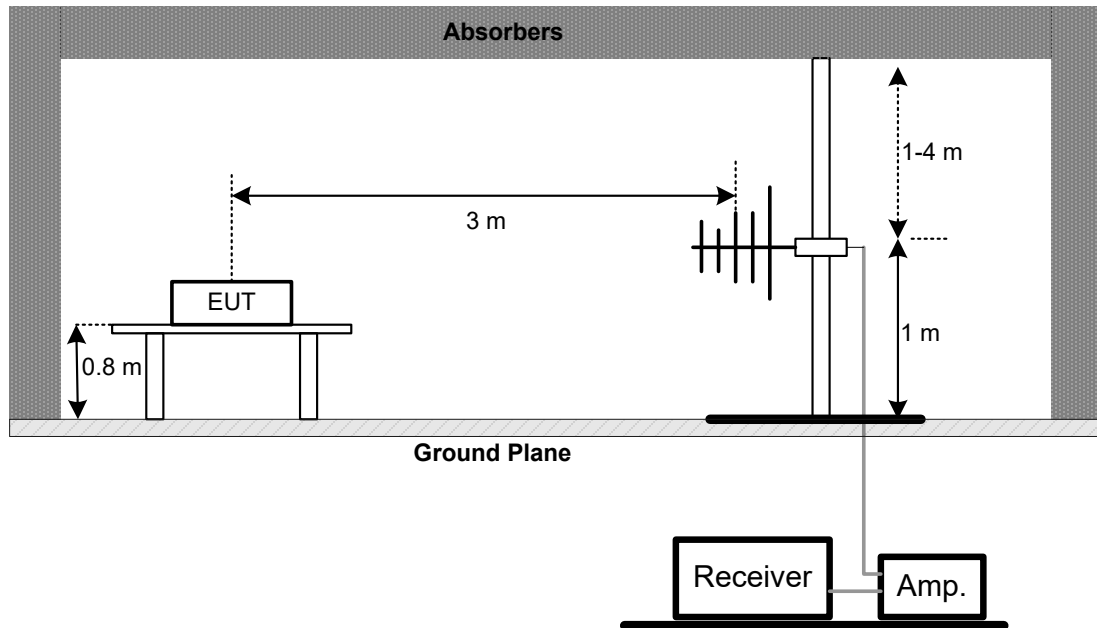

Above 1 GHz

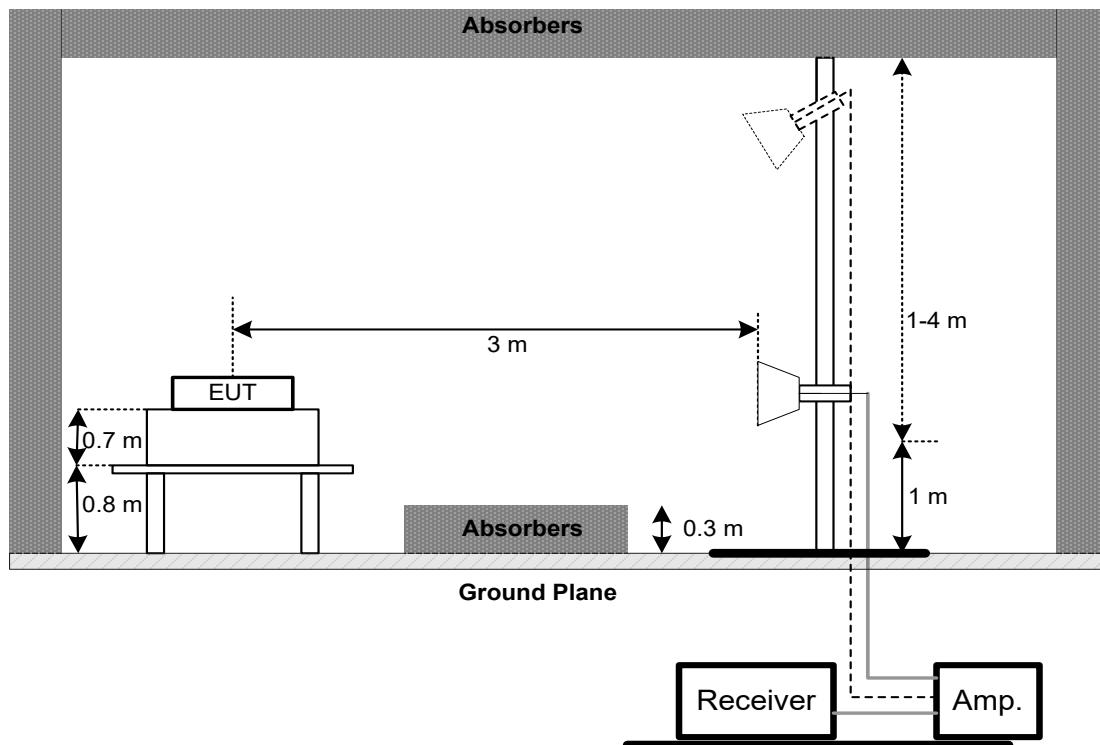

4.5 EUT OPERATING CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

NOTE:

- (1) Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB).
- (2) Limit line = specific limits (dBuV) + distance extrapolation factor.

4.6 TEST RESULT – 9kHz TO 30 MHz

Please refer to the APPENDIX B.

4.7 TEST RESULT – 30 MHz TO 1 GHz

Please refer to the APPENDIX C.

4.8 TEST RESULT – ABOVE 1 GHz

Please refer to the APPENDIX D.

NOTE:

- (1) No limit: This is fundamental signal, the judgment is not applicable.
For fundamental signal judgment was referred to Peak output test.

5 BANDWIDTH TEST

5.1 LIMIT

Section	Test Item	Limit
15.247(a)	6 dB Bandwidth	500 kHz

5.2 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- Spectrum Setting: RBW= 100KHz, VBW=300KHz, Sweep time = 2.5 ms.

5.3 DEVIATION FROM TEST STANDARD

No deviation.

5.4 TEST SETUP



5.5 EUT OPERATING CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

5.6 TEST RESULT

Please refer to the APPENDIX E.

6 OUTPUT POWER TEST

6.1 LIMIT

Section	Test Item	Limit
15.247(b)	Maximum Output Power	1 Watt or 30dBm


6.2 TEST PROCEDURE

- The EUT was directly connected to the power meter and antenna output port as show in the block diagram below.
- The maximum peak conducted output power was performed in accordance with FCC KDB 558074 D01 15.247 Meas Guidance.
- Subclause 11.9.1.1 of ANSI C63.10 is applied. The maximum peak conducted output power may be measured using a broadband peak RF power meter.
The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall use a fast-responding diode detector.

6.3 DEVIATION FROM TEST STANDARD

No deviation.

6.4 TEST SETUP

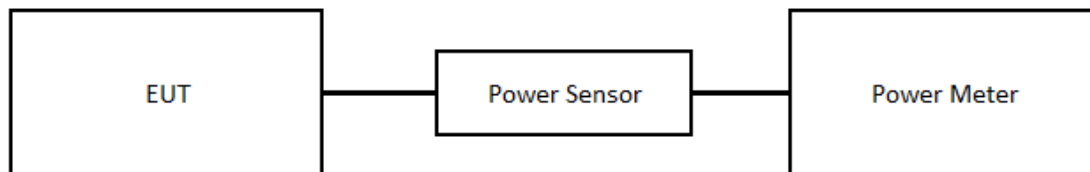

6.5 EUT OPERATING CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

6.6 TEST RESULT

Please refer to the APPENDIX F.

7 POWER SPECTRAL DENSITY

7.1 LIMIT

Section	Test Item	Limit
15.247(e)	Power Spectral Density	8 dBm (in any 3 kHz)


7.2 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- Spectrum Setting: RBW = 3 kHz, VBW = 10 kHz, Sweep time = Auto.

7.3 DEVIATION FROM TEST STANDARD

No deviation.

7.4 TEST SETUP

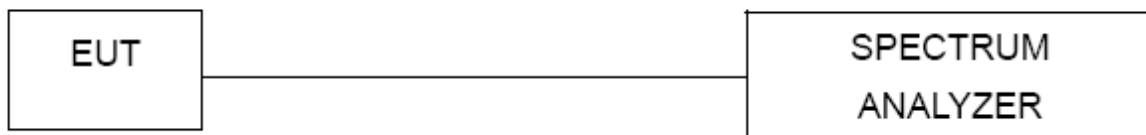

7.5 EUT OPERATING CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

7.6 TEST RESULT

Please refer to the APPENDIX G.

8 ANTENNA CONDUCTED SPURIOUS EMISSIONS TEST

8.1 LIMIT

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits.

8.2 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- Spectrum Setting: RBW = 100 kHz, VBW=300 kHz, Sweep time = Auto.
- Offset = antenna gain + cable loss.

8.3 DEVIATION FROM TEST STANDARD

No deviation.

8.4 TEST SETUP



8.5 EUT OPERATING CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

8.6 TEST RESULT

Please refer to the APPENDIX H.

9 LIST OF MEASURING EQUIPMENTS

AC Power Line Conducted Emissions						
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated Date	Calibrated Until
1	Two-Line V-Network	R&S	ENV216	101051	2024/6/26	2025/6/25
2	Test Cable	EMCI	EMCRG58-BM-B M-9000	210501	2023/12/11	2024/12/10
3	EMC Receiver	Keysight	N9038A	MY54130009	2024/6/27	2025/6/26
4	Measurement Software	Farad	EZ_EMC (Ver. NB-03A1-01)	N/A	N/A	N/A

Radiated Emissions						
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated Date	Calibrated Until
1	Pre-Amplifier	EMCI	EMC184045SE	980512	2023/12/11	2024/12/10
2	Broad-Band Horn Antenna	Schwarzbeck	BBHA 9170	340	2024/6/27	2025/6/26
3	Test Cable	EMCI	EMC102-KM-KM-1000	220328	2023/12/11	2024/12/10
4	Test Cable	EMCI	EMC101G-KM-K M-3000	220330	2023/12/11	2024/12/10
5	Broad-Band Horn Antenna	RFSPIN	DRH18-E	210109A18E	2024/1/10	2025/1/9
6	Pre-Amplifier	EMCI	EMC051845SE	980779	2023/12/11	2024/12/10
7	Test Cable	EMCI	EMC105-SM-SM-1000	210119	2023/12/11	2024/12/10
8	Test Cable	EMCI	EMC105-SM-SM-3000	210118	2023/12/11	2024/12/10
9	Test Cable	EMCI	EMC105-SM-SM-7000	210117	2023/12/11	2024/12/10
10	EXA Spectrum Analyzer	keysight	N9010A	MY56480554	2023/9/12	2024/9/11
11	Trilog-Broadband Antenna	Schwarzbeck	VULB 9168	01207	2023/12/18	2024/12/17
12	EMC Receiver	Keysight	N9038A	MY54130009	2024/6/27	2025/6/26
13	Pre-Amplifier	EMCI	EMC001330-202 01222	980807	2023/12/11	2024/12/10
14	Test Cable	EMCI	EMC-8D-NM-NM-5000	150106	2023/12/11	2024/12/10
15	Test Cable	EMCI	EMC-CFD-400-N M-NM-8000	200348	2023/12/11	2024/12/10
16	Measurement Software	Farad	EZ_EMC (Ver. NB-03A1-01)	N/A	N/A	N/A

Bandwidth						
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated Date	Calibrated Until
1	Spectrum Analyzer	R&S	FSP 30	100854	2024/6/27	2025/6/26
2	10dbAttenuator	INMET	AHC-10dB	1	N/A	N/A
3	BTL -ConducredTest	BTL	1247788684	N/A	N/A	N/A

Output Power						
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated Date	Calibrated Until
1	POWER METER	Anritsu	MA24408A	12591	2023/10/25	2024/10/24
2	10dbAttenuator	INMET	AHC-10dB	1	N/A	N/A

Power Spectral Density						
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated Date	Calibrated Until
1	Spectrum Analyzer	R&S	FSP 30	100854	2024/6/27	2025/6/26
2	10dbAttenuator	INMET	AHC-10dB	1	N/A	N/A
3	BTL -ConducredTest	BTL	1247788684	N/A	N/A	N/A

Antenna conducted Spurious Emission						
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated Date	Calibrated Until
1	Spectrum Analyzer	R&S	FSP 30	100854	2024/6/27	2025/6/26
2	10dbAttenuator	INMET	AHC-10dB	1	N/A	N/A
3	BTL -ConducredTest	BTL	1247788684	N/A	N/A	N/A

Remark: "N/A" denotes no model name, no serial no. or no calibration specified.
All calibration period of equipment list is one year.

10 EUT TEST PHOTO


Please refer to document Appendix No.: TP-2409G011-FCCP-1 (APPENDIX-TEST PHOTOS).

11 EUT PHOTOS

Please refer to document Appendix No.: EP-2409G011-1 (APPENDIX-EUT PHOTOS).

APPENDIX A AC POWER LINE CONDUCTED EMISSIONS

Test Mode	Normal	Tested Date	2024/9/5
Test Frequency	-	Phase	Line

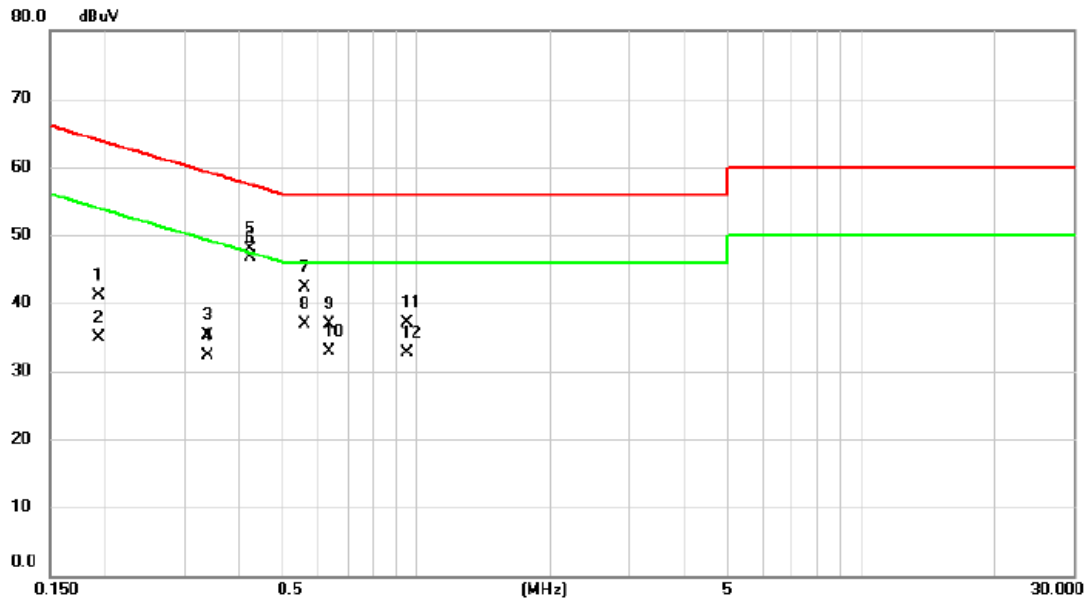


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	0.1930	31.48	9.64	41.12	63.91	-22.79	QP	
2	0.1930	25.24	9.64	34.88	53.91	-19.03	AVG	
3	0.3380	25.58	9.65	35.23	59.25	-24.02	QP	
4	0.3380	22.70	9.65	32.35	49.25	-16.90	AVG	
5	0.4234	38.20	9.65	47.85	57.38	-9.53	QP	
6 *	0.4234	36.97	9.65	46.62	47.38	-0.76	AVG	
7	0.5585	32.67	9.66	42.33	56.00	-13.67	QP	
8	0.5585	27.24	9.66	36.90	46.00	-9.10	AVG	
9	0.6350	27.29	9.67	36.96	56.00	-19.04	QP	
10	0.6350	23.26	9.67	32.93	46.00	-13.07	AVG	
11	0.9500	27.40	9.70	37.10	56.00	-18.90	QP	
12	0.9500	23.08	9.70	32.78	46.00	-13.22	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	Normal	Tested Date	2024/9/5
Test Frequency	-	Phase	Neutral

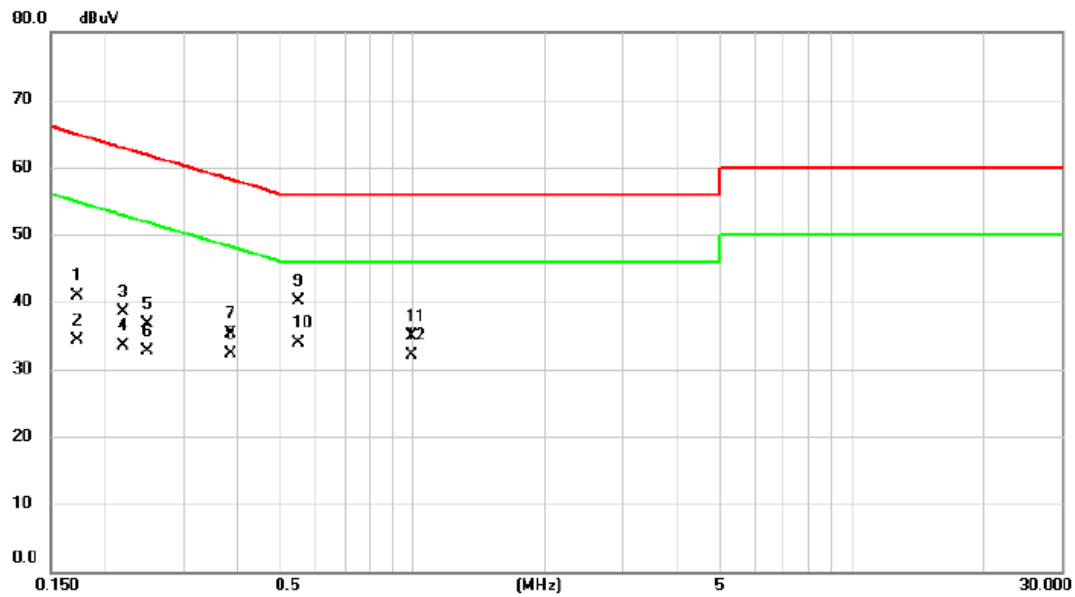


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1		0.1717	31.24	9.63	40.87	64.88	-24.01	QP	
2		0.1717	24.65	9.63	34.28	54.88	-20.60	AVG	
3		0.2196	28.97	9.63	38.60	62.83	-24.23	QP	
4		0.2196	23.93	9.63	33.56	52.83	-19.27	AVG	
5		0.2480	27.16	9.63	36.79	61.82	-25.03	QP	
6		0.2480	23.15	9.63	32.78	51.82	-19.04	AVG	
7		0.3845	25.74	9.63	35.37	58.18	-22.81	QP	
8		0.3845	22.70	9.63	32.33	48.18	-15.85	AVG	
9		0.5495	30.42	9.64	40.06	56.00	-15.94	QP	
10	*	0.5495	24.31	9.64	33.95	46.00	-12.05	AVG	
11		0.9950	25.17	9.69	34.86	56.00	-21.14	QP	
12		0.9950	22.51	9.69	32.20	46.00	-13.80	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	Idle	Tested Date	2024/9/5
Test Frequency	-	Phase	Line

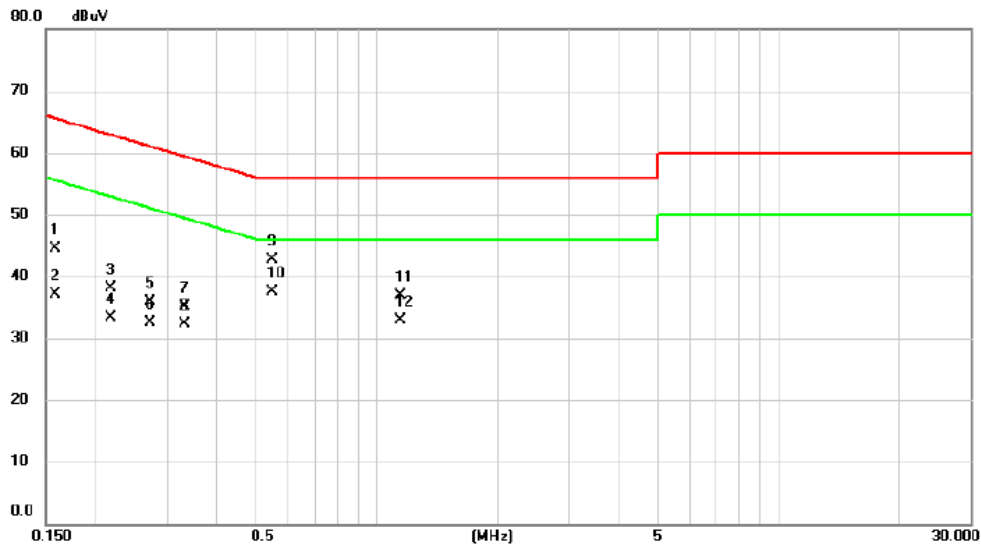


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1		0.1587	34.91	9.65	44.56	65.53	-20.97	QP	
2		0.1587	27.40	9.65	37.05	55.53	-18.48	AVG	
3		0.2175	28.47	9.64	38.11	62.91	-24.80	QP	
4		0.2175	23.60	9.64	33.24	52.91	-19.67	AVG	
5		0.2717	26.30	9.64	35.94	61.07	-25.13	QP	
6		0.2717	22.90	9.64	32.54	51.07	-18.53	AVG	
7		0.3331	25.43	9.65	35.08	59.37	-24.29	QP	
8		0.3331	22.70	9.65	32.35	49.37	-17.02	AVG	
9		0.5495	33.03	9.66	42.69	56.00	-13.31	QP	
10	*	0.5495	27.85	9.66	37.51	46.00	-8.49	AVG	
11		1.1434	27.29	9.71	37.00	56.00	-19.00	QP	
12		1.1434	23.20	9.71	32.91	46.00	-13.09	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	Idle	Tested Date	2024/9/5
Test Frequency	-	Phase	Neutral

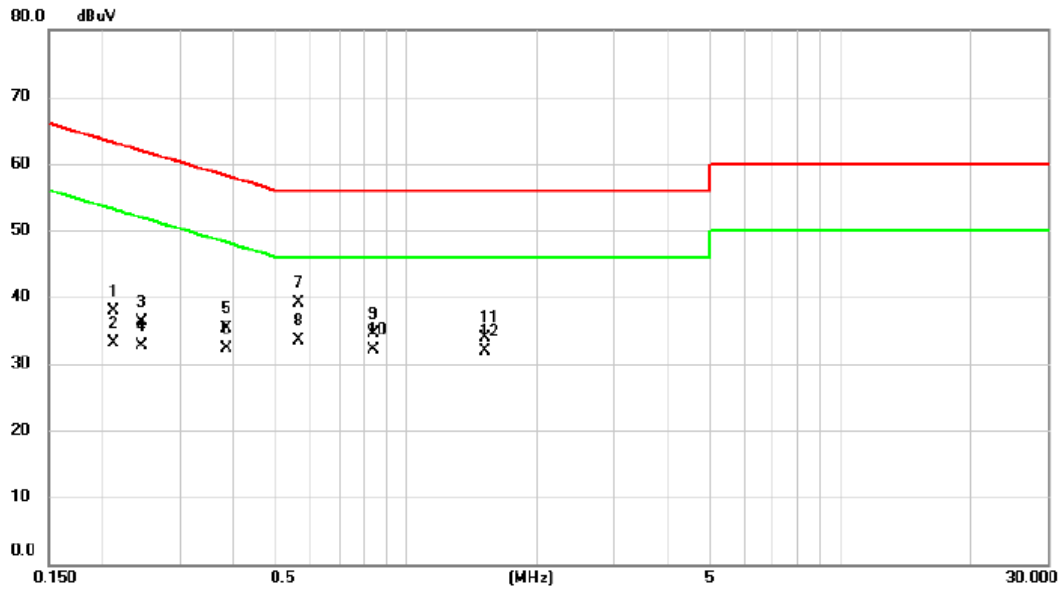


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.2120	28.32	9.63	37.95	63.13	-25.18	QP	
2		0.2120	23.53	9.63	33.16	53.13	-19.97	AVG	
3		0.2455	26.65	9.63	36.28	61.91	-25.63	QP	
4		0.2455	23.10	9.63	32.73	51.91	-19.18	AVG	
5		0.3850	25.65	9.63	35.28	58.17	-22.89	QP	
6		0.3850	22.64	9.63	32.27	48.17	-15.90	AVG	
7		0.5630	29.52	9.65	39.17	56.00	-16.83	QP	
8	*	0.5630	23.85	9.65	33.50	46.00	-12.50	AVG	
9		0.8375	24.91	9.68	34.59	56.00	-21.41	QP	
10		0.8375	22.44	9.68	32.12	46.00	-13.88	AVG	
11		1.5170	24.18	9.74	33.92	56.00	-22.08	QP	
12		1.5170	22.25	9.74	31.99	46.00	-14.01	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

APPENDIX B RADIATED EMISSIONS - 9 KHZ TO 30 MHZ

Test Mode	IEEE 802.11b	Test Date	2024/10/21
Test Frequency	2462MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

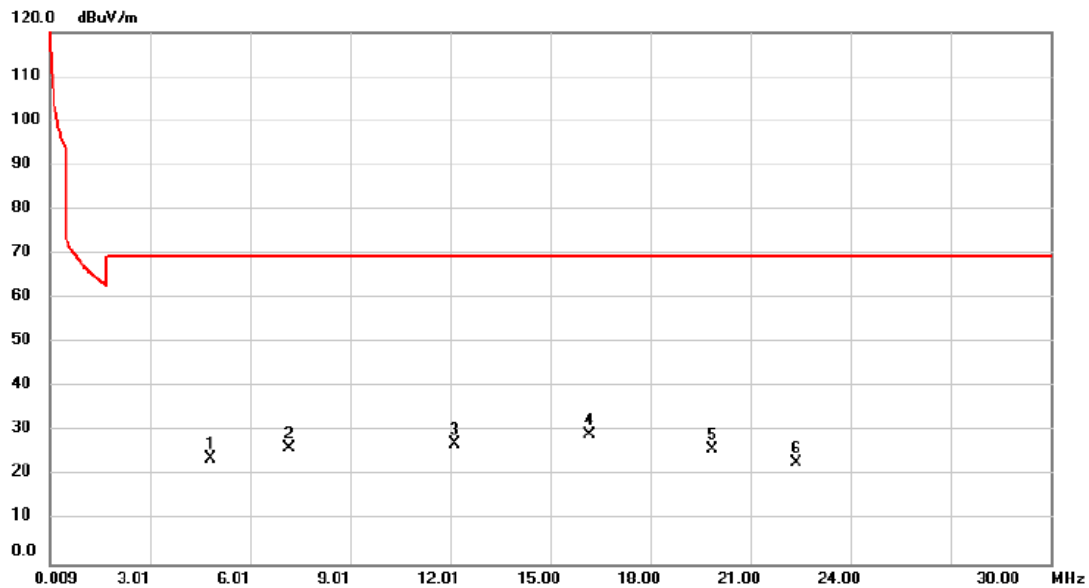


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Antenna Height cm	Table Degree	Comment
1	4.8076	29.64	-5.65	23.99	69.54	-45.55	peak	100	244	
2	7.1768	30.06	-3.77	26.29	69.54	-43.25	peak	100	274	
3	12.1254	31.29	-4.14	27.15	69.54	-42.39	peak	100	25	
4 *	16.2041	34.07	-4.73	29.34	69.54	-40.20	peak	100	270	
5	19.8630	30.54	-4.49	26.05	69.54	-43.49	peak	100	235	
6	22.3822	29.11	-6.08	23.03	69.54	-46.51	peak	100	78	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11b	Test Date	2024/10/21
Test Frequency	2462MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

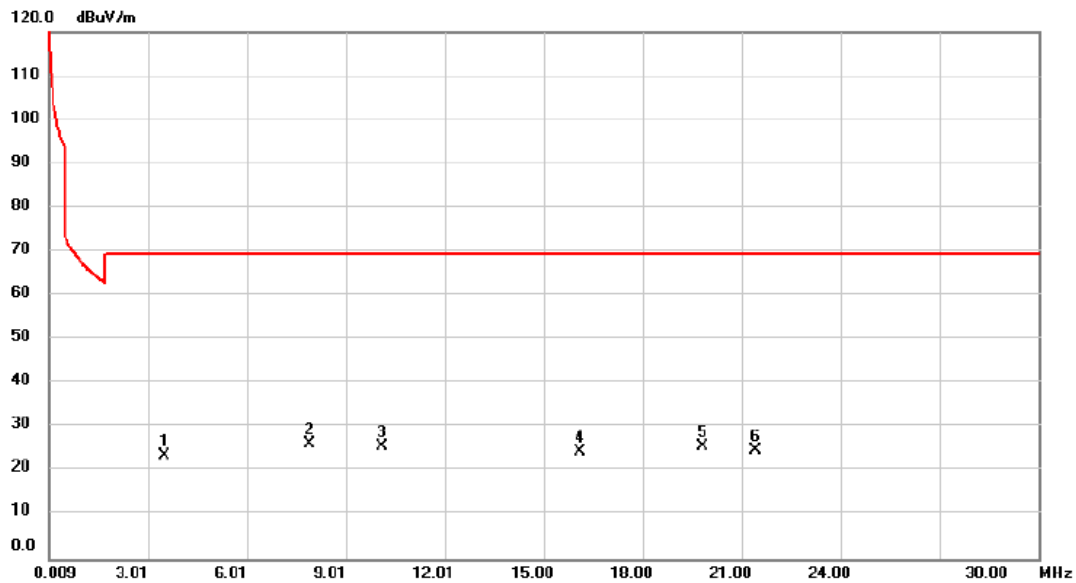


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		3.5180	29.06	-5.37	23.69	69.54	-45.85	peak	100	352
2	*	7.8966	30.00	-3.79	26.21	69.54	-43.33	peak	100	0
3		10.0860	29.85	-4.14	25.71	69.54	-43.83	peak	100	272
4		16.0842	29.23	-4.74	24.49	69.54	-45.05	peak	100	203
5		19.8031	30.23	-4.48	25.75	69.54	-43.79	peak	100	142
6		21.4226	30.00	-5.32	24.68	69.54	-44.86	peak	100	138

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

APPENDIX C RADIATED EMISSIONS - 30 MHZ TO 1 GHZ

Test Mode	IEEE 802.11b	Test Date	2024/10/21
Test Frequency	2462MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

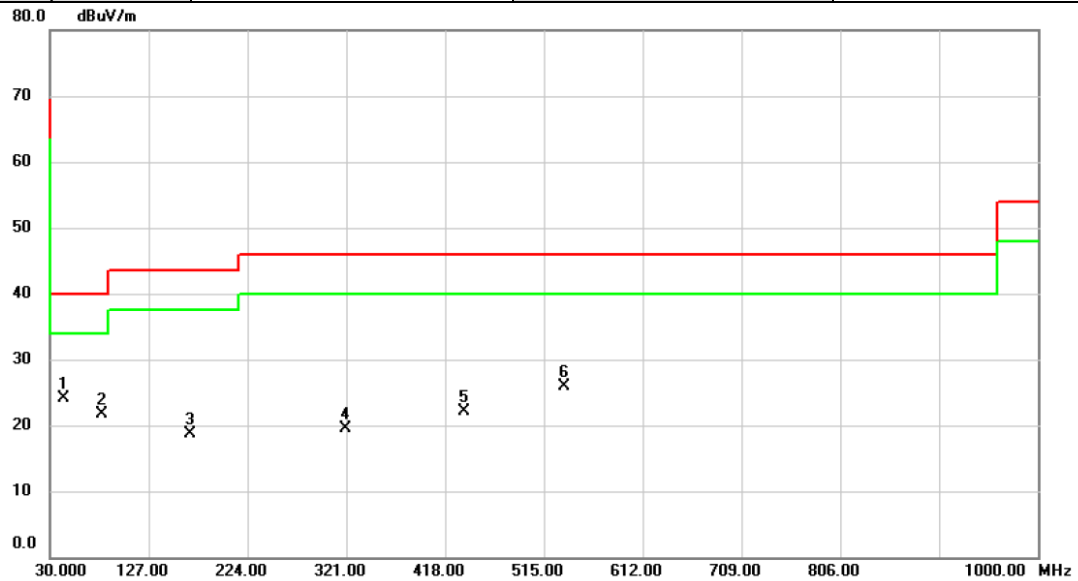


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Antenna Height cm	Table Degree	Comment
1	*	43.5800	36.23	-12.05	24.18	40.00	-15.82	peak	200	111
2		81.4100	38.00	-16.32	21.68	40.00	-18.32	peak	200	235
3		167.7400	30.38	-11.62	18.76	43.50	-24.74	peak	100	261
4		320.0300	29.18	-9.72	19.46	46.00	-26.54	peak	200	304
5		436.4300	28.58	-6.40	22.18	46.00	-23.82	peak	200	295
6		534.4000	30.47	-4.53	25.94	46.00	-20.06	peak	100	350

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11b	Test Date	2024/10/21
Test Frequency	2462MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

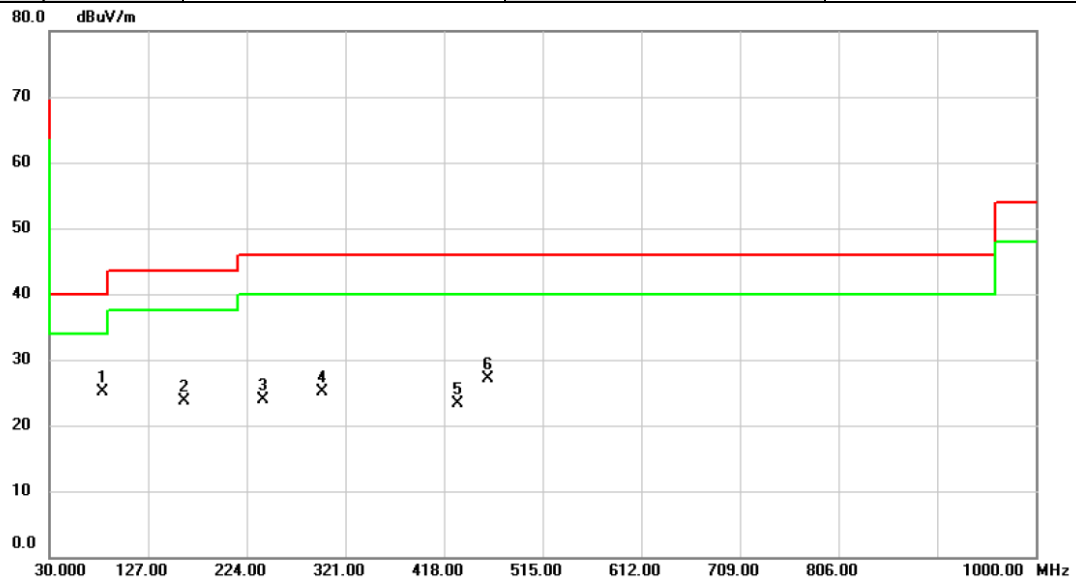


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	82.3800	41.58	-16.44	25.14	40.00	-14.86	peak	200	130
2		161.9200	34.82	-11.19	23.63	43.50	-19.87	peak	100	160
3		240.4900	36.07	-12.25	23.82	46.00	-22.18	peak	100	160
4		297.7200	35.44	-10.26	25.18	46.00	-20.82	peak	108	360
5		431.5800	29.75	-6.54	23.21	46.00	-22.79	peak	108	360
6		460.6800	32.98	-5.84	27.14	46.00	-18.86	peak	200	273

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

APPENDIX D RADIATED EMISSIONS - ABOVE 1 GHZ

Test Mode	IEEE 802.11b	Test Date	2024/10/21
Test Frequency	2412MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

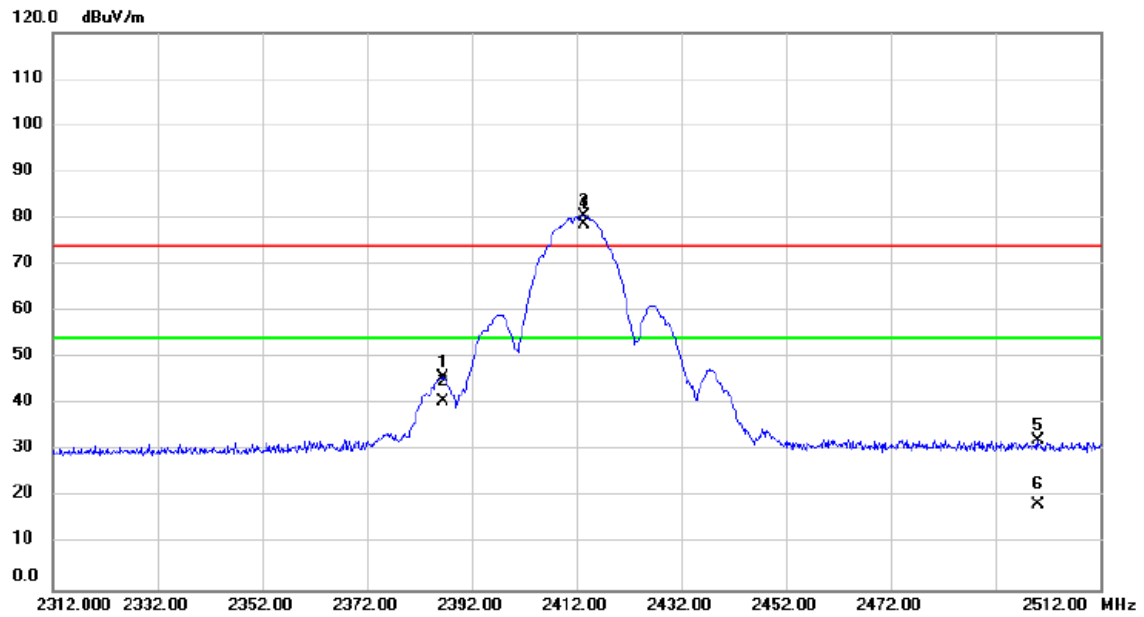


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		2386.600	52.03	-6.13	45.90	74.00	-28.10	peak		
2		2386.600	46.80	-6.13	40.67	54.00	-13.33	AVG		
3	X	2413.400	86.61	-6.06	80.55	74.00	6.55	peak		No Limit
4	*	2413.400	84.72	-6.06	78.66	54.00	24.66	AVG		No Limit
5		2500.000	38.03	-5.88	32.15	74.00	-41.85	peak		
6		2500.000	24.23	-5.88	18.35	54.00	-35.65	AVG		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11b	Test Date	2024/10/21
Test Frequency	2462MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

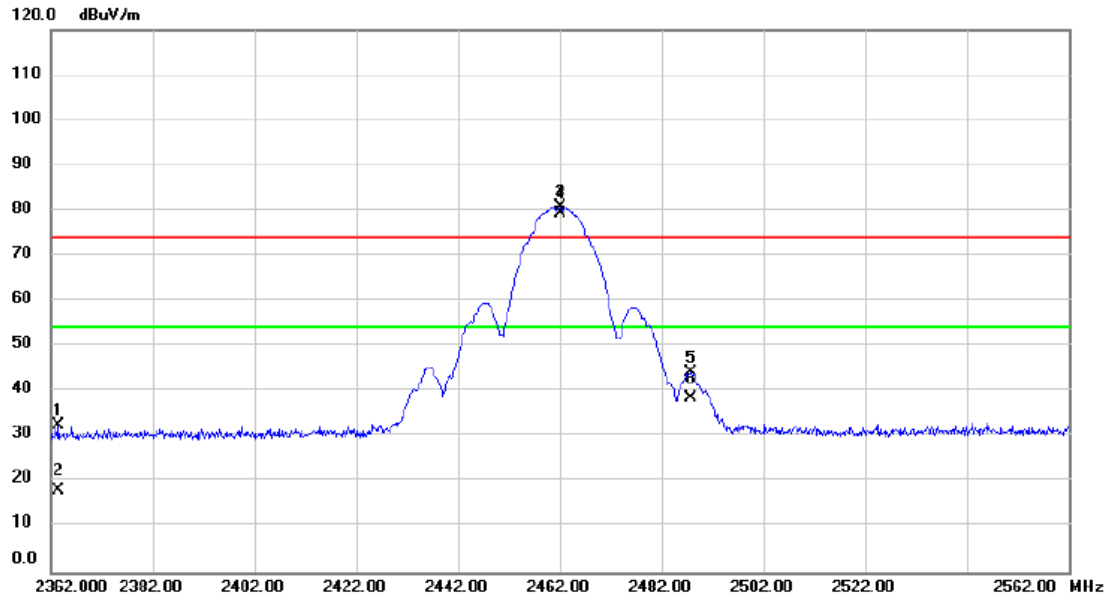


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Antenna Height cm	Table Degree	Comment
1		2363.600	38.66	-6.17	32.49	74.00	-41.51	peak			
2		2363.600	24.24	-6.17	18.07	54.00	-35.93	AVG			
3	X	2462.000	86.77	-5.97	80.80	74.00	6.80	peak			No Limit
4	*	2462.000	85.21	-5.97	79.24	54.00	25.24	AVG			No Limit
5		2487.800	50.12	-5.90	44.22	74.00	-29.78	peak			
6		2487.800	44.36	-5.90	38.46	54.00	-15.54	AVG			

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11g	Test Date	2024/10/21
Test Frequency	2412MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

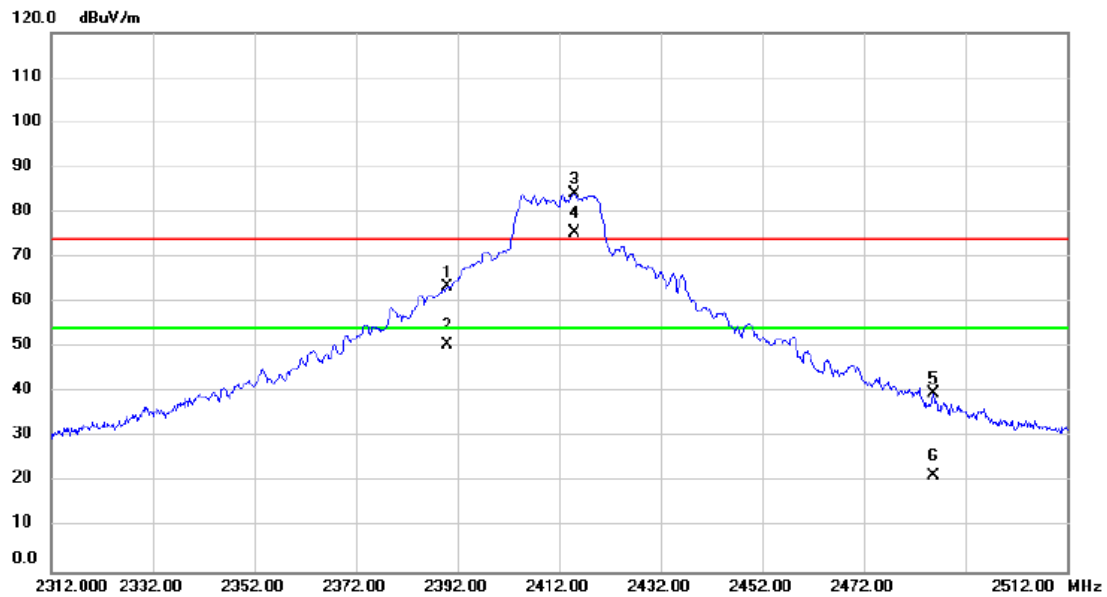


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Antenna Height cm	Table Degree	Comment
1		2390.000	69.62	-6.12	63.50	74.00	-10.50	peak			
2		2390.000	56.66	-6.12	50.54	54.00	-3.46	AVG			
3	X	2415.000	90.25	-6.06	84.19	74.00	10.19	peak			No Limit
4	*	2415.000	81.55	-6.06	75.49	54.00	21.49	AVG			No Limit
5		2485.800	45.76	-5.91	39.85	74.00	-34.15	peak			
6		2485.800	27.26	-5.91	21.35	54.00	-32.65	AVG			

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11g	Test Date	2024/10/21
Test Frequency	2462MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

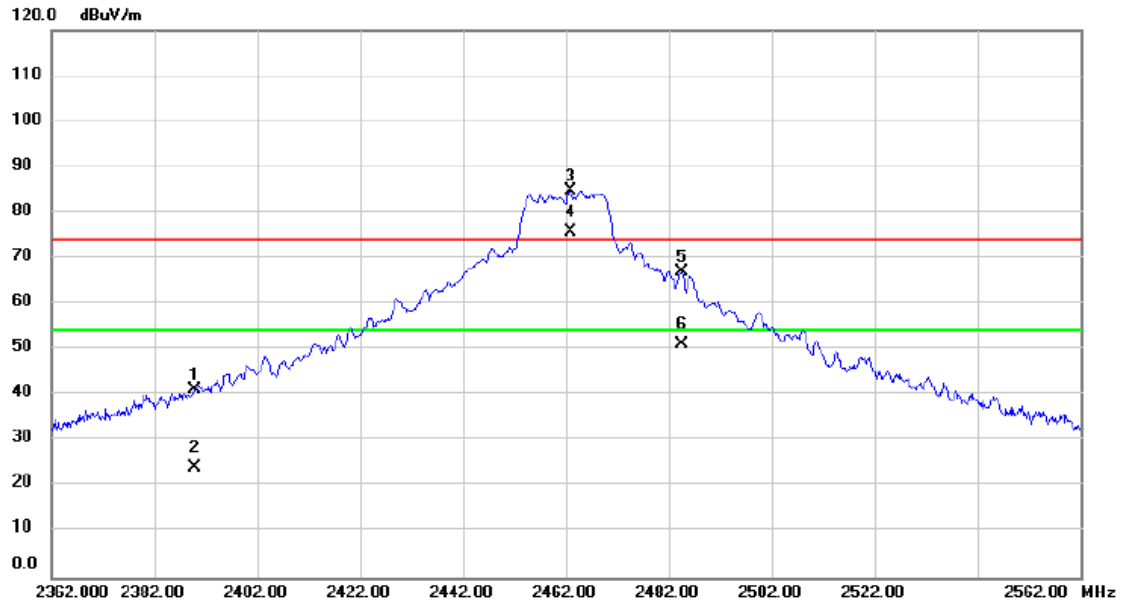


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Antenna Height cm	Table Degree	Detector	Comment
1		2389.800	47.42	-6.12	41.30	74.00	-32.70			peak	
2		2389.800	30.30	-6.12	24.18	54.00	-29.82			AVG	
3	X	2462.800	90.75	-5.96	84.79	74.00	10.79			peak	No Limit
4	*	2462.800	81.82	-5.96	75.86	54.00	21.86			AVG	No Limit
5		2484.400	72.86	-5.91	66.95	74.00	-7.05			peak	
6		2484.400	57.13	-5.91	51.22	54.00	-2.78			CAV	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT20)	Test Date	2024/10/21
Test Frequency	2412MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

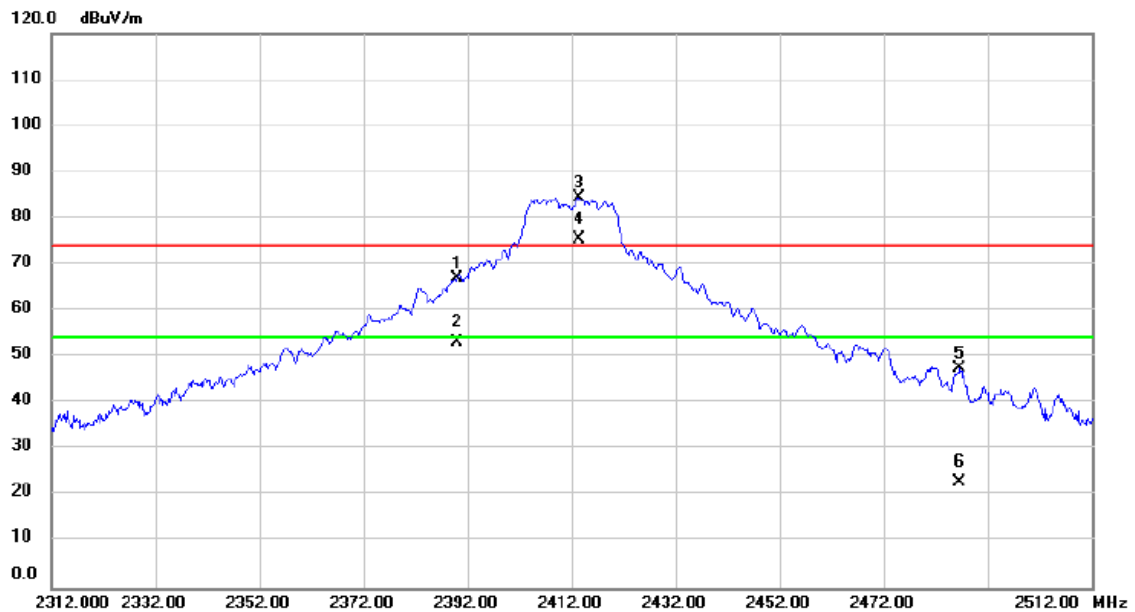


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Antenna Height cm	Table Degree degree	Comment
1		2390.000	73.18	-6.12	67.06	74.00	-6.94	peak		
2		2390.000	59.31	-6.12	53.19	54.00	-0.81	AVG		
3	X	2413.400	90.51	-6.06	84.45	74.00	10.45	peak		No Limit
4	*	2413.400	81.64	-6.06	75.58	54.00	21.58	AVG		No Limit
5		2486.600	53.32	-5.91	47.41	74.00	-26.59	peak		
6		2486.600	28.98	-5.91	23.07	54.00	-30.93	AVG		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT20)	Test Date	2024/10/21
Test Frequency	2462MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

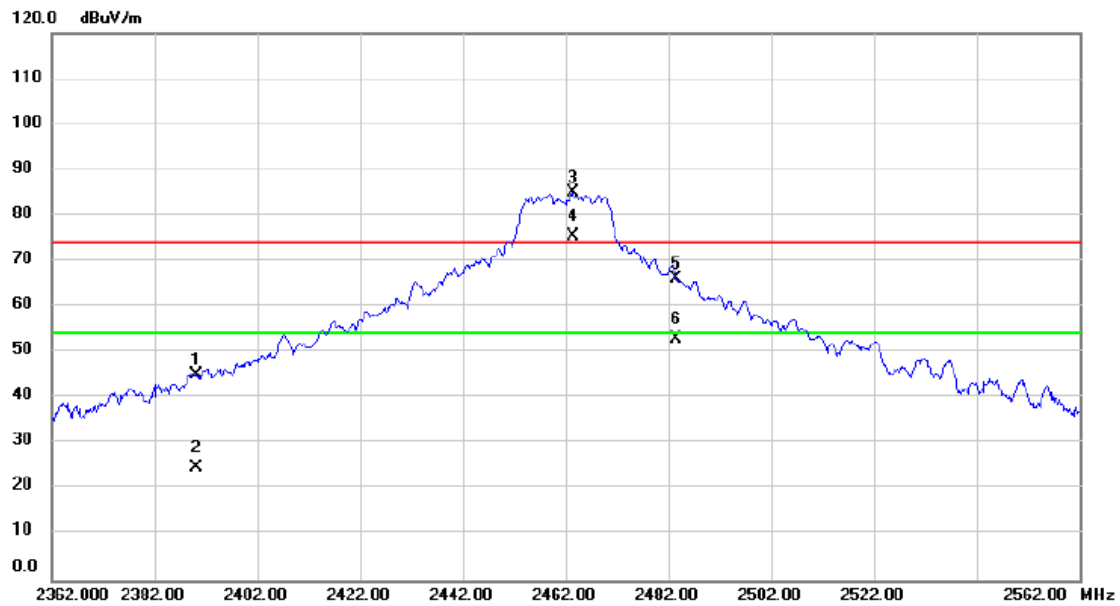


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		2390.000	51.27	-6.12	45.15	74.00	-28.85	peak		
2		2390.000	30.89	-6.12	24.77	54.00	-29.23	AVG		
3	X	2463.400	90.92	-5.96	84.96	74.00	10.96	peak		No Limit
4	*	2463.400	81.43	-5.96	75.47	54.00	21.47	AVG		No Limit
5		2483.500	72.09	-5.92	66.17	74.00	-7.83	peak		
6		2483.500	58.84	-5.92	52.92	54.00	-1.08	AVG		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11b	Test Date	2024/10/21
Test Frequency	2412MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

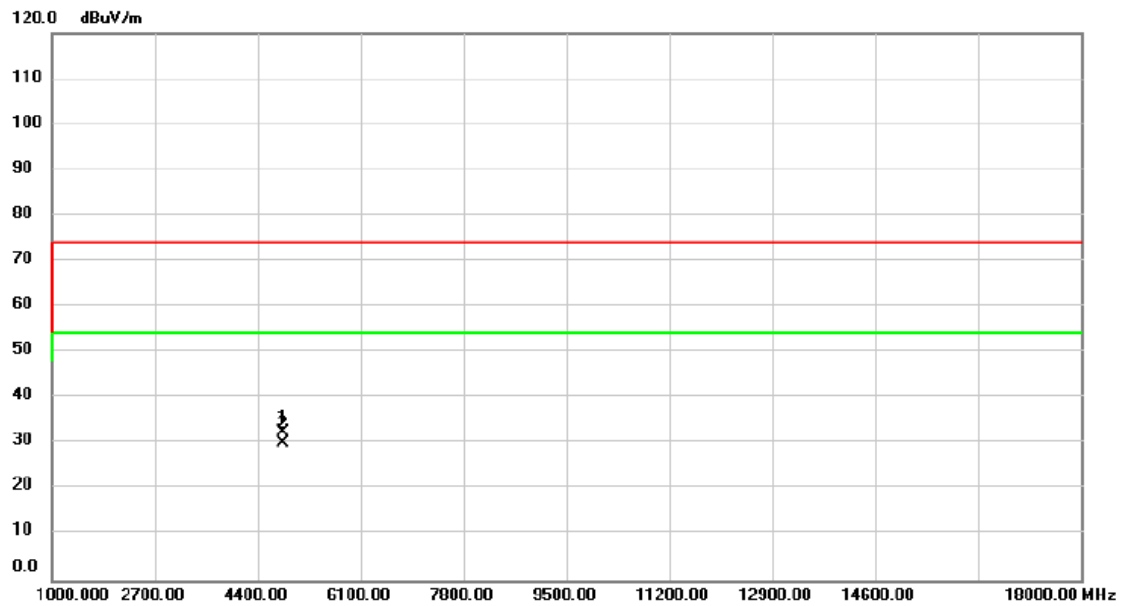


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		4825.000	41.21	-8.56	32.65	74.00	-41.35			peak
2	*	4825.000	38.63	-8.56	30.07	54.00	-23.93			AVG

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11b	Test Date	2024/10/21
Test Frequency	2412MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

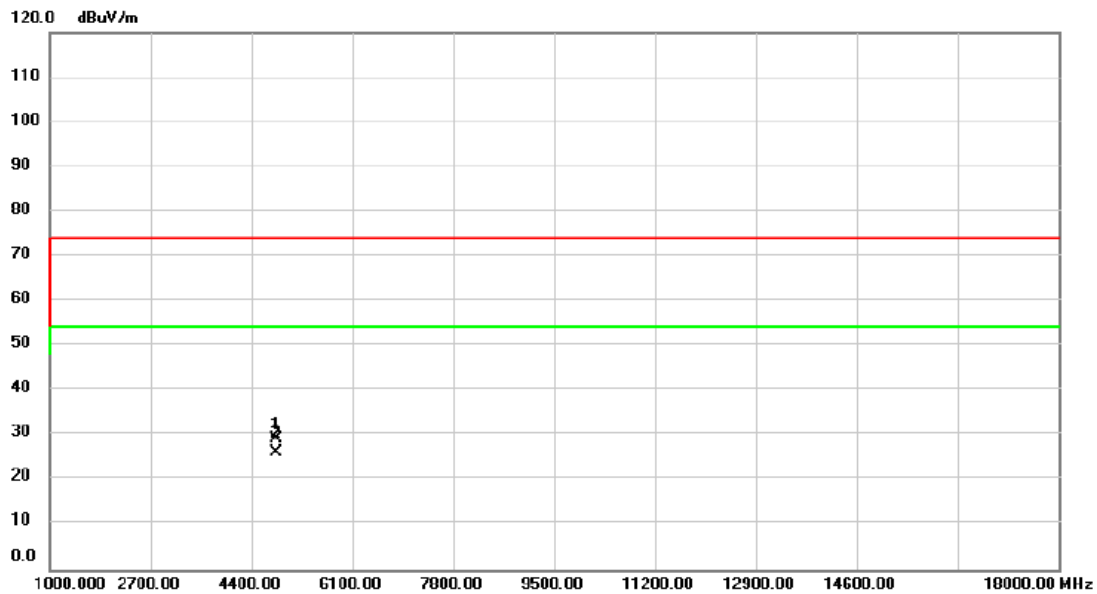


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		4825.000	37.76	-8.56	29.20	74.00	-44.80			peak
2	*	4825.000	34.91	-8.56	26.35	54.00	-27.65			AVG

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11b	Test Date	2024/10/21
Test Frequency	2437MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

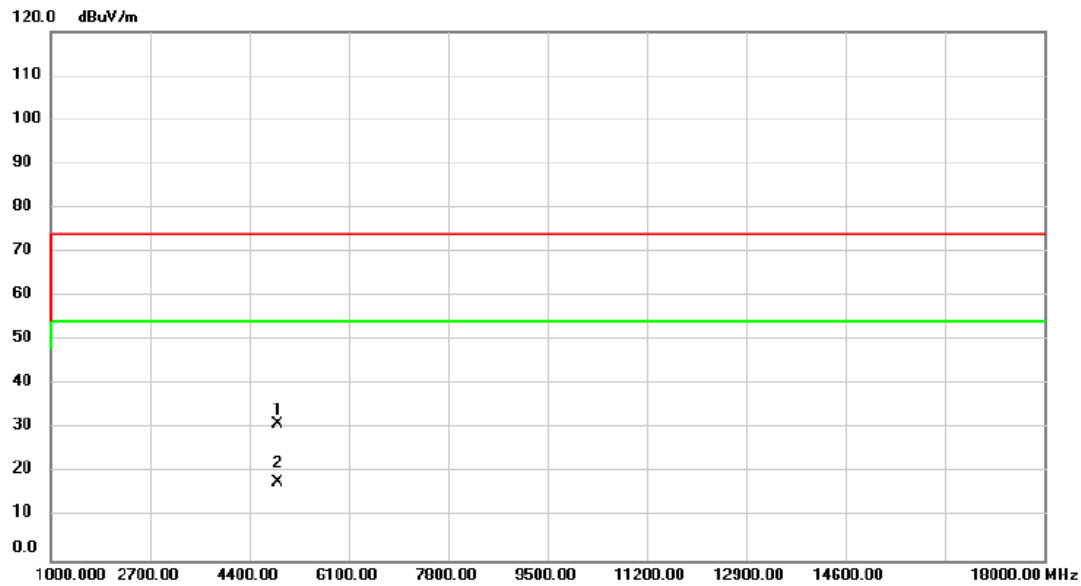


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		4876.000	39.41	-8.43	30.98	74.00	-43.02	peak		
2	*	4876.000	26.32	-8.43	17.89	54.00	-36.11	AVG		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11b	Test Date	2024/10/21
Test Frequency	2437MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

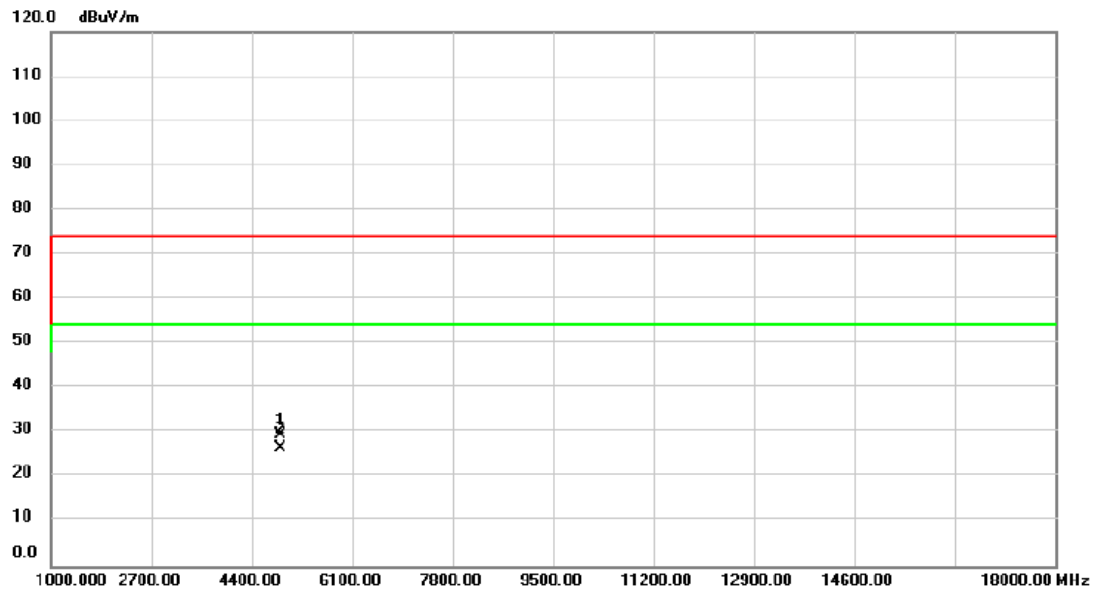


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		4876.000	38.02	-8.43	29.59	74.00	-44.41	peak		
2	*	4876.000	35.09	-8.43	26.66	54.00	-27.34	AVG		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11b	Test Date	2024/10/21
Test Frequency	2462MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

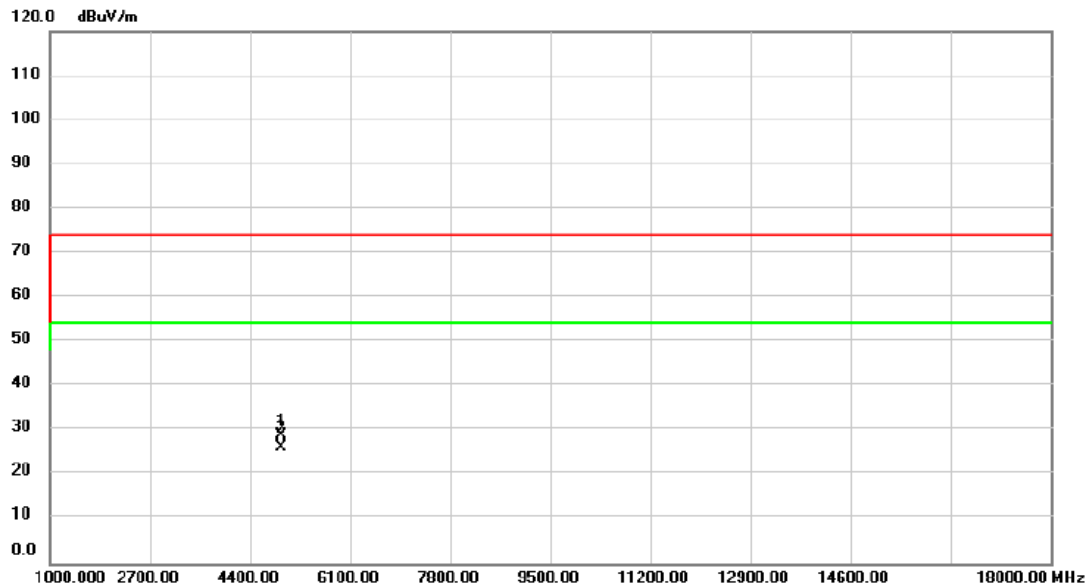


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		4927.000	37.21	-8.31	28.90	74.00	-45.10	peak		
2	*	4927.000	34.61	-8.31	26.30	54.00	-27.70	AVG		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11b	Test Date	2024/10/21
Test Frequency	2462MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

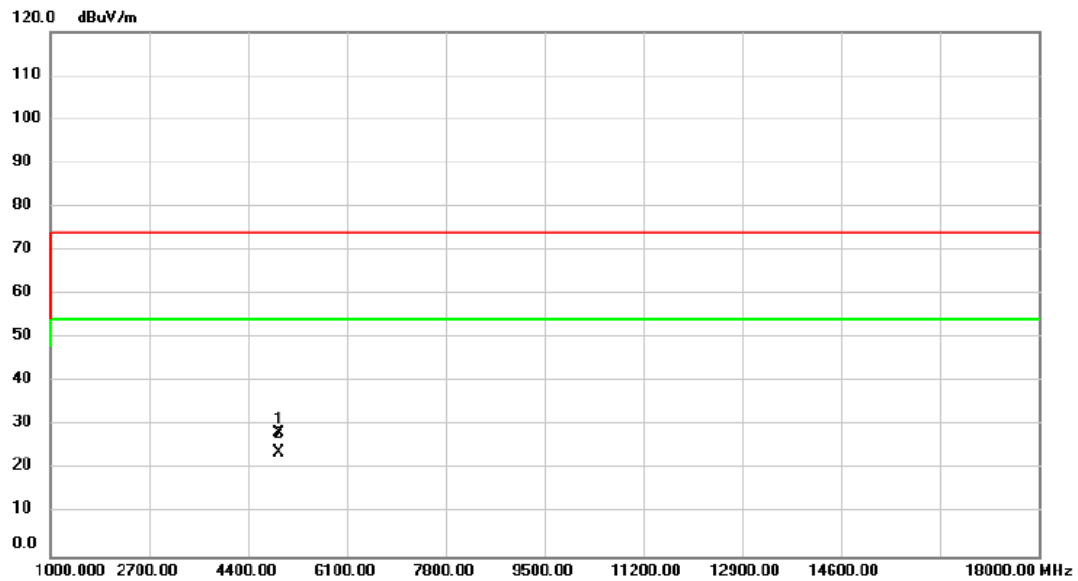


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		4927.000	36.52	-8.31	28.21	74.00	-45.79	peak		
2	*	4927.000	32.25	-8.31	23.94	54.00	-30.06	AVG		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11g	Test Date	2024/10/21
Test Frequency	2412MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

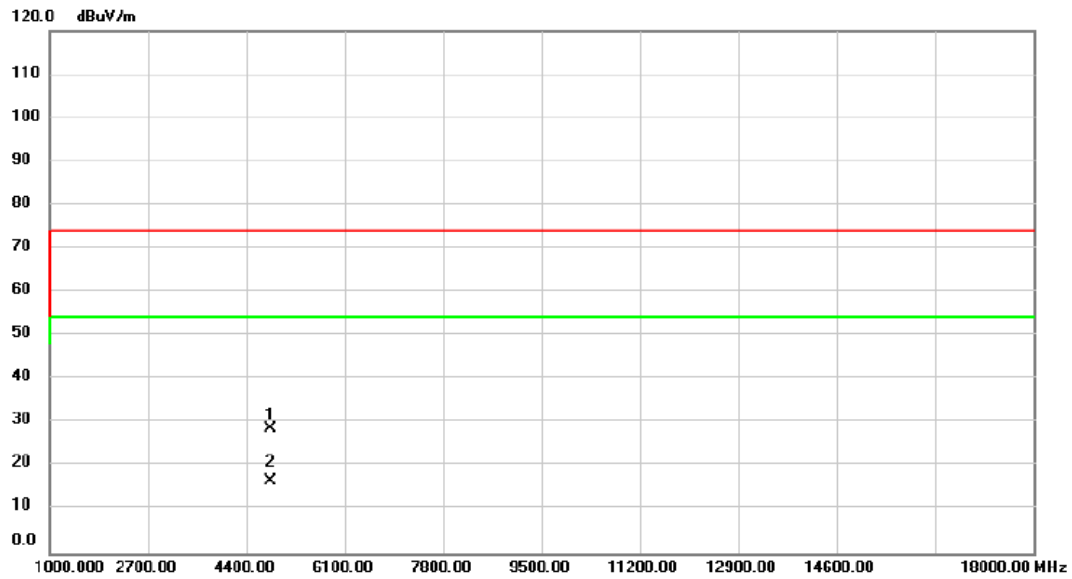


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		4825.000	37.13	-8.56	28.57	74.00	-45.43	peak		
2	*	4825.000	25.23	-8.56	16.67	54.00	-37.33	AVG		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11g	Test Date	2024/10/21
Test Frequency	2412MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

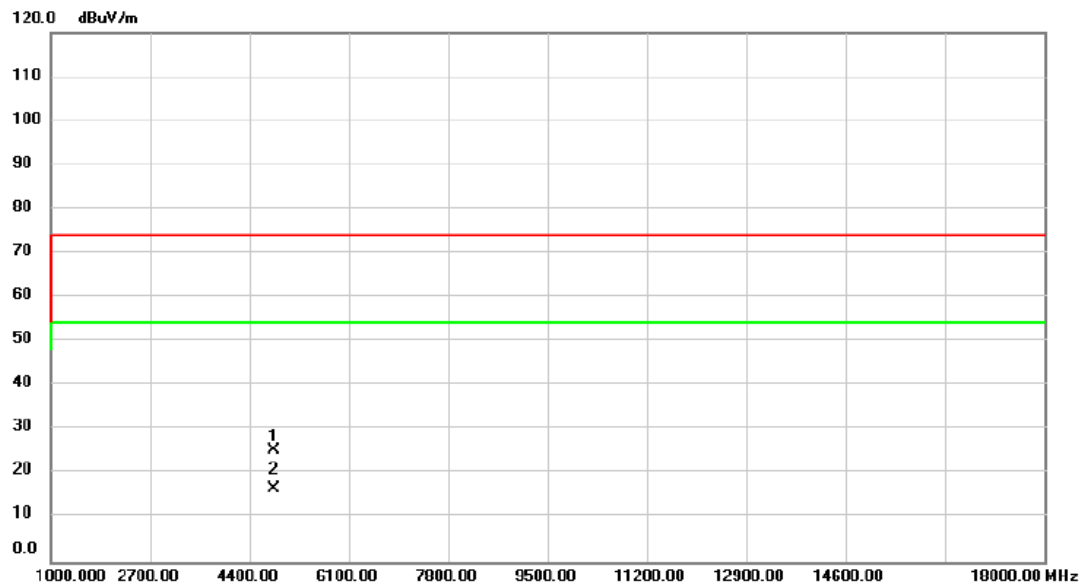


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		4825.000	33.78	-8.56	25.22	74.00	-48.78	peak		
2	*	4825.000	25.23	-8.56	16.67	54.00	-37.33	AVG		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11g	Test Date	2024/10/21
Test Frequency	2437MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

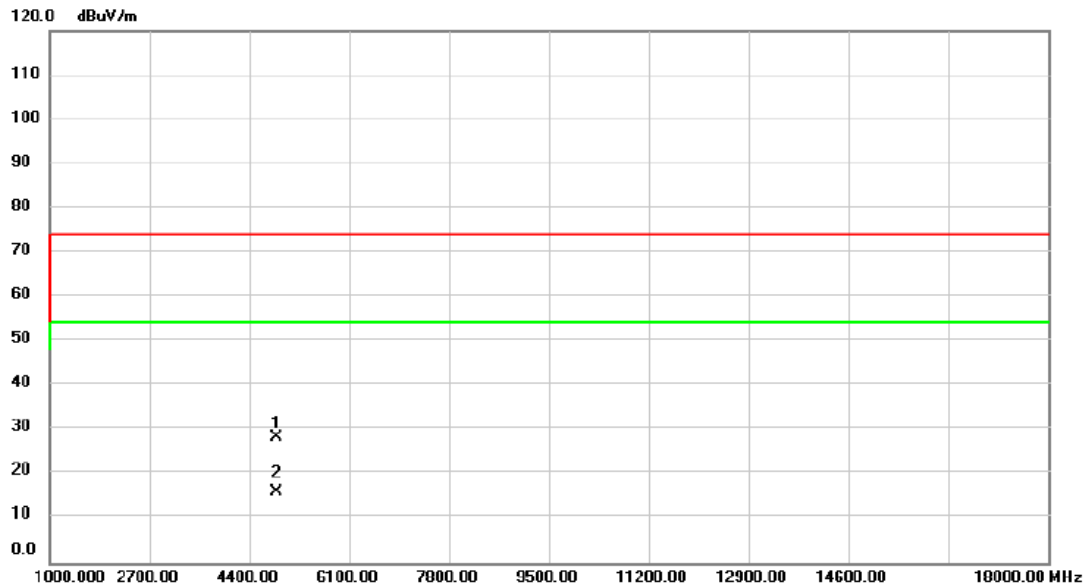


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		4859.000	36.69	-8.47	28.22	74.00	-45.78	peak		
2	*	4859.000	24.52	-8.47	16.05	54.00	-37.95	AVG		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11g	Test Date	2024/10/21
Test Frequency	2437MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

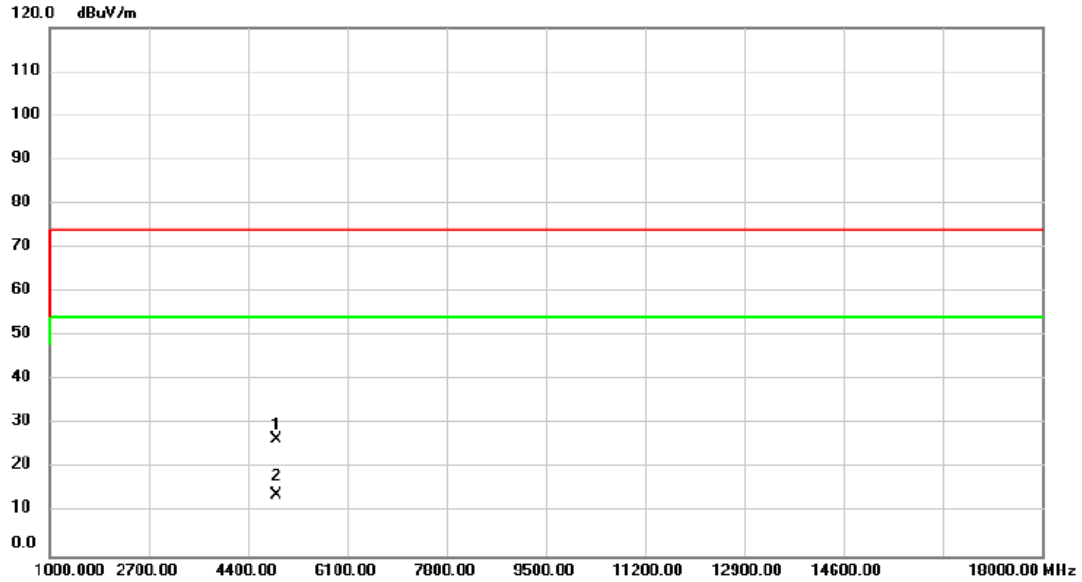


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		4876.000	35.01	-8.43	26.58	74.00	-47.42	peak		
2	*	4876.000	22.38	-8.43	13.95	54.00	-40.05	AVG		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11g	Test Date	2024/10/21
Test Frequency	2462MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

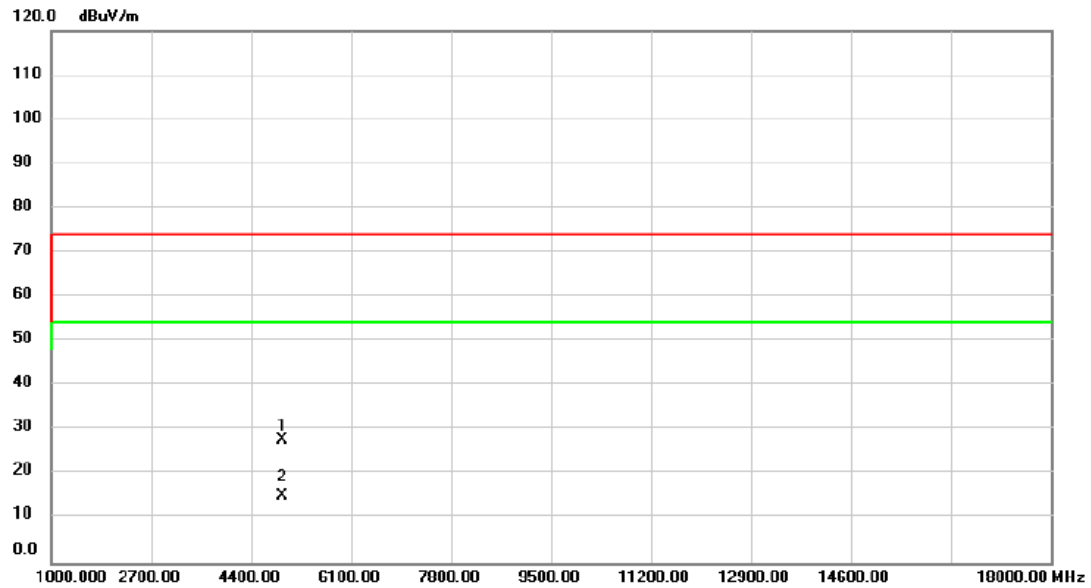


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		4927.000	36.18	-8.31	27.87	74.00	-46.13	peak		
2	*	4927.000	23.39	-8.31	15.08	54.00	-38.92	AVG		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11g	Test Date	2024/10/21
Test Frequency	2462MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

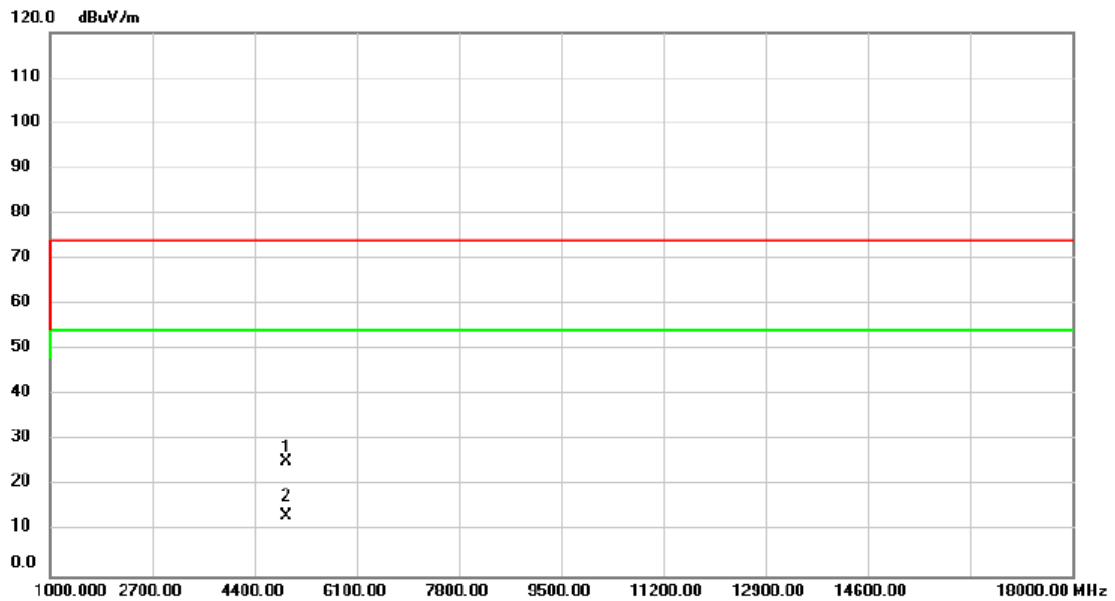


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Antenna Height cm	Table Degree degree	Comment
1		4927.000	33.56	-8.31	25.25	74.00	-48.75	peak		
2	*	4927.000	21.55	-8.31	13.24	54.00	-40.76	AVG		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT20)	Test Date	2024/10/21
Test Frequency	2412MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

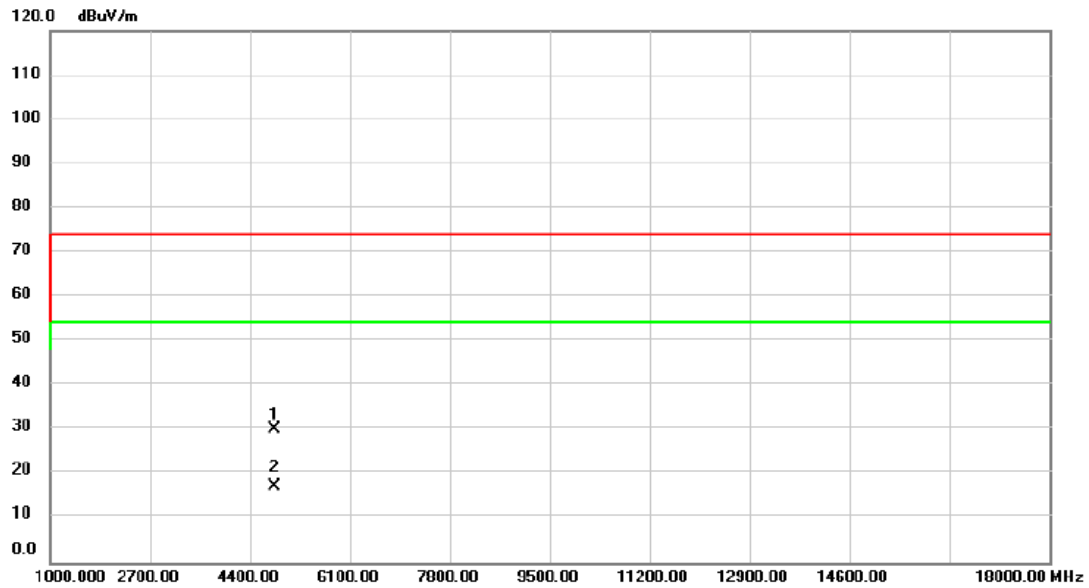


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		4825.000	38.69	-8.56	30.13	74.00	-43.87	peak		
2	*	4825.000	25.80	-8.56	17.24	54.00	-36.76	AVG		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT20)	Test Date	2024/10/21
Test Frequency	2412MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

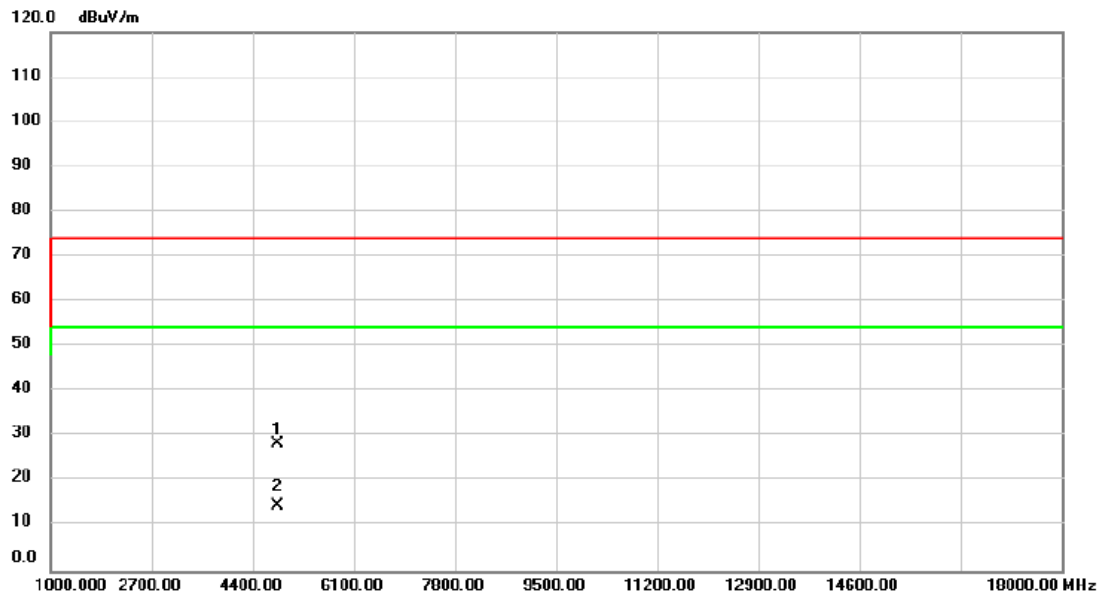


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		4825.000	36.89	-8.56	28.33	74.00	-45.67			peak
2	*	4825.000	23.12	-8.56	14.56	54.00	-39.44			AVG

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT20)	Test Date	2024/10/21
Test Frequency	2437MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

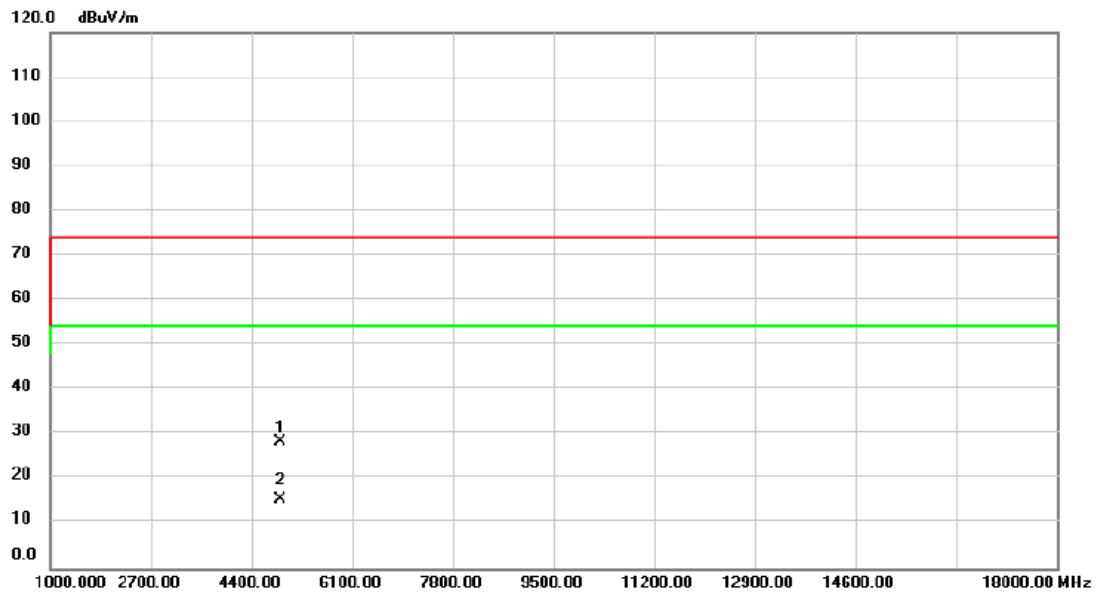


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		4876.000	36.89	-8.43	28.46	74.00	-45.54	peak		
2	*	4876.000	23.82	-8.43	15.39	54.00	-38.61	AVG		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT20)	Test Date	2024/10/21
Test Frequency	2412MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

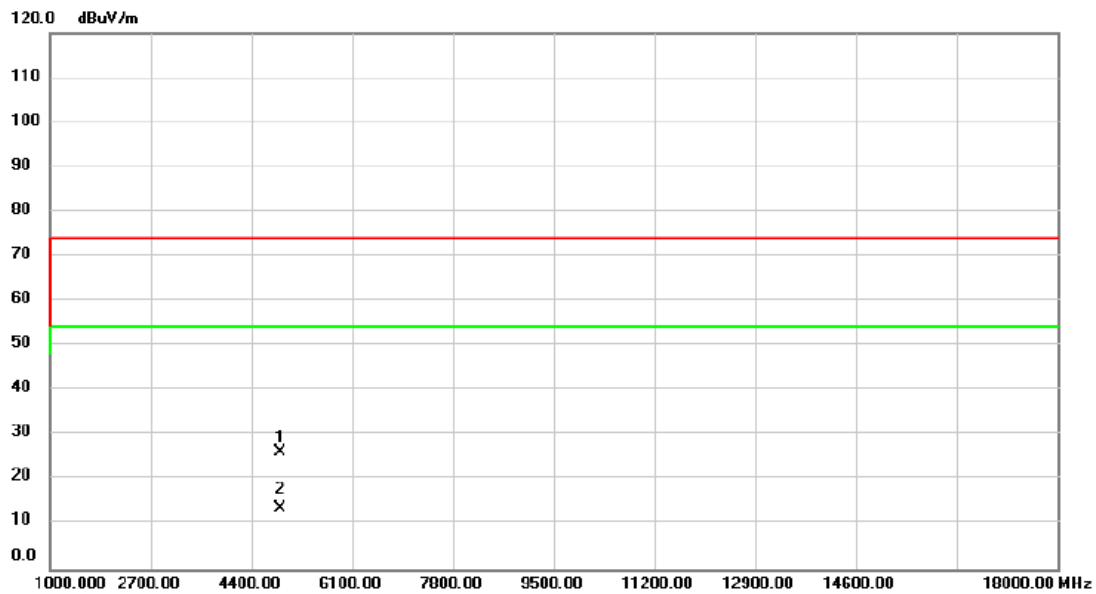


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		4876.000	34.73	-8.43	26.30	74.00	-47.70			peak
2	*	4876.000	21.98	-8.43	13.55	54.00	-40.45			AVG

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT20)	Test Date	2024/10/21
Test Frequency	2462MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

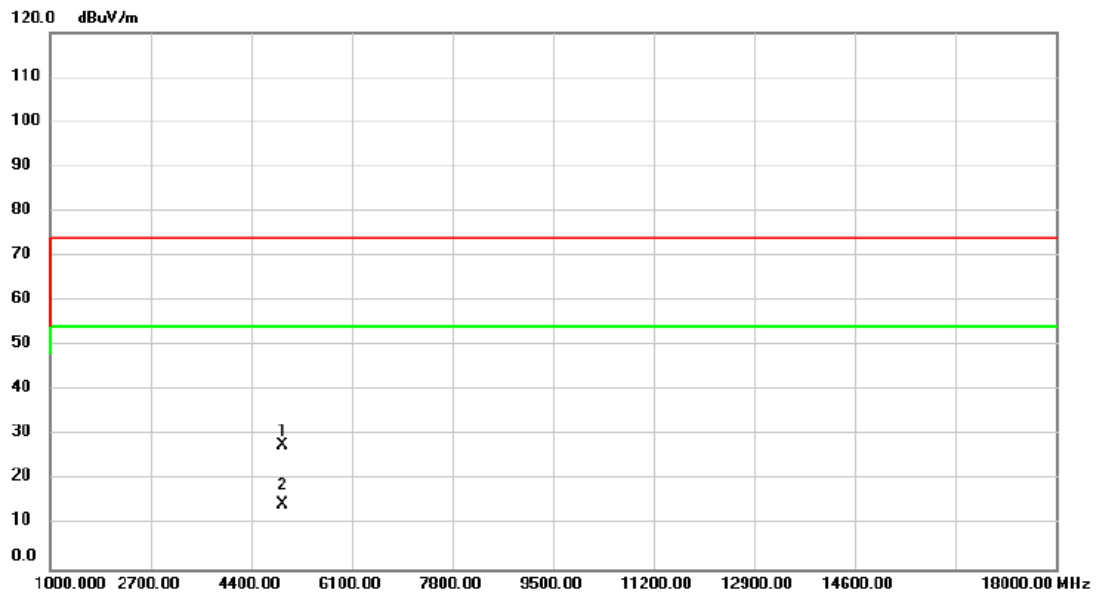


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		4927.000	36.07	-8.31	27.76	74.00	-46.24			peak
2	*	4927.000	22.94	-8.31	14.63	54.00	-39.37			AVG

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT20)	Test Date	2024/10/21
Test Frequency	2462MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

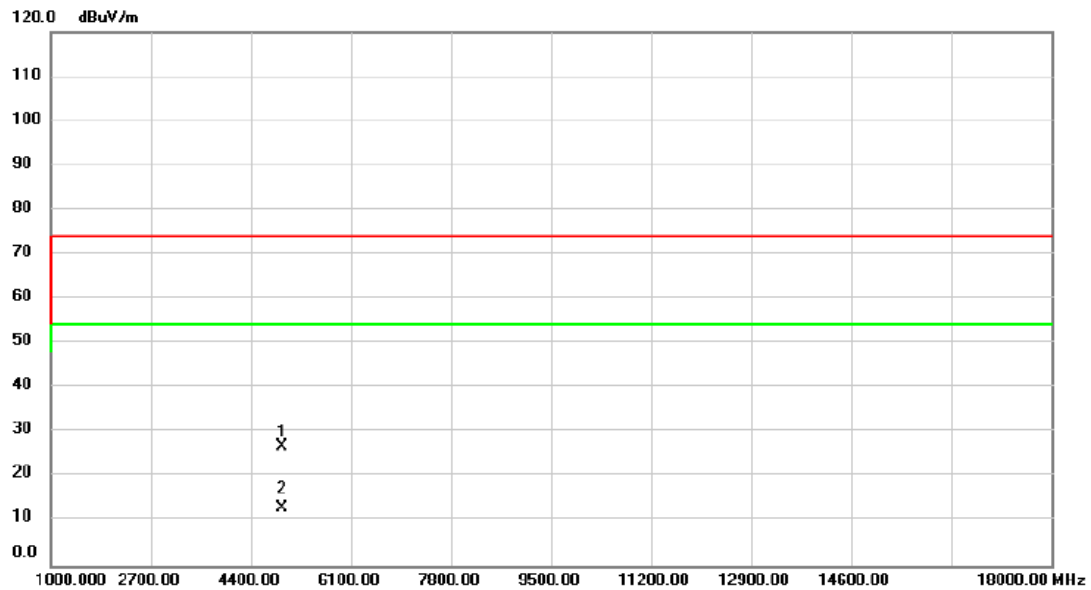


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		4927.000	35.30	-8.31	26.99	74.00	-47.01			peak
2	*	4927.000	21.43	-8.31	13.12	54.00	-40.88			AVG

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11b	Test Date	2024/10/21
Test Frequency	2462MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

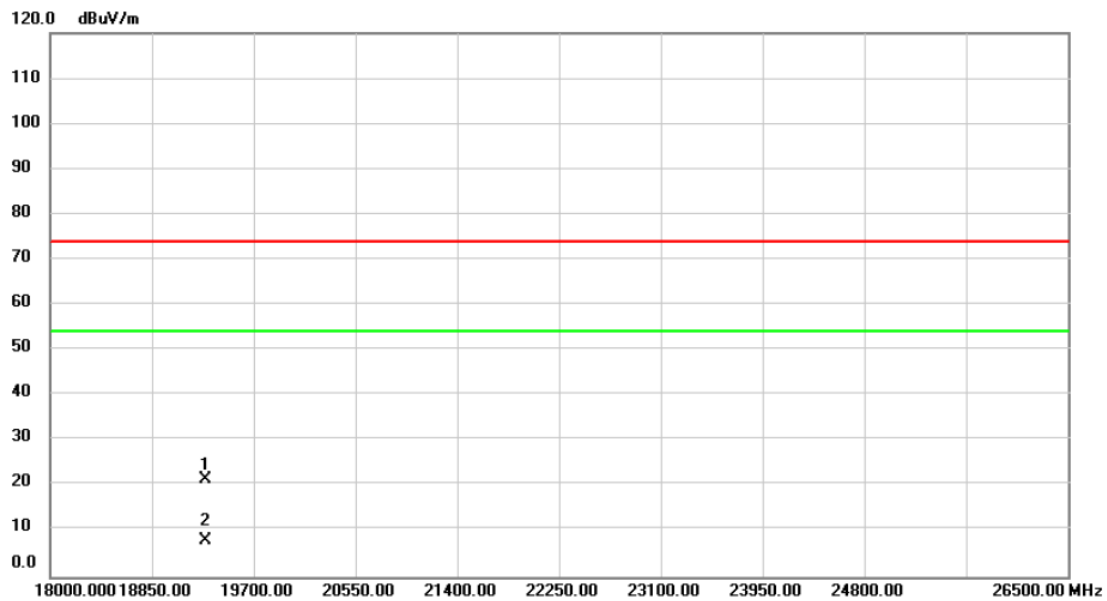


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		19296.00	31.86	-10.43	21.43	74.00	-52.57	peak		
2	*	19296.00	18.41	-10.43	7.98	54.00	-46.02	AVG		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11b	Test Date	2024/10/21
Test Frequency	2462MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

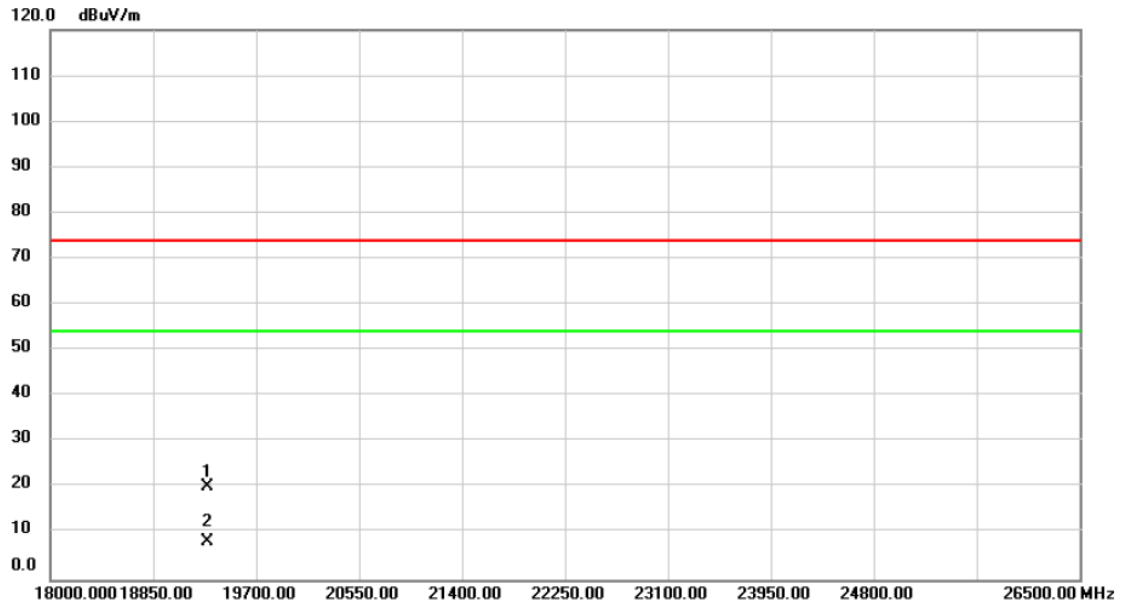

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		19296.00	30.83	-10.43	20.40	74.00	-53.60	peak		
2	*	19296.00	18.67	-10.43	8.24	54.00	-45.76	AVG		



REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

APPENDIX E BANDWIDTH



Test Mode	IEEE 802.11b
-----------	--------------

Test Frequency (MHz)	6 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	Minimum 6 dB Bandwidth Limit (kHz)	Result
2412	9.100	13.600	≥ 500	Pass
2437	9.100	13.520	≥ 500	Pass
2462	8.590	13.520	≥ 500	Pass

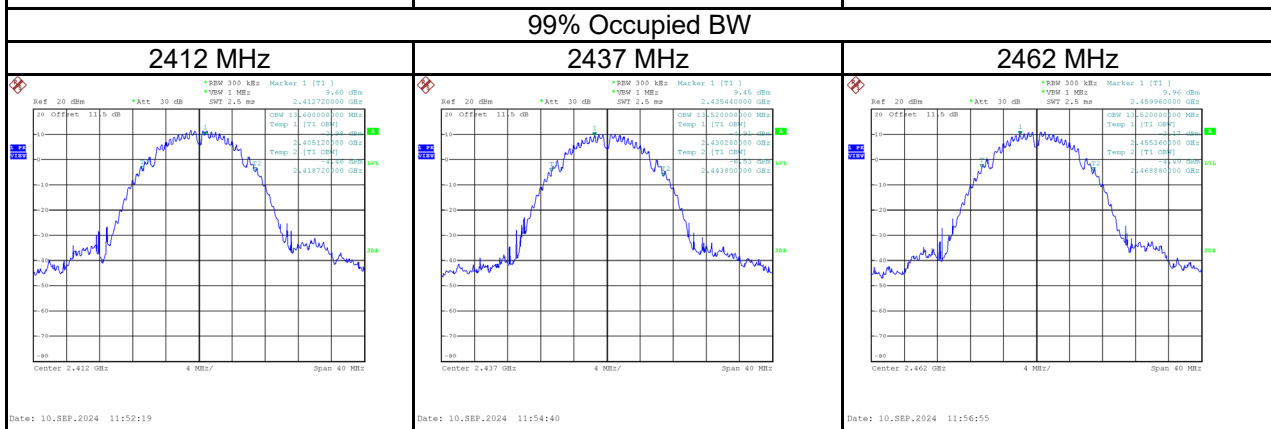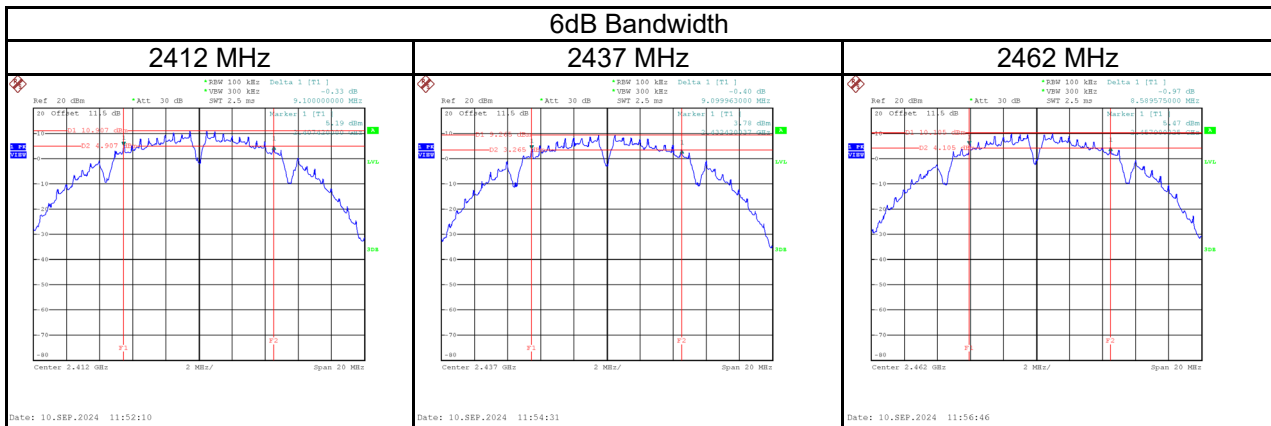



Test Mode	IEEE 802.11g
-----------	--------------

Test Frequency (MHz)	6 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	Minimum 6 dB Bandwidth Limit (kHz)	Result
2412	16.410	16.960	≥ 500	Pass
2437	16.400	17.040	≥ 500	Pass
2462	16.410	16.960	≥ 500	Pass

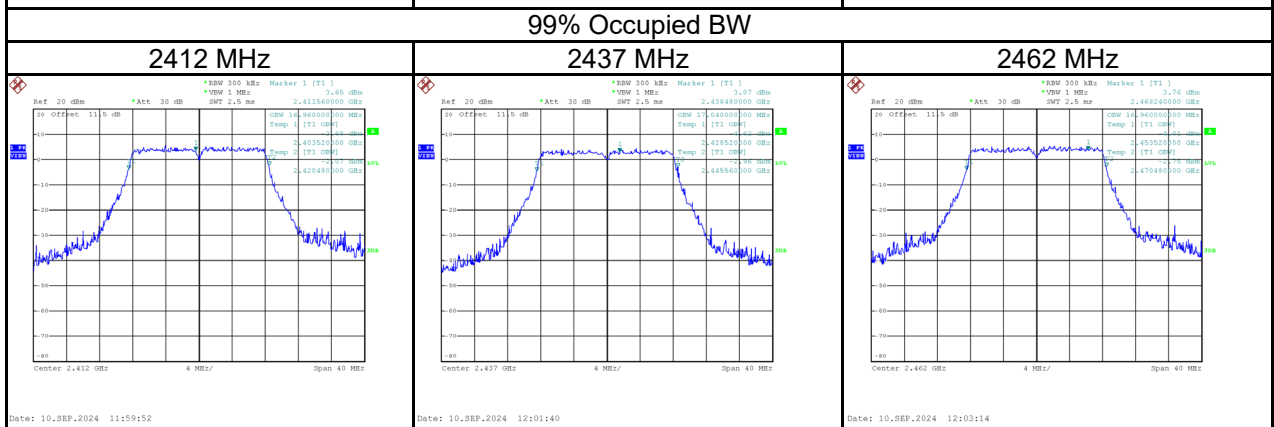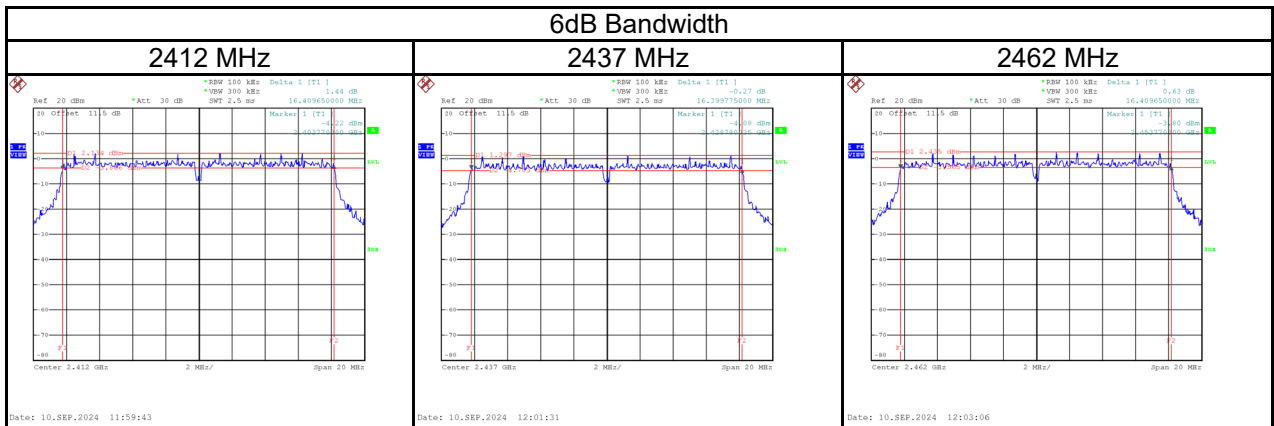

Test Mode	IEEE 802.11n (HT20)
-----------	---------------------

Test Frequency (MHz)	6 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	Minimum 6 dB Bandwidth Limit (kHz)	Result
2412	17.640	17.920	≥ 500	Pass
2437	17.660	18.000	≥ 500	Pass
2462	17.580	18.000	≥ 500	Pass

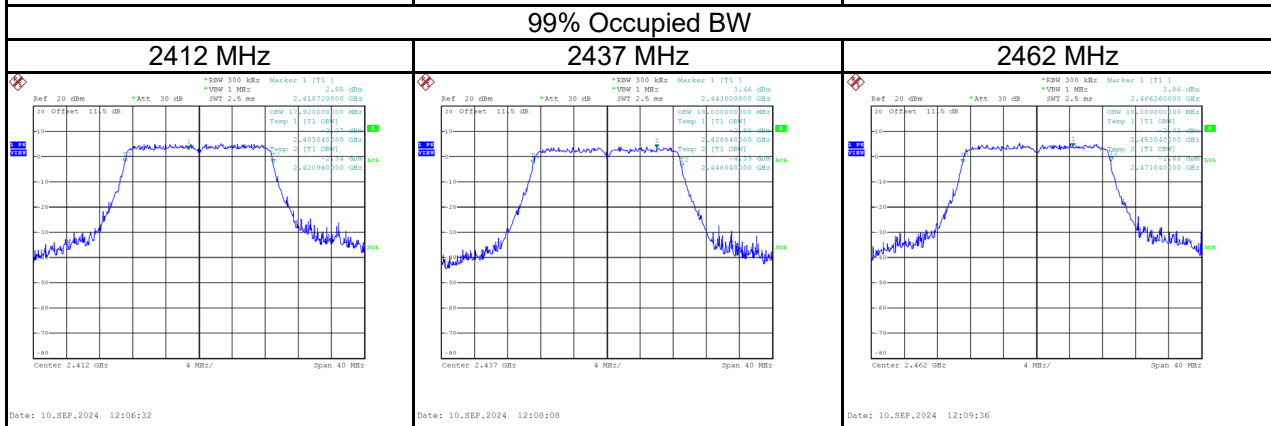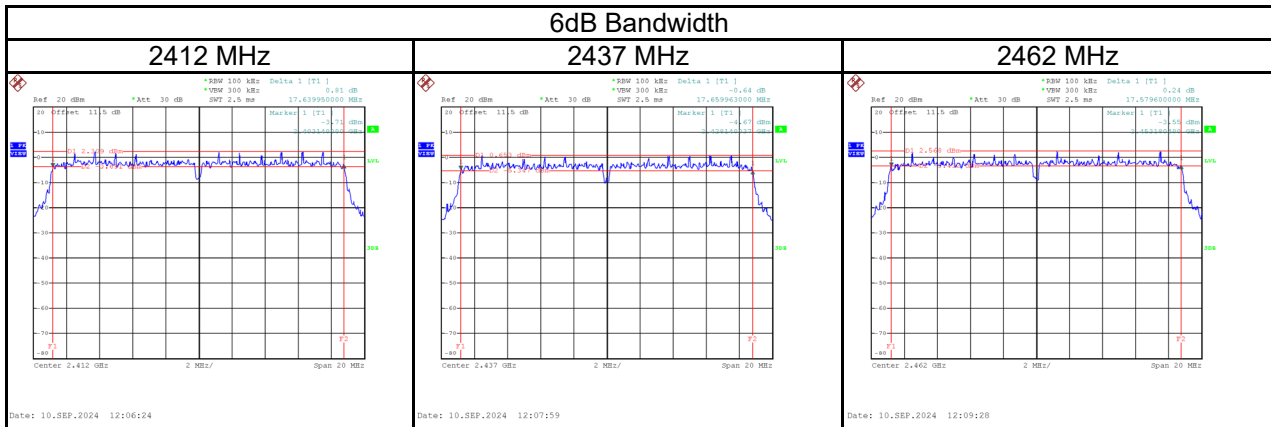

APPENDIX F OUTPUT POWER

Test Mode	IEEE 802.11b	Tested Date	2024/10/17
-----------	--------------	-------------	------------

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	23.71	0.00	23.71	30.00	1.0000	Complies
06	2437	23.48	0.00	23.48	30.00	1.0000	Complies
11	2462	24.57	0.00	24.57	30.00	1.0000	Complies

Test Mode	IEEE 802.11g	Tested Date	2024/10/17
-----------	--------------	-------------	------------

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	20.87	0.27	21.14	30.00	1.0000	Complies
06	2437	20.65	0.27	20.92	30.00	1.0000	Complies
11	2462	21.37	0.27	21.64	30.00	1.0000	Complies


Test Mode	IEEE 802.11n (HT20)	Tested Date	2024/10/17
-----------	---------------------	-------------	------------

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	21.36	0.39	21.75	30.00	1.0000	Complies
06	2437	21.25	0.39	21.64	30.00	1.0000	Complies
11	2462	21.83	0.39	22.22	30.00	1.0000	Complies

APPENDIX G POWER SPECTRAL DENSITY


Test Mode	IEEE 802.11b
-----------	--------------

Test Frequency (MHz)	Power Spectral Density (dBm/3kHz)	Maximum Limit (dBm/3kHz)	Result
2412	-4.25	8.00	Pass
2437	-5.50	8.00	Pass
2462	-4.92	8.00	Pass

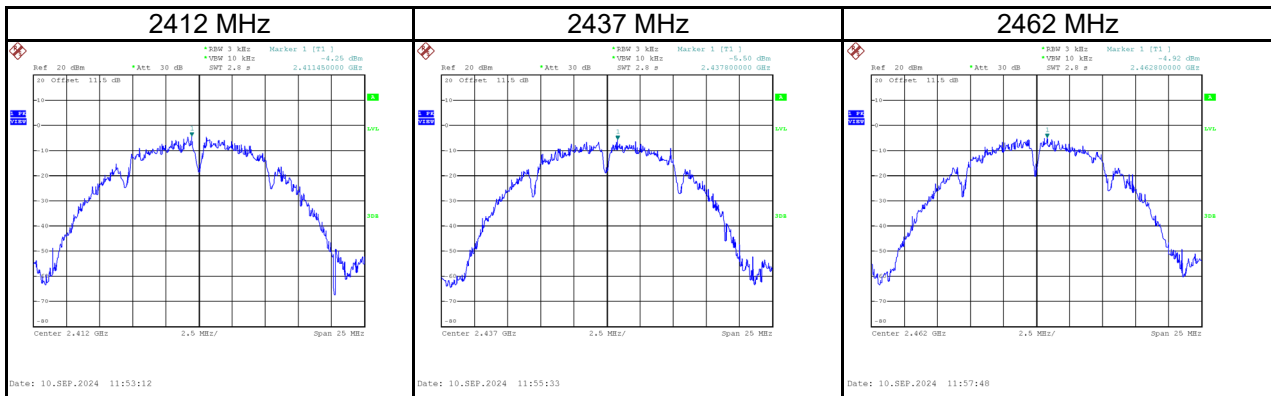


Test Mode	IEEE 802.11g
-----------	--------------

Test Frequency (MHz)	Power Spectral Density (dBm/3kHz)	Maximum Limit (dBm/3kHz)	Result
2412	-12.83	8.00	Pass
2437	-13.04	8.00	Pass
2462	-12.22	8.00	Pass

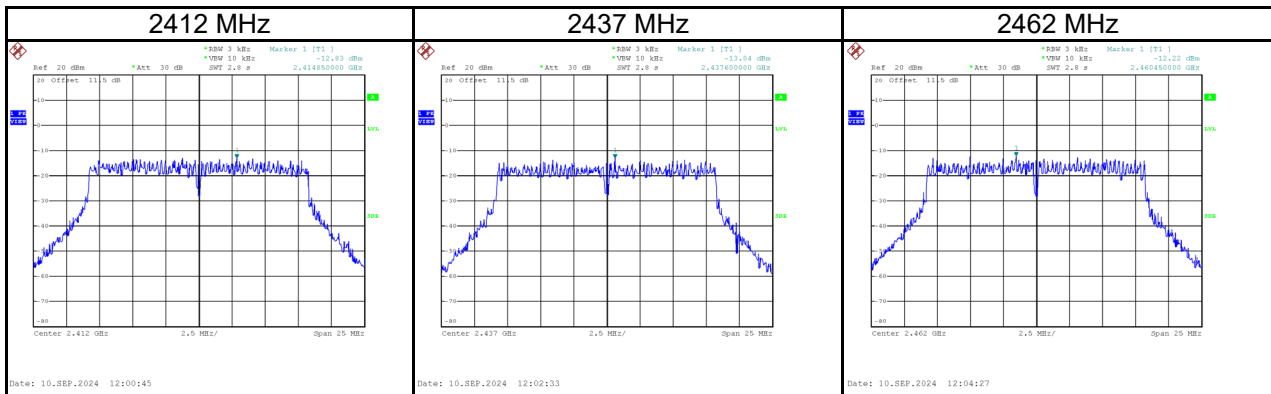

Test Mode	IEEE 802.11n (HT20)
-----------	---------------------


Test Frequency (MHz)	Power Spectral Density (dBm/3kHz)	Maximum Limit (dBm/3kHz)	Result
2412	-12.52	8.00	Pass
2437	-13.52	8.00	Pass
2462	-12.49	8.00	Pass

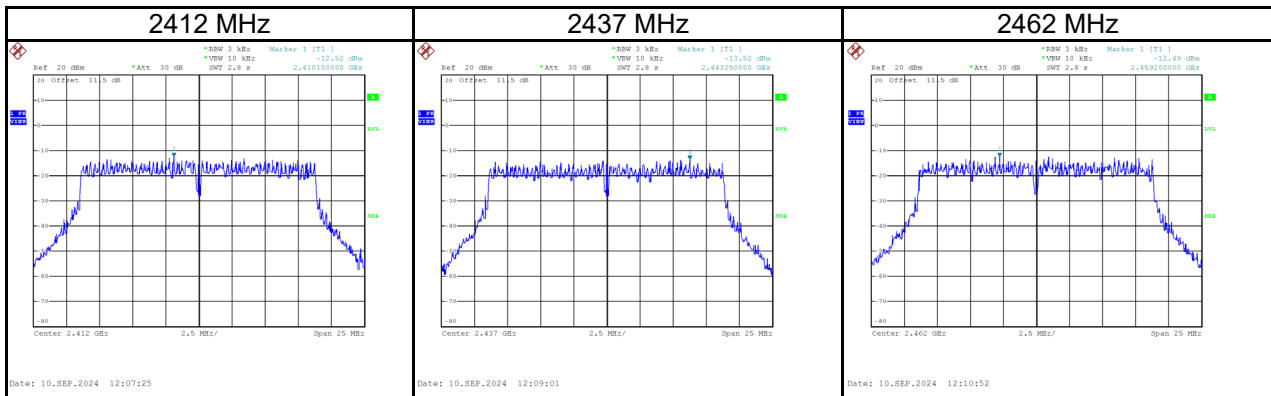


APPENDIX H ANTENNA CONDUCTED SPURIOUS EMISSIONS

Test Mode IEEE 802.11b




Low Bandedge-2412 MHz

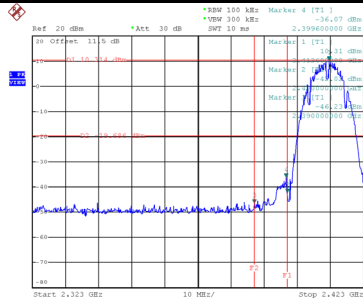




High Bandedge-2462 MHz

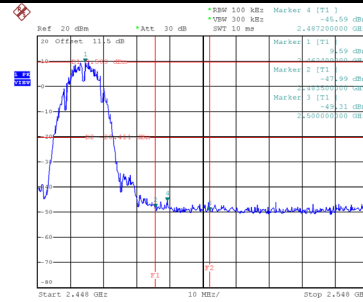




2412 MHz-10th Harmonics

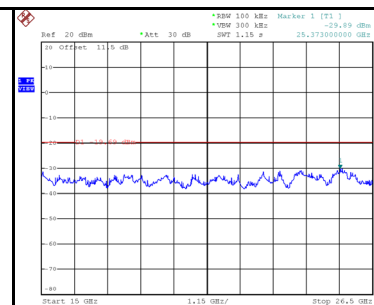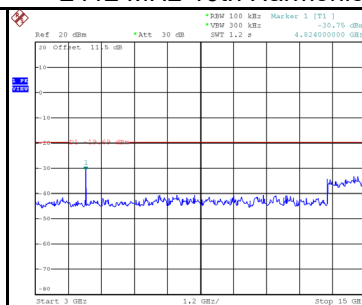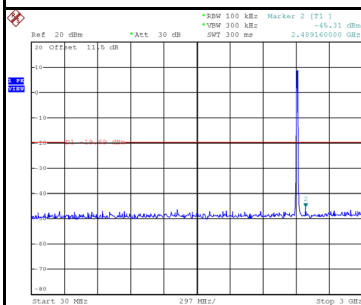

2437 MHz-10th Harmonics

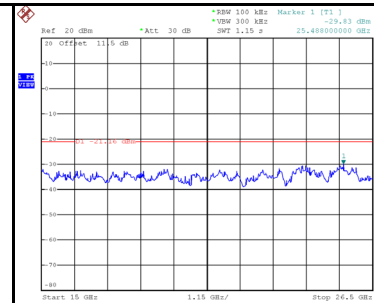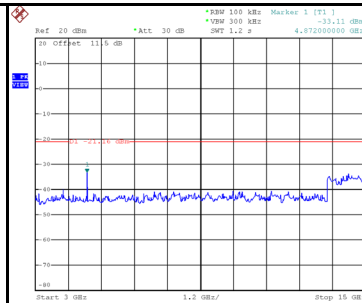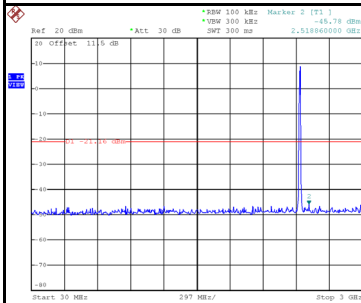


2462 MHz-10th Harmonics

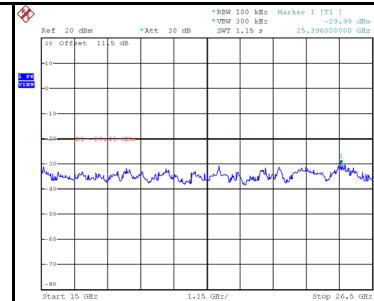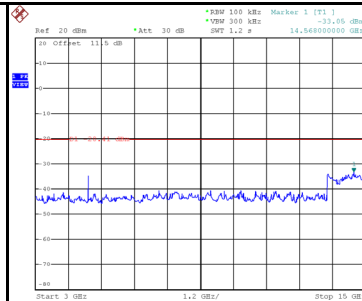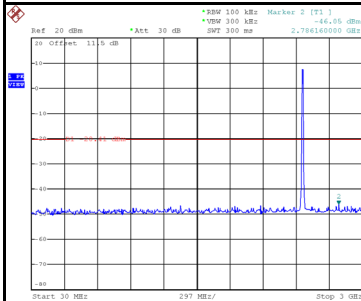


Test Mode IEEE 802.11g




Low Bandedge-2412 MHz

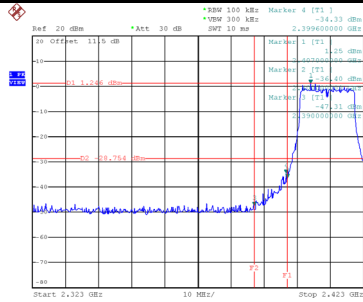




High Bandedge-2462 MHz

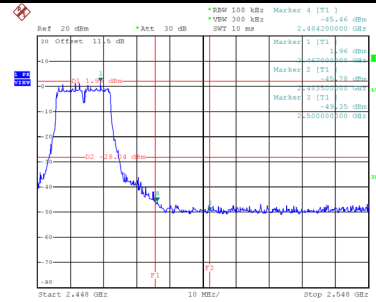




2412 MHz-10th Harmonics

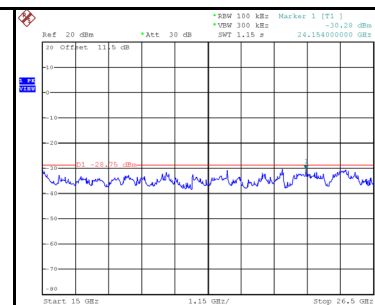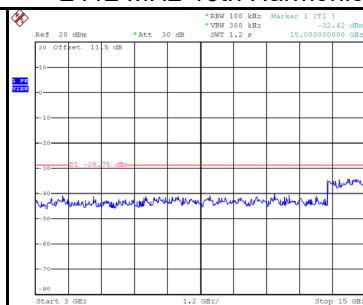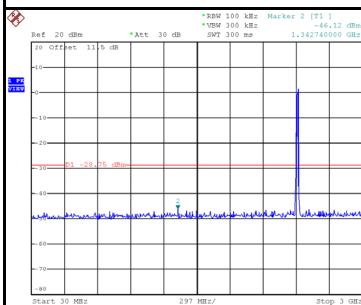

2437 MHz-10th Harmonics

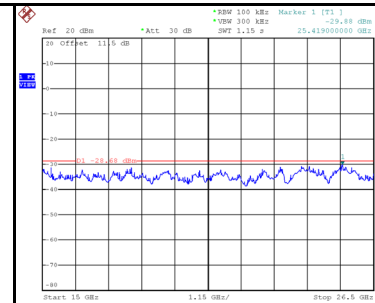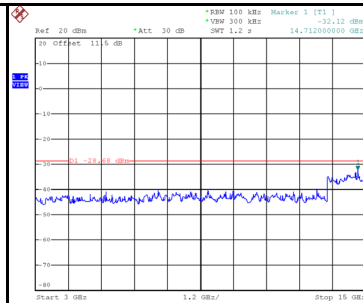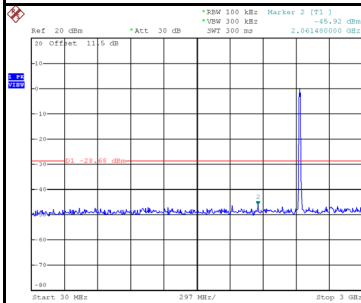


2462 MHz-10th Harmonics

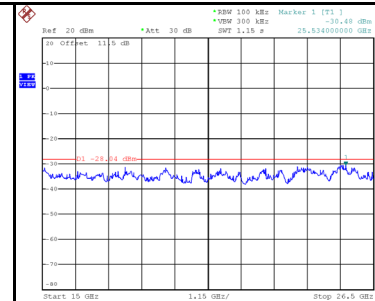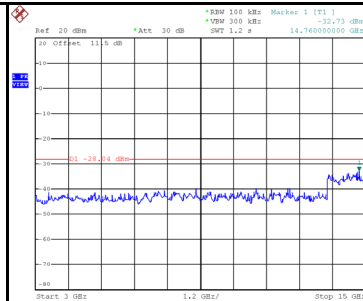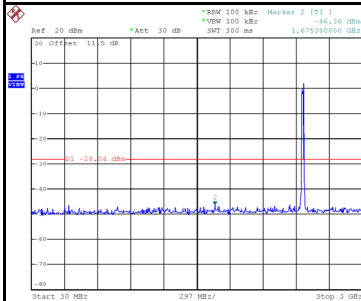


Test Mode IEEE 802.11n (HT20)

Low Bandedge-2412 MHz

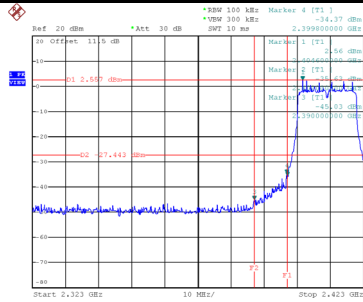


Date: 10.SEP.2024 12:06:41

High Bandedge-2462 MHz

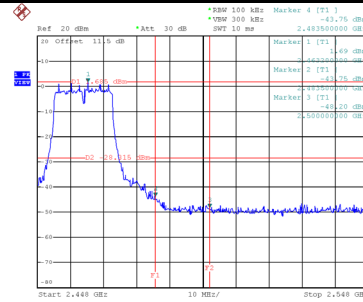


Date: 10.SEP.2024 12:09:45


2412 MHz-10th Harmonics

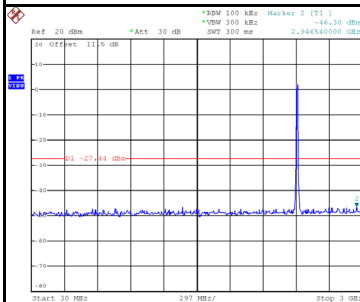

Date: 10.SEP.2024 12:06:56

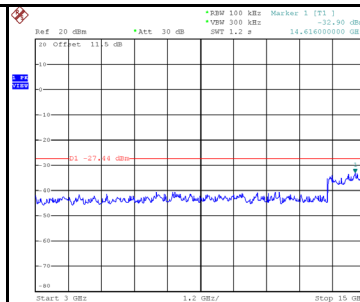


Date: 10.SEP.2024 12:07:05

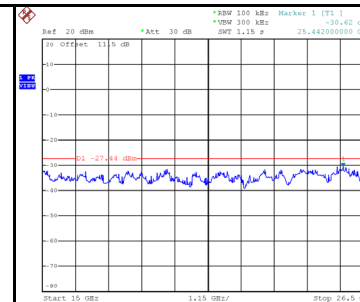


Date: 10.SEP.2024 12:07:14


2437 MHz-10th Harmonics

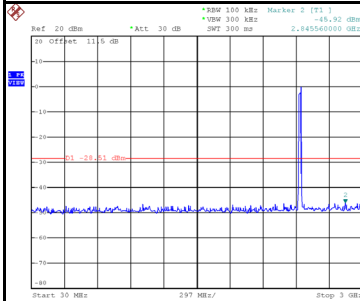

Date: 10.SEP.2024 12:08:32

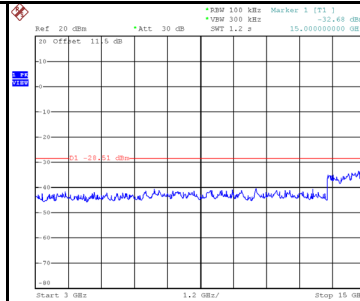


Date: 10.SEP.2024 12:08:41

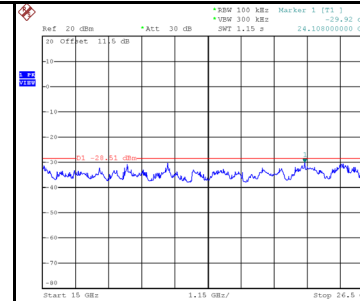


Date: 10.SEP.2024 12:08:50


2462 MHz-10th Harmonics

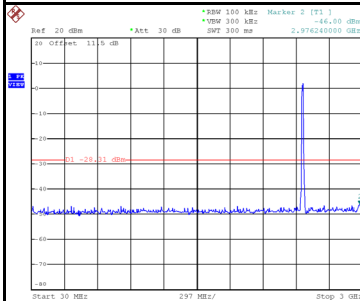

Date: 10.SEP.2024 12:10:01

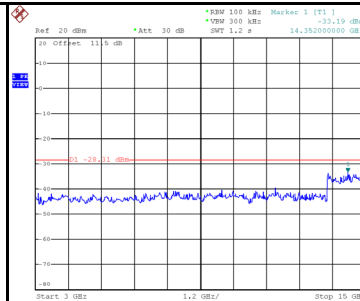

Date: 10.SEP.2024 12:10:10

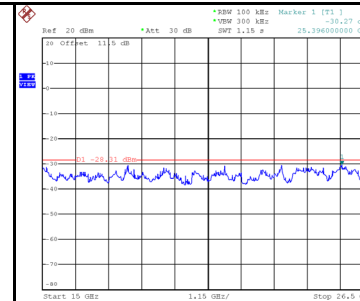

Date: 10.SEP.2024 12:10:19

End of Test Report