

Report No.: SUCR240400012702

Rev.: 01

Page: 1 of 53

TEST REPORT

Application No.: SUCR2404000127MO **Applicant:** TP-Link Systems Inc.

Address of Applicant: 10 Mauchly, Irvine, CA 92618

Manufacturer: TP-Link Systems Inc.

Address of Manufacturer: 10 Mauchly, Irvine, CA 92618

EUT Description: 5G Mobile Wi-Fi

Model No.: M8550
Trade Mark: tp-link

FCC ID: 2BH7FM8550 Standards: 47 CFR Part 2

47 CFR Part 22 47 CFR Part 24 47 CFR Part 27 47 CFR Part 90 47 CFR Part 96

Date of Receipt: 2024/04/23

Date of Test: 2024/07/05 to 2024/08/28

Date of Issue: 2024/09/02

Test Result: PASS *

Authorized Signature:

Cloud Pe

Cloud Peng Technical Manager



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.spx. and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of iliability, indemification and jurisdiction issues define therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company, Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (80-755) 8307 144. or email: CN.Doccheck@sgs.com

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jangsu) Plot Free Trade Zone 215000 t (86—512) 62992980 www.sgsgroup.com.ci 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区消胜商与告め5号厂房南部 邮编: 215000 t (86—512) 62992980 sgs.china@sgs.com

^{*} In the configuration tested, the EUT detailed in this report complied with the standards specified above.



Report No.: SUCR240400012702

Rev.: Page: 2 of 53

Version

Revision Record					
Version Chapter Date Modifier Remark					
01		2024/09/02		Original	

Prepared By	(Levi Li) / Test Engineer
Checked By	Stone Gu) / Reviewer



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company, Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are related for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN. Doccheck@ass.com

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国 • 苏州 • 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

t (86-512) 62992980 sgs.china@sgs.com

t (86-512) 62992980 www.sgsgroup.com.cn



Report No.: SUCR240400012702

Rev.: 01 Page: 3 of 53

Content

1	Vers	sion	2
2	Test	Summary	5
	2.1	NR Band n5	5
	2.2	NR Band n41	
	2.3	NR Band n2/ NR Band n25	8
	2.4	NR Band n12	9
	2.5	NR Band n14	10
	2.6	NR Band n30	12
	2.7	NR Band n66	14
	2.8	NR Band n71	15
	2.9	NR Band n77	16
	2.10	NR Band n48	18
3	Gen	eral Information	20
	3.1	Client Information	20
	3.2	Test Location	20
	3.3	Test Facility	20
	3.4	General Description of EUT	21
	3.5	Test Mode	23
	3.6	Test Environment	23
	3.7	Description of Support Units	23
	3.8	Technical Specification	24
	3.9	Test Frequencies	26
	3.9.	1 Reference test frequencies for NR operating band n2	26
	3.9.	2 Reference test frequencies for NR operating band n5	27
	3.9.	Reference test frequencies for NR operating band n12	28
	3.9.	4 Reference test frequencies for NR operating band n14	29
	3.9.	5 Reference test frequencies for NR operating band n25	30
	3.9.	Reference test frequencies for NR operating band n30	31
	3.9.	7 Reference test frequencies for NR operating band n41	32
	3.9.	Reference test frequencies for NR operating band n48	33
	3.9.	9 Reference test frequencies for NR operating band n66	34



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document one one exore exercises and the service of the service of

South of No. 6 Plant, No. 1, Runsheng Road, Suchou Industrial Park, Suchou Area, Chine (Liangsu) Plot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

t (86–512) 62992980 www.sgsgroup.com.cn t (86–512) 62992980 sgs.china@sgs.com



D (N)	011000404004070
Report No.:	SUCR240400012702

Rev.:	01
Page:	4 of 5

		Fage. 4 01 53	
	3.9	.10 Reference test frequencies for NR operating band n71	35
	3.9	.11 Reference test frequencies for NR operating band n77	36
4	Des	scription of Tests	38
	4.1	Conducted Output Power	38
	4.2	Effective (Isotropic) Radiated Power of Transmitter	39
	4.3	EIRP Power Density	40
	4.4	Occupied Bandwidth	41
	4.5	Band Edge at Antenna Terminals	42
	4.6	Spurious And Harmonic Emissions at Antenna Terminal	43
	4.7	Peak-Average Ratio	44
	4.8	Field Strength of Spurious Radiation	45
	4.9	Frequency Stability / Temperature Variation	46
	4.10	Test Setups	47
	4.1	0.1 Test Setup 1	47
	4.1	0.2 Test Setup 2	47
	4.1	0.3 Test Setup 3	48
	4.11	Test Conditions	
5	Mai	n Test Instruments	50
6	Mea	asurement Uncertainty	52
7	Apr	pendixes	53



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company, Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@gs.com

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国 • 苏州 • 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000



Report No.: SUCR240400012702

Rev.: 5 of 53 Page:

Test Summary

2.1 NR Band n5

Test Item	FCC Rule No.	Requirements	Test Result	Verdict
Effective (Isotropic) Radiated Power Output Data	§2.1046, §22.913(a)(5)	FCC: ERP ≤ 7 W	Appendix B.24	Pass
Peak-Average Ratio	§22.913(d)	Limit≤13 dB		
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.		
Band Edges Compliance	§2.1051, §22.917(a)	≤ -13 dBm/1%*EBW, in 1 MHz bands immediately outside and adjacent to the frequency block.	Reference report 2303RSU050-U2	
Spurious Emission at Antenna Terminals	§2.1051, §22.917(a)	FCC: ≤ -13 dBm/100 kHz, from 9 kHz to 10th harmonics but outside authorized operating frequency ranges.		
Field Strength of Spurious Radiation	§2.1053, §22.917(a)	FCC: ≤ -13 dBm/100 kHz.	Appendix B.24	Pass
Frequency Stability	§2.1055(a)(1)(b) §2.1055(d)(2) §22.355	±2.5ppm.	Reference report 2303RSU050-U2	

Remark:

The Effective (Isotropic) Radiated Power Output Data and Field Strength of Spurious Radiation were tested in this report, and other items data please refer to the test report 2303RSU050-U2.

The FCC ID is XMR2023RG520NNA has been certified, and the test report issued by MRT Technology (Suzhou) Co., Ltd on 2023/05/17.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx.and, for electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions-and-Conditions-and-Co

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的0号厂房南部 邮编: 215000 t (86-512) 62992980 www.sgsgroup.com.cn t (86-512) 62992980

sgs.china@sgs.com



Report No.: SUCR240400012702

Rev.: 6 of 53 Page:

2.2 NR Band n41

Test Item	FCC Rule No.	Requirements	Test Result	Verdict
Effective (Isotropic) Radiated Power Output Data	§2.1046, §27.50(h)(2)	EIRP ≤ 2W	Appendix B.29	Pass
Peak-Average Ratio		≤13 dB		
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.		
Band Edges Compliance	§2.1051, §27.53(m)(4)	For mobile digital stations, the attenuation factor shall be not less than 40 + 10 log (P) dB on all frequencies between the channel edge and 5 megahertz from the channel edge, 43 + 10 log (P) dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and 55 + 10 log (P) dB on all frequencies more than X megahertz from the channel edge, wdhere X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less that 43 + 10 log (P) dB on all frequencies between 2490.5 MHz and 2496 MHz and 55 + 10 log (P) dB at or below 2490.5 MHz.	Reference re 2303RSU050 & 2303RSU05)-U2
Spurious Emission at Antenna Terminals	§2.1051, §27.53(m)	Channel Edge -25dBm/ 1 MHz 1 M		
Field Strength of Spurious Radiation	§2.1053, §27.53(m)	Channel Edge -25dBm/ 1 MHz 1 MHz 1 MHz 9 kHz 95 MHz XMHz 10th harmonics X=Max {6MHz, EBW}	Appendix B.29	Pass
Frequency Stability	§2.1055(a)(1)(b) §2.1055(d)(2) §27.54	Within authorized bands of operation/frequency block.	Reference report 2303RSU050-U2 & 2303RSU050-U1	

The Effective (Isotropic) Radiated Power Output Data and Field Strength of Spurious Radiation were tested



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.ags.com/en/Terms-and-Conditions.ags.and.for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.ags.com/en/Terms-and-Conditions/Terms-e-Document.ags.and-Conditio

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国•苏州•中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编:215000

t (86-512) 62992980 www.sgsgroup.com.cn



Report No.: SUCR240400012702

Rev.: 01 Page: 7 of 53

Test Item FCC Rule No. Requirements Test Result Verdict

in this report, and other items data please refer to the test report 2303RSU050-U2 & 2303RSU050-U1. The FCC ID is XMR2023RG520NNA has been certified, and the test report issued by MRT Technology (Suzhou) Co., Ltd on 2023/05/17.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx.and, for electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions-and-Conditions-and-Co

 South of No. 6 Plant, No. 1, Runsheng Read, Suchou Industria Plant, Suchou Area, China (Jangsu) Plot Free Trade Zone
 215000
 t (86–5

 中国 - 苏州 - 中国 (江芥) 自由贸易试验区苏州片区苏州工业园区滑胜路1号的6号厂房南部
 邮编:
 215000
 t (86–5

t (86–512) 62992980 www.sgsgroup.com. t (86–512) 62992980 sgs.china@sgs.com



Report No.: SUCR240400012702

Rev.: 01 Page: 8 of 53

2.3 NR Band n2/ NR Band n25

Test Item	FCC Rule No.	Requirements	Test Result	Verdict
Effective (Isotropic) Radiated Power Output Data	§2.1046, §24.232(c)	EIRP ≤ 2 W	Appendix B.23&B.27	Pass
Peak-Average Ratio	§24.232(d)	Limit≤13 dB		
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.		
Band Edges Compliance	§2.1051, §24.238(a)	≤ -13 dBm/1%*EBW, in 1 MHz bands immediately outside and adjacent to the frequency block.	Reference report 2303RSU050-U2	
Spurious Emission at Antenna Terminals	§2.1051, §24.238(a)	≤ -13 dBm/1 MHz, from 9 kHz to 10 th harmonics but outside authorized operating frequency ranges.		
Field Strength of Spurious Radiation	§2.1053, §24.238(a)	≤ -13 dBm/1 MHz.	Appendix B.23&B.27	Pass
Frequency Stability	§2.1055(a)(1)(b) §2.1055(d)(2) §24.235	Within authorized bands of operation/frequency block.	Reference report 2303RSU050-U2	

Remark:

The Effective (Isotropic) Radiated Power Output Data and Field Strength of Spurious Radiation were tested in this report, and other items data please refer to the test report 2303RSU050-U2.

The FCC ID is XMR2023RG520NNA has been certified, and the test report issued by MRT Technology (Suzhou) Co., Ltd on 2023/05/17.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions.Appx Attention: The terms and the second of the second and the second and

South of No. 6 Plant, No. 1, Runsheng Rosat, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Plot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州广区苏州工业园区消胜路(号约6号厂房南部 邮编: 215000

t (86–512) 62992980 t (86–512) 62992980

sgs.china@sgs.com



Report No.: SUCR240400012702

Rev.: 01 Page: 9 of 53

2.4 NR Band n12

Test Item	FCC Rule No.	Requirements	Test Result	Verdict
Effective (Isotropic) Radiated Power Output Data	§2.1046 §27.50(c)(10)	ERP ≤ 3 W.	Appendix B.25	Pass
Peak-Average Ratio		Limit≤13 dB		
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.	Reference report 2303RSU050-U2	
Band Edges Compliance	§2.1051, §27.53(g)	≤ 43+10log10(P[Watts])		
Spurious Emission at Antenna Terminals	§2.1051, §27.53(g)	≤ 43+10log10(P[Watts])		
Field Strength of Spurious Radiation	§2.1053, §27.53(g)	FCC: ≤ -13 dBm/100 kHz.	Appendix B.25	Pass
Frequency Stability	§2.1055(a)(1)(b) §2.1055(d)(2) §27.54	Within authorized bands of operation/frequency block.	Reference report 2303RSU050-U2	

Remark:

The Effective (Isotropic) Radiated Power Output Data and Field Strength of Spurious Radiation were tested in this report, and other items data please refer to the test report 2303RSU050-U2.

The FCC ID is XMR2023RG520NNA has been certified, and the test report issued by MRT Technology (Suzhou) Co., Ltd on 2023/05/17.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions.Appx Attention: The terms and the second of the second and the second and

South of No. 6 Plant, No. 1, Runsharag Read, Suzhou Industrial Plark, Suzhou Area, China (Jiangsu) Plot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区测胜路1号约6号厂房南部 邮编: 215000

t (86-512) 62992980 t (86-512) 62992980

www.sgsgroup.com.cn sgs.china@sgs.com



Report No.: SUCR240400012702

Rev.:

Page: 10 of 53

2.5 NR Band n14

Test Item	FCC Rule No.	Requirements	Test Result	Verdict
Effective (Isotropic) Radiated Power Output Data	§2.1046 §90.542(a)	ERP ≤ 3 W.	Appendix B.26	Pass
Peak-Average Ratio		Limit≤13 dB		
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.	Reference report 2303RSU050-U3	
Emission Mask	§2.1051 §90.210(b)	Transmitters designed for operation under this part on frequencies other than listed in this section must meet the emission mask requirements of Emission Mask B. Equipment operating under this part on frequencies allocated to but shared with the Federal Government, must meet the applicable Federal Government technical standards (b) Emission Mask B. For transmitters that are equipped with an audio low-pass filter, the power of any emission must be attenuated below the unmodulated carrier power (P) as follows: (1) On any frequency removed from the assigned frequency by more than 50 percent, but not more than 100 percent of the authorized bandwidth: At least 25 dB.(2) On any frequency removed from the assigned frequency by more than 250 percent of the authorized bandwidth: At least 35 dB(3) On any frequency removed from the assigned frequency by more than 250 percent of the authorized bandwidth: At least 43 + 10 log (P) dB.		
Band Edges Compliance	§2.1051 §90.543(e)(2)(3)	(1) On all frequencies between 769- 775 MHz and 799-805 MHz, by a factor not less than 76 + 10 log (P) dB in a 6.25 kHz band segment, for base and fixed stations.(2) On all frequencies between 769-775 MHz and 799-805 MHz, by a factor not less than 65 + 10 log (P) dB in a 6.25 kHz band segment, for mobile and portable stations.(3) On any		



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's Instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company, Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) test etailed for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@qs.com"

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国•苏州•中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编:215000

t (86-512) 62992980 www.sgsgroup.com.cn t (86-512) 62992980 sgs.china@sgs.com



Report No.: SUCR240400012702

Rev.: 01

Page: 11 of 53

Test Item	FCC Rule No.	Requirements	Test Result	Verdict
		frequency between 775-788 MHz, above 805 MHz, and below 758 MHz, by at least 43 + 10 log (P) dB.		
Spurious Emission at Antenna Terminals	§2.1051, §90.543(c) §90.543(f)	FCC: ≤ -13 dBm/100 kHz, from 9 kHz to 10th harmonics but outside authorized operating frequency ranges. For operations in the 758–775 MHz and 788–805 MHz bands, all emissions including harmonics in the band 1559–1610 MHz shall be limited to -70 dBW/ MHz equivalent isotropically radiated power (EIRP) for wideband signals, and -80 dBW EIRP for discrete emissions of less than 700 Hz bandwidth.		
Field Strength of Spurious Radiation	§2.1053, §90.543(c) §90.543(f)	FCC: ≤ -13 dBm/100 kHz. For operations in the 758–775 MHz and 788–805 MHz bands, all emissions including harmonics in the band 1559–1610 MHz shall be limited to -70 dBW/ MHz equivalent isotropically radiated power (EIRP) for wideband signals, and -80 dBW EIRP for discrete emissions of less than 700 Hz bandwidth.	Appendix B.26	Pass
Frequency Stability	§2.1055(a)(1)(b) §2.1055(d)(2) §90.213	Within authorized bands of operation/frequency block.	Reference re 2303RSU050	

Remark:

The Effective (Isotropic) Radiated Power Output Data and Field Strength of Spurious Radiation were tested in this report, and other items data please refer to the test report 2303RSU050-U3.

The FCC ID is XMR2023RG520NNA has been certified, and the test report issued by MRT Technology (Suzhou) Co., Ltd on 2023/04/24.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions.Appx Attention: The terms and the second of the second and the second and

South of No. 6 Plant, No. 1, Runsheng Read, Southou Industrial Plant, Southou Area, China (Liangsu) Plot Free Trate Zone
中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区周胜路1号约6号厂房南部 邮编: 215000

t (86-512) 62992980 sgs.china@sgs.com

Member of the SGS Group (SGS SA)

t (86-512) 62992980



Report No.: SUCR240400012702

Rev.:

12 of 53 Page:

2.6 NR Band n30

Test Item	FCC Rule No.	FCC Rule No. Requirements Test Res		Verdict
Effective (Isotropic) Radiated Power Output Data	§2.1046, §27.50(a)(3)	EIRP ≤ 50mW/1MHz EIRP ≤ 250mW/5MHz Appendix B.28		Pass
Peak-Average Ratio		FCC: Limit≤13 dB		
Bandwidth	§2.1049,	OBW: No limit. EBW: No limit.		
Band Edges Compliance	§2.1051, §27.53(a)(4)	≤ -13 dBm/1%*EBW, in 1 MHz bands immediately outside and adjacent to the frequency block.		
Spurious Emission at Antenna Terminals	§2.1051, §27.53(a)(4)	For mobile and portable stations operating in the 2305-2315 MHz and 2350-2360 MHz bands: (i) By a factor of not less than: 43 + 10 log (P) dB on all frequencies between 2305 and 2320 MHz and on all frequencies between 2345 and 2360 MHz that are outside the licensed band(s) of operation, not less than 55 + 10 log (P) dB on all frequencies between 2341 and 2324 MHz and on all frequencies between 2324 and 2328 MHz and on all frequencies between 2341 and 2345 MHz, not less than 61 + 10 log (P) dB on all frequencies between 2324 and 2328 MHz and on all frequencies between 2328 and 2337 MHz; (ii) By a factor of not less than 43 + 10 log (P) dB on all frequencies between 2300 and 2305 MHz, 55 + 10 log (P) dB on all frequencies between 2300 and 2305 MHz, 55 + 10 log (P) dB on all frequencies between 2300 and 2300 MHz, 61 + 10 log (P) dB on all frequencies between 2296 and 2300 MHz, 61 + 10 log (P) dB on all frequencies between 2296 and 2300 MHz, 67 +	Reference re 2303RSU050	



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's Instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company, Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) terretained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-75) 8307 1443, or email: Ch.Doccheck@ass.com

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国•苏州•中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编:215000

t (86-512) 62992980

t (86-512) 62992980 www.sgsgroup.com.cn sgs.china@sgs.com



Report No.: SUCR240400012702

Rev.: 01

Page: 13 of 53

Test Item	FCC Rule No.	Requirements	Test Result	Verdict
		10 log (P) dB on all frequencies between 2288 and 2292 MHz, and 70 + 10 log (P) dB below 2288 MHz;(iii) By a factor of not less than 43 + 10 log (P) dB on all frequencies between 2360 and 2365 MHz, and not less than 70 + 10 log (P) dB above 2365 MHz.		
Field Strength of Spurious Radiation	§2.1053, §27.53(a)(4)	≤ -40dBm/MHz.	Appendix B.28	Pass
Frequency Stability	§2.1055(a)(1)(b) §2.1055(d)(2) §27.54	within the range of the operating frequency blocks	Reference report 2303RSU050-U5	

Remark:

The Effective (Isotropic) Radiated Power Output Data and Field Strength of Spurious Radiation were tested in this report, and other items data please refer to the test report 2303RSU050-U5.

The FCC ID is XMR2023RG520NNA has been certified, and the test report issued by MRT Technology (Suzhou) Co., Ltd on 2023/04/24.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx.and, for electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions-and-Conditions-and-Co

South of No. F Part, No. 1, Runsheng Road, Suzhou Industrial Part, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

t (86-512) 62992980 t (86-512) 62992980

www.sgsgroup.com.cn sgs.china@sgs.com



Report No.: SUCR240400012702

Rev.: 01

Page: 14 of 53

2.7 NR Band n66

Test Item	FCC Rule No.	Requirements	Test Result	Verdict
Effective (Isotropic) Radiated Power Output Data	§2.1046, §27.50(d)(4)	EIRP ≤ 1 W	Appendix B.31	Pass
Peak-Average Ratio	§27.50(d)(5)	Limit≤13 dB		
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.		
Band Edges Compliance	§2.1051, §27.53(h)	≤ -13 dBm/1%*EBW, in 1 MHz bands immediately outside and adjacent to the frequency block.	Reference report 2303RSU050-U2	
Spurious Emission at Antenna Terminals	§2.1051, §27.53(h)	≤ -13 dBm/1 MHz, from 9 kHz to 10 th harmonics but outside authorized operating frequency ranges.		
Field Strength of Spurious Radiation	§2.1053, §27.53(h)	≤ -13 dBm/1 MHz.	Appendix B.31	Pass
Frequency Stability	§2.1055(a)(1)(b) §2.1055(d)(2) §27.54	Within authorized bands of operation/frequency block.	Reference report 2303RSU050-U2	

Remark:

The Effective (Isotropic) Radiated Power Output Data and Field Strength of Spurious Radiation were tested in this report, and other items data please refer to the test report 2303RSU050-U2.

The FCC ID is XMR2023RG520NNA has been certified, and the test report issued by MRT Technology (Suzhou) Co., Ltd on 2023/05/17.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions.Appx Attention: The terms and the second of the second and the second and

South of No. 6 Plant, No. 1, Runshang Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Plot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州上区苏州工业园区河胜路1号的6月厂房南部 邮编: 215000 t (86–512) 62992980 t (86–512) 62992980

sgs.china@sgs.com



Report No.: SUCR240400012702

Rev.: 01

Page: 15 of 53

2.8 NR Band n71

Test Item	FCC Rule No.	Requirements Test Result		Verdict	
Effective (Isotropic) Radiated Power Output Data	§2.1046 §27.50(c)(10)	ERP≤3W	Appendix B.32 Pass		
Peak-Average Ratio		Limit≤13 dB			
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.			
Band Edges Compliance	§2.1051, §27.53(g)	≤ 43+10log10(P[Watts])	Reference report 2303RSU050-U2		
Spurious Emission at Antenna Terminals	§2.1051, §27.53(g)	≤ 43+10log10(P[Watts])			
Field Strength of Spurious Radiation	§2.1053, §27.53(g)	≤ -13 dBm/1 MHz.	Appendix B.32 Pass		
Frequency Stability	§2.1055(a)(1)(b) §2.1055(d)(2) §27.54	within the authorized bands of operation.	Reference report 2303RSU050-U2		

Remark:

The Effective (Isotropic) Radiated Power Output Data and Field Strength of Spurious Radiation were tested in this report, and other items data please refer to the test report 2303RSU050-U2.

The FCC ID is XMR2023RG520NNA has been certified, and the test report issued by MRT Technology (Suzhou) Co., Ltd on 2023/05/17.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions.Appx Attention: The terms and the second of the second and the second and

South of No. 6 Plant, No. 1, Runsheng Road, Suchou Industrial Park, Suchou Area, China (Jiangsu) Plot Free Trade Zone 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000 t (86-512) 62992980 t (86-512) 62992980

www.sgsgroup.com.cn sgs.china@sgs.com



Report No.: SUCR240400012702

Rev.: 01

Page: 16 of 53

2.9 NR Band n77

3700-3980MHz:

Test Item	FCC Rule No.	Requirements	Test Result	Verdict
Effective (Isotropic) Radiated Power Output Data	§2.1046, §27.50(j)(3)	EIRP ≤ 1W	Appendix B.34	Pass
Peak-Average Ratio		≤13 dB		
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.		
Band Edges Compliance	§2.1051, §27.53(I)(2)	(2) For mobile operations in the 3700-3980 MHz band, the conducted power of any emission outside the licensee's authorized bandwidth shall not exceed - 13 dBm/MHz. Compliance with this paragraph (I)(2) is based on the use of measurement instrumentation employing a resolution bandwidth of 1 megahertz or greater. However, in the 1 megahertz bands immediately outside and adjacent to the licensee's frequency block, the minimum resolution bandwidth for the measurement shall be either one percent of the emission of the transmitter or 350 kHz. In the bands between 1 and 5 MHz removed from the licensee's frequency block, the minimum resolution bandwidth for the measurement shall be 500 kHz.	Reference 2303RSU0 & 2303RSU	50-U2
Spurious Emission at Antenna Terminals	§2.1051, §27.53(I)(2)	not exceed -13 dBm/MHz.		
Field Strength of Spurious Radiation	§2.1053, §27.53(I)(2)	not exceed -13 dBm/MHz Appendix B.34		Pass
Frequency Stability	§2.1055(a)(1)(b) §2.1055(d)(2) §27.54	Within authorized bands of operation/frequency block.	Reference report 2303RSU050-U2 & 2303RSU050-U1	

Remark:

The Effective (Isotropic) Radiated Power Output Data and Field Strength of Spurious Radiation were tested in this report, and other items data please refer to the test report 2303RSU050-U2 & 2303RSU050-U1. The FCC ID is XMR2023RG520NNA has been certified, and the test report issued by MRT Technology (Suzhou) Co., Ltd on 2023/05/17.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx.

Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention:To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, **Attention:**To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443,

 South of No. 6. Plant, No. 1, Runsherg Road, Suchou Industrial Park, Suchou Area, Chine (Liangsu) Plot Free Trade Zone
 215000
 t (86–512) 62992980
 wwww.sgsgroup.com.cn

 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区测胜数1号的6号厂房南部
 邮编:
 215000
 t (86–512) 62992980
 sgs.china@sgs.com



Report No.: SUCR240400012702

Rev.: 01

Page: 17 of 53

3450-3550MHz:

Test Item	FCC Rule No.	Requirements	Test Result Verd	
Effective (Isotropic) Radiated Power Output Data	§2.1046, §27.50(k)(3)	EIRP ≤ 30dBm	Appendix B.33	Pass
Peak-Average Ratio	§27.50(k)(4)	FCC: Limit≤13 dB		
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.		
Band Edges Compliance	§2.1051, §27.50(n)(2)	For mobile operations in the 3450-3550 MHz band, the conducted power of any emission outside the licensee's authorized bandwidth shall not exceed -13 dBm/MHz.	Reference report 2303RSU050-U2 & 2303RSU050-U1	
Spurious Emission at Antenna Terminals	§2.1051, §27.50(n)(2)	For mobile operations in the 3450-3550 MHz band, the conducted power of any emission outside the licensee's authorized bandwidth shall not exceed -13 dBm/MHz.		
Field Strength of Spurious Radiation	§2.1053, §27.50(n)(2) For mobile operations in the 3450- 3550 MHz band, the conducted power of any emission outside the licensee's authorized bandwidth shall not exceed -13 dBm/MHz.		Appendix B.33	Pass
Frequency Stability	§2.1055(a)(1)(b) §2.1055(d)(2) §27.54	Within authorized bands of operation/ frequency block.	Reference report 2303RSU050-U2 & 2303RSU050-U1	

Remark:

The Effective (Isotropic) Radiated Power Output Data and Field Strength of Spurious Radiation were tested in this report, and other items data please refer to the test report 2303RSU050-U2 & 2303RSU050-U1. The FCC ID is XMR2023RG520NNA has been certified, and the test report issued by MRT Technology (Suzhou) Co., Ltd on 2023/05/17.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx.and, for electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions-and-Conditions-and-Co

South of No. 6 Plant, No. 1, Runshang Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Plot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州广区苏州工业园区河胜路1号的6号厂房南部 邮编: 215000

t (86–512) 62992980 t (86–512) 62992980 t (86–512) 62992980

www.sgsgroup.com.cn sgs.china@sgs.com



Report No.: SUCR240400012702

Rev.:

18 of 53 Page:

2.10 NR Band n48

Test Item	FCC Rule No.	Requirements	Test Result	Verdict
Effective (Isotropic) Radiated Power Output Data	§2.1046, §96.41	EIRP ≤ 23dBm/10MHz Ap		Pass
Peak-Average Ratio	§96.41	FCC: Limit≤13 dB		
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.		
Adjacent Channel Leakage Ratio	§96.41	the Adjacent Channel Leakage Ratio for End User Devices shall be at least 30 dB.		
Band Edges Compliance	§2.1051, §96.41	for channel and frequency assignments made by a CBSD to End User Devices, the conducted power of any End User Device emission outside the fundamental emission (whether in or outside of the authorized band) shall not exceed -13 dBm/MHz within 0 to B megahertz (where B is the bandwidth in megahertz of the assigned channel or multiple contiguous channels of the End User Device) above the upper CBSD-assigned channel edge and within 0 to B megahertz below the lower CBSD-assigned channel edge.		
Spurious Emission at Antenna Terminals	§2.1051, §96.41	for channel and frequency assignments made by a CBSD to End User Devices, the conducted power of any End User Device emission outside the fundamental emission (whether in or outside of the authorized band) shall not exceed –13 dBm/MHz within 0 to B megahertz (where B is the bandwidth in megahertz of the assigned channel or multiple contiguous channels of the End User Device) above the upper CBSD-assigned channel edge and within 0 to B megahertz below the lower CBSD-assigned channel edge. At all frequencies greater than B megahertz above the upper CBSD assigned channel edge and less than B megahertz below the lower CBSD-assigned channel edge, the conducted power of any End User Device emission shall not exceed –25 dBm/MHz. (2) Additional protection levels. Notwithstanding paragraph (e)(1) of this section, for CBSDs and End User Devices, the conducted power of emissions below 3540 MHz or above 3710 MHz shall not exceed –25 dBm/MHz, and the	Reference 2303RSU0	



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.ags.com/en/Terms-and-Conditions.ags.and.for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.ags.com/en/Terms-and-Conditions/Terms-e-Document.ags.and-Conditio

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的0号厂房南部 邮编: 215000 t (86-512) 62992980 www.sgsgroup.com.cn t (86-512) 62992980

sgs.china@sgs.com



Report No.: SUCR240400012702

Rev.: 01

Page: 19 of 53

	FCC Rule			
Test Item	No.	Requirements	Test Result	Verdict
		conducted power of emissions below 3530 MHz or above 3720 MHz shall not exceed -40dBm/MHz.		
Field Strength of Spurious Radiation	§2.1053, §96.41	for channel and frequency assignments made by a CBSD to End User Devices, the conducted power of any End User Device emission outside the fundamental emission (whether in or outside of the authorized band) shall not exceed -13 dBm/MHz within 0 to B megahertz (where B is the bandwidth in megahertz of the assigned channel or multiple contiguous channels of the End User Device) above the upper CBSD-assigned channel edge and within 0 to B megahertz below the lower CBSD-assigned channel edge. At all frequencies greater than B megahertz above the upper CBSD assigned channel edge and less than B megahertz below the lower CBSD-assigned channel edge, the conducted power of any End User Device emission shall not exceed -25 dBm/MHz. (2) Additional protection levels. Notwithstanding paragraph (e)(1) of this section, for CBSDs and End User Devices, the conducted power of emissions below 3540 MHz or above 3710 MHz shall not exceed -25 dBm/MHz, and the conducted power of emissions below 3530 MHz or above 3720 MHz shall not exceed -40dBm/MHz.	Appendix B.30	Pass
Frequency Stability	§2.1055, §96.41	Within authorized bands of operation/ frequency block.	Reference 2303RSU0	

Remark:

1.The Effective (Isotropic) Radiated Power Output Data and Field Strength of Spurious Radiation were tested in this report, and other items data please refer to the test report 2303RSU050-U6.

The FCC ID is XMR2023RG520NNA has been certified, and the test report issued by MRT Technology (Suzhou) Co., Ltd on 2023/04/24.

2. (CBRS)End User Device additional requirement data please refer to 2303RSU050-U6.

The FCC ID is XMR2023RG520NNA has been certified, and the test report issued by MRT Technology (Suzhou) Co., Ltd on 2023/04/24.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions.Appx Attention: The terms and the second of the second and the second and

South of No. 6 Part, No. 1, Runsharg Road, Suchou Industrial Park, Suchou Area, Chira (Jiangsu) Pilot Free Trade Zone
中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜最1号的6号厂房商部 邮编: 215000

215000 t (86–512) 62992980 215000 t (86–512) 62992980 www.sgsgroup.com.cn sgs.china@sgs.com



Report No.: SUCR240400012702

Rev.: 01

Page: 20 of 53

3 General Information

3.1 Client Information

Applicant:	TP-Link Systems Inc.
Address of Applicant:	10 Mauchly, Irvine, CA 92618
Manufacturer:	TP-Link Systems Inc.
Address of Manufacturer:	10 Mauchly, Irvine, CA 92618

3.2 Test Location

Company:	SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.
Address:	South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone
Post code:	215000
Test engineer:	Levi Li, Tizzy Song

3.3 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

• A2LA (Certificate No. 6336.01)

SGS-CSTC STANDARDS TECHNICAL SERVICES (SUZHOU) CO., LTD. is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 6336.01.

• Innovation, Science and Economic Development Canada

SGS-CSTC STANDARDS TECHNICAL SERVICES (SUZHOU) CO., LTD. has been recognized by ISED as an accredited testing laboratory.

CAB identifier: CN0120.

IC#: 27594.

• FCC -Designation Number: CN1312

SGS-CSTC STANDARDS TECHNICAL SERVICES (SUZHOU) CO., LTD. has been recognized as an

accredited testing laboratory. Designation Number: CN1312.

Test Firm Registration Number: 717327



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions.Appx Attention: The terms and the second of the second and the second and

South of No. 6 Plant, No. 1, Runsheng Road, Sudhou Industrial Park, Sudhou Alea, Chira (Jängsai) Plat Free Trade Zone 215000 t (86 中国 - 苏州 - 中国(江苏) 自由贸易试验区苏州片区苏州工业园区海胜费1号的6号厂房南部 邮编: 215000 t (86

t (86–512) 62992980 t (86–512) 62992980

www.sgsgroup.com.cn sgs.china@sgs.com



Report No.: SUCR240400012702

Rev.:

Page: 21 of 53

3.4 General Description of EUT

EUT Description:	5G Mobile Wi-Fi					
Model No.:	M8550					
Trade Mark:	tp-link					
Hardware Version:	V1.0					
Software Version:	V1.0					
IN AIT I.	RF Conducted	3529	21970001435			
IMEI:	RSE	3529	21970001443			
Feature:	UL 2*2 MIMO: NR Band n41; NR Ba	nd n4	8; NR Band n7	7;		
Power Class:	Class 2: NR Band n41; NR Band n77; Class 1.5: UL MIMO NR Band n41; UL MIMO NR Band n77;					
Antenna Type:	Internal Antenna					
	NR Band n2:	1.72	dBi	NR Band n5	:	-0.98dBi
	NR Band n12:	2.6d	Bi	NR Band n1	4:	2.85dBi
	NR Band n25:	1.72	dBi	NR Band n3	0:	0.89dBi
	NR Band n41 (MIMO):	2.27	dBi	NR Band n4 (MIMO):	.8	0.98dBi
Antenna Gain:	NR Band n66:	1.56	dBi	NR Band n7	' 1:	1.95dBi
	NR Band n77 (MIMO):	2.11dBi				
	Note: The antenna gain are derived from the gain information report provide manufacturer.					provided by the
DE Cable	0.8dB(Below 1GHz)		1.0dB(1.0~2.4	lGHz)	1.2dE	8(2.4~3.4GHz)
RF Cable:	1.5dB(Above 3.4G)					
Domark:	•					



As above information is provided and confirmed by the applicant. SGS is not liable to the accuracy, suitability, reliability or/and integrity of the information.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.appx and, for electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions-and-Terms-and-Conditions-

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的0号厂房南部 邮编: 215000 t (86-512) 62992980

Member of the SGS Group (SGS SA)

sgs.china@sgs.com



Report No.: SUCR240400012702

Rev.: 01

Page: 22 of 53

MIMO Model:

FCC KDB 662911 D01 Multiple Transmitter Output v02r01

If all antennas have the same gain, G_{ANT} , Directional gain = G_{ANT} + Array Gain, where Array Gain is as follows.

• For power measurements on IEEE 802.11 devices:

Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \le 4$;

Array Gain = 0 dB (i.e., no array gain) for channel widths \geq 40 MHz for any N_{ANT} ;

Array Gain = 5 log(N_{ANT}/N_{SS}=1) dB or 3 dB, whichever is less, for 20-MHz channel widths with N_{ANT} ≥ 5.

Unequal antenna gains, with equal transmit powers. For antenna gains given by G1, G2, ..., GN dBi

• If transmit signals are correlated, then

Directional gain = 10 log[(10^{G1/20} + 10^{G2/20} + ... + 10^{GN/20})² /N_{ANT}] dBi [Note the "20"s in the denominator of each exponent and the square of the sum of terms; the object is to combine the signal levels coherently.]

If all transmit signals are completely uncorrelated, then
 Directional gain = 10 log[(10^{G1/10} + 10^{G2/10} + ... + 10^{GN/10})/N_{ANT}] dBi

Band	ANT Gain1 (dBi)	ANT Gain2 (dBi)	Directional gain (dBi)
NR Band n41:	2.27	2.27	2.27
NR Band n48:	0.98	0.98	0.98
NR Band n77:	2.11	2.11	2.11



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.appx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-a-Document.appx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction forcement cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extend of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

**Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone; (86-755) 8307 1443,

South of No. 6 Plant, No. 1, Runsheng Road, Suchou Industrial Park, Suchou Area, China (Jiangsu) Plot Free Trade Zone 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

t (86-512) 62992980 t (86-512) 62992980

www.sgsgroup.com.cn sgs.china@sgs.com



Report No.: SUCR240400012702

Rev.: 01

Page: 23 of 53

3.5 Test Mode

Test Mode	Test Modes Description
NR/TM1	NR system, DFT-s-Pi/2-BPSK modulation
NR/TM2	NR system, DFT-s-QPSK modulation
NR/TM3	NR system, DFT-s-16QAM modulation
NR/TM4	NR system, DFT-s-64QAM modulation
NR/TM5	NR system, DFT-s-256QAM modulation
NR/TM6	NR system, CP-QPSK modulation
NR/TM7	NR system, CP-16QAM modulation
NR/TM8	NR system, CP-64QAM modulation
NR/TM9	NR system, CP-256QAM modulation
Remark: The test mode(s)	are selected according to relevant radio technology specifications.

3.6 Test Environment

Environment Parameter	101.0 kPa Selected Values During Tests				
Relative Humidity	44-46 % RH Ambient				
Value	Temperature(℃)	Voltage(V)			
NTNV	22~23	5			

Remark:

NV: Normal Voltage

NT: Normal Temperature

3.7 Description of Support Units

The EUT has been tested as an independent unit.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.appx and, for electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions-and-Terms-and-Conditions-

| South of No. 6 Plant, No. 1, Runshang Read, Suthou Industrial Park, Suthou Area, China (Eargsu) Plot Fire Taxle Zone 215000 t (86–512) 62992980 www.sgs.group.com. 中国 - 苏州 - 中国 (江苏) 自由贸易试验区苏州片区苏州工业园区洞胜路1号的6号厂房南部 邮编: 215000 t (86–512) 62992980 sgs.china@sgs.com



Report No.: SUCR240400012702

Rev.:

Page: 24 of 53

3.8 Technical Specification

Characteristics	Description		
Radio System Type	⊠ SA ⊠ NSA		
	Band	TX	RX
	NR Band n2	1850 to 1910 MHz	1930 to 1990 MHz
	NR Band n5	824 to 849 MHz	869 to 894 MHz
	NR Band n12	699 to 716 MHz	729 to 746 MHz
	NR Band n14	788 to 798 MHz	758 to 768 MHz
	NR Band n25	1850 to 1915MHz	1930 to 1995 MHz
	NR Band n30	2305 to 2315 MHz	2350 to 2360 MHz
	NR Band n41	2496 to 2690 MHz	2496 to 2690 MHz
	NR Band n48	3550 to 3700 MHz	3550 to 3700 MHz
	NR Band n66	1710 to 1780 MHz	2110 to 2200 MHz
	NR Band n71	663 to 698 MHz	617 to 652 MHz
	NR Band n77	3700 to 3980 MHz	3700 to 3980 MHz
	INK Danu II//	3450 to 3550 MHz	3450 to 3550 MHz
Supported Frequency Range	DC_71A_n2A;DC_1 DC_2A_n5A;DC_12 DC_48A_n5A;DC_2 DC_13A_n7A;DC_2 DC_2A_n12A;DC_7 DC_30A_n14A;DC_7 DC_2A_n30A;DC_5 DC_2A_n41A;DC_6 DC_4A_n41A;DC_1 DC_71A_n41A;DC_1 DC_66A_n48A;DC_1 DC_30A_n66A;DC_1 DC_2A_n71A;DC_5 DC_2A_n77A;DC_7	14A_n2A;DC_30A_n2A;DC_12A 13A_n2A;DC_7A_n2A;DC_4A_ 12A_n5A;DC_30A_n5A;DC_66A_ 12A_n7A;DC_5A_n7A;DC_66A_ 12A_n7A;DC_4A_n7A;DC_2A_n 12A_n12A;DC_5A_n12A;DC_48_ 12A_n25A;DC_5A_n25A;DC_5 12A_n30A;DC_12A_n30A;DC_1_5 12A_n41A;DC_25A_n41A;DC_1_2A_n41A;DC_1_2A_n41A;DC_1_2A_n41A;DC_1_2A_n41A;DC_1_2A_n41A;DC_1_2A_n41A;DC_1_2A_n45A;DC_1_2A_n45A;DC_1_2A_n45A;DC_1_2A_n66A;DC_5_1_1A_n66A;DC_5_1_1A_n66A;DC_5_1_1A_n66A;DC_5_1A_n71A;DC_48_17A_n77A;DC_13_14A_n77A;DC_13_14A_n77A;DC_13_14A_n77A;DC_13_14A_n77A;DC_30A_n77A;DC_13_14A_n77A;DC_30A_n77A;DC_13_14A_n77A;DC_30A_n77A;DC_13_14A_n77A;DC_30A_n77A;DC_13_14A_n77A;DC_30A_n77A;DC_13_14A_n77A;DC_30A_n77A;DC_13_14A_n77A;DC_30A_n77A;DC_13_14A_n77A;DC_30A_n77A;DC_13_14A_n77A;DC_30A_n77A;DC_13_14A_n77A;DC_30A_n77A;DC_13_14A_n77A;DC_30A_n77A;DC_13_14A_n77A;DC_30A_n77A;DC_13_14A_n77A;DC_30A_n77A;DC_13_14A_n77A;DC_30A_n77A;DC_13_14A_n77A;DC_30A_n77A;DC_30A_n77A;DC_13_14A_n77A;DC_30A_n77A;DC_13_14A_n77A;DC_30A_30A_10A_10A_10A_10A_10A_10A_10A_10A_10A_1	n2A;DC_13A_n5A; n=n5A;DC_7A_n5A; n7A;DC_71A_n7A; n12A;DC_2A_n12A; n=n12A;DC_2A_n14A; n=n12A;DC_2A_n25A; n=n25A;DC_48A_n25A; n=n25A;DC_5A_n25A; n=n25A;DC_5A_n25A; n=n25A;DC_5A_n25A; n=n25A;DC_5A_n25A; n=n25A;DC_66A_n30A;
-		y test RSE, report only show w	vorst mode.
Supported Channel	NR Band n2	SCS 15kHz:	



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Ferms-and-Conditions.aspx.and, for electronic Documents at <a href="http://www.sgs.com/en/Ferms-and-Conditions-And-Ferms-and-Conditions-And-Ferms-and-Conditions-And-Ferms-and-Conditions-And-Ferms-and-Conditions-And-Ferms-and-Conditions-And-Ferms-and-Conditions-And-Ferms-and-Conditions-And-Ferms-and-Conditions-And-Ferms-and-Conditions-And-Ferms-and-Conditions-And-Ferms-and-Conditions-And-Ferms-and-Conditions-And-Ferms-and-Conditions-And-Ferms-and-Conditions-And-Ferms-and-Conditions-And-Ferms-and-Conditions-And-Ferms-and-Conditions-And-Ferms-and-Conditions-And-Ferms-and-Conditions-And-Ferms-and-Condit

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国•苏州•中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编:215000 t (86-512) 62992980 www.sgsgroup.com.cn



Report No.: SUCR240400012702

Rev.:

Page: 25 of 53

			r aye.	20 01 0	,
Bandwidth		⊠5 MHz	⊠10 MHz	⊠15 MHz	⊠20 MHz
	NR Band n5	SCS 15kHz:			
	INK Band no	⊠5 MHz	⊠10 MHz	⊠15 MHz	⊠20 MHz
	ND Dond n40	SCS 15kHz:			
	NR Band n12	⊠5 MHz	⊠10 MHz	⊠15 MHz	
	ND Dond n44	SCS 15kHz:			
	NR Band n14	⊠5 MHz	⊠10 MHz		
		SCS 15kHz:			
	NR Band n25	⊠5 MHz	⊠10 MHz	⊠15 MHz	⊠20 MHz
		⊠25 MHz	⊠30 MHz	⊠40 MHz	
	ND Dond 200	SCS 15kHz:			
	NR Band n30	⊠5 MHz	⊠10 MHz		
	NR Band n41	SCS 30kHz:			
		⊠10 MHz	⊠15 MHz	⊠20 MHz	⊠30 MHz
		⊠40 MHz	⊠50 MHz	⊠60 MHz	⊠70 MHz
		⊠80 MHz	⊠90 MHz	⊠100 MHz	
	ND Dond n 40	SCS 30kHz:			
	NR Band n48	⊠10 MHz	⊠20 MHz	⊠30 MHz	⊠40 MHz
		SCS 15kHz:			
	NR Band n66	⊠5 MHz	⊠10 MHz	⊠15 MHz	⊠20 MHz
		⊠30 MHz	⊠40 MHz		
	NR Band n71	SCS 15kHz:			
	INK Ballu II/ I	⊠5 MHz	⊠10 MHz	⊠15 MHz	⊠20 MHz
		SCS 30kHz:			
	NR Band n77	⊠10 MHz	⊠15 MHz	⊠20 MHz	⊠25 MHz
	INK Dallu II//	⊠30 MHz	⊠40 MHz	⊠50 MHz	⊠60 MHz
		⊠70 MHz	⊠80 MHz	⊠90 MHz	⊠100 MHz



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-ConditionsTerms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's Instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company, Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) test etained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 83071443, or email: CND.Doccheck@gs.com"

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国 • 苏州 • 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

t (86-512) 62992980 sgs.china@sgs.com

t (86-512) 62992980 www.sgsgroup.com.cn



Report No.: SUCR240400012702

Rev.:

26 of 53 Page:

3.9 Test Frequencies

Reference test frequencies for NR operating band n2

3.9.1.1 Test frequencies for NR operating band n2 and SCS 15 kHz

CBW [MHz]	Range		Carrier centre [MHz]	Carrier centre [ARFCN]	SS block SCS [kHz]
		Low	1932.5	386500	
	Downlink	Mid	1960	392000	15
5		High	1987.5	397500	
5	5	Low	1852.5	370500	
	Uplink	Mid	1880	376000	-
		High	1907.5	381500	
	<u> </u>	Low	1935	387000	
	Downlink	Mid	1960	392000	15
10	10	High	1985	397000	
10		Low	1855	371000	
	Uplink	Mid	1880	376000	-
	·	High	1905	381000	
		Low	1937.5	387500	
	Downlink	Mid	1960	392000	15
15		High	1982.5	396500	
15		Low	1857.5	371500	
	Uplink	Mid	1880	376000	-
		High	1902.5	380500	
		Low	1940	388000	
	Downlink	Mid	1960	392000	15
20		High	1980	396000	
20	<u> </u>	Low	1860	372000	
	Uplink	Mid	1880	376000	-
		High	1900	380000	



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Ferms-and-Conditions.aspx.and, for electronic Documents at <a href="http://www.sgs.com/en/Ferms-and-Conditions-And-Ferms-and-Conditions-And-Ferms-and-Conditions-And-Ferms-and-Conditions-And-Ferms-and-Conditions-And-Ferms-and-Conditions-And-Ferms-and-Conditions-And-Ferms-and-Conditions-And-Ferms-and-Conditions-And-Ferms-and-Conditions-And-Ferms-and-Conditions-And-Ferms-and-Conditions-And-Ferms-and-Conditions-And-Ferms-and-Conditions-And-Ferms-and-Conditions-And-Ferms-and-Conditions-And-Ferms-and-Conditions-And-Ferms-and-Conditions-And-Ferms-and-Conditions-And-Ferms-and-Conditions-And-Ferms-and-Condit

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 t (86-512) 62992980 www.sgsgroup.com.cn 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的0号厂房南部 邮编: 215000 t (86-512) 62992980

sgs.china@sgs.com



Report No.: SUCR240400012702

Rev.:

27 of 53 Page:

Reference test frequencies for NR operating band n5

3.9.2.1 Test frequencies for NR operating band n5 and SCS 15 kHz

CBW [MHz]	Range		Carrier centre [MHz]	Carrier centre [ARFCN]	SS block SCS [kHz]
		Low	871.5	174300	
	Downlink	Mid	881.5	176300	15
5		High	891.5	178300	
3	Uplink	Low	826.5	165300	
		Mid	836.5	167300	-
		High	846.5	169300	
		Low	874	174800	
	Downlink	Mid	881.5	176300	15
10	10	High	889	177800	
10	10	Low	829	165800	
	Uplink	Mid	836.5	167300	-
	•	High	844	168800	
		Low	876.5	175300	
	Downlink	Mid	881.5	176300	15
4.5		High	886.5	177300	
15		Low	831.5	166300	
	Uplink	Mid	836.5	167300	-
	·	High	841.5	168300	
		Low	879	175800	
	Downlink	Mid	881.5	176300	15
00		High	884	176800	
20		Low	834	166800	
	Uplink	Mid	836.5	167300	-
		High	839	167800	



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company, Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 83071443, or email: CN.Doccheck@sqs.com

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的0号厂房南部 邮编: 215000

t (86-512) 62992980 www.sgsgroup.com.cn



Report No.: SUCR240400012702

Rev.: 01

Page: 28 of 53

3.9.3 Reference test frequencies for NR operating band n12

3.9.3.1 Test frequencies for NR operating band n12 and SCS 15 kHz

Bandwidth [MHz]	Rang	e	Carrier centre [MHz]	Carrier centre [ARFCN]	SS block SCS [kHz]
		Low	731.5	146300	
	Downlink	Mid	737.5	147500	15
5		High	743.5	148700	
5		Low	701.5	140300	
	Uplink	Mid	707.5	141500	
		High	713.5	142700	
		Low	734	146800	
	Downlink	Mid	737.5	147500	15
10		High	741	148200	
10		Low	704	140800	
	Uplink	Mid	707.5	141500	
		High	711	142200	
		Low	736.5	147300	
	Downlink	Mid	737.5	147500	15
15		High	738.5	147700	
		Low	706.5	141300	
	Uplink	Mid	707.5	141500	
		High	708.5	141700	



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company, Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 83071443, or email: CN.Doccheck@sqs.com

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, Chine (Jiangsu) Plot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州广区苏州工业园区河胜商(号的6号厂房南部 邮编: 215000

t (86–512) 62992980 www.sgsgroup.com.cn t (86–512) 62992980 sgs.china@sgs.com

..



Report No.: SUCR240400012702

Rev.:

29 of 53 Page:

Reference test frequencies for NR operating band n14

3.9.4.1 Test frequencies for NR operating band n14 and SCS 15 kHz

Bandwidth [MHz]	Rang	e	Carrier centre [MHz]	Carrier centre [ARFCN]	SS block SCS [kHz]
		Low	760.5	151200	
	Downlink	Mid	763	152600	15
5		High	765.5	153100	
5	Uplink	Low	790.5	158100	
		Mid	793	158600	
		High	795.5	159100	
		Low	/	/	
	Downlink	Mid	763	152600	15
10		High	/	/	
10 Uplink		Low	/	/	
	Uplink	Mid	793	158600	
		High	/	/	



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extend of the law Luness otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

**Attention: To check the authenticity of testing (inspection report & certificate, please contact us at telephone: (86-755) 8307 1443,

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的0号厂房南部 邮编: 215000

t (86-512) 62992980 www.sgsgroup.com.cn



Report No.: SUCR240400012702

Rev.: 01

Page: 30 of 53

3.9.5 Reference test frequencies for NR operating band n25

3.9.5.1 Test frequencies for NR operating band n25 and SCS 15 kHz

CBW [MHz]	Range		Carrier centre [MHz]	Carrier centre [ARFCN]	SS block SCS [kHz]
		Low	1932.5	386500	
	Downlink	Mid	1962.5	392500	15
5		High	1992.5	398500	
5		Low	1852.5	370500	
	Uplink	Mid	1882.5	376500	-
		High	1912.5	382500	
		Low	1935	387000	
	Downlink	Mid	1962.5	392500	15
10		High	1990	398000	
10		Low	1855	371000	
	Uplink	Mid	1882.5	376500	-
	•	High	1910	382000	
		Low	1937.5	387500	
	Downlink	Mid	1962.5	392500	15
45		High	1987.5	397500	
15		Low	1857.5	371500	
	Uplink	Mid	1882.5	376500	-
	·	High	1907.5	381500	
		Low	1940	388000	
	Downlink	Mid	1962.5	392500	15
00		High	1985	397000	
20		Low	1860	372000	
	Uplink	Mid	1882.5	376500	-
	•	High	1905	381000	
		Low	1942.5	388500	
	Downlink	Mid	1962.5	392500	15
0.5		High	1982.5	396500	
25		Low	1862.5	372500	
	Uplink	Mid	1882.5	376500	-
	•	High	1902.5	380500	
		Low	1945	389000	
	Downlink	Mid	1962.5	392500	15
00		High	1980	396000	
30		Low	1865	373000	
	Uplink	Mid	1882.5	882.5 376500	-
	·	High	1900	380000	1
		Low	1950	390000	
	Downlink	Mid	1962.5	392500	15
		High	1975	395000	1
40		Low	1870	374000	
	Uplink	Mid	1882.5	376500	† <u> </u>
	Opillik	iviiu	1002.0	37 0000	



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company, Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 83071443, or email: CN.Doccheck@sqs.com

| South of No. 6 Plant, No. 1, Runsheng Road, Sudnou Industrial Park, Sudnou Area, China (Liangsu) Plot Free Trade Zone 215000 t (86–512) 62992980 www.s.gsgroup.com.cn 中国 - 苏州 - 中国 (江苏) 自由贸易试验区苏州 | 区苏州 工业园区周胜费(号的号厂资南部 邮编: 215000 t (86–512) 62992980 sgs..china@sgs.com



Report No.: SUCR240400012702

Rev.:

31 of 53 Page:

Reference test frequencies for NR operating band n30

3.9.6.1 Test frequencies for NR operating band n30 and SCS 15 kHz

CBW [MHz]	Range		Carrier centre [MHz]	Carrier centre [ARFCN]	SS block SCS [kHz]
		Low	2352.5	470500	
	Downlink	Mid	2355	471000	15
5		High	2357.5	471500	
5		Low	2307.5	461500	
	Uplink	Mid	2310	462000	-
		High	2312.5	462500	
		Low	2355	471000	
	Downlink	Mid	2355	471000	15
40		High	2355	471000	
10		Low	2310	462000	
	Uplink	Mid	2310	462000	-
		High	2310	462000	



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company, Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 83071443, or email: CN.Doccheck@sqs.com

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的0号厂房南部 邮编: 215000

t (86-512) 62992980 sgs.china@sgs.com

t (86-512) 62992980 www.sgsgroup.com.cn



Report No.: SUCR240400012702

Rev.:

32 of 53 Page:

Reference test frequencies for NR operating band n41

3.9.7.1 Test frequencies for NR operating band n41 and SCS 30 kHz

CBW [MHz]	Range		Carrier centre [MHz]	Carrier centre [ARFCN]	SS block SCS [kHz]
	Downlink	Low	2501.01	500202	
10	&	Mid	2592.99	518598	30
	Uplink	High	2685	537000	
	Downlink	Low	2503.5	500700	
15	&	Mid	2592.99	518598	30
	Uplink	High	2682.48	536496	
	Downlink	Low	2506.02	501204	
20	&	Mid	2592.99	518598	30
	Uplink	High	2670	534000	
	Downlink	Low	2511	502200	
30	&	Mid	2592.99	518598	30
	Uplink	High	2675	535000	7
	Downlink	Low	2516.01	503202	30
40	&	Mid	2592.99	518598	
	Uplink	High	2670	534000	
	Downlink	Low	2521.02	504204	
50	&	Mid	2592.99	518598	30
	Uplink	High	2664.99	532998	
	Downlink	Low	2526	505200	
60	&	Mid	2592.99	518598	30
	Uplink	High	2659.98	531996	
	Downlink	Low	2531	506200	
70	&	Mid	2592.29	518598	30
	Uplink	High	2655	531000	
	Downlink	Low	2536.02	507204	
80	&	Mid	2592.99	518598	30
	Uplink	High	2649.99	529998	7
	Downlink	Low	2541	508200	30
90	&	Mid	2592.99	518598	
	Uplink	High	2644.98	528996	
	Downlink	Low	2546.01	509202	
100	&	Mid	2592.99	518598	30
	Uplink	High	2640	528000	



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Ferms-and-Conditions.aspx.and, for electronic Documents at <a href="http://www.sgs.com/en/Ferms-and-Conditions-And-Ferms-and-Conditions-And-Ferms-and-Conditions-And-Ferms-and-Conditions-And-Ferms-and-Conditions-And-Ferms-and-Conditions-And-Ferms-and-Conditions-And-Ferms-and-Conditions-And-Ferms-and-Conditions-And-Ferms-and-Conditions-And-Ferms-and-Conditions-And-Ferms-and-Conditions-And-Ferms-and-Conditions-And-Ferms-and-Conditions-And-Ferms-and-Conditions-And-Ferms-and-Conditions-And-Ferms-and-Conditions-And-Ferms-and-Conditions-And-Ferms-and-Conditions-And-Ferms-and-Conditions-And-Ferms-and-Condit

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的0号厂房南部 邮编: 215000

t (86-512) 62992980 www.sgsgroup.com.cn



Report No.: SUCR240400012702

Rev.: 01

Page: 33 of 53

3.9.8 Reference test frequencies for NR operating band n48

3.9.8.1 Test frequencies for NR operating band n48 and SCS 30 kHz

CBW [MHz]	Range		Carrier centre [MHz]	Carrier centre [ARFCN]	SS block SCS [kHz]
	Downlink	Low	3555	637000	
10	&	Mid	3624.99	641666	30
	Uplink	High	3694.98	646332	
	Downlink	Low	3560.01	637334	
20	&	Mid	3624.99	641666	30
	Uplink	High	3690	646000	
	Downlink	Low	3565.02	637668	
30	&	Mid	3624.99	641666	30
	Uplink	High	3684.99	645666	
	Downlink	Low	3570	638000	
40	&	Mid	3624.99	641666	30
	Uplink	High	3679.98	645332	



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company, Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 83071443, or email: CN.Doccheck@sqs.com

| South of No. 6 Plant, No. 1, Runsherg Read, Suzhou Industrial Park, Suzhou Area, Chiria (Liangsu) Pilot Free Trade Zone 215000 t (86–512) 62992980 www.s.gsgroup.com.cn 中国 - 苏州 - 中国 (江苏) 自由贸易试验区苏州片区苏州工业园区消胜费1号的4号厂房南部 邮编: 215000 t (86–512) 62992980 sgs.china@sgs.com



Report No.: SUCR240400012702

Rev.:

34 of 53 Page:

Reference test frequencies for NR operating band n66 3.9.9

3.9.9.1 Test frequencies for NR operating band n66 and SCS 15 kHz

CBW [MHz]	Range		Carrier centre Carrier centr		SS block SCS [kHz]
		Low	2112.5	422500	
	Downlink	Mid	2155	431000	15
E		High	2197.5	439500	
5	Uplink	Low	1712.5	342500	
		Mid	1745	349000	
		High	1777.5	355500	
	Downlink	Low	2115	423000	15
		Mid	2155	431000	
40		High	2195	439000	
10		Low	1715	343000	_
	Uplink	Mid	1745	349000	
	•	High	1775	355000	
	Downlink	Low	2117.5	423500	
		Mid	2155	431000	15
4.5		High	2192.5	438500	
15	Uplink	Low	1717.5	343500	-
		Mid	1745	349000	
		High	1772.5	354500	
	Downlink	Low	2120	424000	15
		Mid	2155	431000	
00		High	2190	438000	
20		Low	1720	344000	
	Uplink	Mid	1745	349000	- -
		High	1770	354000	
	Downlink	Low	2125	425000	15
		Mid	2155	431000	
20		High	2185	437000	
30	Uplink	Low	1725	345000	-
		Mid	1745	349000	
		High	1765	353000	
	Downlink	Low	2130	426000	15
40		Mid	2155	431000	
		High	2180	436000	
		Low	1730	346000	
	Uplink	Mid	1745	349000	╡ _
	Oplilik			352000	╡ -
		High	1760	352000	



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company, Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 83071443, or email: CN.Doccheck@sqs.com

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的0号厂房南部 邮编: 215000

t (86-512) 62992980 www.sgsgroup.com.cn



Report No.: SUCR240400012702

Rev.:

Page: 35 of 53

3.9.10 Reference test frequencies for NR operating band n71 3.9.10.1 Test frequencies for NR operating band n71 and SCS 15 kHz

CBW [MHz]	Range		Carrier centre [MHz]	Carrier centre [ARFCN]	SS block SCS [kHz]
5 -	Downlink	Low	619.5	123900	15
		Mid	634.5	126900	
		High	649.5	129900	
	Uplink	Low	665.5	133100	-
		Mid	680.5	136100	
		High	695.5	139100	
	Downlink	Low	622	124400	15
40		Mid	634.5	126900	
		High	647	129400	
10		Low	668	133600	-
	Uplink	Mid	680.5	136100	
		High	693	138600	
	Downlink	Low	624.5	124900	15
15 -		Mid	634.5	126900	
		High	644.5	128900	
	Uplink	Low	670.5	134100	-
		Mid	680.5	136100	
		High	690.5	138100	
20	Downlink	Low	627	125400	15
		Mid	634.5	126900	
		High	642	128400	
	Uplink	Low	673	134600	-
		Mid	680.5	136100	
		High	688	137600	



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Ferms-and-Conditions.aspx.and, for electronic Documents at <a href="http://www.sgs.com/en/Ferms-and-Conditions-And-Ferms-and-Conditions-And-Ferms-and-Conditions-And-Ferms-and-Conditions-And-Ferms-and-Conditions-And-Ferms-and-Conditions-And-Ferms-and-Conditions-And-Ferms-and-Conditions-And-Ferms-and-Conditions-And-Ferms-and-Conditions-And-Ferms-and-Conditions-And-Ferms-and-Conditions-And-Ferms-and-Conditions-And-Ferms-and-Conditions-And-Ferms-and-Conditions-And-Ferms-and-Conditions-And-Ferms-and-Conditions-And-Ferms-and-Conditions-And-Ferms-and-Conditions-And-Ferms-and-Conditions-And-Ferms-and-Condit

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的0号厂房南部 邮编: 215000

t (86-512) 62992980 www.sgsgroup.com.cn



Report No.: SUCR240400012702

Rev.: 01

Page: 36 of 53

3.9.11 Reference test frequencies for NR operating band n77 3.9.11.1 Test frequencies for NR operating band n77 and SCS 30 kHz

3700-3980:

CBW [MHz]	Range		Carrier centre [MHz]	Carrier centre [ARFCN]	SS block SCS [kHz]
	Downlink	Low	3705	647000	
10	&	Mid	3840	656000	30
	Uplink	High	3975	665000	1
	Downlink	Low	3707.52	647168	
15	&	Mid	3840	656000	30
	Uplink	High	3972.48	664832	
	Downlink	Low	3710.01	647334	30
20	&	Mid	3840	656000	
	Uplink	High	3969.99	664666	
	Downlink	Low	3712.515	647501	
25	&	Mid	3840	656000	30
	Uplink	High	3967.485	664499	
	Downlink	Low	3714.99	647666	
30	&	Mid	3840	656000	30
	Uplink	High	3965.01	664334	
	Downlink	Low	3720	648000	30
40	&	Mid	3840	656000	
	Uplink	High	3960	664000	
	Downlink	Low	3725.01	648334	30
50	&	Mid	3840	656000	
	Uplink	High	3954.99	663666	
	Downlink	Low	3730.02	648668	
60	&	Mid	3840	656000	30
	Uplink	High	3949.98	663332	
	Downlink	Low	3735	649000	30
70	&	Mid	3840	656000	
	Uplink	High	3945	663000	
80	Downlink	Low	3740.01	649334	30
	&	Mid	3840	656000	
	Uplink	High	3939.99	662666	
90	Downlink	Low	3745.02	649668	30
	&	Mid	3840	656000	
	Uplink	High	3934.98	662332	
100	Downlink	Low	3750	650000	30
	&	Mid	3840	656000	
	Uplink	High	3930	662000	



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Ferms-and-Conditions.aspx.and, for electronic Documents at <a href="http://www.sgs.com/en/Ferms-and-Conditions-And-Ferms-and-Conditions-And-Ferms-and-Conditions-And-Ferms-and-Conditions-And-Ferms-and-Conditions-And-Ferms-and-Conditions-And-Ferms-and-Conditions-And-Ferms-and-Conditions-And-Ferms-and-Conditions-And-Ferms-and-Conditions-And-Ferms-and-Conditions-And-Ferms-and-Conditions-And-Ferms-and-Conditions-And-Ferms-and-Conditions-And-Ferms-and-Conditions-And-Ferms-and-Conditions-And-Ferms-and-Conditions-And-Ferms-and-Conditions-And-Ferms-and-Conditions-And-Ferms-and-Conditions-And-Ferms-and-Condit

South of No. 6 Plant, No. 1, Runsheng Read, Suchou Industrial Park, Suchou Area, Chine (Kiangsu) Plot Free Trade Zone 215000 t (86—51 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜商1号的6号厂房南部 邮编: 215000 t (86—51

t (86–512) 62992980 www.sgsgroup.com.cn t (86–512) 62992980 sgs.china@sgs.com



Report No.: SUCR240400012702

Rev.:

Page: 37 of 53

3450-3550:

CBW [MHz]	Range		Carrier centre [MHz]	Carrier centre [ARFCN]	SS block SCS [kHz]
	Downlink	Low	3455.01	630334	
10	&	Mid	3500.01	633334	30
	Uplink	High	3545.01	636334	
	Downlink	Low	3457.5	630500	30
15	&	Mid	3500.01	633334	
	Uplink	High	3542.49	636166	
	Downlink	Low	3460.02	630668	
20	&	Mid	3500.01	633334	30
	Uplink	High	3540	636000	
	Downlink	Low	3462.51	630834	
25	&	Mid	3500.01	633334	30
	Uplink	High	3537.51	635834	
	Downlink	Low	3465	631000	
30	&	Mid	3500.01	633334	30
	Uplink	High	3534.99	635666	
	Downlink	Low	3470.01	631334	30
40	&	Mid	3500.01	633334	
	Uplink	High	3530.01	635334	
	Downlink	Low	3475.02	631668	30
50	&	Mid	3500.01	633334	
	Uplink	High	3525	635000	
	Downlink	Low	3480	632000	
60	&	Mid	3500.01	633334	30
	Uplink	High	3519.99	634666	
	Downlink	Low	3485.01	632334	
70	&	Mid	3500.01	633334	30
	Uplink	High	3515.01	634334	1
	Downlink	Low	3490.02	632668	30
80	&	Mid	3500.01	633334	
	Uplink	High	3510	634000	
90	Downlink	Low	3495	633000	30
	&	Mid	3500.01	633334	
	Uplink	High	3504.99	633666	
	Downlink	Low	\	\	
100	&	Mid	3500.01	633334	30
	Uplink	High	\	\	1



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company, Any unauthorized alteration, forger or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443,

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国 • 苏州 • 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

t (86-512) 62992980 www.sgsgroup.com.cn



Report No.: SUCR240400012702

Rev.: 01

Page: 38 of 53

4 Description of Tests

4.1 Conducted Output Power

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 5.2.1

The transmitter output was connected to a calibrated coaxial cable, attenuator and power meter, the other end of which was connected to a Base Station Simulator. The Base Station Simulator was set to force the EUT to its maximum power setting. The power output at the transmitter antenna port was determined by adding the value of the cable insertion loss to the power reading. The tests were performed at three frequencies (low channel, middle channel and high channel) and on the highest power levels, which can be setup on the transmitters.

Remark: Reference test setup 1



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.appx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-a-Document.appx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction forcement cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extend of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

**Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone; (86-755) 8307 1443,

South of No. 6 Plant, No. 1, Runsheng Road, Suchou Industrial Park, Suchou Area, China (Jiangsu) Pilot Free Trade Zone 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

5000 t (86–512) 62992980 5000 t (86–512) 62992980



Report No.: SUCR240400012702

Rev.: 01

Page: 39 of 53

4.2 Effective (Isotropic) Radiated Power of Transmitter

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 5.8.4

Calculate power in dBm by the following formula:

ERP (dBm) = Conducted Power (dBm) + antenna gain (dBd)

EIRP(dBm) = Conducted Power (dBm) + antenna gain (dBi)

EIRP=ERP+2.15dB



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx.and, for electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions-and-Conditions-and-Co

South of No. 6 Plant, No. 1, Runsheng Road, Suchou Industrial Park, Suchou Area, China (Jiangsu) Pilot Free Trade Zone 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

215000 t (86–512) 62992980 215000 t (86–512) 62992980



Report No.: SUCR240400012702

Rev.: 01

Page: 40 of 53

4.3 EIRP Power Density

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 5.3

Test Settings

- 1. Set instrument center frequency to OBW center frequency.
- 2. Set span to at least 1.5 times the OBW.
- 3. Set the RBW to the specified reference bandwidth (often 1 MHz).
- 4. Set VBW ≥ 3 × RBW.
- 5. Detector = RMS (power averaging).
- 6. Ensure that the number of measurement points in the sweep $\geq 2 \times \text{span/RBW}$.
- 7. Sweep time = auto couple.
- 8. Employ trace averaging (RMS) mode over a minimum of 100 traces.
- 9. Use the peak marker function to determine the maximum amplitude level within the reference bandwidth (PSD).



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions.Appx Attention: The terms and the second of the second and the second and

South of No. 6 Plant, No. 1, Runsheng Road, Suchou Industrial Park, Suchou Area, China (liangsu) Pilot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000 t (86-512) 62992980 t (86-512) 62992980



Report No.: SUCR240400012702

Rev.:

41 of 53 Page:

4.4 Occupied Bandwidth

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 4.2 & 4.3

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured. The transmitter output was connected to a calibrated coaxial cable, attenuator and Spectrum analyser, the other end of which was connected to a Base Station Simulator. The Base Station Simulator was set to force the EUT to its maximum power setting. The tests were performed at three frequencies (low channel, middle channel and high channel). The span of the analyzer shall be set to capture all products of the modulation process, including the emission skirts. The resolution bandwidth shall be set to as close to 1 percent of the selected span as is possible without being below 1 percent. The video bandwidth shall be set to 3 times the resolution bandwidth. Video averaging is not permitted. Where practical, a sampling detector shall be used since a peak or, peak hold, may produce a wider bandwidth than actual. The trace data points are recovered and are directly summed in linear terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5 percent of the total is reached and that frequency recorded. The process is repeated for the highest frequency data points. This frequency is recorded. The span between the two recorded frequencies is the occupied bandwidth.

Remark: Reference test setup 1

Test Settings

- 1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99% occupied bandwidth and the 26dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
- 2. RBW = 1 5% of the expected OBW
- VBW ≥ 3 x RBW
- Detector = Peak
- 5. Trace mode = max hold
- 6. Sweep = auto couple
- 7. The trace was allowed to stabilize
- 8. If necessary, steps 2 7 were repeated after changing the RBW such that it would be within
 - 1 5% of the 99% occupied bandwidth observed in Step 7



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.appx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-a-Document.appx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction forcement cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extend of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

**Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone; (86-755) 8307 1443,

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000

t (86-512) 62992980 t (86-512) 62992980 中国•苏州•中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000



Report No.: SUCR240400012702

Rev.: 01

Page: 42 of 53

4.5 Band Edge at Antenna Terminals

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 6.0

The transmitter output was connected to a calibrated coaxial cable, attenuator and Spectrum analyser, the other end of which was connected to a Base Station Simulator. The Base Station Simulator was set to force the EUT to its maximum power setting. The tests were performed at two frequencies (low channel and high channel).in the 1MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of 100kHz or 1% of the emission bandwidth of the fundamental emission of the transmitter may be employed. The EUT emission bandwidth is measured as the width of the signal between two points, outside of which all emission are attenuated at least 26dB below the transmitter power. The video bandwidth of the spectrum analyzer was set at thrice the resolution bandwidth. Detector Mode was set to peak or peak hold power.

Remark: Reference test setup 1

Test Settings

- 1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
- 2. Span was set large enough so as to capture all out of band emissions near the band edge
- 3. RBW > 1% of the emission bandwidth
- VBW ≥ 3 x RBW
- Detector = RMS
- Number of sweep points ≥ 2 x Span/RBW
- 7. Trace mode = trace average for continuous emissions, max hold for pulse emissions
- Sweep time = auto couple
- 9. The trace was allowed to stabilize



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.appx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-a-Document.appx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction forcement cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extend of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

**Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone; (86-755) 8307 1443,

South of No. 6 Plant, No. 1, Runsheng Read, Suchou Industrial Park, Suchou Area, China (Jangsu) Pilot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000 t (86–512) 62992980 t (86–512) 62992980



Report No.: SUCR240400012702

Rev.:

Page: 43 of 53

4.6 Spurious And Harmonic Emissions at Antenna Terminal

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 6.0

The transmitter output was connected to a calibrated coaxial cable, attenuator and Spectrum analyzer, the other end of which was connected to a Base Station Simulator. The Base Station Simulator was set to force the EUT to its maximum power setting. The tests were performed at three frequencies (low channel and high channel). The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. On any frequency outside a licensee's frequency block, the power of any emission shall be attenuated below the transmitter power (P) by at least 43 + 10 log(P) dB. Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.

Remark: Reference test setup 1

Test Settings

- 1. Start frequency was set to 9kHz and stop frequency was set to at least 10* the fundamental frequency(Separated into at least two plots per channel)
- 2. Detector = RMS
- 3. Trace mode = trace average for continuous emissinos, max hold for pulse emissions
- 4. Sweep time = auto couple
- 5. The trace was allowed to stabilize
- 6. Please see test notes below for RBW and VBW settings



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.appx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-a-Document.appx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction forcement cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extend of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

**Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone; (86-755) 8307 1443,

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000

t (86-512) 62992980 中国•苏州•中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000



Report No.: SUCR240400012702

Rev.: 01

Page: 44 of 53

4.7 Peak-Average Ratio

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 5.7.2

A peak to average ratio measurement is performed at the conducted port of the EUT. For WCDMA signals, the spectrum analyzers Complementary Cumulative Distribution Function (CCDF) measurement profile is used to determine the largest deviation between the average and the peak power of the EUT in a given bandwidth. The CCDF curve shows how much time the peak waveform spends at or above a given average power level. The percent of time the signal spends at or above the level defines the probability for that particular power level. For GSM signals, an average and a peak trace are used on a spectrum analyzer to determine the largest deviation between the average and the peak power of the EUT in a bandwidth greater than the emission bandwidth. The traces are generated with the spectrum analyzer set to zero span mode

Remark: Reference test setup 1

Test Settings

- 1. The signal analyzer's CCDF measurement profile is enabled
- 2. Frequency = carrier center frequency
- 3. Measurement BW > Emission bandwidth of signal
- 4. The signal analyzer was set to collect one million samples to generate the CCDF curve
- 5. The measurement interval was set depending on the type of signal analyzed. For continuous signals (>98% duty cycle), the measurement interval was set to 1ms. For burst transmissions, the spectrum analyzer is set to use an internal "RF Burst" trigger that is synced with an incoming pulse and the measurement interval is set to less than the duration of the "on time" of one burst to ensure that energy is only captured during a time in which the transmitter is operating at maximum power



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.appx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-a-Document.appx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction forcement cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extend of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

**Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone; (86-755) 8307 1443,

South of No. 6 Plant, No. 1, Runsheng Road, Suchou Industrial Park, Suchou Area, China (liangsu) Pilot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000 t (86-512) 62992980 t (86-512) 62992980



Report No.: SUCR240400012702

Rev.: 01

Page: 45 of 53

4.8 Field Strength of Spurious Radiation

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 5.8

Below 1GHz test procedure as below:

- 1). The EUT was powered ON and placed on a 80cm high table in the chamber. The antenna of the transmitter was extended to its maximum length.
- 2). The disturbance of the transmitter was maximized on the test receiver display by raising and lowering from 1m to 4m (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) the receive antenna and by rotating through 360° the turntable. After the fundamental emission was maximized, a field strength measurement was made.
- 3). Steps 1) and 2) were performed with the EUT and the receive antenna in both vertical and horizontal polarization.
- 4). Test the EUT in the lowest channel, the middle channel ,the Highest channel.
- 5). The radiation measurements are performed in X, Y, Z axis positioning. And found the X axis positioning which it is worse case, Only the test worst case mode is recorded in the report.
- 6). Repeat above procedures until all frequencies measured was complete.

E (dB μ V/m) = Measured amplitude level (dB μ V) + (Cable Loss (dB) + Antenna Factor (dB/m) – AMP(dB)) EIRP (dBm) = E (dB μ V/m) + 20 log D – 104.8; where D is the measurement distance in meters

Above 1GHz test procedure as below:

- Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber
- 2) Calculate power in dBm by the following formula:

E (dB μ V/m) = Measured amplitude level (dB μ V) + (Cable Loss (dB) + Antenna Factor (dB/m) – AMP(dB)) EIRP (dBm) = E (dB μ V/m) + 20 log D – 104.8; where D is the measurement distance in meters

- 3). Test the EUT in the lowest channel, the middle channel the Highest channel
- 4). The radiation measurements are performed in X, Y, Z axis positioning. And found the X axis positioning which it is worse case, Only the test worst case mode is recorded in the report.
- 5). Repeat above procedures until all frequencies measured was complete

Remark1: Reference test setup 2

Remark2: The emission below 18G were measured at a 3m test distance, while emissions above 18GHz were measured at a 1m test distance. At a measurement distance of 1 meter the limit line was increased by 20*LOG(3/1) = 9.54 dB.

Remark: Reference test setup 2

Remark

1) The field strength is calculated by adding the Antenna Factor, Cable Factor & AMP. The basic equation with a sample calculation is as follows:

AF = Antenna Factor(dB/m)

Factor = Cable Factor(dB) - Preamplifier (dB)

Level = Reading Level + AF + Factor -95.26

Margin = Limit - Level

2) Scan from 9kHz to 40GHz, The disturbance between 9KHz to 30MHz and 18GHz to 40GHz was very low, and the harmonics were the highest point could be found when testing, so only the harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.

3) All modes have been tested, but only the worst case data displayed in this report.



Report Template No./Rev.: WI-TRF-RG(FCC)007/v01

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/Terms-en/Con

South of No. 6 Plant, No. 1, Runsheng Road, Suchou Industrial Park, Suchou Area, China (langsu) Pilot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号约6号厂房南部 邮编: 215000

215000 t (86-

sgs.china@sgs.com

t (86-512) 62992980



Report No.: SUCR240400012702

Rev.: 01

Page: 46 of 53

4.9 Frequency Stability / Temperature Variation

Measurement Procedure:

Frequency stability testing is performed in accordance with the guidelines of FCC KDB 971168 D01 V03r01 Section 9

The frequency stability of the transmitter is measured by:

- a.) **Temperature:** The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.
- b.) **Primary Supply Voltage:** The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

Specification – The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within ±0.00025% (±2.5 ppm) of the center frequency.

Time Period and Procedure:

- 1. The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).
- 2. The equipment is turned on in a "standby" condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
- 3. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

Remark: Reference test setup 3



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.appx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-a-Document.appx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction forcement cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extend of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

**Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone; (86-755) 8307 1443,

South of No. 6 Pfart, No. 1, Runsteing Road, Suchou Industrial Park, Suchou Area, China (Jangsu) Pilot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

t (86-512) 62992980 t (86-512) 62992980




Report No.: SUCR240400012702

Rev.:


47 of 53 Page:

4.10 Test Setups

4.10.1 Test Setup 1

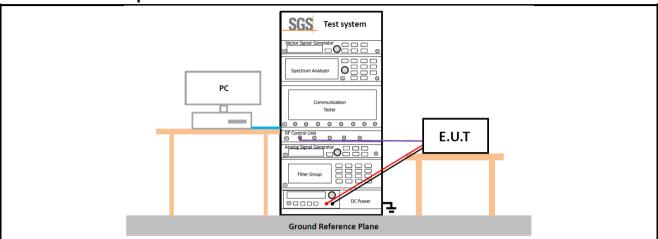

4.10.2 Test Setup 2

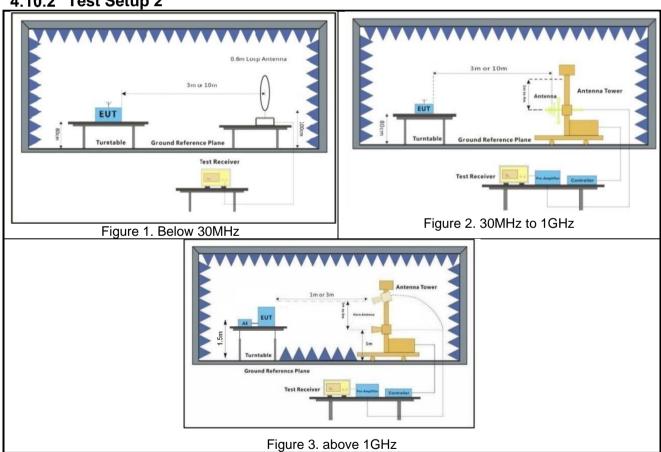



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx.

Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention:To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, **Attention:**To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443,

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

t (86-512) 62992980




Report No.: SUCR240400012702

Rev.: 01

Page: 48 of 53

4.10.3 Test Setup 3

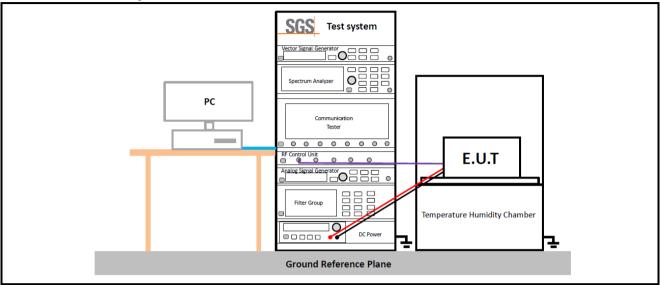



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx.

Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention:To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, **Attention:**To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443,

South of No. 6 Plant, No. 1, Runstering Read, Suthou Industrial Park, Suthou Area, China (Liangsu) Plot Fire Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区洞胜路1号的6号厂房南部 邮编: 215000

t (86–512) 62992980 www.sgsgroup.com.cn t (86–512) 62992980 sgs.china@sgs.com



Report No.: SUCR240400012702

Rev.:

Page: 49 of 53

4.11 Test Conditions

Transmit Output Power Data - Average Power, Spectral Density			
Test Case	Test Conditions		
Test Environment	Ambient Climate & Rated Voltage		
Test Setup	Test Setup 1		
RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel)		
Test Mode	NR/TM1; NR/TM2; NR/TM3; NR/TM4; NR/TM5; NR/TM6; NR/TM7; NR/TM8; NR/TM9		
Field Strength of Spurious Radiation			
Test Case	Test Conditions		
Test Environment	Ambient Climate & Rated Voltage		
Test Setup	Test Setup 2		
RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel)		
Test Mode	NR/TM1 Remark: All bandwidth and modulation of NR have been pre tested, and only the worst results are reflected in the report.		



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company, Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 83071443, or email: CN.Doccheck@gs.com

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国•苏州•中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编:215000

t (86-512) 62992980 www.sgsgroup.com.cn



Report No.: SUCR240400012702

Rev.:

Page: 50 of 53

Main Test Instruments

RF Test Equipment					
Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. date (yyyy/mm/dd)	Cal.Due date (yyyy/mm/dd)
Shielding Room	Brilliant-emc	N/A	SUWI-04-01-06	2022/11/09	2025/11/08
Temperature and humidity meter	MingGao	TH101B	SUWI-01-01-07	2024/02/18	2025/02/17
Signal Analyzer	ROHDE &SCHWARZ	FSV3030	SUWI-01-02-02	2024/05/08	2025/05/07
Measurement Software	TST	TST-271-2.0	SUWI-03-55-01	NCR	NCR
Measurement Software	Tonscend	J1120 RFAuto Test System	SUWI-02-03-01	NCR	NCR
Signal Analyzer	ROHDE &SCHWARZ	FSW43	SUWI-01-02-04	2024/05/08	2025/05/07
Wideband Radio Communication Tester	Anritsu	MT8821C	SUWI-01-26-03	2023/11/21	2024/11/20
Wideband Radio Communication Test Ststion	Anritsu	MT8000A	SUWI-01-34-02	2023/09/12	2024/09/11



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company, Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 83071443, or email: CN.Doccheck@gs.com

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国 • 苏州 • 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

t (86-512) 62992980 www.sgsgroup.com.cn



Report No.: SUCR240400012702

Rev.:

Page: 51 of 53

RSE Test Equipment					
Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. date (yyyy/mm/dd)	Cal.Due date (yyyy/mm/dd)
Semi-Anechoic Chamber	Brilliant-emc	N/A	SUWI-04-02-02	2023/03/04	2026/03/03
Temperature and humidity meter	MingGao	TH101B	SUWI-01-01-13	2024/02/08	2025/02/07
Signal Analyzer	ROHDE&SCHWARZ	FSW43	SUWI-01-02-04	2024/05/08	2025/05/07
Signal Analyzer	KEYSIGHT	N9020A	SUWI-01-02-06	2023/11/21	2024/11/20
Test receiver	ROHDE&SCHWARZ	ESR7	SUWI-01-10-01	2024/02/01	2025/01/31
Receiving antenna	SCHWRZBECK MESS- ELEKTRONIK	VULB 9168	SUWI-01-11-04	2023/11/25	2024/11/24
Receiving antenna	SCHWRZBECK MESS- ELEKTRONIK	BBHA 9120D	SUWI-01-11-05	2023/11/25	2024/11/24
Receiving antenna	SCHWRZBECK MESS- ELEKTRONIK	BBHA 9170	SUWI-01-11-03	2023/05/12	2025/05/11
Active Loop Antenna	SCHWRZBECK MESS- ELEKTRONIK	FMZB 1519B	SUWI-01-21-01	2023/05/13	2025/05/12
Amplifier	Tonscend	TAP9K3G32	SUWI-01-14-06	2023/11/21	2024/11/20
Amplifier	Tonscend	TAP01018050	SUWI-01-14-04	2023/11/21	2024/11/20
Amplifier	Tonscend	TAP30M7G30	SUWI-01-14-05	2023/11/21	2024/11/20
Wideband Radio Communication Tester	Anritsu	MT8820C	SUWI-01-16-08	2024/02/04	2025/02/03
Wideband Radio Communication Tester	Anritsu	MT8821C	SUWI-01-26-03	2023/11/21	2024/11/20
Measurement Software	Tonscend	JS32-RSE 4.0.0.1	SUWI-02-09-06	NCR	NCR
Radio Communication Analyzer	StarPoint	SP9500E	SUWI-01-28-02	2023/11/21	2024/11/20

Remark: NCR=No Calibration Requirement.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Ferms-and-Conditions.aspx.and, for electronic Documents at <a href="http://www.sgs.com/en/Ferms-and-Conditions-And-Ferms-and-Conditions-And-Ferms-and-Conditions-And-Ferms-and-Conditions-And-Ferms-and-Conditions-And-Ferms-and-Conditions-And-Ferms-and-Conditions-And-Ferms-and-Conditions-And-Ferms-and-Conditions-And-Ferms-and-Conditions-And-Ferms-and-Conditions-And-Ferms-and-Conditions-And-Ferms-and-Conditions-And-Ferms-and-Conditions-And-Ferms-and-Conditions-And-Ferms-and-Conditions-And-Ferms-and-Conditions-And-Ferms-and-Conditions-And-Ferms-and-Conditions-And-Ferms-and-Conditions-And-Ferms-and-Condit

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国•苏州•中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000 t (86-512) 62992980 www.sgsgroup.com.cn t (86-512) 62992980



Report No.: SUCR240400012702

Rev.: 01

Page: 52 of 53

6 Measurement Uncertainty

For a 95% confidence level (k = 2), the measurement expanded uncertainties for defined systems, in accordance with the recommendations of ISO 17025 as following:

No.	Item	Measurement Uncertainty	
1	Total RF power, conducted	±0.54dB	
		± 3.13dB (9k -30MHz)	
2	Radiated Emission	± 4.88dB (30M -1GHz)	
		± 4.75dB (1GHz to 18GHz)	
		± 4.77dB (Above 18GHz)	

Remark:

The Ulab (lab Uncertainty) is less than Ucispr/ETSI (CISPR/ETSI Uncertainty), so the test results

- compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;

- non-compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions.Appx Attention: The terms and the second of the second and the second and

South of No. F Part, No. 1, Runsheng Road, Suzhou Industrial Part, Suzhou Area, China (Jangsu) Pilot Free Trade Zone 自 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

5000 t (86–512) 62992980 5000 t (86–512) 62992980



Report No.: SUCR240400012702

Rev.:

Page: 53 of 53

Appendixes

Appendix A.1	WWAN Setup Photos
Appendix B.23	NR Band n2
Appendix B.24	NR Band n5
Appendix B.25	NR Band n12
Appendix B.26	NR Band n14
Appendix B.27	NR Band n25
Appendix B.28	NR Band n30
Appendix B.29	NR Band n41
Appendix B.30	NR Band n48
Appendix B.31	NR Band n66
Appendix B.32	NR Band n71
Appendix B.33	NR Band n77(3450-3550)
Appendix B.34	NR Band n77(3700-3980)

---End of Report---



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overteaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.agpx, and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is dorawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company, Any unauthorized alteration, forger or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443,

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 t (86-512) 62992980 www.sgsgroup.com.cn 中国・苏州・中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的0号厂房南部 邮编: 215000 t (86-512) 62992980

Member of the SGS Group (SGS SA)