



# FCC Part 15E Test Report

## FCC ID: 2BH9M-FX2330

Applicant: Shenzhen FuXin Industrial Co.,Ltd

Address: 4/F, Block 65, Bao Tian Industry Zone, Qianjin 2nd Road, Xixiang, Bao'an, Shenzhen, China

Manufacturer: Shenzhen FuXin Industrial Co.,Ltd

Address: 4/F, Block 65, Bao Tian Industry Zone, Qianjin 2nd Road, Xixiang, Bao'an, Shenzhen, China

EUT: TYPE-C HUB

Trade Mark: N/A

Model Number: FX-2330  
FX-2330A, FX-2330B, FX-2330C

Date of Receipt: Jul. 10, 2024

Test Date: Jul. 10, 2024 - Aug. 21, 2024

Date of Report: Aug. 21, 2024

Prepared By: Shenzhen DL Testing Technology Co., Ltd.

Address: 101-201, Building C, Shuanghuan, No.8, Baoqing Road, Baolong Industrial Zone, Baolong Street, Longgang District, Shenzhen, Guangdong, China

Applicable Standards: FCC PART 15 E 15.407  
ANSI C63.10:2013

Test Result: Pass

Report Number: DL-240710016ER

Prepared (Test Engineer): Alisa Song

Reviewer (Supervisor): Jack Bu

Approved (Manager): Jade Yang



*This test report is based on a single evaluation of one sample of above-mentioned products. It is not permitted to be duplicated in extracts without written approval of Shenzhen DL Testing Technology Co., Ltd.*



Table of Contents	Page
<b>1 . SUMMARY OF TEST RESULTS</b>	<b>5</b>
1.1 MEASUREMENT UNCERTAINTY	5
<b>2 . GENERAL INFORMATION</b>	<b>6</b>
2.1 GENERAL DESCRIPTION OF EUT	6
2.2 DESCRIPTION OF TEST MODES	7
2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	8
2.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)	8
2.5 TABLE OF PARAMETERS OF TEST SOFTWARE SETTING	8
2.6 EQUIPMENTS LIST FOR ALL TEST ITEMS	9
<b>3 . EMC EMISSION TEST</b>	<b>10</b>
3.1 CONDUCTED EMISSION MEASUREMENT	10
3.1.1 POWER LINE CONDUCTED EMISSION LIMITS	10
3.1.2 TEST PROCEDURE	10
3.1.3 DEVIATION FROM TEST STANDARD	10
3.1.4 TEST SETUP	11
3.1.5 EUT OPERATING CONDITIONS	11
3.1.6 TEST RESULTS	11
3.2 RADIATED EMISSION MEASUREMENT	12
3.2.1 RADIATED EMISSION LIMITS	12
3.2.2 TEST PROCEDURE	13
3.2.3 DEVIATION FROM TEST STANDARD	13
3.2.4 TEST SETUP	14
3.2.5 EUT OPERATING CONDITIONS	15
3.2.6 TEST RESULTS (BETWEEN 9KHZ – 30 MHZ)	16
3.2.7 TEST RESULTS (BETWEEN 30MHZ – 1GHZ)	17
3.2.8 TEST RESULTS (1GHZ~40GHZ)	19
3.3 RADIATED BAND EMISSION MEASUREMENT	24
3.3.1 TEST REQUIREMENT:	24
3.3.2 TEST PROCEDURE	24
3.3.3 DEVIATION FROM TEST STANDARD	24
3.3.4 TEST SETUP	24
3.3.5 EUT OPERATING CONDITIONS	24
<b>4 . AVERAGE OUTPUT POWER</b>	<b>27</b>
4.1 APPLIED PROCEDURES / LIMIT	27
4.1.1 TEST PROCEDURE	27
4.1.2 DEVIATION FROM STANDARD	27
4.1.3 TEST SETUP	27



<b>Table of Contents</b>	<b>Page</b>
4.1.4 EUT OPERATION CONDITIONS	27
4.1.5 TEST RESULTS	28
<b>5 . POWER SPECTRAL DENSITY TEST</b>	<b>32</b>
5.1 APPLIED PROCEDURES / LIMIT	32
5.1.1 TEST PROCEDURE	32
5.1.2 DEVIATION FROM STANDARD	32
5.1.3 TEST SETUP	32
5.1.4 EUT OPERATION CONDITIONS	32
5.1.5 TEST RESULTS	33
<b>6 . 6DB BANDWIDTH TEST</b>	<b>37</b>
6.1 APPLIED PROCEDURES / LIMIT	37
6.1.1 TEST PROCEDURE	37
6.1.2 DEVIATION FROM STANDARD	37
6.1.3 TEST SETUP	37
6.1.4 EUT OPERATION CONDITIONS	37
6.1.5 TEST RESULTS	38
<b>7 . DUTY CYCLE TEST SIGNAL</b>	<b>42</b>
7.1 APPLIED PROCEDURES / LIMIT	42
7.1.1 TEST PROCEDURE	42
7.1.2 DEVIATION FROM STANDARD	42
7.1.3 TEST SETUP	42
7.1.4 EUT OPERATION CONDITIONS	42
7.1.5 TEST RESULTS	43
<b>8 . FREQUENCY STABILITY</b>	<b>45</b>
8.1 APPLIED PROCEDURES / LIMIT	45
8.1.1 TEST PROCEDURE	45
8.1.2 DEVIATION FROM STANDARD	45
8.1.3 TEST SETUP	45
8.1.4 EUT OPERATION CONDITIONS	45
8.1.5 TEST RESULTS	46
<b>9 . TRANSMISSION IN THE ABSENCE OF DATA</b>	<b>48</b>
9.1 STANDARD REQUIREMENT	48
9.2 TEST RESULT	48
<b>10 . ANTENNA REQUIREMENT</b>	<b>48</b>
10.1 STANDARD REQUIREMENT	48
10.2 EUT ANTENNA	48
<b>11 . TEST SEUUP PHOTO</b>	<b>48</b>



Table of Contents	Page
12 . EUT PHOTO	48

**1. SUMMARY OF TEST RESULTS**

Test procedures according to the technical standards:

FCC Part15 (15.407) , Subpart E			
Standard Section	Test Item	Judgment	Remark
15.207	Conducted Emission	N/A	
15.407(b), 15.209	Radiated Spurious Emission	PASS	
15.407 (b)	Band Edge Emission	PASS	
15.407 (a)	Average Output Power	PASS	
15.407 (a)	Power Spectral Density	PASS	
15.407(e)	6dB bandwidth	PASS	
15.407(g)	Frequency Stability	PASS	
15.407(c)	Transmission in case of Absence of Information	PASS	
15.203	Antenna Requirement	PASS	

**NOTE:**

(1)" N/A" denotes test is not applicable in this Test Report

Test lab: Shenzhen DL Testing Technology Co., Ltd.

Address: 101-201, Building C, Shuanghuan, No.8, Baoqing Road, Baolong Industrial Zone, Baolong Street, Longgang District, Shenzhen, Guangdong, China

FCC Test Firm Registration Number: 854456

Designation Number: CN1307

IC Registered No.: 27485

CAB ID.: CN0118

**1.1 MEASUREMENT UNCERTAINTY**The reported uncertainty of measurement  $y \pm U$ , where expanded uncertainty  $U$  is based on a standard uncertainty multiplied by a coverage factor of  $k=2$  providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	Conducted Emission Test	$\pm 2.56\text{dB}$
2	RF power,conducted	$\pm 0.42\text{dB}$
3	Spurious emissions,conducted	$\pm 2.76\text{dB}$
4	All emissions,radiated(<1G)	$\pm 3.65\text{dB}$
5	All emissions,radiated(>1G)	$\pm 4.89\text{dB}$
6	Temperature	$\pm 0.5^\circ\text{C}$
7	Humidity	$\pm 2\%$
8	6dB Bandwidth	$\pm 0.2\text{MHz}$



## 2. GENERAL INFORMATION

### 2.1 GENERAL DESCRIPTION OF EUT

Product Name:	TYPE-C HUB
Trademark	N/A
Model No.:	FX-2330 FX-2330A, FX-2330B, FX-2330C
Model Difference	The product's different for model number and appearance color.
Operation Frequency:	5745-5825MHz(802.11a/n/ac(HT20)) 5755-5795MHz(802.11n/ac(HT40)) 5775MHz (802.11ac(HT80))
Channel numbers:	See channel list
Channel separation:	20MHz/40MHz/80MHz
Modulation technology:	64QAM, 16QAM, 256QAM, QPSK, BPSK for OFDM
Rate of Transmitter	802.11a: 6Mbps, 9Mbps, 12Mbps, 18Mbps, 24Mbps, 36Mbps, 48Mbps,54Mbps 802.11n: Up to 500Mbps 802.11ac: up to 867Mbps
Antenna Type:	Internal Antenna
Antenna gain:	0.72dBi
Power supply:	DC 5V from USB

Note:

- 1.For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.
- 2.The EUT's all information provided by client.



2. Channel List

Channel List for 802.11a/n(HT20)/ac(HT20)			
Channel	Frequency (MHz)	Channel	Frequency (MHz)
149	5745	161	5805
153	5765	165	5825
157	5785		

Channel List for 802.11n(HT40)/ac(HT40)			
Channel	Frequency (MHz)	Channel	Frequency (MHz)
151	5755	159	5795

Channel List for 802.11ac(HT80)			
Channel	Frequency (MHz)	Channel	Frequency (MHz)
155	5775	/	/

2.1.1 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

For Conducted Emission		
Pretest Mode	Channel	Band 4
Mode 1	802.11a/n/acHT20	CH149, CH157, CH165
Mode 2	802.11n/acHT40	CH151, CH159
Mode 3	802.11acHT80	CH155
Mode 4	Link Mode	


For Radiated Emission		
Pretest Mode	Channel	Band 4
Mode 1	802.11a/n/acHT20	CH149, CH157, CH165
Mode 2	802.11n/acHT40	CH151, CH159
Mode 3	802.11acHT80	CH155
Mode 4	Link Mode	

Note: 1. The measurements are performed at the highest, middle, lowest available channels.  
 2. During the test, the test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and found that the worst case was under the nominal rated supply condition. So the report just shows that condition's data.



2.2 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

Radiated Spurious Emission Test



2.3 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Model/Type No.	Series No.	Note
E-1	TYPE-C HUB	FX-2330	N/A	EUT
E-2	Notebook	310S-14AST	N/A	LENOVO

Item	Shielded Type	Ferrite Core	Length	Note

Note:

- (1) For detachable type I/O cable should be specified the length in cm in 『Length』 column.

2.4 TABLE OF PARAMETERS OF TEST SOFTWARE SETTING

During testing, channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the end product.

Max output power Setting				
Test software Version	Test program: Win7_MP_Kit_RTL11n_AM9421_USB_v0.37_2022			
Mode	802.11a	802.11n HT20	802.11n HT40	802.11ac HT20/HT40/HT80
Data Rate	6Mbps	MSC0	MSC0	MSC0
Power Setting of Softwave	60	60	66	66



**2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS**

## Radiation test, Band-edge test and 6db bandwidth test equipment

Item	Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	Spectrum Analyzer (9kHz-26.5GHz)	Agilent	E4408B	MY50140780	Nov. 05, 2023	Nov. 04, 2024
2	Test Receiver (9kHz-7GHz)	R&S	ESRP7	101393	Nov. 05, 2023	Nov. 04, 2024
3	Bilog Antenna (30MHz-1GHz)	R&S	VULB9162	00306	Nov. 05, 2023	Nov. 04, 2024
4	Horn Antenna (1GHz-18GHz)	Schwarzbeck	BBHA9120D	02139	Nov. 05, 2023	Nov. 04, 2024
5	Horn Antenna (18GHz-40GHz)	A.H. Systems	SAS-574	588	Nov. 05, 2023	Nov. 04, 2024
6	Amplifier (9KHz-6GHz)	Schwarzbeck	BBV9743B	00153	Nov. 05, 2023	Nov. 04, 2024
7	Amplifier (1GHz-18GHz)	EMEC	EM01G8GA	00270	Nov. 05, 2023	Nov. 04, 2024
8	Amplifier (18GHz-40GHz)	Quanjuda	DLE-161	97	Nov. 05, 2023	Nov. 04, 2024
9	Loop Antenna (9KHz-30MHz)	Schwarzbeck	FMZB1519B	00014	Nov. 05, 2023	Nov. 04, 2024
10	RF cables1 (9kHz-1GHz)	ChengYu	966	004	Nov. 05, 2023	Nov. 04, 2024
11	RF cables2 (1GHz-40GHz)	ChengYu	966	003	Nov. 05, 2023	Nov. 04, 2024
12	Antenna connector	Florida RF Labs	N/A	RF 01#	Nov. 05, 2023	Nov. 04, 2024
13	Power probe	KEYSIGHT	U2021XA	MY55210018	Nov. 05, 2023	Nov. 04, 2024
14	Signal Analyzer 9kHz-26.5GHz	Agilent	N9020A	MY55370280	Nov. 05, 2023	Nov. 04, 2024
15	Test Receiver 20kHz-40GHz	R&S	ESU 40	100376	Nov. 05, 2023	Nov. 04, 2024
16	D.C. Power Supply	LongWei	PS-305D	010964729	Nov. 05, 2023	Nov. 04, 2024

## Conduction Test equipment

Item	Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	843 Shielded Room	YIHENG	843 Room	843	Nov. 05, 2023	Nov. 04, 2026
2	EMI Receiver	R&S	ESR	101421	Nov. 05, 2023	Nov. 04, 2024
3	LISN	R&S	ENV216	102417	Nov. 05, 2023	Nov. 04, 2024
4	843 Cable 1#	ChengYu	CE Cable	001	Nov. 05, 2023	Nov. 04, 2024

## Other

Item	Name	Manufacturer	Model	Software version
1	EMC Conduction Test System	FALA	EZ_EMCC	EMC-CON 3A1.1
2	EMC radiation test system	FALA	EZ_EMCC	FA-03A2
3	RF test system	MAIWEI	MTS8310	2.0.0.0
4	RF communication test system	MAIWEI	MTS8200	2.0.0.0



3. EMC EMISSION TEST

3.1 CONDUCTED EMISSION MEASUREMENT

3.1.1 POWER LINE CONDUCTED EMISSION Limits (Frequency Range 150KHz-30MHz)

FREQUENCY (MHz)	Limit (dBuV)		Standard
	Quasi-peak	Average	
0.15 -0.5	66 - 56 *	56 - 46 *	FCC
0.5 -5.0	56.00	46.00	FCC
5.0 -30.0	60.00	50.00	FCC

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " \* " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz


3.1.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

3.1.3 DEVIATION FROM TEST STANDARD

No deviation

### 3.1.4 TEST SETUP

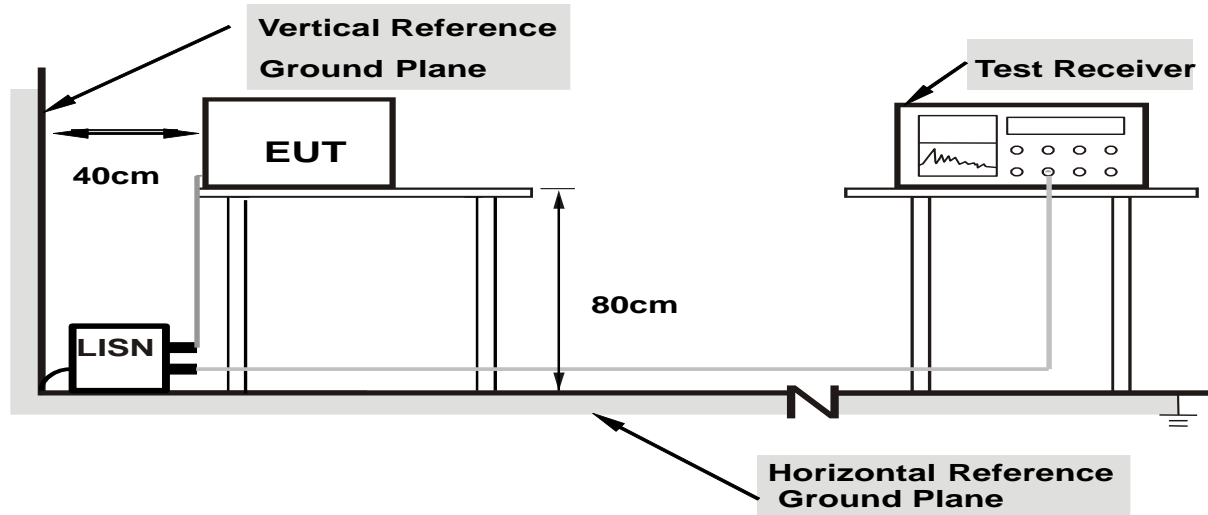

- Note:**
- 1.Support units were connected to second LISN.
  - 2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

### 3.1.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

We pretest AC 120V and AC 230V, the worst voltage was AC 120V and the data recording in the report.

### 3.1.6 TEST RESULTS

The EUT is powered by DC, no requirements for this item.



**3.2 RADIATED EMISSION MEASUREMENT**

**3.2.1 RADIATED EMISSION LIMITS (Frequency Range 9kHz-1000MHz)**

15.407(b)Undesirable emission limits. Except as shown in paragraph (b) (10) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

- (1)For transmitters operating in the 5.15-5.25GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (2)For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (3)For transmitters operating in the 5.47-5.725GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (4)For transmitters operating solely in the 5.725-5.850GHz band:  
All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to10dBm/MHzat25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micovolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Limit (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	40GHz
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average



Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

### 3.2.2 TEST PROCEDURE

Below 1GHz test procedure as below:

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

- g. Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 metre to 1.5 metre( Above 18GHz the distance is 1 meter and table is 1.5 metre).
- h. Test the EUT in the lowest channel, the middle channel, the Highest channel

Note:


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

### 3.2.3 DEVIATION FROM TEST STANDARD


No deviation

### 3.2.4 TEST SETUP


(A) Radiated Emission Test-Up Frequency Below 30MHz

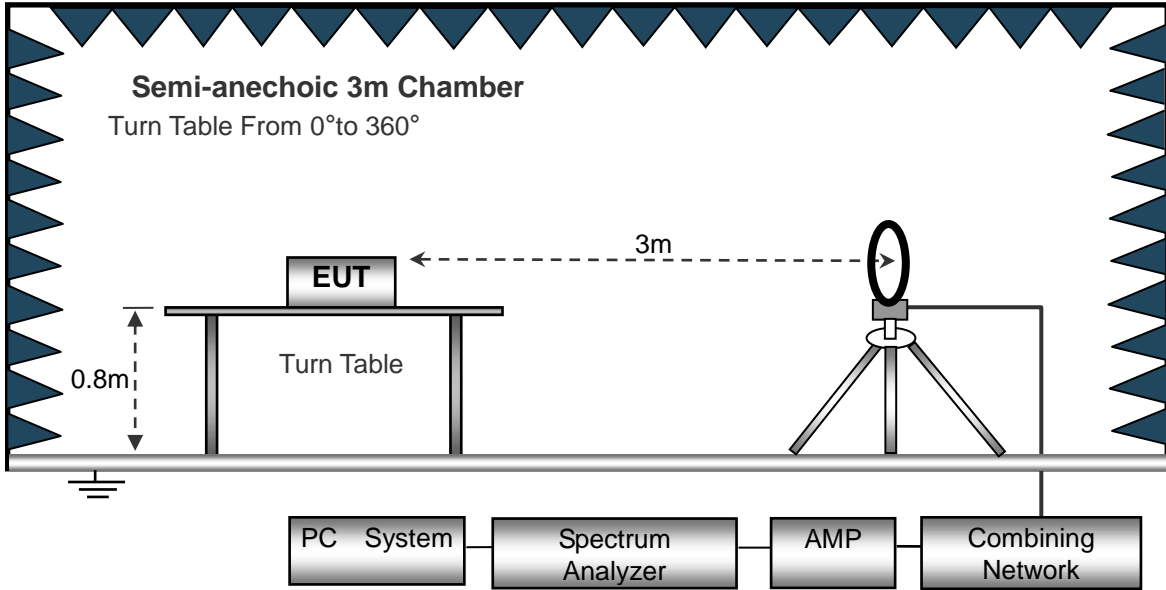

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

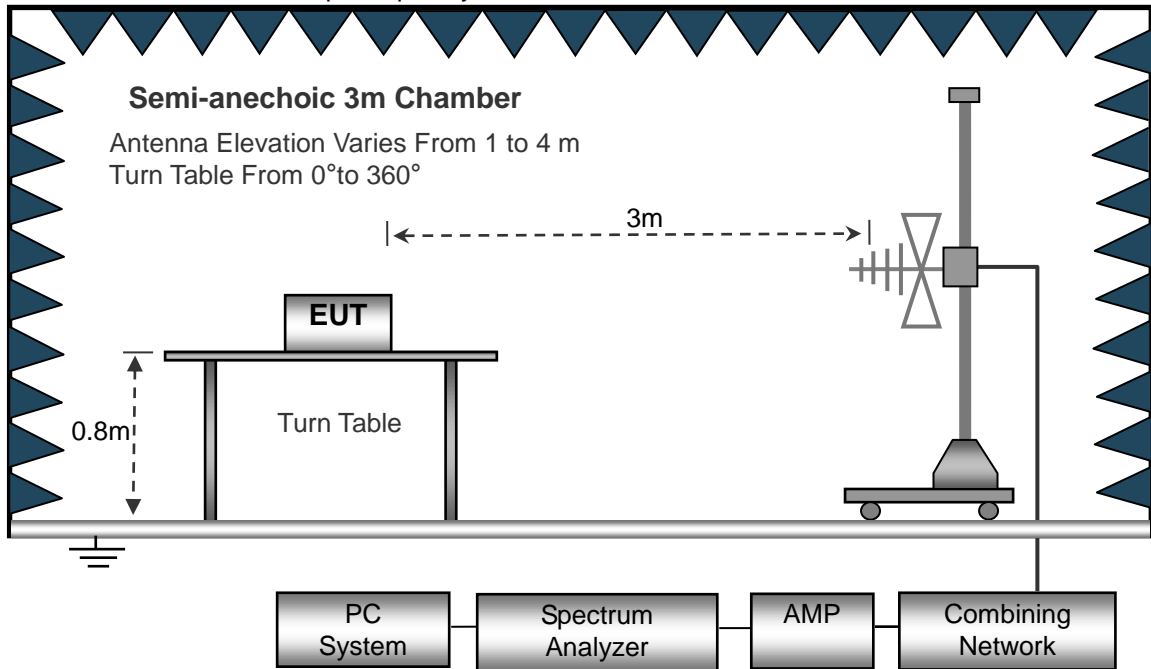

(C) Radiated Emission Test-Up Frequency Above 1GHz

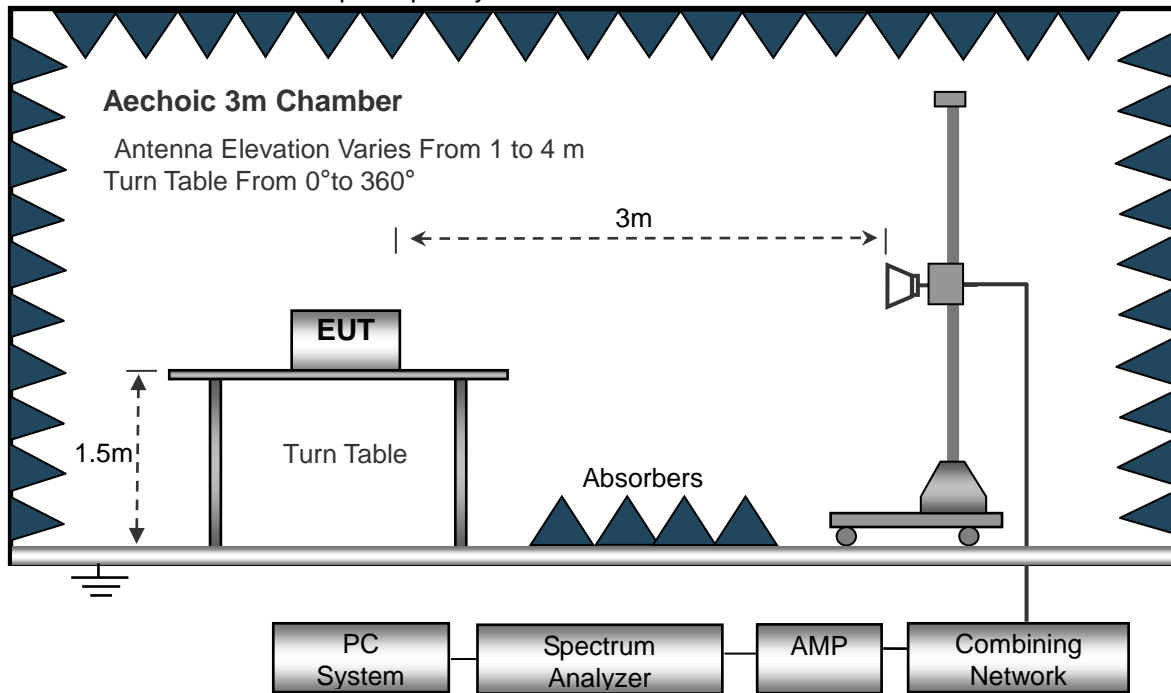

**3.2.5 EUT OPERATING CONDITIONS**

The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.

**3.2.6 TEST RESULTS (Between 9KHz – 30 MHz)**

Temperature:	20°C	Relative Humidity:	48%
Pressure:	1010 hPa	Test Voltage :	DC 5V
Test Mode :	Mode 4	Polarization :	--

Freq. (MHz)	Reading (dBuV/m)	Limit (dBuV/m)	Margin (dB)	State P/F
--	--	--	--	PASS
--	--	--	--	PASS

**NOTE:**

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor =  $40 \log(\text{specific distance}/\text{test distance})$ (dB);


Limit line = specific limits(dBuv) + distance extrapolation factor.





3.2.7 TEST RESULTS (Between 30MHz – 1GHz)

Temperature:	26°C	Relative Humidity:	54%
Pressure:	1010 hPa	Polarization :	Horizontal
Test Voltage :	DC 5V		
Test Mode :	Mode 4		

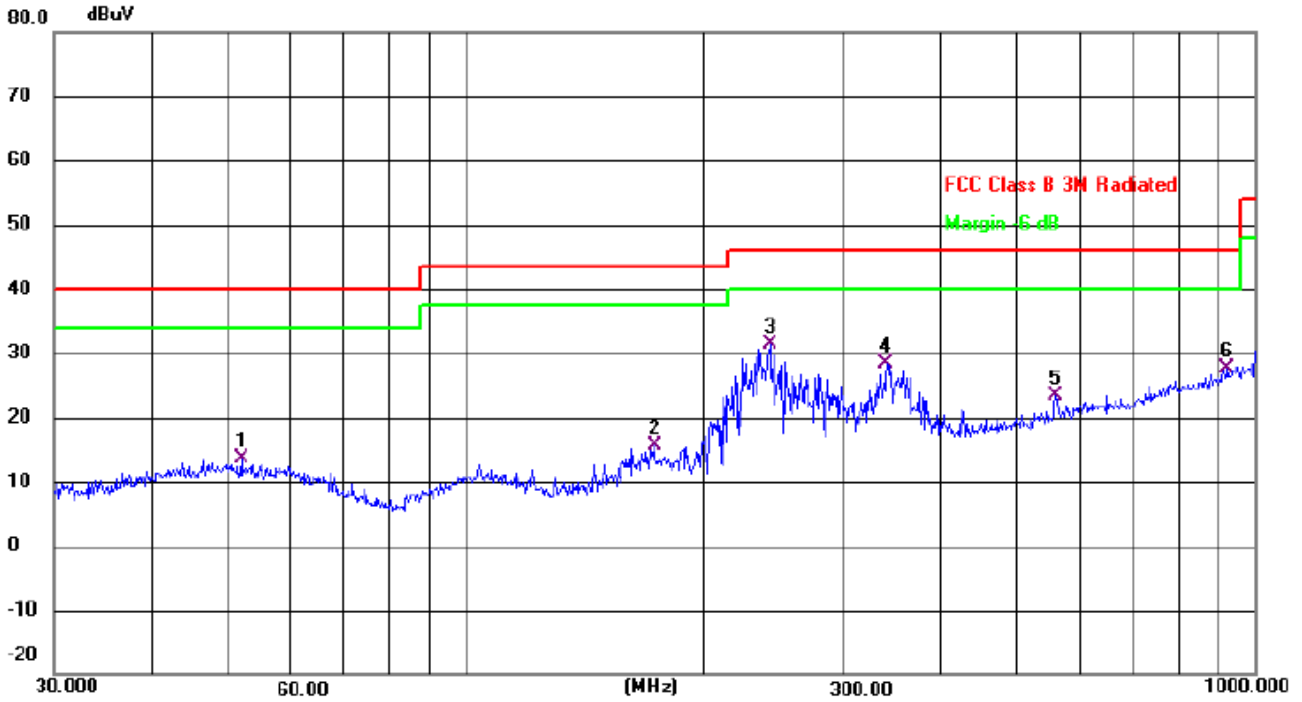

No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector
	MHz	dBuV	dB	dBuV	dB	dB	
1	51.8430	26.84	-13.18	13.66	40.00	-26.34	QP
2	173.2050	32.44	-16.88	15.56	43.50	-27.94	QP
3 *	242.5252	44.76	-13.39	31.37	46.00	-14.63	QP
4	341.9786	39.38	-10.95	28.43	46.00	-17.57	QP
5	558.7301	29.42	-5.93	23.49	46.00	-22.51	QP
6	922.5157	27.80	-0.19	27.61	46.00	-18.39	QP


Remark:

Correct Factor = Cable loss + Antenna factor – Preamplifier;

Level = Reading Level + Correct Factor; Margin = Level - Limit;



Temperature:	26°C	Relative Humidity:	54%
Pressure:	1010 hPa	Polarization :	Vertical
test voltage :	DC 5V		
Test Mode :	Mode 4		

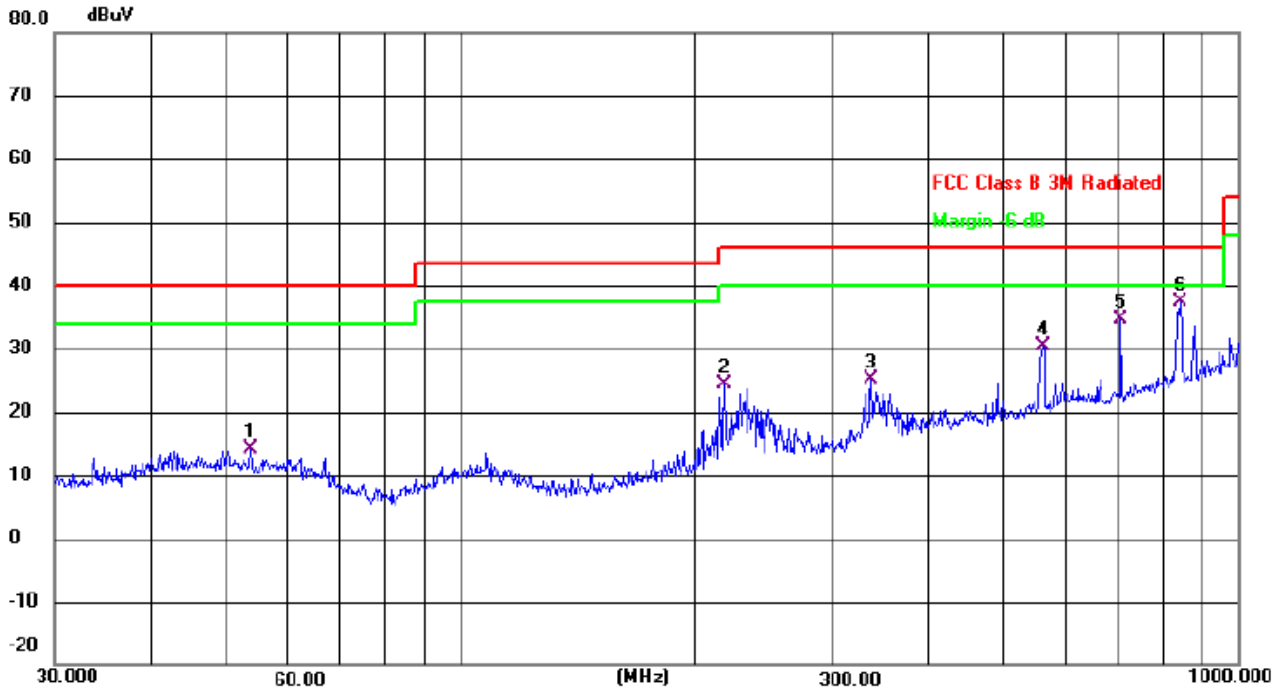

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dB	Margin dB	Detector
1		53.6931	27.40	-13.30	14.10	40.00	-25.90	QP
2		218.3084	38.47	-14.21	24.26	46.00	-21.74	QP
3		337.2155	36.20	-11.06	25.14	46.00	-20.86	QP
4		560.6928	36.26	-5.93	30.33	46.00	-15.67	QP
5		706.6998	38.70	-4.06	34.64	46.00	-11.36	QP
6	*	842.1296	38.96	-1.70	37.26	46.00	-8.74	QP

Remark:

Correct Factor = Cable loss + Antenna factor – Preamplifier;

Level = Reading Level + Correct Factor; Margin = Level - Limit;

**3.2.8 TEST RESULTS (1ghz~40ghZ)**

802.11a band 4

Polar (H/V)	Frequency	Meter Reading	Pre- amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBUV)	(dB)	(dB)	(dB/m)	(dBUV/m)	(dBUV/m)	(dB)	
<b>operation frequency:5745</b>									
V	11490	54.36	49.05	15.3	37.39	58	74	-16.00	PK
V	11490	41.14	49.05	15.3	37.39	44.78	54	-9.22	AV
V	17235	55.96	49.16	15.27	40.45	62.52	68.2	-5.68	PK
V	17235	40.52	49.16	15.27	40.45	47.08	54	-6.92	AV
H	11490	52.57	49.05	15.3	37.39	56.21	74	-17.79	PK
H	11490	42.61	49.05	15.3	37.39	46.25	54	-7.75	AV
H	17235	51.39	49.16	15.27	40.45	57.95	68.2	-10.25	PK
H	17235	40.15	49.16	15.27	40.45	46.71	54	-7.29	AV
<b>operation frequency:5785</b>									
V	11570	51.14	49.09	15.34	37.42	54.81	74	-19.19	PK
V	11570	41.33	49.09	15.34	37.42	45	54	-9.00	AV
V	17355	50.18	49.18	15.29	40.47	56.76	68.2	-11.44	PK
V	17355	40.96	49.18	15.29	40.47	47.54	54	-6.46	AV
H	11570	50.74	49.09	15.34	37.42	54.41	74	-19.59	PK
H	11570	42.05	49.09	15.34	37.42	45.72	54	-8.28	AV
H	17355	48.36	49.18	15.29	40.47	54.94	68.2	-13.26	PK
H	17355	40.94	49.18	15.29	40.47	47.52	54	-6.48	AV
<b>operation frequency:5825</b>									
V	11650	52.39	49.11	15.37	37.46	56.11	74	-17.89	PK
V	11650	41.85	49.11	15.37	37.46	45.57	54	-8.43	AV
V	17475	49.56	49.21	15.34	40.51	56.2	68.2	-12.00	PK
V	17475	40.38	49.21	15.34	40.51	47.02	54	-6.98	AV
H	11650	57.64	49.11	15.37	31.31	55.21	74	-18.79	PK
H	11650	48.96	49.11	15.37	31.31	46.53	54	-7.47	AV
H	17475	49.25	49.21	15.34	40.51	55.89	68.2	-12.31	PK
H	17475	40.57	49.21	15.34	40.51	47.21	54	-6.79	AV

**Remark:**

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,  
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



802.11n HT20

Polar (H/V)	Frequency	Meter Reading	Pre-amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBUV)	(dB)	(dB)	(dB/m)	(dBUV/m)	(dBUV/m)	(dB)	
<b>operation frequency:5745</b>									
V	11490	49.46	49.05	15.3	37.39	53.1	74	-20.90	PK
V	11490	42.37	49.05	15.3	37.39	46.01	54	-7.99	AV
V	17235	48.63	49.16	15.27	40.45	55.19	68.2	-13.01	PK
V	17235	40.45	49.16	15.27	40.45	47.01	54	-6.99	AV
H	11490	49.74	49.05	15.3	37.39	53.38	74	-20.62	PK
H	11490	41.13	49.05	15.3	37.39	44.77	54	-9.23	AV
H	17235	48.14	49.16	15.27	40.45	54.7	68.2	-13.50	PK
H	17235	40.43	49.16	15.27	40.45	46.99	54	-7.01	AV
<b>operation frequency:5785</b>									
V	11570	52.48	49.09	15.34	37.42	56.15	74	-17.85	PK
V	11570	42.63	49.09	15.34	37.42	46.3	54	-7.70	AV
V	17355	49.41	49.18	15.29	40.47	55.99	68.2	-12.21	PK
V	17355	40.32	49.18	15.29	40.47	46.9	54	-7.10	AV
H	11570	49.99	49.09	15.34	37.42	53.66	74	-20.34	PK
H	11570	43.57	49.09	15.34	37.42	47.24	54	-6.76	AV
H	17355	49.14	49.18	15.29	40.47	55.72	68.2	-12.48	PK
H	17355	40.63	49.18	15.29	40.47	47.21	54	-6.79	AV
<b>operation frequency:5825</b>									
V	11650	51.96	49.11	15.37	37.46	55.68	74	-18.32	PK
V	11650	41.35	49.11	15.37	37.46	45.07	54	-8.93	AV
V	17475	48.34	49.21	15.34	40.51	54.98	68.2	-13.22	PK
V	17475	40.85	49.21	15.34	40.51	47.49	54	-6.51	AV
H	11650	57.56	49.11	15.37	31.31	55.13	74	-18.87	PK
H	11650	44.14	49.11	15.37	31.31	41.71	54	-12.29	AV
H	17475	49.36	49.21	15.34	40.51	56	68.2	-12.20	PK
H	17475	40.25	49.21	15.34	40.51	46.89	54	-7.11	AV

**Remark:**

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,  
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



802.11n HT40

Polar (H/V)	Frequency	Meter Reading	Pre-amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
<b>operation frequency:5755</b>									
V	11510	49.36	49.07	15.33	37.41	53.03	74	-20.97	PK
V	11510	41.27	49.07	15.33	37.41	44.94	54	-9.06	AV
V	17265	49.63	49.17	15.28	40.46	56.2	68.2	-12.00	PK
V	17265	40.78	49.17	15.28	40.46	47.35	54	-6.65	AV
H	11510	48.63	49.07	15.33	37.41	52.3	74	-21.70	PK
H	11510	41.18	49.07	15.33	37.41	44.85	54	-9.15	AV
H	17265	49.64	49.17	15.28	40.46	56.21	68.2	-11.99	PK
H	17265	40.43	49.17	15.28	40.46	47	54	-7.00	AV
<b>operation frequency:5795</b>									
V	11590	49.27	49.11	15.37	37.46	52.99	74	-21.01	PK
V	11590	41.26	49.11	15.37	37.46	44.98	54	-9.02	AV
V	17385	48.24	49.21	15.34	40.51	54.88	68.2	-13.32	PK
V	17385	40.46	49.21	15.34	40.51	47.1	54	-6.90	AV
H	11590	57.52	49.11	15.37	31.31	55.09	74	-18.91	PK
H	11590	44.54	49.11	15.37	31.31	42.11	54	-11.89	AV
H	17385	48.96	49.21	15.34	40.51	55.6	68.2	-12.60	PK
H	17385	40.47	49.21	15.34	40.51	47.11	54	-6.89	AV

**Remark:**

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,  
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



802.11ac HT20

Polar (H/V)	Frequency	Meter Reading	Pre-amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBUV)	(dB)	(dB)	(dB/m)	(dBUV/m)	(dBUV/m)	(dB)	
<b>operation frequency:5745</b>									
V	11490	49.36	49.05	15.3	37.39	53	74	-21.00	PK
V	11490	42.24	49.05	15.3	37.39	45.88	54	-8.12	AV
V	17235	48.68	49.16	15.27	40.45	55.24	68.2	-12.96	PK
V	17235	40.36	49.16	15.27	40.45	46.92	54	-7.08	AV
H	11490	48.28	49.05	15.3	37.39	51.92	74	-22.08	PK
H	11490	41.94	49.05	15.3	37.39	45.58	54	-8.42	AV
H	17235	48.63	49.16	15.27	40.45	55.19	68.2	-13.01	PK
H	17235	40.14	49.16	15.27	40.45	46.7	54	-7.30	AV
<b>operation frequency:5785</b>									
V	11570	48.63	49.09	15.34	37.42	52.3	74	-21.70	PK
V	11570	41.58	49.09	15.34	37.42	45.25	54	-8.75	AV
V	17355	49.14	49.18	15.29	40.47	55.72	68.2	-12.48	PK
V	17355	40.59	49.18	15.29	40.47	47.17	54	-6.83	AV
H	11570	49.95	49.09	15.34	37.42	53.62	74	-20.38	PK
H	11570	43.11	49.09	15.34	37.42	46.78	54	-7.22	AV
H	17355	49.19	49.18	15.29	40.47	55.77	68.2	-12.43	PK
H	17355	40.25	49.18	15.29	40.47	46.83	54	-7.17	AV
<b>operation frequency:5825</b>									
V	11650	49.63	49.11	15.37	37.46	53.35	74	-20.65	PK
V	11650	41.47	49.11	15.37	37.46	45.19	54	-8.81	AV
V	17475	48.45	49.21	15.34	40.51	55.09	68.2	-13.11	PK
V	17475	40.29	49.21	15.34	40.51	46.93	54	-7.07	AV
H	11650	57.25	49.11	15.37	31.31	54.82	74	-19.18	PK
H	11650	44.66	49.11	15.37	31.31	42.23	54	-11.77	AV
H	17475	48.57	49.21	15.34	40.51	55.21	68.2	-12.99	PK
H	17475	40.59	49.21	15.34	40.51	47.23	54	-6.77	AV

**Remark:**

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



## 802.11ac HT40

Polar (H/V)	Frequency	Meter Reading	Pre-amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
<b>operation frequency:5755</b>									
V	11510	49.14	49.07	15.33	37.41	52.81	74	-21.19	PK
V	11510	42.56	49.07	15.33	37.41	46.23	54	-7.77	AV
V	17265	48.37	49.17	15.28	40.46	54.94	68.2	-13.26	PK
V	17265	41.26	49.17	15.28	40.46	47.83	54	-6.17	AV
H	11510	48.38	49.07	15.33	37.41	52.05	74	-21.95	PK
H	11510	42.84	49.07	15.33	37.41	46.51	54	-7.49	AV
H	17265	48.63	49.17	15.28	40.46	55.2	68.2	-13.00	PK
H	17265	40.84	49.17	15.28	40.46	47.41	54	-6.59	AV
<b>operation frequency:5795</b>									
V	11590	49.33	49.11	15.37	37.46	53.05	74	-20.95	PK
V	11590	41.38	49.11	15.37	37.46	45.1	54	-8.90	AV
V	17385	48.36	49.21	15.34	40.51	55	68.2	-13.20	PK
V	17385	40.68	49.21	15.34	40.51	47.32	54	-6.68	AV
H	11590	57.84	49.11	15.37	31.31	55.41	74	-18.59	PK
H	11590	44.79	49.11	15.37	31.31	42.36	54	-11.64	AV
H	17385	48.48	49.21	15.34	40.51	55.12	68.2	-13.08	PK
H	17385	40.29	49.21	15.34	40.51	46.93	54	-7.07	AV

**Remark:**

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,  
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

## 802.11ac HT80

Polar (H/V)	Frequency	Meter Reading	Pre-amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
<b>operation frequency:5775</b>									
V	11550	48.14	49.07	15.33	37.41	51.81	74	-22.19	PK
V	11550	42.79	49.07	15.33	37.41	46.46	54	-7.54	AV
V	17325	49.52	49.17	15.28	40.46	56.09	68.2	-12.11	PK
V	17325	40.36	49.17	15.28	40.46	46.93	54	-7.07	AV
H	11550	48.54	49.07	15.33	37.41	52.21	74	-21.79	PK
H	11550	41.85	49.07	15.33	37.41	45.52	54	-8.48	AV
H	17325	48.84	49.17	15.28	40.46	55.41	68.2	-12.79	PK
H	17325	40.19	49.17	15.28	40.46	46.76	54	-7.24	AV

**Remark:**

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,  
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



**3.3 CONDUCTED BAND EMISSION MEASUREMENT**

**3.3.1 TEST REQUIREMENT:**

FCC Part15 C Section 15.209 and 15.407

(4) For transmitters operating in the 5.725-5.85 GHz band: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

Spectrum Parameter	Setting	
Attenuation	Auto	
Start Frequency	5150MHz	5725MHz
Stop Frequency	5250MHz	5850MHz
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average	

**3.3.2 TEST PROCEDURE**

Test method: FCC KDB 789033 G)& Parts 15.407(b)(4) & 15.209(a)

**3.3.3 DEVIATION FROM TEST STANDARD**

No deviation

**3.3.4 TEST SETUP**



**3.3.5 EUT OPERATING CONDITIONS**

The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.


**3.3.6 TEST RESULT**

The antenna gain and line loss is compensated in the test data.






802.11a

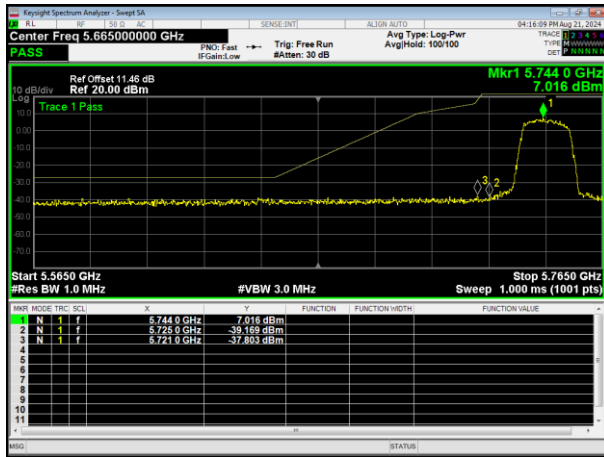


5745MHz

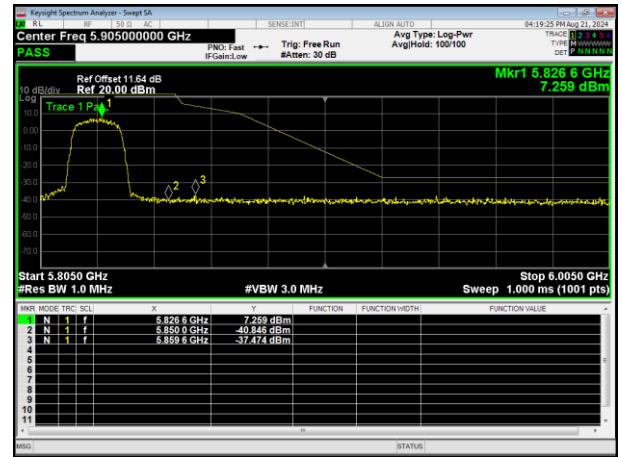


5825MHz

802.11ac HT20

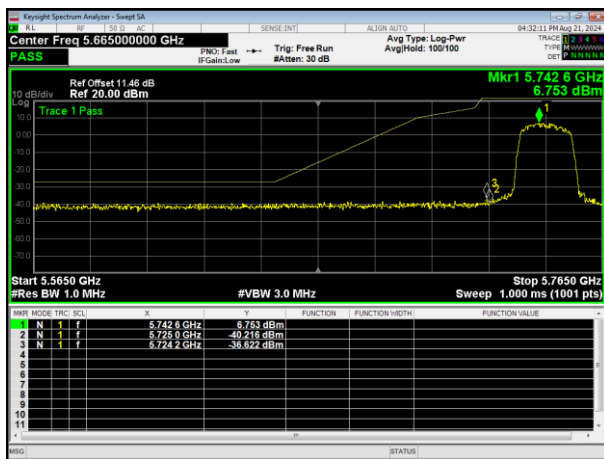


5745MHz

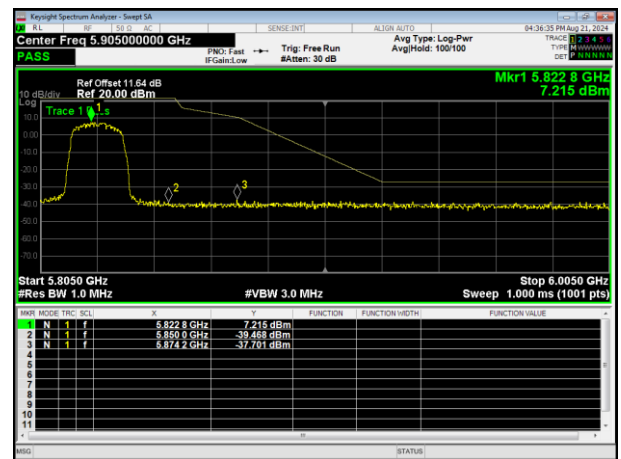


5825MHz

802.11ac HT40

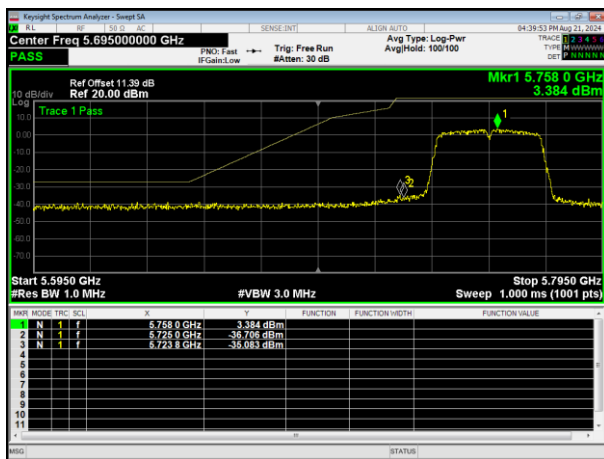


5755MHz

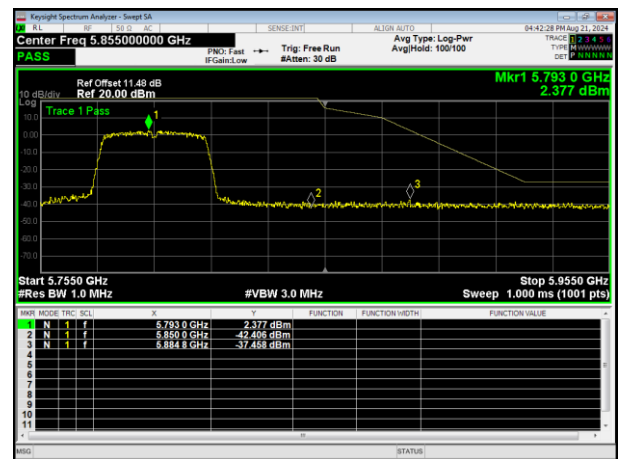


5795MHz



802.11n HT20

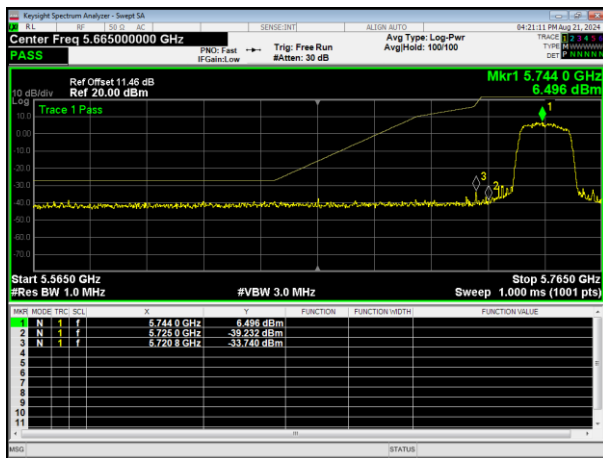


5745MHz

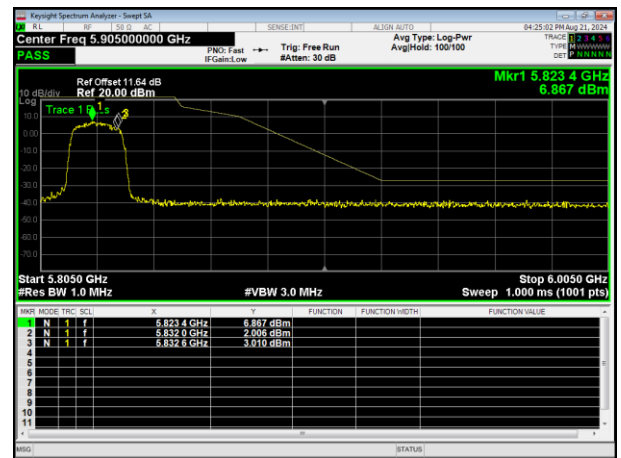


5825MHz

802.11n HT40

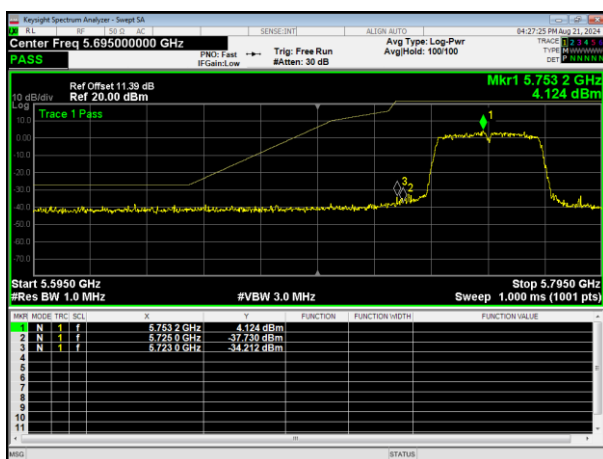


5755MHz

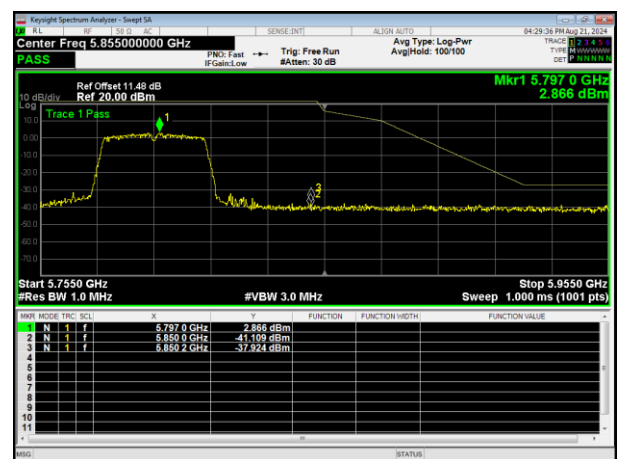

5795MHz

802.11ac HT80

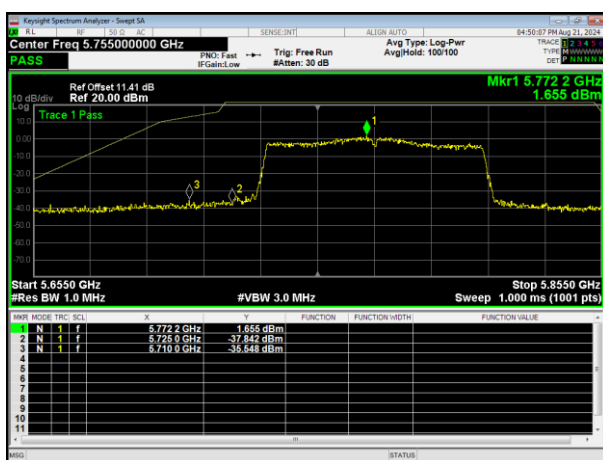

5775MHz



#### 4. AVERAGE OUTPUT POWER

##### 4.1 APPLIED PROCEDURES / LIMIT

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W.


##### 4.1.1 TEST PROCEDURE

- a. The EUT was directly connected to the frequency spectrum and antenna output port as show in the block diagram below,
- b. Spectrum Setting : Set RBW = 1 MHz. VBW  $\geq$  3 MHz.  
Span =Number of points in sweep  $\geq$  2 x span / RBW. (This ensures that bin-to-bin spacing is  $\leq$  RBW/2, so that narrowband signals are not lost between frequency bins.)  
Sweep = auto  
Detector function = RMS (i.e., power averaging), if available. Otherwise, use sample detector mode.  
Trace = max hold

##### 4.1.2 DEVIATION FROM STANDARD

No deviation.

##### 4.1.3 TEST SETUP

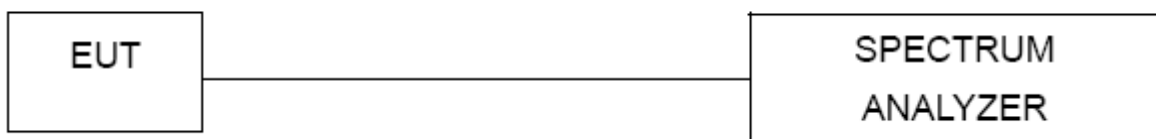

##### 4.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.


**4.1.5 TEST RESULTS**

Temperature:	25 °C	Relative Humidity:	60%
Pressure:	1012 hPa	Test Voltage :	DC 5V


Mode	Test Channel	Average Output Power (dBm)	Duty factor (dB)	Total Output Power(dB)	LIMIT (dBm)
802.11a	Low	5.286	0.87	6.156	30
	Middle	4.732	0.87	5.602	30
	High	5.242	0.87	6.112	30
802.11ac HT20	Low	4.995	0.16	5.155	30
	Middle	5.972	0.16	6.132	30
	High	5.098	0.16	5.258	30
802.11ac HT40	Low	4.599	0.32	4.919	30
	High	5.13	0.32	5.45	30
802.11ac HT80	/	5.355	0.51	5.865	30
802.11n HT20	Low	5.972	0.16	6.132	30
	Middle	5.694	0.16	5.854	30
	High	5.604	0.16	5.764	30
802.11n HT40	Low	4.686	0.26	4.946	30
	High	5.554	0.26	5.814	30




802.11a

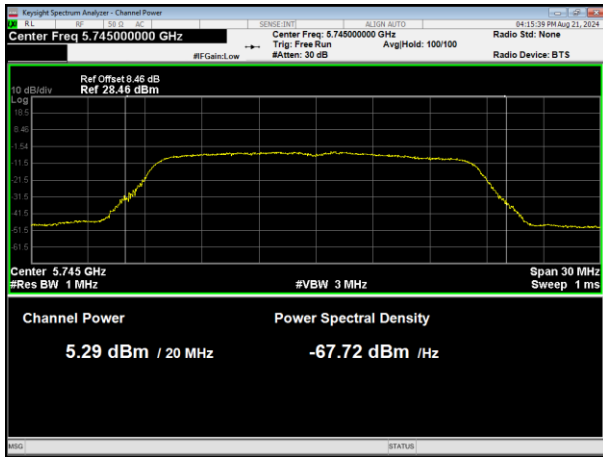


802.11ac HT20

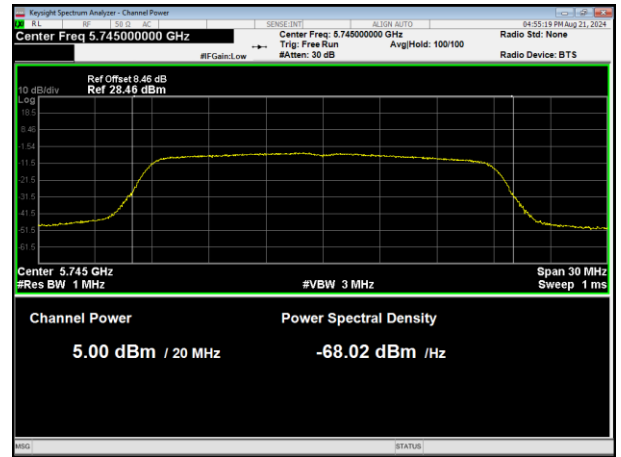


5745MHz

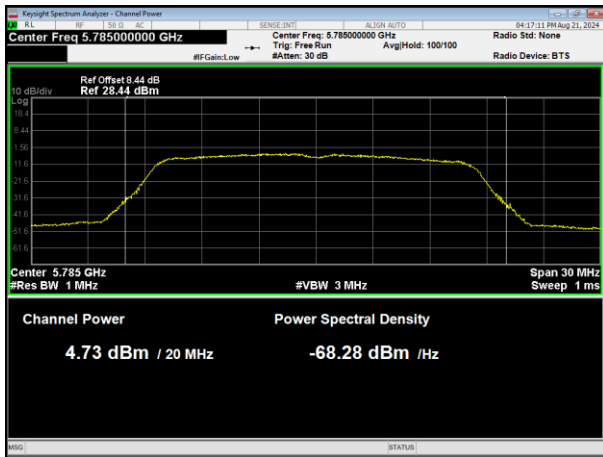


5745MHz

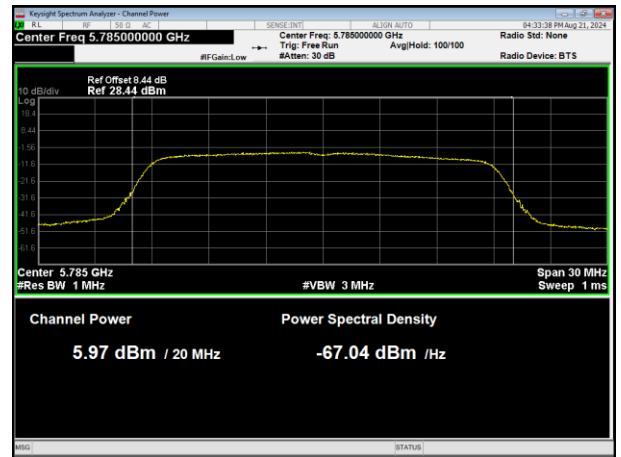

5785MHz

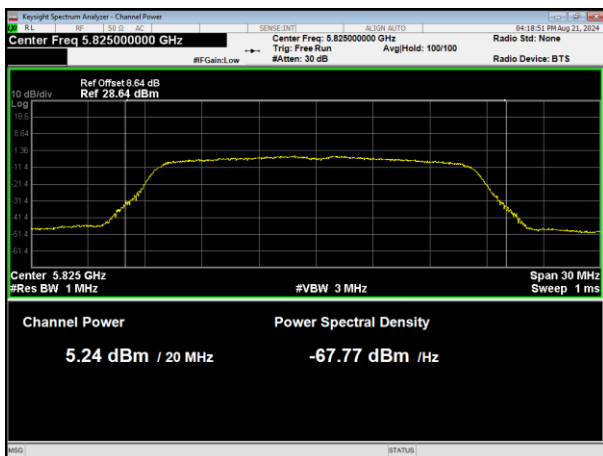

5785MHz

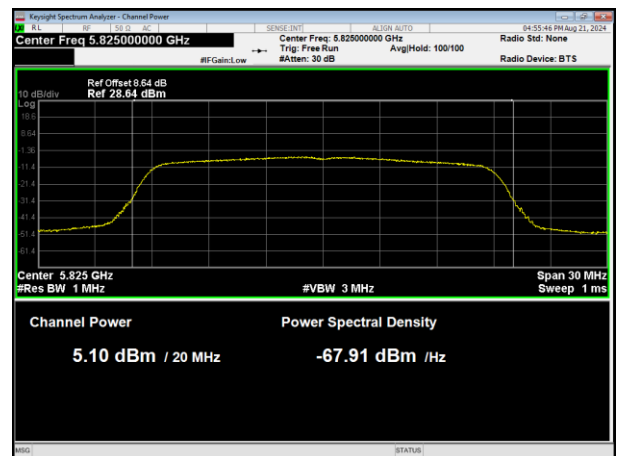


5825MHz


5825MHz




802.11ac HT40

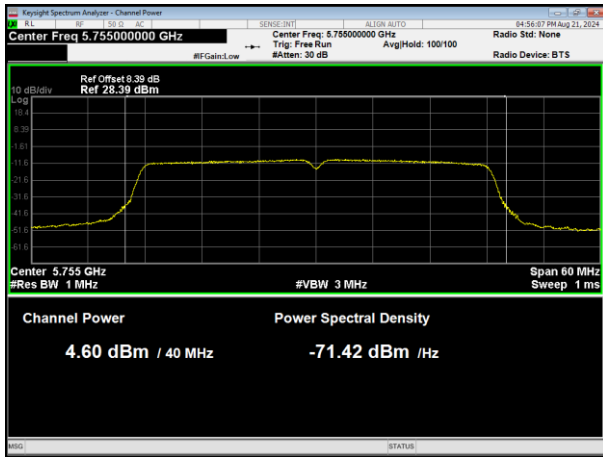


802.11n HT20

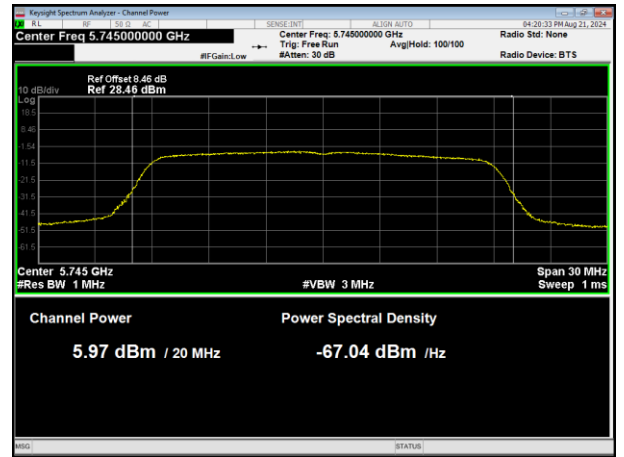

5755MHz

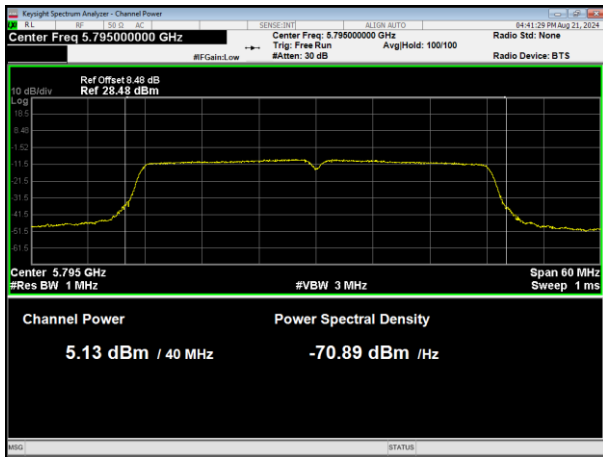


5745MHz

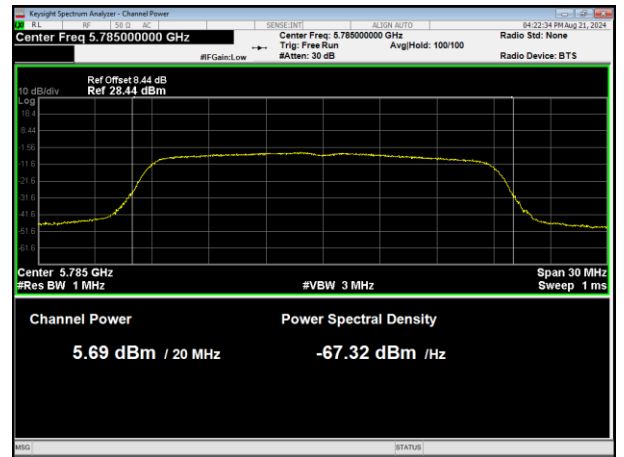

5795MHz




5785MHz

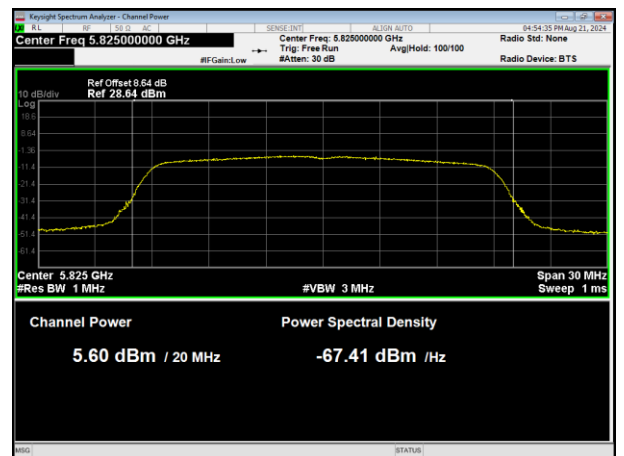


5825MHz




802.11n HT40

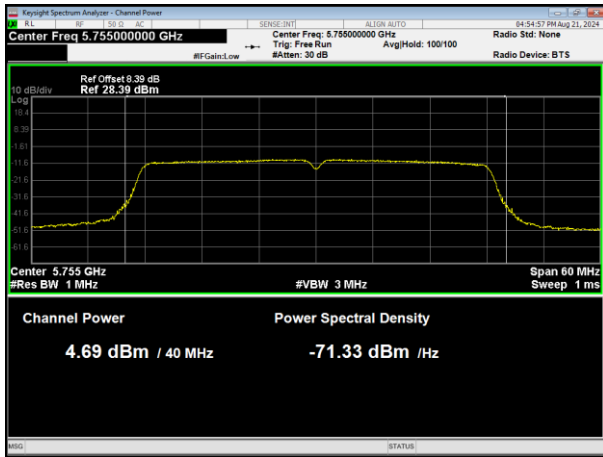

802.11ac HT80

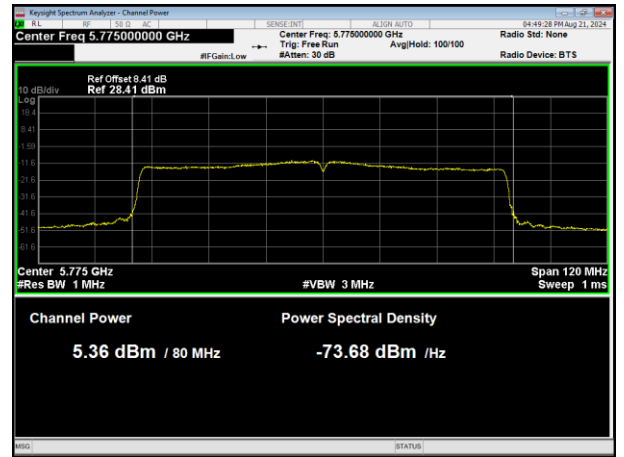

5755MHz

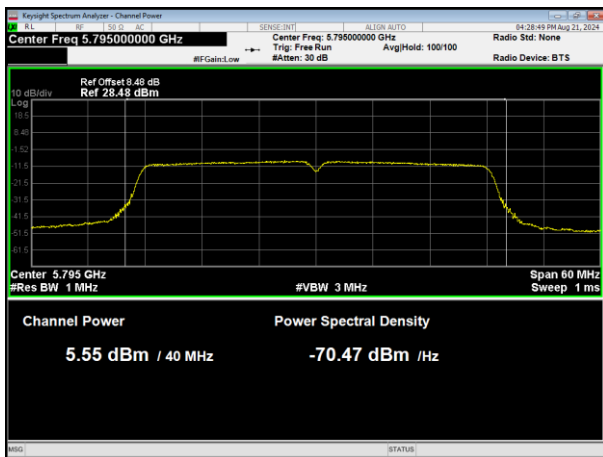

5775MHz



5795MHz



5. POWER SPECTRAL DENSITY TEST

5.1 APPLIED PROCEDURES / LIMIT

In addition, the maximum power spectral density shall not exceed 30 dBm in any 500 kHz band.

Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	= the frequency band of operation
RB	RBW ≥ 1MHz for band 1 RBW ≥ 510KHz for band 4
VB	VBW ≥ 3RBW
Detector	RMS (i.e., power averaging).
Trace	RMS/average
Sweep Time	Auto


5.1.1 TEST PROCEDURE

- Place the EUT on the table and set it in transmitting mode.
- The testing follows FCC KDB 789033 D02.
- Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to Spectrum.
- For U-NII1, U-NII-2A, U-NII-2C Band:  
Set RBW=1MHz, VBW=3MHz, where span is enough to capture the entire bandwidth, Sweep time = Auto (601 pts), detector = sample, traces 100 sweeps of video averaging. (SA-2 with the omission of procedure x, the integration with 26dB EBW bandwidth)  
For U-NII-3 Band:  
Set RBW=510 kHz, VBW=3\*RBW, where span is enough to capture the entire bandwidth, Sweep time = Auto (601 pts), detector = sample, traces 100 sweeps of video averaging. (SA-2 with the omission of procedure x, the integration with 26dB EBW bandwidth)
- Use the cursor on spectrum to peak search the highest level of trace
- Record the max. reading and add 10 log(1/duty cycle).  
we test all antennas, the antenna 1 was worst mode and the data recording in the report.
- Duty factor Reference is made to the test results in Section 7.1.5.

5.1.2 DEVIATION FROM STANDARD

No deviation.

5.1.3 TEST SETUP

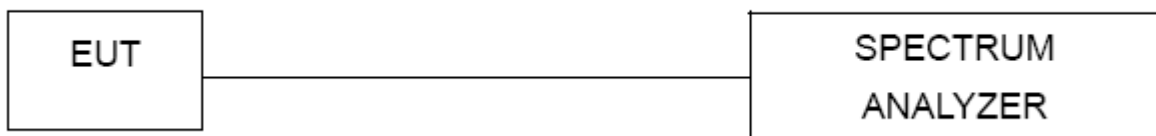

5.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.




**5.1.5 TEST RESULTS**


	Mode	Test Channel	Reading Level (dBm)	Duty factor (dB)	PSD (dBm/500kHz)	Limit (dBm/500kHz)	Result
Band4	802.11a	Low	-7.123	0.87	-6.253	30.00	PASS
		Middle	-7.544	0.87	-6.674	30.00	PASS
		High	-7.185	0.87	-6.315	30.00	PASS
	802.11ac HT20	Low	-6.3	0.16	-6.14	30.00	PASS
		Middle	-6.782	0.16	-6.622	30.00	PASS
		High	-5.696	0.16	-5.536	30.00	PASS
	802.11ac HT40	Low	-10.389	0.32	-10.069	30.00	PASS
		High	-11.382	0.32	-11.062	30.00	PASS
	802.11ac HT80	/	-12.586	0.51	-12.076	30.00	PASS
	802.11n HT20	Low	-6.641	0.16	-6.481	30.00	PASS
		Middle	-6.902	0.16	-6.742	30.00	PASS
		High	-6.476	0.16	-6.316	30.00	PASS
	802.11n HT40	Low	-10.418	0.26	-10.158	30.00	PASS
		High	-10.657	0.26	-10.397	30.00	PASS




802.11a

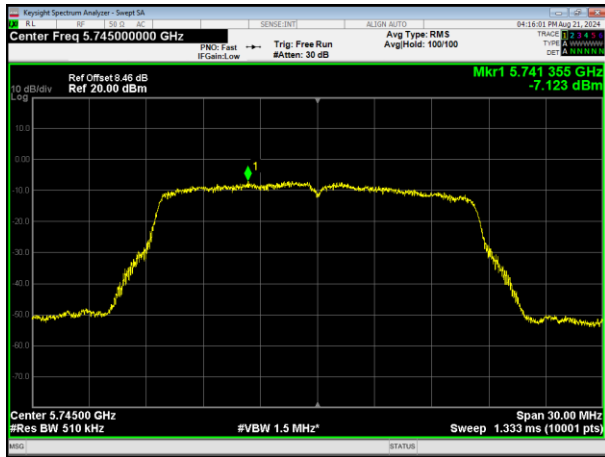


802.11ac HT20

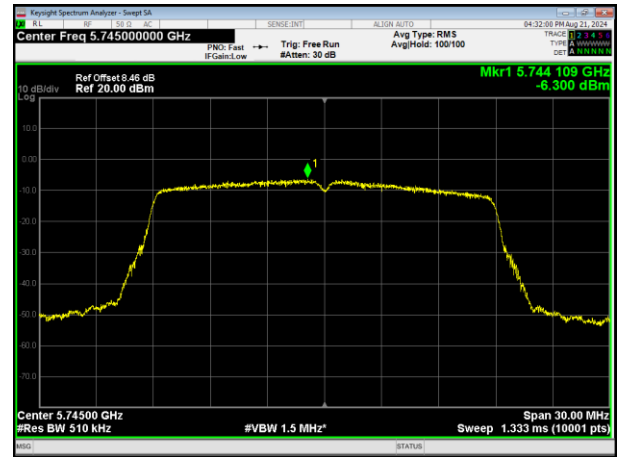


5745MHz

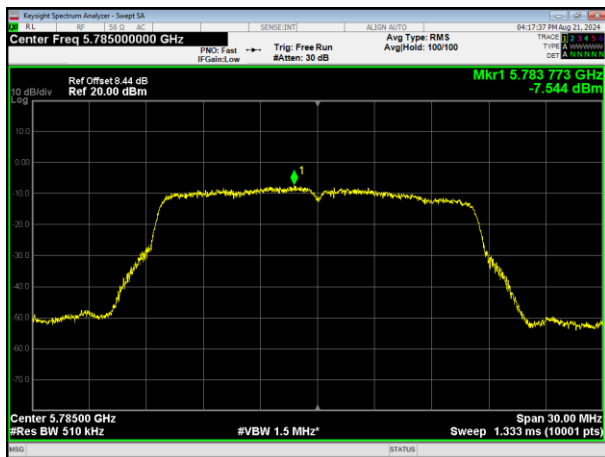


5745MHz

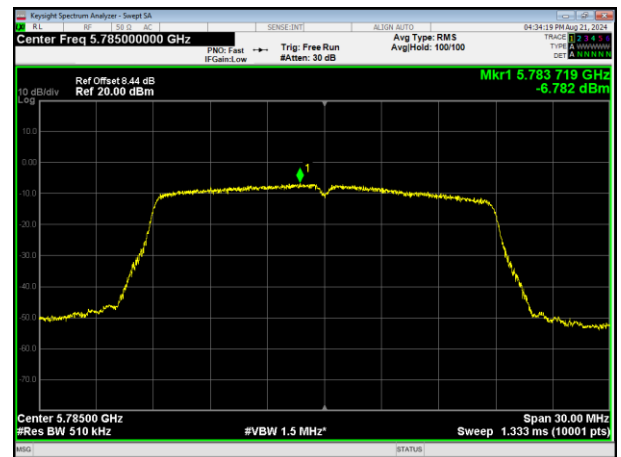

5785MHz

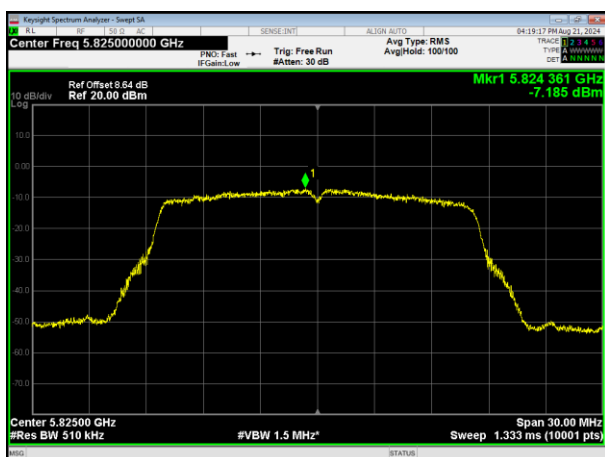

5785MHz

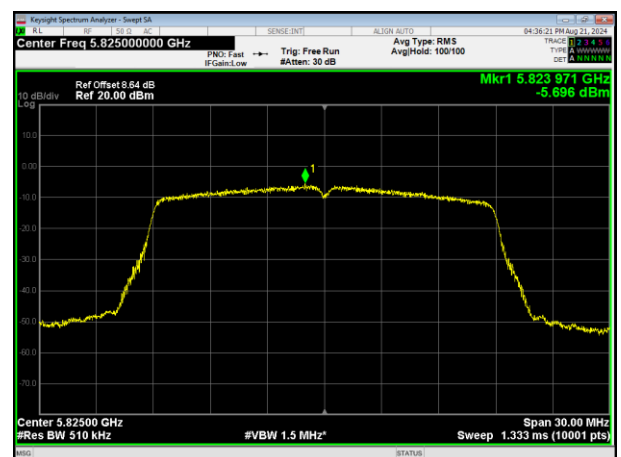

5825MHz




5825MHz







802.11ac HT40

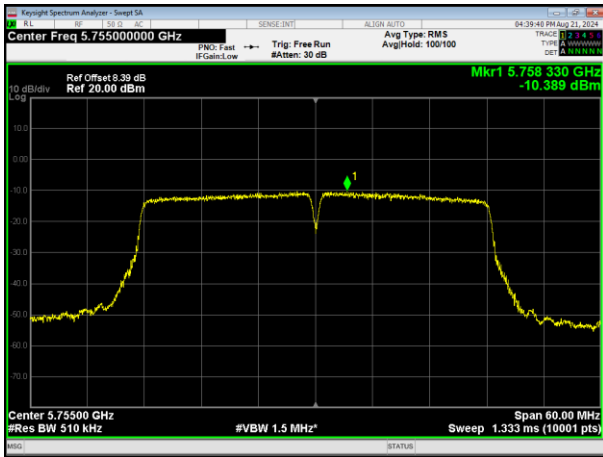


802.11n HT20

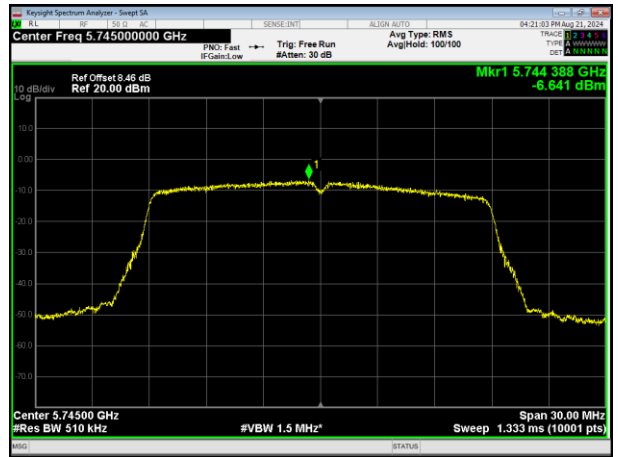

5755MHz

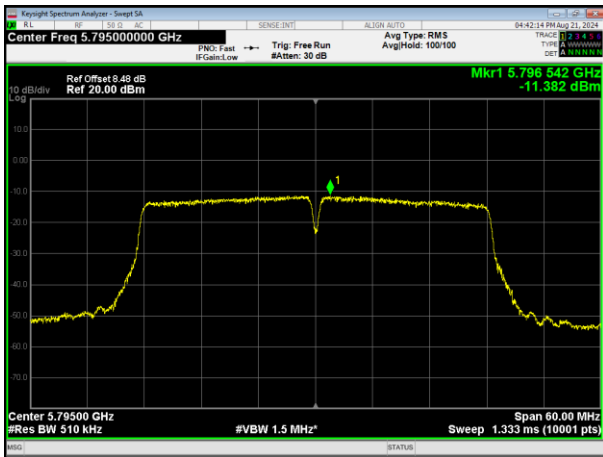


5745MHz

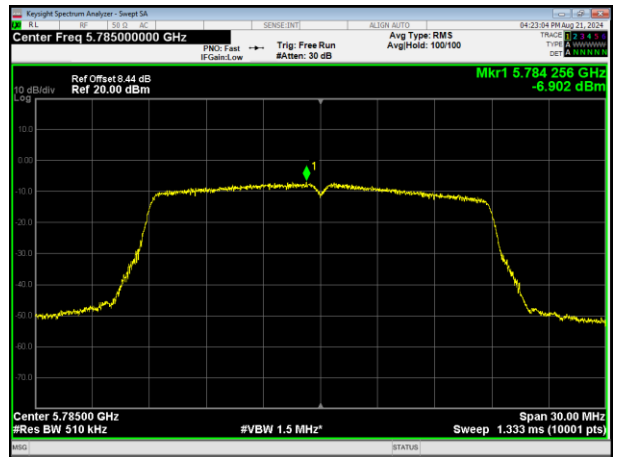

5795MHz




5785MHz

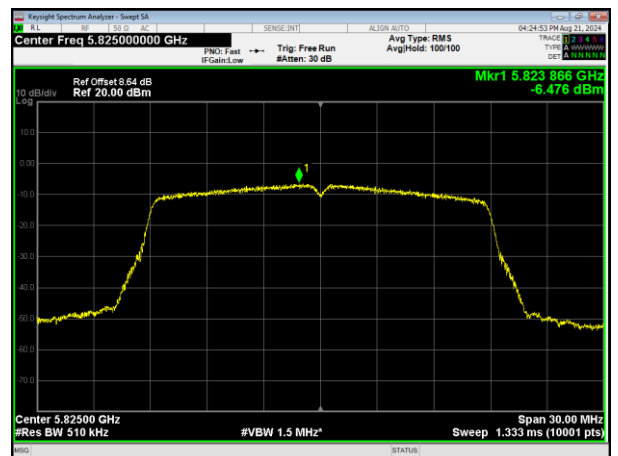


5825MHz




802.11n HT40

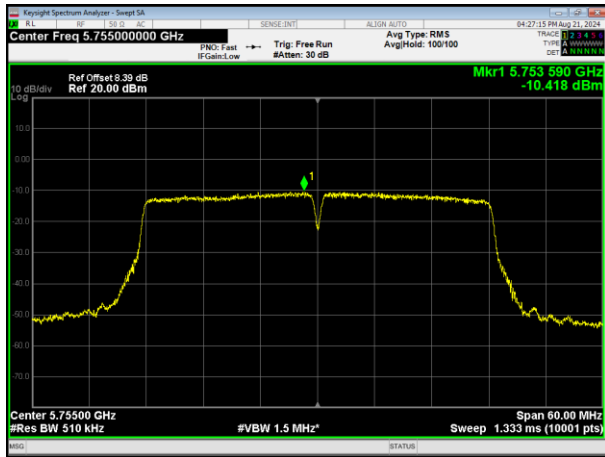

802.11ac HT80

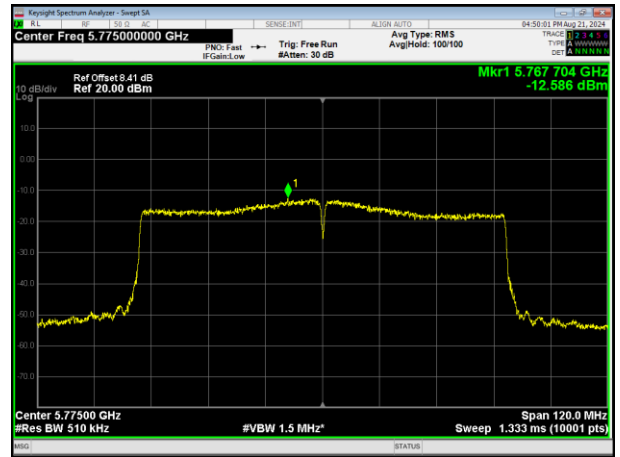

5755MHz

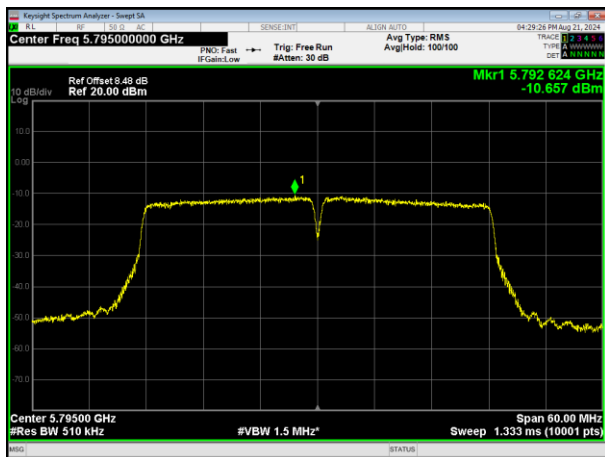

5775MHz



5795MHz





6. 6DB BANDWIDTH TEST

6.1 APPLIED PROCEDURES / LIMIT

There is no limit bandwidth for U-NII-1, U-NII-2-A and U-NII-2-C.
The minimum of 6dB Bandwidth measurement is 0.5 MHz for U-NII-3

6.1.1 TEST PROCEDURE

Table with 2 columns: Spectrum Parameters, Setting. Rows include RBW (100KHz), VBW (300KHz), Span (30MHz, 60MHz, 120MHz), Sweep Time (Auto), Detector (Peak), Trace Mode (Max Hold).

6.1.2 DEVIATION FROM STANDARD

No deviation.

6.1.3 TEST SETUP



6.1.4 EUT OPERATION CONDITIONS


The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.

**6.1.5 TEST RESULTS**


		Test Channel	6dB Bandwidth (MHz)	6dB Bandwidth Limit (MHz)	Result
Band 4	802.11a	Low	15.715	>0.5	Pass
		Middle	15.765	>0.5	Pass
		High	15.408	>0.5	Pass
	802.11ac HT20	Low	15.641	>0.5	Pass
		Middle	13.842	>0.5	Pass
		High	14.98	>0.5	Pass
	802.11ac HT40	Low	35.072	>0.5	Pass
		High	33.861	>0.5	Pass
	802.11ac HT80	/	75.133	>0.5	Pass
	802.11n HT20	Low	15.083	>0.5	Pass
		Middle	15.094	>0.5	Pass
		High	16.882	>0.5	Pass
	802.11n HT40	Low	35.059	>0.5	Pass
		High	35.092	>0.5	Pass




802.11a

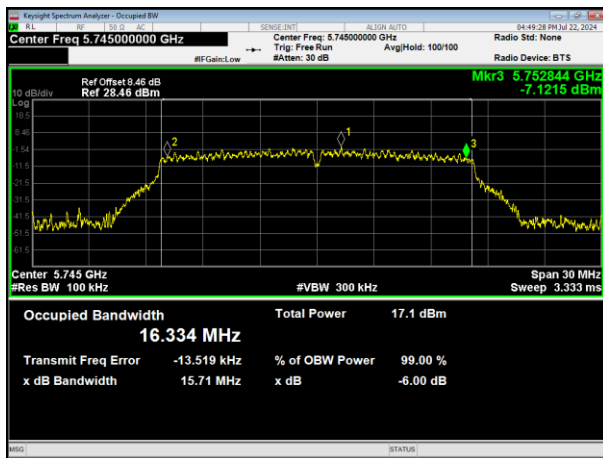


802.11ac HT20

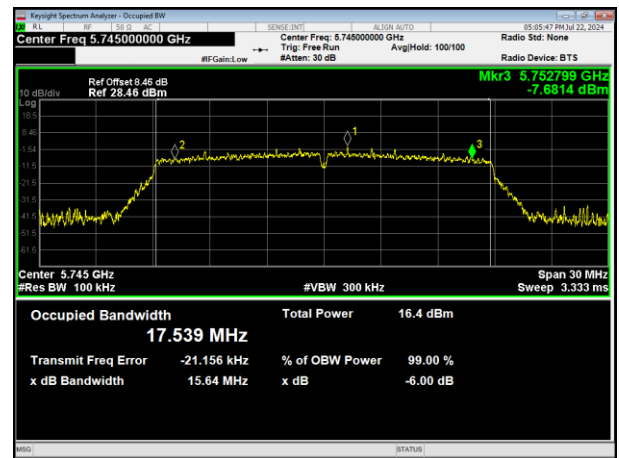


5745MHz

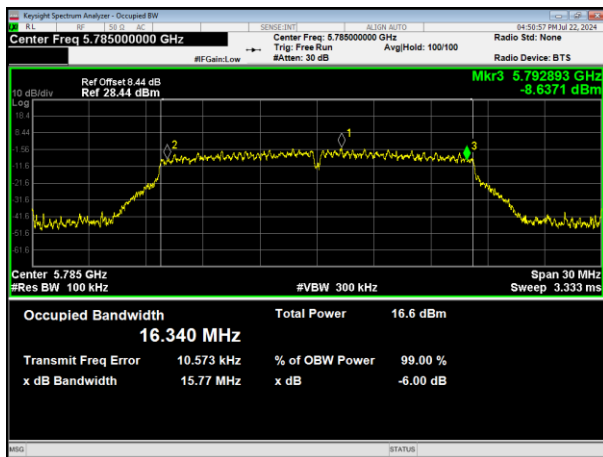


5745MHz

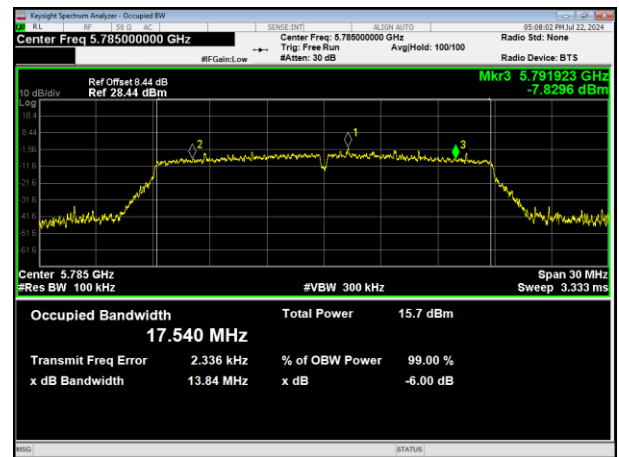

5785MHz

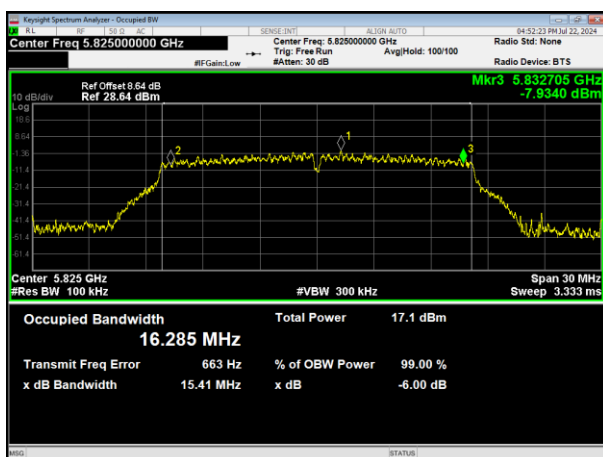

5785MHz

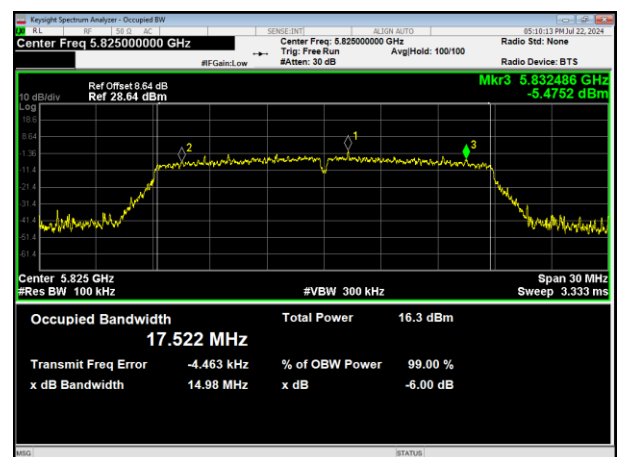


5825MHz


5825MHz




802.11ac HT40

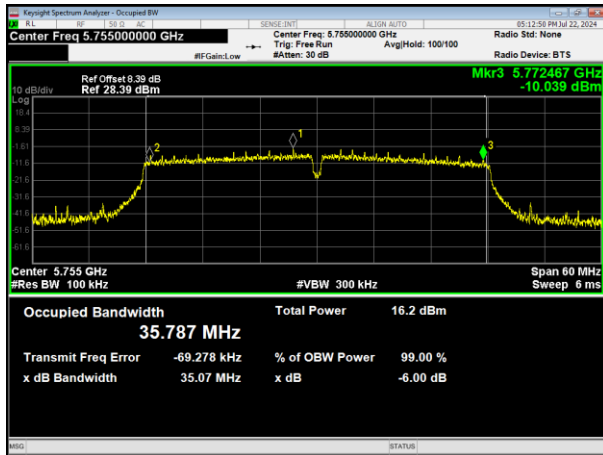


802.11n HT20

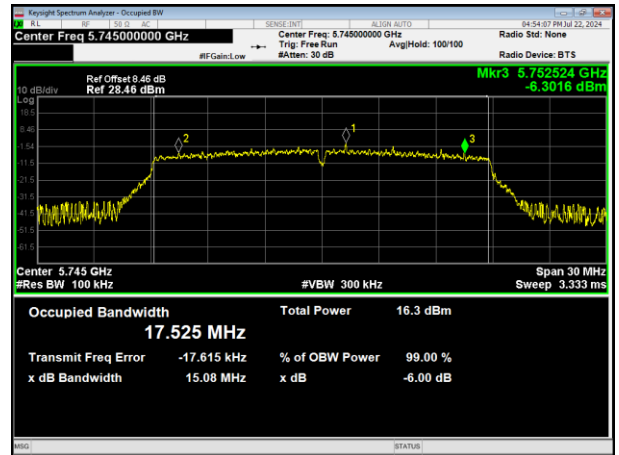


5755MHz

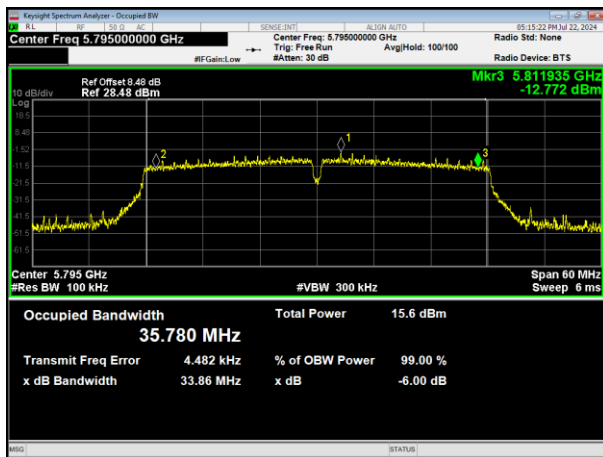


5745MHz

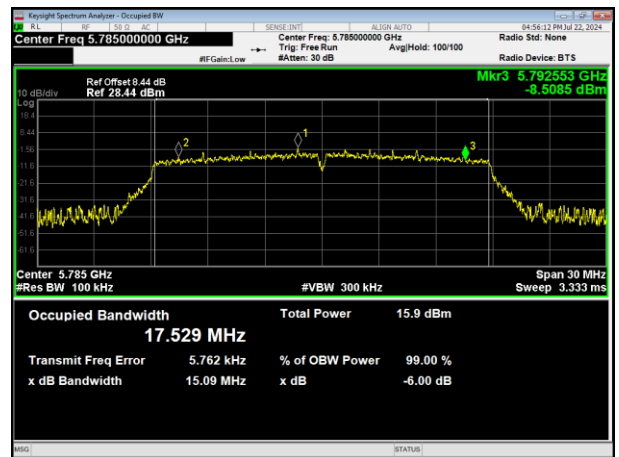

5795MHz



5785MHz

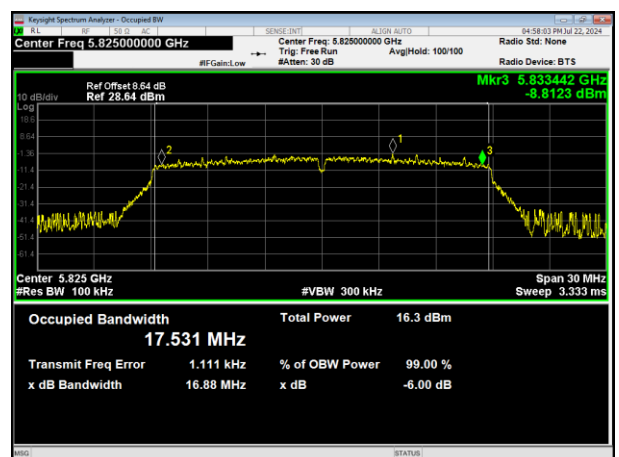


5825MHz







802.11n HT40

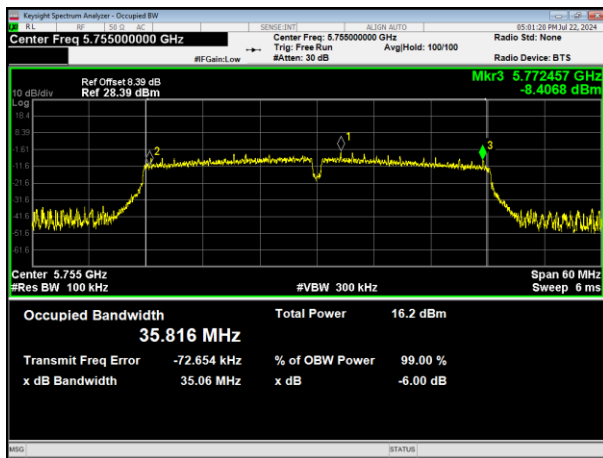

802.11ac HT80

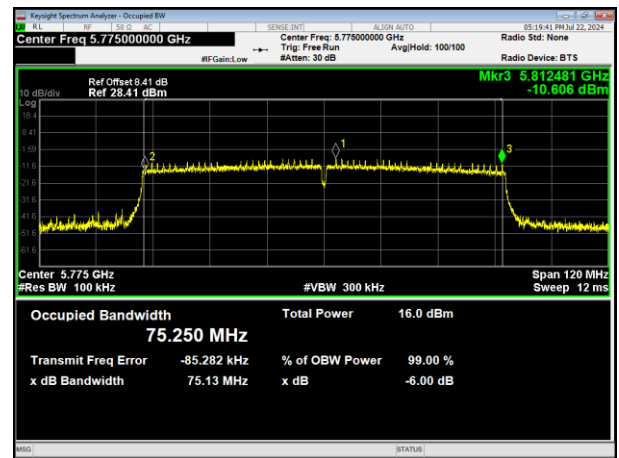

5755MHz

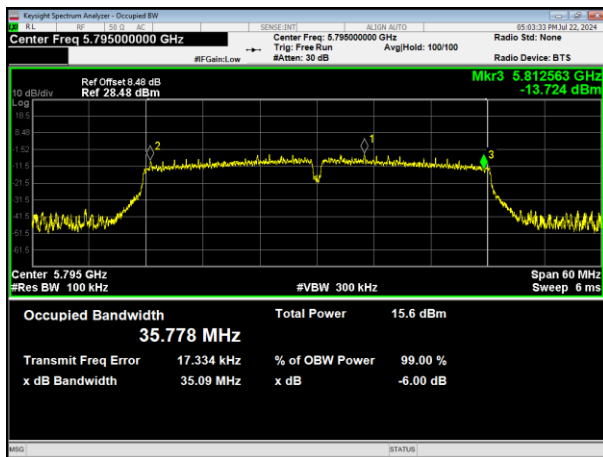

5775MHz



5795MHz



## 7. DUTY CYCLE TEST SIGNAL

### 7.1 APPLIED PROCEDURES / LIMIT

Pre-analysis Check: While conducting average power measurement, duty cycle of each mode shall be checked to ensure its duty cycle in order to compensate for the loss due to insufficient ratio of duty cycle. All duty cycle is pre-scanned, and result as obtained below shows only the most representative ones where duty cycle is conducted as the given transmission with given virtual operation that expresses the percentage.


#### 7.1.1 TEST PROCEDURE

1. Set RBW = 1 MHz.
2. Set the video bandwidth (VBW)  $\geq$ RBW.
3. Detector = Peak.
4. Sweep = auto couple.
5. Allow the trace to stabilize.
6. Span=0

#### 7.1.2 DEVIATION FROM STANDARD

No deviation.

#### 7.1.3 TEST SETUP

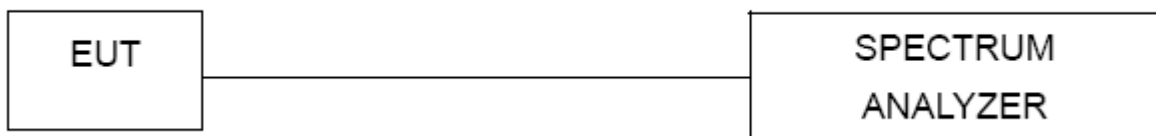

#### 7.1.4 EUT OPERATION CONDITIONS


The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.

**7.1.5 TEST RESULTS**


Operation Mode		Duty Cycle(%)	Duty Fator (dB) $10 * \log (1/ \text{Duty cycle})$
Band 4	802.11a	81.82	0.87
	802.11ac(HT20)	96.32	0.16
	802.11ac(HT40)	92.86	0.32
	802.11ac(HT80)	88.89	0.51
	802.11n(HT20)	96.3	0.16
	802.11n(HT40)	94.2	0.26




802.11a

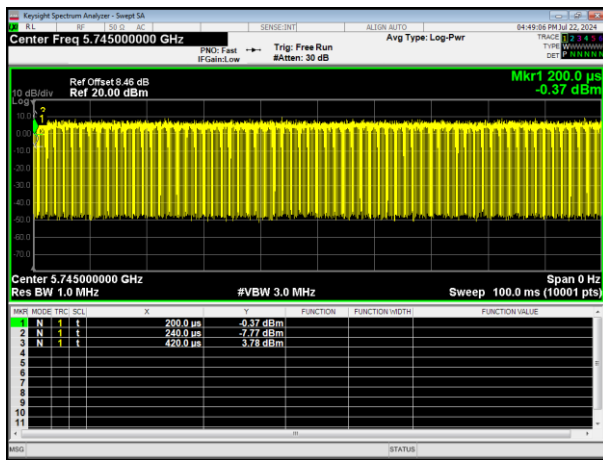


802.11ac HT20

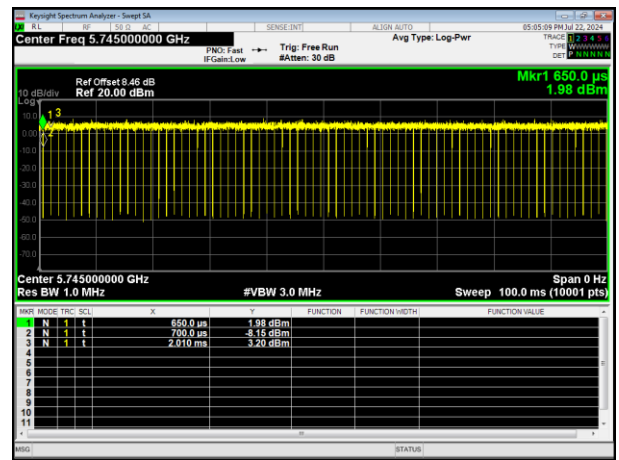


802.11ac HT40

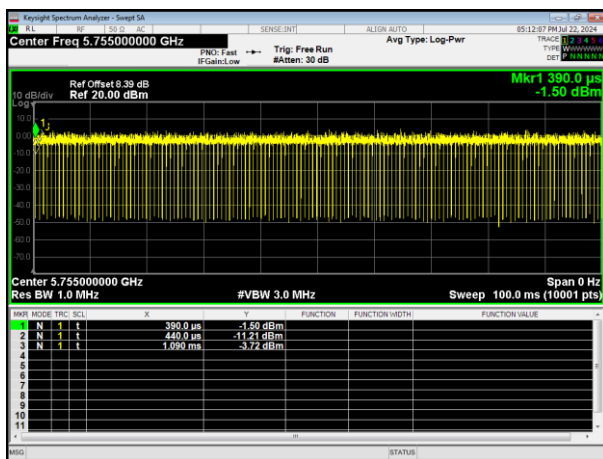


802.11n HT20

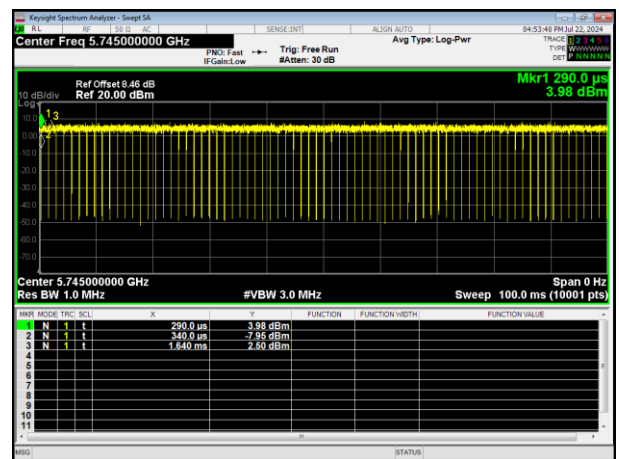

802.11n HT40

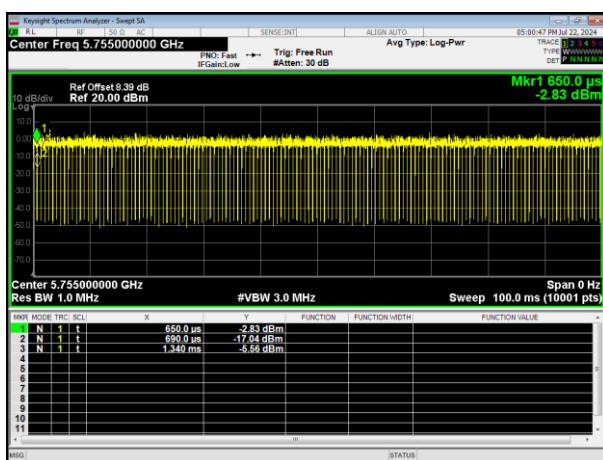

802.11ac HT80

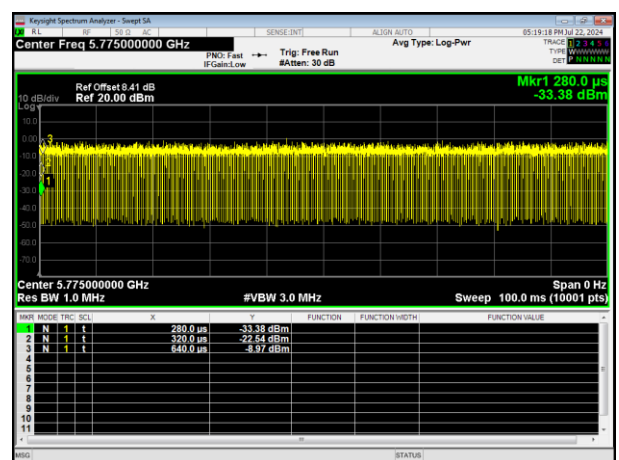



## 8. FREQUENCY STABILITY

### 8.1 APPLIED PROCEDURES / LIMIT

Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.


#### 8.1.1 TEST PROCEDURE

1. The EUT was placed inside temperature chamber and powered and powered by nominal DC voltage.
2. Set EUT as normal operation.
3. Turn the EUT on and couple its output to spectrum.
4. Turn the EUT off and set the chamber to the highest temperature specified.
5. Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize, turn the EUT and measure the operating frequency.
6. Repeat step with the temperature chamber set to the lowest temperature.

#### 8.1.2 DEVIATION FROM STANDARD

No deviation.

#### 8.1.3 TEST SETUP

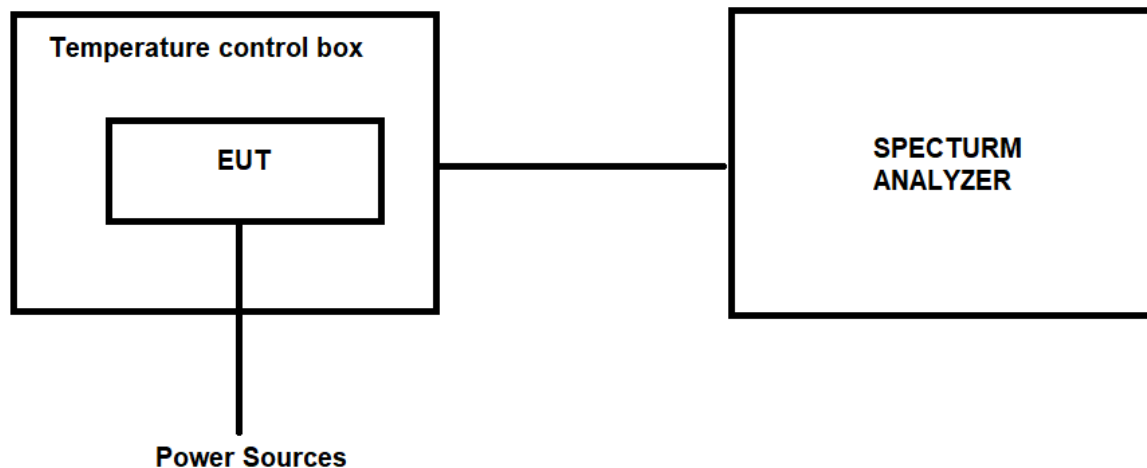

#### 8.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.



**8.1.5 TEST RESULTS**

Test Voltage	Test Temp.	Measured Frequency (MHz)	Spectrum Frequency (MHz)			Δ Frequency (MHz)		
			802.11a	802.11n HT20	802.11ac HT20	802.11a	802.11n HT20	802.11ac HT20
5.5V	-20°C	5745	5745.0323	5745.0325	5745.0369	5.6223	5.6571	6.4230
		5785	5785.0359	5785.0352	5785.0352	6.2057	6.0847	6.0847
		5825	5825.0341	5825.0336	5825.0336	5.8541	5.7682	5.7682
4.5V		5745	5745.0296	5745.0252	5745.0241	5.1523	4.3864	4.1950
		5785	5785.0354	5785.0341	5785.0352	6.1193	5.8946	6.0847
		5825	5825.0496	5825.0414	5825.0424	8.5150	7.1073	7.2790
5V	25°C	5745	5745.0314	5745.0352	5745.0366	5.4656	6.1271	6.3708
		5785	5785.0414	5785.0434	5785.0459	7.1564	7.5022	7.9343
		5825	5825.0241	5825.0214	5825.0264	4.1373	3.6738	4.5322
5.5V	50°C	5745	5745.0669	5745.0696	5745.0685	11.6449	12.1149	11.9234
		5785	5785.0452	5785.0452	5785.0463	7.8133	7.8133	8.0035
		5825	5825.0644	5825.0664	5825.0614	11.0558	11.3991	10.5408
4.5V	50°C	5745	5745.0414	5745.0452	5745.0463	7.2063	7.8677	8.0592
		5785	5785.0239	5785.0263	5785.0225	4.1314	4.5462	3.8894
		5825	5825.0752	5825.0714	5825.0736	12.9099	12.2575	12.6352

Test Voltage	Test Temp.	Measured Frequency (MHz)	Spectrum Frequency (MHz)		Δ Frequency (MHz)	
			802.11n HT40	802.11ac HT40	802.11n HT40	802.11ac HT40
5.5V	-20°C	5755	5755.0525	5755.0552	9.1225	9.5917
		5795	5795.0636	5795.0633	10.9750	10.9232
4.5V		5755	5755.0214	5755.0618	3.7185	10.7385
		5795	5795.0438	5795.0432	7.5582	7.4547
5V	25°C	5755	5755.0216	5755.0263	3.7533	4.5699
		5795	5795.0595	5795.0552	10.2675	9.5255
5.5V	50°C	5755	5755.0463	5755.0414	8.0452	7.1937
		5795	5795.0365	5795.0369	6.2985	6.3676
4.5V	50°C	5755	5755.0354	5755.0314	6.1512	5.4561
		5795	5795.0466	5795.0436	8.0414	7.5237



Test Voltage	Test Temp.	Measured Frequency (MHz)	Spectrum Frequency (MHz)	$\Delta$ Frequency (MHz)
			802.11ac HT80	802.11ac HT80
5.5V	-20°C	5775	5775.0125	2.1645
4.5V		5775	5775.0336	5.8182
5V	25°C	5775	5775.0341	5.9048
5.5V	50°C	5775	5775.0263	4.5541
4.5V	50°C	5775	5775.0563	9.7489



## 9. TRANSMISSION IN THE ABSENCE OF DATA

### 9.1 STANDARD REQUIREMENT

According to §15.407(c)

The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signaling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals. Applicants shall include in their application for equipment authorization a description of how this requirement is met.

### 9.2 TEST RESULT

No non-compliance noted:  
Refer to the theory of operation.

## 10. ANTENNA REQUIREMENT

### 10.1 STANDARD REQUIREMENT

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

### 10.2 EUT ANTENNA

The EUT antenna is Internal Antenna, It comply with the standard requirement.

## 11. TEST SEUUP PHOTO

Reference to the appendix I for details.

## 12. EUT PHOTO

Reference to the appendix II for details.

\*\*\*\*\* END OF REPORT \*\*\*\*\*