

FCC Test Report

Report No.: AGC16535240701FR01

FCC ID	:	2BHE5-EL001
APPLICATION PURPOSE	:	Original Equipment
PRODUCT DESIGNATION	:	ElderLife
BRAND NAME	:	ElderLife
MODEL NAME	:	el001
APPLICANT	:	CHUZHOU FORTUNE COLLECTION IMPT. & EXPT. CO., LTD
DATE OF ISSUE	:	Jul. 11, 2024
STANDARD(S)	:	FCC Part 15 Subpart C §15.247
REPORT VERSION	:	V1.0







Report Revise Record

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	Jul. 11, 2024	Valid	Initial Release



Table of Contents

1. General Information	5
2. Product Information	6
2.1 Product Technical Description	
2.2 Test Frequency List	
2.3 Related Submittal(S) / Grant (S)	7
2.4 Test Methodology	7
2.5 Special Accessories	7
2.6 Equipment Modifications	7
2.7 Antenna Requirement	7
3. Test Environment	
3.1 Address of the Test Laboratory	
3.2 Test Facility	
3.3 Environmental Conditions	9
3.4 Measurement Uncertainty	9
3.5 List of Equipment Use	
4.System Test Configuration	
4.1 EUT Configuration	
4.2 EUT Exercise	
4.3 Configuration of Tested System	
4.4 Equipment Used In Tested System	
4.5 Summary of Test Results	13
5. Description of Test Modes	
6. Duty Cycle Measurement	15
7. RF Output Power Measurement	
7.1 Provisions Applicable	
7.2 Measurement Procedure	
7.3 Measurement Setup (Block Diagram of Configuration)	
7.4 Measurement Result	
8. 6dB Bandwidth Measurement	19
8.1 Provisions Applicable	
8.2 Measurement Procedure	19
8.3 Measurement Setup (Block Diagram of Configuration)	
8.4 Measurement Results	
9. Power Spectral Density Measurement	
9.1 Provisions Applicable	
9.2 Measurement Procedure	
9.3 Measurement Setup (Block Diagram of Configuration)	
9.4 Measurement Results	
10. Conducted Band Edge and Out-of-Band Emissions	



10.1 Provisions Applicable	27
10.2 Measurement Procedure	
10.3 Measurement Setup (Block Diagram of Configuration)	27
10.4 Measurement Results	
11. Radiated Spurious Emission	
11.1 Measurement Limit	
11.2 Measurement Procedure	
11.3 Measurement Setup (Block Diagram of Configuration)	
11.4 Measurement Result	
12. AC Power Line Conducted Emission Test	47
12.1 Measurement Limit	47
12.2 Measurement Setup (Block Diagram of Configuration)	47
12.3 Preliminary Procedure of Line Conducted Emission Test	
12.4 Final Procedure of Line Conducted Emission Test	
12.5 Measurement Results	
Appendix I: Photographs of Test Setup	49
Appendix II: Photographs of Test EUT	49



1. General Information

Applicant	CHUZHOU FORTUNE COLLECTION IMPT. & EXPT. CO., LTD
Address	No. 292, Langya East Road, Langya District, Chuzhou City, Anhui, China
Manufacturer	CHUZHOU FORTUNE COLLECTION IMPT.& EXPT. CO., LTD
Address	No. 292, Langya East Road, Langya District, Chuzhou City, Anhui, China
Factory	CHUZHOU FORTUNE COLLECTION IMPT.& EXPT.CO.,LTD
Address	No. 292, Langya East Road, Langya District, Chuzhou City, Anhui, China
Product Designation	ElderLife
Brand Name	ElderLife
Test Model	el001
Series Model(s)	N/A
Difference Description	N/A
Date of receipt of test item	Jul. 04, 2024
Date of Test	Jul. 04, 2024~Jul. 11, 2024
Deviation from Standard	No any deviation from the test method
Condition of Test Sample	Normal
Test Result	Pass
Test Report Form No	AGCER-FCC-BLE-V1

Note: The test results of this report relate only to the tested sample identified in this report.

Prepared By

TCI-li

Cici Li (Project Engineer)

Jul. 11, 2024

Reviewed By

Calvin Liu (Reviewer)

Jul. 11, 2024

Approved By

lax Zhang

.

ved By

Max Zhang

Authorized Officer

Jul. 11, 2024



2. Product Information

2.1 Product Technical Description

Frequency Band	2400MHz-2483.5MHz
Operation Frequency Range	2402MHz-2480MHz
Bluetooth Version	V5.0
Modulation Type	BLE GFSK 1Mbps GFSK 2Mbps
Number of channels	40
Carrier Frequency of Each Channel	40 Channels (37 Data channels + 3 advertising channels)
Channel Separation	2 MHz
Maximum Transmitter Power	3.926 dBm (0.00247 W)
Hardware Version	1.0
Software Version	1.0
Antenna Designation	Chip Antenna
Antenna Gain	0.5 dBi
Power Supply	DC 3V by battery
Adapter Information	N/A

2.2 Test Frequency List

Frequency Band	Channel Number	Frequency		
	0	2402 MHz		
	1	2404 MHz		
2400~2483.5MHz	:	:		
	19	2440MHz		
	:	:		
	38	2478 MHz		
	39	2480 MHz		
Note: f = 2402 + 2*k MHz, k = 0,, 39 f is the operating frequency (MHz); k is the operating channel.				



2.3 Related Submittal(S) / Grant (S)

This submittal(s) (test report) is intended for FCC ID: **2BHE5-EL001**, filing to comply with Part 2, Part 15 of the Federal Communication Commission rules.

2.4 Test Methodology

The tests were performed according to following standards:

No.	Identity	Document Title		
1	FCC 47 CFR Part 2	Frequency allocations and radio treaty matters; general rules and regulations		
2	FCC 47 CFR Part 15	Radio Frequency Devices		
3	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices		
4	KDB 558074 D01 15.247 Meas Guidance v05r02	Guidance for compliance measurements on Digital Transmission Systems, Frequency Hopping Spread Spectrum system, and Hybrid system devices operating under Section 15.247 of the FCC rules		

2.5 Special Accessories

Not available for this EUT intended for grant.

2.6 Equipment Modifications

Not available for this EUT intended for grant.

2.7 Antenna Requirement

Standard Requirement

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi

EUT Antenna:

The non-detachable antenna inside the device cannot be replaced by the user at will. The gain of the antenna is 0.5 dBi.



3. Test Environment

3.1 Address of the Test Laboratory

Laboratory: Attestation of Global Compliance (Shenzhen) Co., Ltd.

Address: 1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

3.2 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L5488

Attestation of Global Compliance (Shenzhen) Co., Ltd. has been assessed and proved to follow CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories).

A2LA-Lab Cert. No.: 5054.02

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to follow ISO/IEC 17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

FCC-Registration No.: 975832

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files with Registration 975832.

IC-Registration No.: 24842 (CAB identifier: CN0063)

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the Certification and Engineering Bureau of Industry Canada. The acceptance letter from the IC is maintained in our files with Registration 24842.



3.3 Environmental Conditions

	Normal Conditions
Temperature range (°C)	15 - 35
Relative humidity range	20 % - 75 %
Pressure range (kPa)	86 - 106
Power supply	DC 3V by battery

3.4 Measurement Uncertainty

The reported uncertainty of measurement $y \pm U$, where expended uncertainty U is based on a standard

uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95%.

Item	Measurement Uncertainty
Uncertainty of Conducted Emission for AC Port	$U_c = \pm 2.9 \text{ dB}$
Uncertainty of Radiated Emission below 1GHz	$U_c = \pm 3.9 \text{ dB}$
Uncertainty of Radiated Emission above 1GHz	$U_c = \pm 4.9 \text{ dB}$
Uncertainty of total RF power, conducted	$U_c = \pm 0.8 \text{ dB}$
Uncertainty of RF power density, conducted	$U_c = \pm 2.6 \text{ dB}$
Uncertainty of spurious emissions, conducted	U _c = ±2 %
Uncertainty of Occupied Channel Bandwidth	U _c = ±2 %



3.5 List of Equipment Use

• R	RF Conducted Test System							
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)	
\square	AGC-ER-E036	Spectrum Analyzer	Agilent	N9020A	MY49100060	2024-05-24	2025-05-23	
\boxtimes	AGC-ER-E062	Power Sensor	Agilent	U2021XA	MY54110007	2024-02-01	2025-01-31	
\boxtimes	AGC-ER-E063	Power Sensor	Agilent	U2021XA	MY54110009	2024-02-01	2025-01-31	
\boxtimes	AGC-ER-A001	6dB Attenuator	Eeatsheep	LM-XX-6-5W	N/A	2023-09-21	2025-09-20	
	AGC-ER-E083	Signal Generator	Agilent	E4421B	US39340815	2024-05-23	2025-05-22	
	N/A	RF Connection Cable	N/A	1#	N/A	Each time	N/A	
\boxtimes	N/A	RF Connection Cable	N/A	2#	N/A	Each time	N/A	

• F	Radiated Spurious Emission							
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)	
\boxtimes	AGC-EM-E046	EMI Test Receiver	R&S	ESCI	10096	2024-02-01	2025-01-31	
	AGC-EM-E116	EMI Test Receiver	R&S	ESCI	100034	2024-05-24	2025-05-23	
\boxtimes	AGC-EM-E061	Spectrum Analyzer	Agilent	N9010A	MY53470504	2024-05-28	2025-05-27	
\boxtimes	AGC-EM-E086	Loop Antenna	ZHINAN	ZN30900C	18051	2024-03-05	2026-03-04	
\boxtimes	AGC-EM-E001	Wideband Antenna	SCHWARZBECK	VULB9168	D69250	2023-05-11	2025-05-10	
\boxtimes	AGC-EM-E029	Broadband Ridged Horn Antenna	ETS	3117	00034609	2024-03-31	2025-03-30	
\boxtimes	AGC-EM-E082	Horn Antenna	SCHWARZBECK	BBHA 9170	#768	2023-09-24	2025-09-23	
\boxtimes	AGC-EM-E146	Pre-amplifier	ETS	3117-PA	00246148	2022-08-04	2024-08-03	
\boxtimes	AGC-EM-A119	2.4G Filter	SongYi	N/A	N/A	2024-05-23	2025-05-22	
\boxtimes	AGC-EM-A138	6dB Attenuator	Eeatsheep	LM-XX-6-5W	N/A	2023-06-09	2025-06-08	
	AGC-EM-A139	6dB Attenuator	Eeatsheep	LM-XX-6-5W	N/A	2023-06-09	2025-06-08	

• A	AC Power Line Conducted Emission							
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)	
	AGC-EM-E045	EMI Test Receiver	R&S	ESPI	101206	2024-05-28	2025-05-27	
	AGC-EM-A130	6dB Attenuator	Eeatsheep	LM-XX-6-5W	DC-6GZ	2023-06-09	2025-06-08	
	AGC-EM-E023	AMN	R&S	100086	ESH2-Z5	2024-05-28	2025-05-27	



• Te	Test Software						
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Version Information		
	AGC-EM-S001	CE Test System	R&S	ES-K1	V1.71		
\boxtimes	AGC-EM-S003	RE Test System	FARA	EZ-EMC	VRA-03A		
\boxtimes	AGC-ER-S012	BT/WIFI Test System	Tonscend	JS1120-2	2.6		
	AGC-EM-S011	RSE Test System	Tonscend	TS+-Ver2.1(JS36-RSE)	4.0.0.0		



4.System Test Configuration

4.1 EUT Configuration


The EUT configuration for testing is installed on RF field strength measurement to meet the Commission's requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

4.2 EUT Exercise

The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

4.3 Configuration of Tested System

Radiated Emission Configure:



4.4 Equipment Used In Tested System

The following peripheral devices and interface cables were connected during the measurement:

☐ Test Accessories Come From The Laboratory

No.	Equipment	Manufacturer	Model No.	Specification Information	Cable	
1	Control Box		USB-TTL			
Test Accessories Come From The Manufacturer						
No.	Equipment	Manufacturer	Model No.	Specification Information	Cable	

No.	Equipment	Manufacturer	Model No.	Specification Information	Cable	
1						



4.5 Summary of Test Results

Item	FCC Rules	Description of Test	Result
1	§15.203&15.247(b)(4)	Antenna Equipment	Pass
2	§15.247 (b)(3)	RF Output Power	Pass
3	§15.247 (a)(2)	6 dB Bandwidth F	
4	§15.247 (e)	Power Spectral Density F	
5	§15.247 (d)	Conducted Band Edge and Out-of-Band Emissions	
6	§15.209	Radiated Emission& Band Edge P	
7	§15.207	AC Power Line Conducted Emission Not app	

Note: The conducted emission tests at AC port are not required for devices which only employ battery power for operation.



5. Description of Test Modes

Summary Table of Test Cases			
	Data Rate / Modulation		
Test Item	Bluetooth – LE(1Mbps) / GFSK		
Radiated & Conducted Test Cases	Mode 1: Bluetooth Tx CH00_2402 MHz_1Mbps(Battery powered) Mode 2: Bluetooth Tx CH19_2440 MHz_1Mbps(Battery powered) Mode 3: Bluetooth Tx CH39_2480 MHz_1Mbps(Battery powered)		
AC Conducted Emission	N/A		

Note:

- Only the result of the worst case was recorded in the report, if no other cases. 1.
- The battery is full-charged during the test.
- 2. 3. For Radiated Emission, 3axis were chosen for testing for each applicable mode.
- 4. For Conducted Test method, a temporary antenna connector is provided by the manufacture.
 - Software Setting Diagra

Fort Number COM2 Refresh Mode Payload Model Payload Length 37 Single channel Multiple channels Channel 0 Channel 0 9 1 FW LE 1Mbps NW LE 1Mbps NY Start Transmitter Test APP : Stor Transmitter Test APP : Start Transmitter Test APP : Stor Transmitter Test APP : Start Transmitter Test	Common Configuration	Transmit Radio Control Tx Power	0	dBm
Single channel Multiple channels Channel 39 Channel 39 FMY LE 1Mbps FMY LE 1Mbps FMY LE 1Mbps Log Image: Start Transmitter Test AFF : Stop Transmitter Test AFF : COM2 / Pattern : 0 / 37Bytes / OdBm / Tx / PHY : 2 / Channel : 39 AFF : Stop Transmitter Test AFF : COM2 / Pattern : 0 / 37Bytes / OdBm / Tx / PHY : 2 / Channel : 0 AFF : Stop Transmitter Test AFF : Stop Transmitter Test AFF : Stop Transmitter Test AFF : Stop Transmitter Test AFF : Stop Transmitter Test AFF : Stop Transmitter Test AFF : Stop Transmitter Test AFF : Stop Transmitter Test AFF : Stop Transmitter Test AFF : Stop Transmitter Test AFF : Stop Transmitter Test AFF : Stop Transmitter Test AFF : Stop Transmitter Test AFF : Stop Transmitter Test AFF : Stop Transmitter Test AFF : Stop Transmitter Test AFF : Stop Z / Pattern : 0 / 37Bytes / OdBm / Tx / PHY : 2 / Channel : 39 AFF : Stop Z / Pattern : 0 / 37Bytes / OdBm / Tx / PHY : 1 / Channel : 39	Port Number COM2 Refresh			
Single channel Multiple channels Channel 39 Channel 39 FMY LE 1Mbps Received Facket Packet Error Ra Log AFP : Stop Transmitter Test AFP : Stop Z / Pattern : 0 / 37Bytes / 0dBm / Tx / PHY : 2 / Channel : 39 AFP : Stop Z / Pattern : 0 / 37Bytes / 0dBm / Tx / PHY : 1 / Channel : 39	O Transmitter O Receiver		37	Bytes
FHY LE 1Mbps Receiver Radio Control Receiver Radio Control Log Image: Control Control APP: Stop Transmitter Test Stop Transmitter Test APP: Stop Transmitter Test APP: Stop Transmitter Test APP: Stop Z/ Pattern: 0 / 37Bytes / 0dBm / Tx / PHY : 2 / Channel : 39 APP: Stop Transmitter Test APP: Stop Z/ Pattern: 0 / 37Bytes / 0dBm / Tx / PHY : 2 / Channel : 39 APP: Stop Transmitter Test APP: Stop Z/ Pattern: 0 / 37Bytes / 0dBm / Tx / PHY : 1 / Channel : 39				≜ ms
AFP : Stop Transmitter Test 3 AFP : Start Transmitter Test 3 AFP : COUZ / Fattern : 0 / 37Bytes / 0dBm / Tx / PHY : 2 / Channel : 39 3 AFP : Stop Transmitter Test 3 AFP : COUZ / Fattern : 0 / 37Bytes / 0dBm / Tx / PHY : 2 / Channel : 0 3 AFP : COUZ / Fattern : 0 / 37Bytes / 0dBm / Tx / PHY : 2 / Channel : 0 3 AFP : Stop Transmitter Test 3 AFP : Stop Z / Pattern : 0 / 37Bytes / 0dBm / Tx / PHY : 1 / Channel : 39		рну	LE 1Mbps	
AFP : Stop Transmitter Test 3 AFP : Start Transmitter Test 3 AFP : COUZ / Fattern : 0 / 37Bytes / 0dBm / Tx / PHY : 2 / Channel : 39 3 AFP : Stop Transmitter Test 3 AFP : COUZ / Fattern : 0 / 37Bytes / 0dBm / Tx / PHY : 2 / Channel : 0 3 AFP : COUZ / Fattern : 0 / 37Bytes / 0dBm / Tx / PHY : 2 / Channel : 0 3 AFP : Stop Transmitter Test 3 AFP : Stop Z / Pattern : 0 / 37Bytes / 0dBm / Tx / PHY : 1 / Channel : 39		Receiver Radio Control		
AFP : Stop Transmitter Test 3 AFP : Start Transmitter Test 3 AFP : COUZ / Fattern : 0 / 37Bytes / 0dBm / Tx / PHY : 2 / Channel : 39 3 AFP : Stop Transmitter Test 3 AFP : COUZ / Fattern : 0 / 37Bytes / 0dBm / Tx / PHY : 2 / Channel : 0 3 AFP : COUZ / Fattern : 0 / 37Bytes / 0dBm / Tx / PHY : 2 / Channel : 0 3 AFP : Stop Transmitter Test 3 AFP : Stop Z / Pattern : 0 / 37Bytes / 0dBm / Tx / PHY : 1 / Channel : 39				
APP : Start Transmitter Test APP : COM2 / Pattern : 0 / 37Bytes / 0dBm / Tx / PHY : 2 / Channel : 39 APP : Stop Transmitter Test APP : COM2 / Pattern : 0 / 37Bytes / 0dBm / Tx / PHY : 2 / Channel : 0 APP : Stop Transmitter Test APP : Stop Transmitter Test APP : COM2 / Pattern : 0 / 37Bytes / 0dBm / Tx / PHY : 2 / Channel : 39 APP : Stop Transmitter Test APP : Stop Transmitter Test APP : Stop Transmitter Test APP : Start Transmitter Test	Log	L		- i 💼
	APP : Start Transmitter Test APP : COM2 / Pattern : 0 / 37Bytes / 0dBm / APP : Stop Transmitter Test APP : Start Transmitter Test APP : COM2 / Pattern : 0 / 37Bytes / 0dBm / APP : Stop Transmitter Test APP : COM2 / Pattern : 0 / 37Bytes / 0dBm / APP : Stop Transmitter Test APP : Stop Transmitter Test APP : Start Transmitter Test APP : Start Transmitter Test APP : Start Transmitter Test APP : COM2 / Pattern : 0 / 37Bytes / 0dBm /	Tx / PHY : 2 / Channel : Tx / PHY : 2 / Channel :		0



6. Duty Cycle Measurement


The maximum achievable duty cycles for all modes were determined based on measurements performed on a spectrum analyzer in zero-span mode with RBW = 8MHz, VBW = 50MHz, and detector = Peak. The RBW and VBW were both greater than 50/T, where T is the minimum transmission duration, and the number of sweep points across T was greater than 100. The duty cycles are as follows:

Operating mode	T(µs)	Duty Cycle (%)	Duty Cycle Factor (dB)	1/ T Minimum VBW (kHz)
BLE_1Mbps	376	30.18	5.20	2.66

Remark:

- 1. Duty Cycle factor = 10 * log (1/ Duty cycle)
- 2. The duty cycle of each frequency band mode reflects the determination requirements of the low channel measurement value

The test plots as follows:

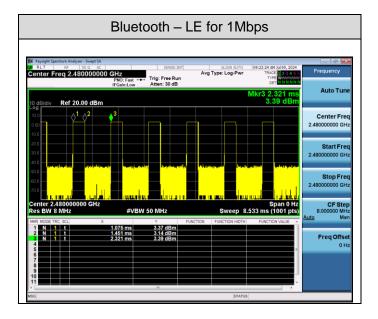



7. RF Output Power Measurement

7.1 Provisions Applicable

For DTSs employing digital modulation techniques operating in the bands 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1 W.


7.2 Measurement Procedure

For Peak Power, the testing follows ANSI C63.10 Section 11.9.1.1 Method Max peak power:

- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2. Set the RBW > DTS bandwidth
- 3. Set the VBW \geq [3 x RBW].
- 4. Span≥[3 x RBW].
- 5. Sweep= auto couple.
- 6. Detector Function= Peak.
- 7. Trace mode= Max hold.
- 8. Allow trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. The indicated level is the peak output power, after any corrections for external attenuators and cables.
- For Average power, the testing follows ANSI C63.10 Section 11.9.2.3.2 Method AVGPM-G:
- 1. The RF output of EUT was connected to the power meter by RF cable and attenuator.
- 2. The path loss was compensated to the results for each measurement.
- 3. Set to the maximum power setting and enable the EUT transmit continuously.
- 4. Measure the conducted output power and record the results in the test report.


7.3 Measurement Setup (Block Diagram of Configuration)

For Average power test setup

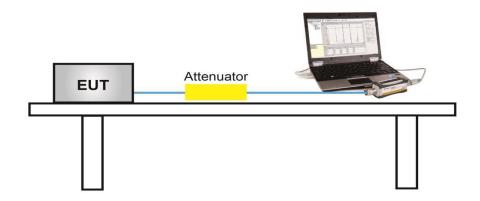




For peak power test setup

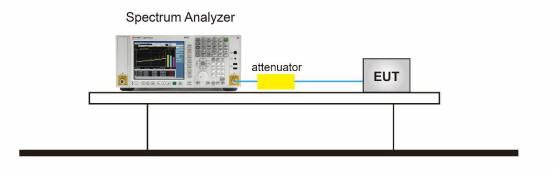


7.4 Measurement Result

Test Data of Conducted Output Power					
Test Mode	Test Frequency (MHz)	Peak Power (dBm)	Limits (dBm)	Pass or Fail	
	2402	3.237	≪30	Pass	
GFSK_1Mbps	2440	3.775	≪30	Pass	
	2480	3.926	≪30	Pass	

Test Graphs of Conducted Output Power

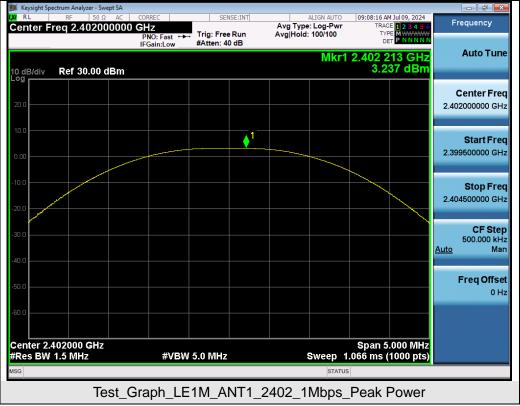



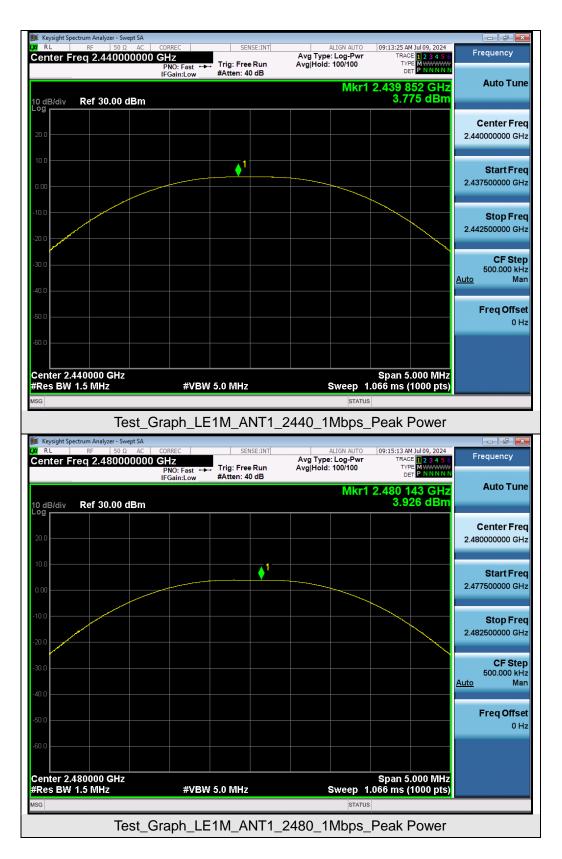



8. 6dB Bandwidth Measurement

8.1 Provisions Applicable


The minimum 6 dB bandwidth shall be 500 kHz.

8.2 Measurement Procedure

The testing follows the ANSI C63.10 Section 6.9.3 (OBW) and 11.8.1 (6dB BW).

- 1. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
- 2. Set to the maximum power setting and enable the EUT transmit continuously.
- Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
- For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1-5% of the OBW and set the Video bandwidth (VBW) ≥ 3 * RBW.
- 5. Measure and record the results in the test report.

8.3 Measurement Setup (Block Diagram of Configuration)

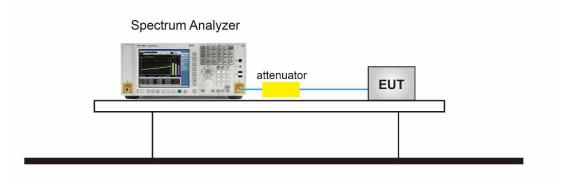




8.4 Measurement Results


Test Data of Occupied Bandwidth and DTS Bandwidth					
Test Mode	Test Frequency (MHz)	Occupied Bandwidth (MHz)	DTS BW (MHz)	DTS BW Limits	Pass or Fail
GFSK_1Mbps	2402	1.042	0.710	≥0.5	Pass
	2440	1.042	0.707	≥0.5	Pass
	2480	1.042	0.716	≥0.5	Pass



Test Graphs of Occupied Bandwidth






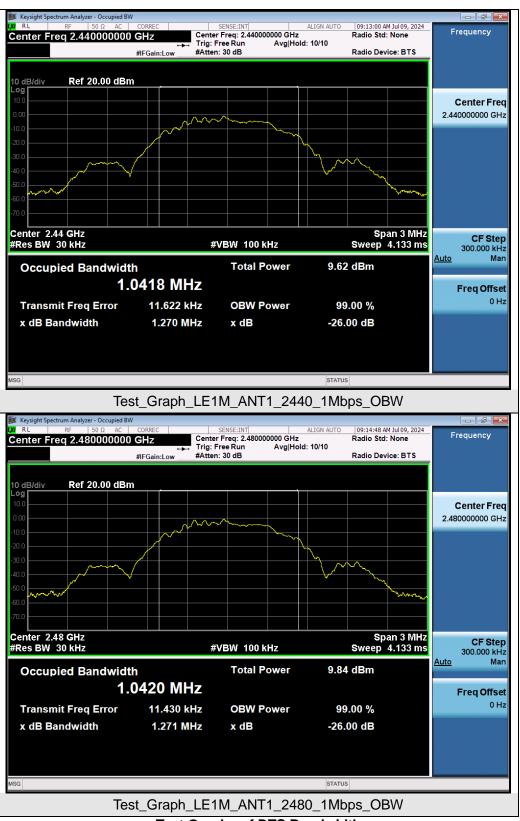


Test Graphs of DTS Bandwidth



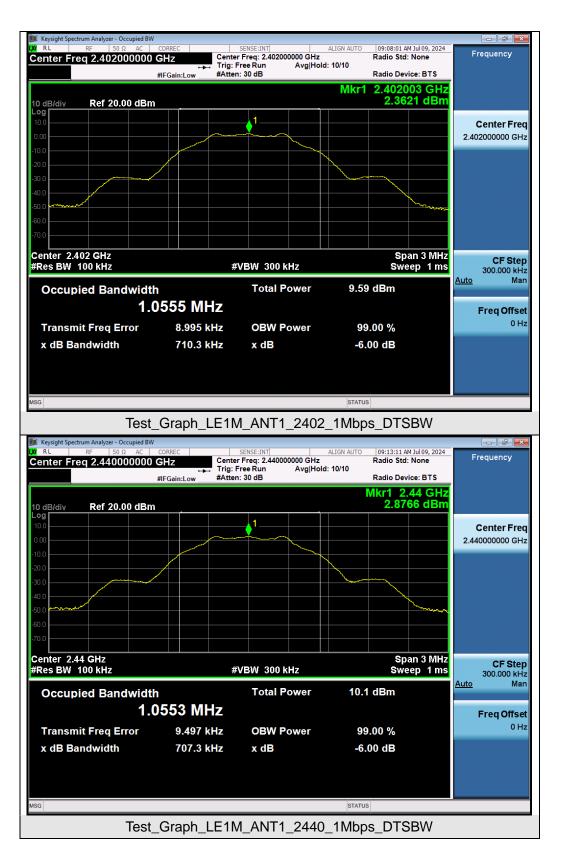



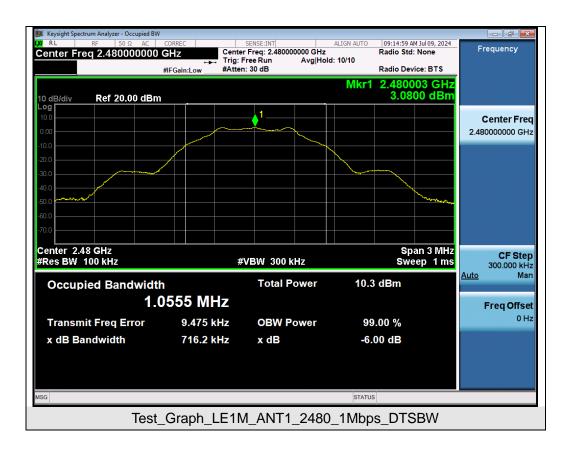



9. Power Spectral Density Measurement

9.1 Provisions Applicable


The transmitter power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

9.2 Measurement Procedure

The testing follows the ANSI C63.10 Section 11.10.2 Method PKPSD.

- 1. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
- 2. Set to the maximum power setting and enable the EUT transmit continuously.
- Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz in order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
- 4. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
- 5. Measure and record the results in the test report.
- The Measured power density (dBm)/ 100kHz is a reference level and used as 20dBc down limit line for Conducted Band Edges and Conducted Spurious Emission.

9.3 Measurement Setup (Block Diagram of Configuration)

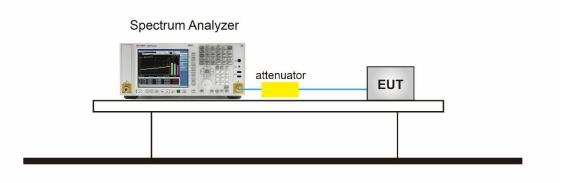





9.4 Measurement Results

Test Data of Conducted Output Power Spectral Density					
Test Mode	Test Frequency (MHz)	Power density (dBm/3kHz)	Limit (dBm/3kHz)	Pass or Fail	
	2402	-12.016	≪8	Pass	
GFSK_1Mbps	2440	-11.580	≪8	Pass	
	2480	-11.388	≪8	Pass	

Test Graphs of Conducted Output Power Spectral Density

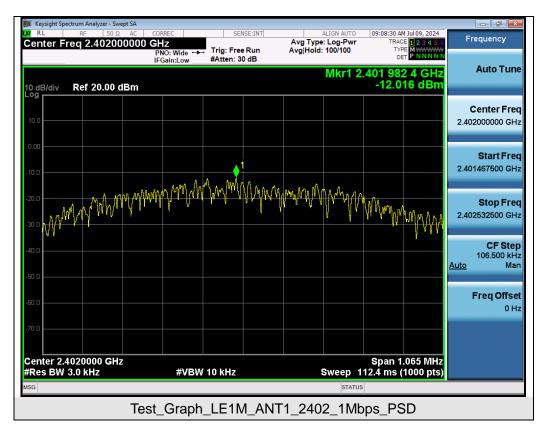



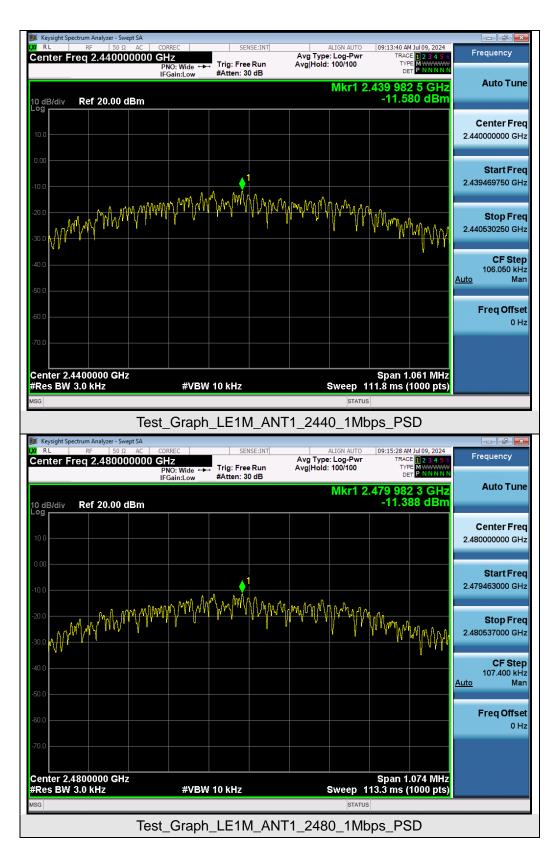



10. Conducted Band Edge and Out-of-Band Emissions

10.1 Provisions Applicable


The limit for out-of-band spurious emissions at the band edge is 20dB below the fundamental emission level, as determined from the in-band power measurement of the DTS channel performed in a 100kHz bandwidth per the PSD procedure.

10.2 Measurement Procedure

- Reference level measurement
- 1. Set instrument center frequency to DTS channel center frequency
- 2. Set the span to \geq 1.5 times the DTS bandwidth
- 3. Set the RBW = 100 kHz
- 4. Set the VBW \geq 3 x RBW
- 5. Detector = peak
- 6. Sweep time = auto couple
- 7. Trace mode = max hold
- 8. Allow trace to fully stabilize
- Emission level measurement
- 1. Set the center frequency and span to encompass frequency range to be measured
- 2. RBW = 100kHz
- 3. VBW = 300kHz
- 4. Detector = Peak
- 5. Trace mode = max hold
- 6. Sweep time = auto couple
- 7. The trace was allowed to stabilize


10.3 Measurement Setup (Block Diagram of Configuration)

Spectrum Analyzer

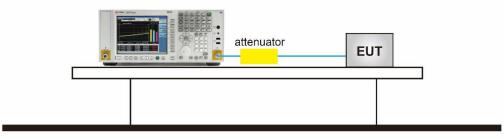




10.4 Measurement Results

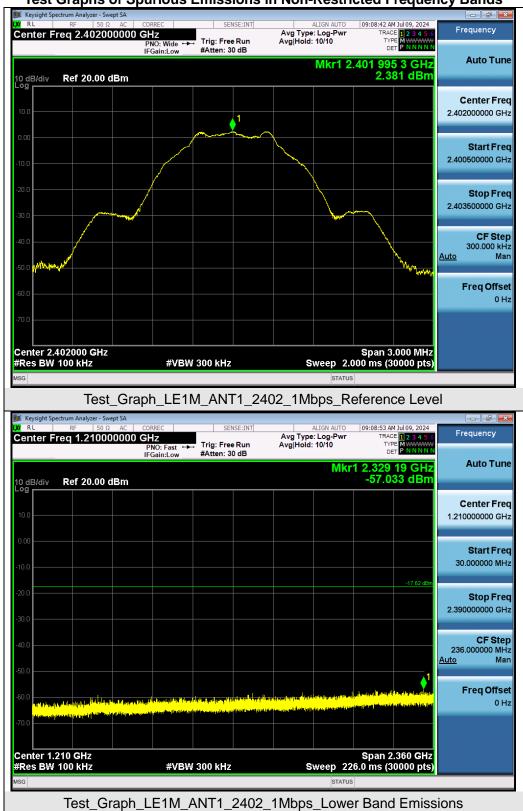


Test Graphs of Spurious Emissions in Non-Restricted Frequency Bands



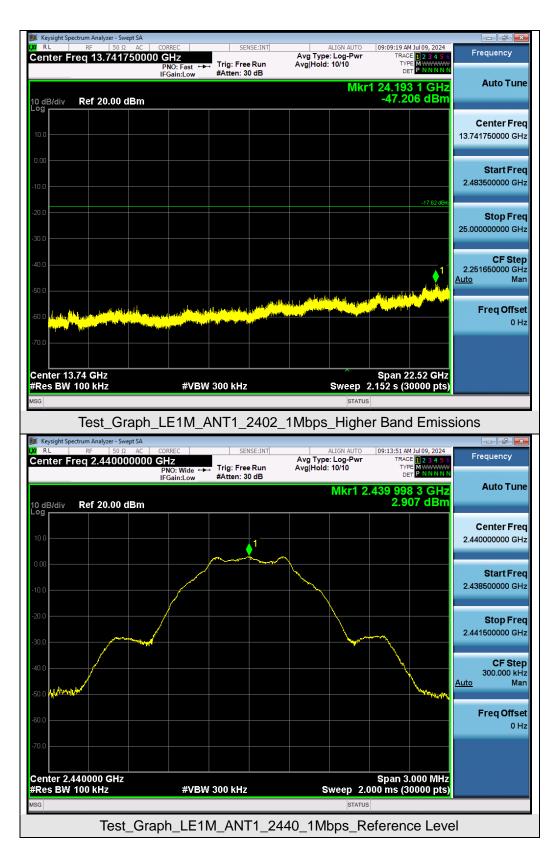




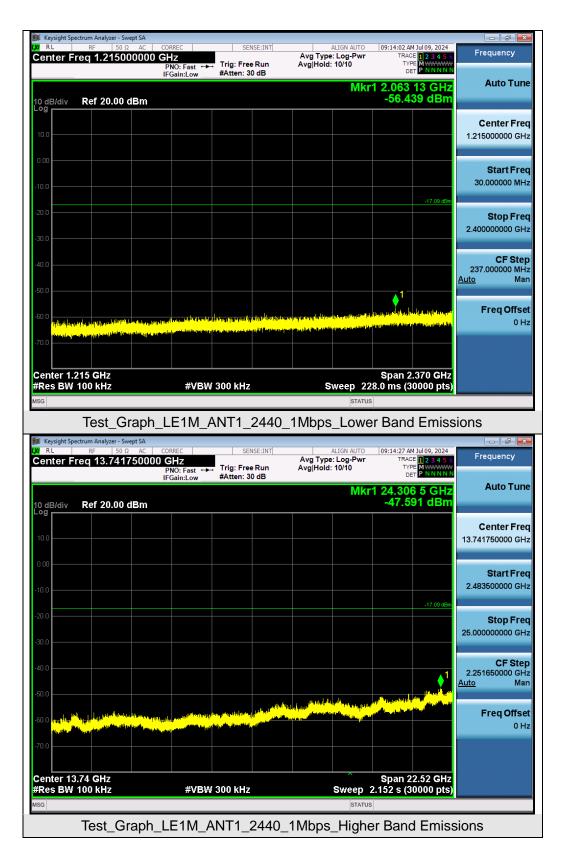








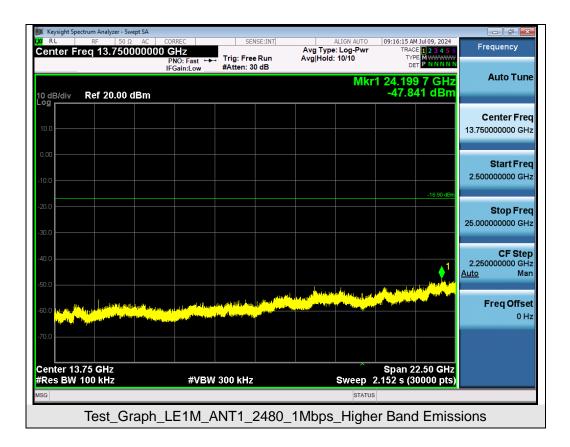



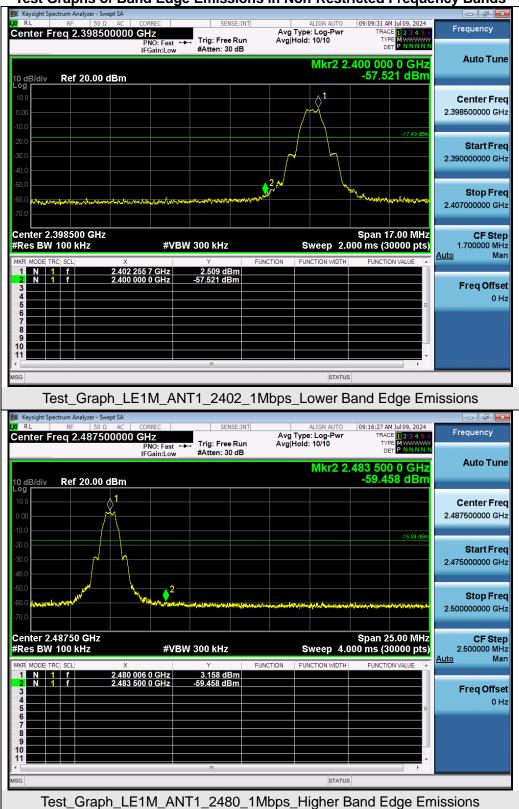

Test Graphs of Band Edge Emissions in Non-Restricted Frequency Bands



11. Radiated Spurious Emission

11.1 Measurement Limit

FCC Part 15.209 Limit in the below table to be followed

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

Note: All modes were tested for restricted band radiated emission, the test records reported below are the worst result compared to other modes.

11.2 Measurement Procedure

- 1. The EUT was placed on the top of the turntable 0.8 or 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
- 2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- 3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
- 4. For each suspected emission, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- 5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
- 6. For emissions above 1GHz, use 1MHz RBW and 3MHz VBW for peak reading. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- 7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds.



As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.

- 8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
- 9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- 10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High Low scan is not required in this case.

Spectrum Parameter	Setting
Start ~Stop Frequency	9kHz~150kHz/RB 200Hz for QP
Start ~Stop Frequency	150kHz~30MHz/RB 9kHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120kHz for QP
Start ~Stop Frequency	1GHz~26.5GHz 1MHz/3MHz for Peak, 1MHz/3MHz for Average

The following table is the setting of spectrum analyzer and receiver.

Receiver Parameter	Setting
Start ~Stop Frequency	9kHz~150kHz/RB 200Hz for QP
Start ~Stop Frequency	150kHz~30MHz/RB 9kHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120kHz for QP



• Quasi-Peak Measurements below 1GHz

- 1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
- 2. Span was set greater than 1MHz
- 3. RBW = as shown in the table above
- 4. Detector = CISPR quasi-peak
- 5. Sweep time = auto couple
- 6. Trace was allowed to stabilize

Peak Measurements above 1GHz

- 1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
- 2. RBW = 1MHz
- 3. VBW = 3MHz
- 4. Detector = peak
- 5. Sweep time = auto couple
- 6. Trace mode = max hold
- 7. Trace was allowed to stabilize


<u>Average Measurements above 1GHz</u>

- 1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
- 2. RBW = 1MHz
- 3. VBW ≥ [3 × RBW]
- 4. Detector = Power averaging (rms)
- 5. Averaging type = power (i.e., rms)
- 6. Sweep time = auto
- 7. Perform a trace average of at least 100 traces.
- 8. The applicable correction factor is [10*log (1 / D)], where D is the duty cycle. The factor had been edited in the "Input Correction" of the Spectrum Analyzer.




11.3 Measurement Setup (Block Diagram of Configuration)




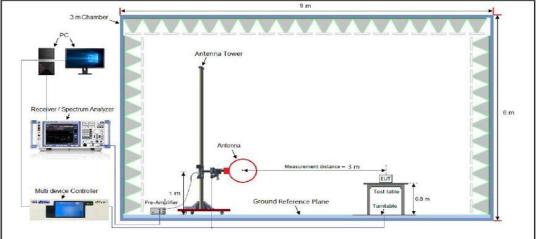

Radiated Emission Test Setup 30MHz-1000MHz

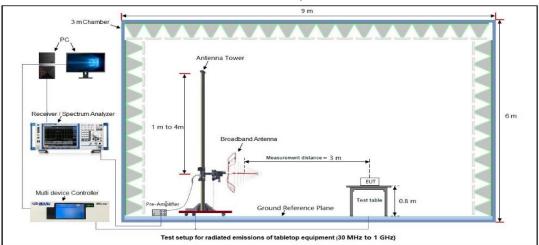

Radiated Emission Test Setup Above 1000MHz

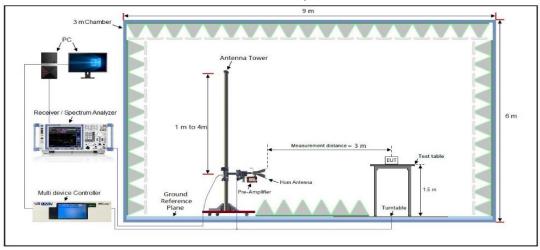

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

 Attestation of Global Compliance(Shenzhen)Co., Ltd

 Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

 Tel: +86-755 2523 4088
 E-mail: agc@agccert.com



11.4 Measurement Result

Radiated Emission Below 30MHz

The amplitude of spurious emissions from 9kHz to 30MHz which are attenuated more than 20 dB below the permissible value need not be reported.

	Radiated Emission Test Results at 30MHz-1GHz								
EUT N	lame	ElderLife Mode			Model Na	me	el001		
Tempe	erature	23.1	°C			Relative H	lumidity	61.7%	
Press	ure	960hPa Test Voltage			DC 3V by battery				
Test N	t Mode 3 Antenna Polarity			Horizontal					
	130 120 110 90 80 70 60 50 40 30 20 10 0 -10 30M	- QP Limit QP Detec		100M	FCC Part 15	Mar Marine Marine			16
Peak [Data List								
NO.	Freq. [MHz]		Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	32.91		36.69	12.41	40.00	3.31	100	59	Horizontal
2	59.1		29.37	17.64	40.00	10.63	100	307	Horizontal
3	98.87	,	32.16	16.73	43.50	11.34	100	189	Horizontal
4	273.4	7	32.57	11.06	46.00	13.43	100	270	Horizontal
5	458.7	4	30.89	24.42	46.00	15.11	100	14	Horizontal
6	848.6	8	36.18	29.64	46.00	9.82	100	213	Horizontal



		Radi	iated Emiss	ion Test Res	ults at 30MHz	z-1GHz		
EUT Nai	me	ElderLife			Model Na	me	el001	
Tempera	ature	23.1 ℃			Relative I	Relative Humidity		
Pressur	е	960hPa Test Voltage DC 3V by battery			battery			
Test Mo	est Mode 3 Antenna Polarity			Polarity	Vertical			
[UU/V ItSP)] and a	130 120 110 90 80 70 60 50 40 30 20 10 0 10 0 30M	- QP Limit		FCC Part 15	American	5 5		16
Peak Da							-	1
NO.	Freq. [MHz]		Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	32.91	34.31	12.41	40.00	5.69	100	2	Vertical
2	57.16	32.04	17.12	40.00	7.96	100	53	Vertical
3	68.8	33.37	15.04	40.00	6.63	100	53	Vertical
4	97.9	36.34	16.44	43.50	7.16	100	229	Vertical
(i	1	1		1	1	1

RESULT: Pass

5

6

343.31

841.89

Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

15.05

29.35

34.95

35.99

2. All test modes had been pre-tested. The mode 3 is the worst case and recorded in the report.

46.00

46.00

11.05

10.01

100

100

220

3

Vertical

Vertical



Radiated Emissions Test Results for Above 1GHz

EUT Name ElderLife				Model Name Relative Humidity		el001 61.7%		
Temperature		23.1 ℃						
Pressure		960hPa			Test Voltage		DC 3V by batt	ery
Test Mode		Mode 1			Antenna	Polarity	Horizontal	
Frequency	Me	eter Reading	Factor	Emis	sion Level	Limits	Margin	Value Type
(MHz)		(dBµV)	(dB)	(dl	BµV/m)	(dBµV/m)	(dB)	value i ype
4804.000		46.38	0.08	4	46.46	74	-27.54	peak
4804.000		37.32	0.08	3	37.40	54	-16.60	AVG
7206.000		41.17	2.21	4	43.38	74	-30.62	peak
7206.000		32.42	2.21	3	34.63	54	-19.37	AVG
							_	
Remark:								
	nna F	actor + Cable	e Loss – Pre-	amplifie	r.		_	-
	nna F	actor + Cable	e Loss – Pre-	amplifie	r			
Factor = Anter	nna F	ElderLife	e Loss – Pre-	amplifie	r. Model Na	ame	el001	
Factor = Anter EUT Name	nna F		e Loss – Pre-	amplifie	Model Na	ame Humidity	el001 61.7%	
Factor = Anter EUT Name Temperature	nna F	ElderLife	e Loss – Pre-	amplifie	Model Na	Humidity		ery
Factor = Anter EUT Name Temperature Pressure	nna F	ElderLife 23.1℃	e Loss – Pre-	amplifie	Model Na Relative	Humidity age	61.7%	ery
Factor = Anter EUT Name Temperature Pressure Test Mode		ElderLife 23.1℃ 960hPa Mode 1			Model Na Relative Test Volt Antenna	Humidity age Polarity	61.7% DC 3V by batt Vertical	ery
Factor = Anter EUT Name Femperature Pressure Frest Mode		ElderLife 23.1℃ 960hPa Mode 1	Factor	Emis	Model Na Relative Test Volt Antenna	Humidity age Polarity Limits	61.7% DC 3V by batt Vertical	
Factor = Anter EUT Name Femperature Pressure Fest Mode Frequency (MHz)		ElderLife 23.1℃ 960hPa Mode 1 eter Reading (dBµV)	Factor (dB)	Emis:	Model Na Relative Test Volt Antenna	Humidity age Polarity Limits (dBµV/m)	61.7% DC 3V by batt Vertical Margin (dB)	ery Value Type
Factor = Anter EUT Name Femperature Pressure Fest Mode Frequency (MHz) 4804.000		ElderLife 23.1 °C 960hPa Mode 1 eter Reading (dBµV) 46.19	Factor (dB) 0.08	Emiss (dl	Model Na Relative Test Volt Antenna sion Level BµV/m) 46.27	Humidity age Polarity Limits (dBµV/m) 74	61.7% DC 3V by batt Vertical Margin (dB) -27.73	- Value Type
Factor = Anter EUT Name Femperature Pressure Fest Mode Frequency (MHz) 4804.000 4804.000		ElderLife 23.1℃ 960hPa Mode 1 eter Reading (dBµV)	Factor (dB) 0.08 0.08	Emiss (dl	Model Na Relative Test Volt Antenna	Humidity age Polarity Limits (dBµV/m)	61.7% DC 3V by batt Vertical Margin (dB)	– Value Type
Factor = Anter EUT Name Femperature Pressure Fest Mode Frequency (MHz) 4804.000 4804.000 7206.000		ElderLife 23.1 ℃ 960hPa Mode 1 eter Reading (dBµV) 46.19 37.88 41.47	Factor (dB) 0.08 0.08 2.21	Emiss (dl	Model Na Relative Test Volt Antenna sion Level BµV/m) 46.27 37.96 43.68	Humidity age Polarity Limits (dBµV/m) 74	61.7% DC 3V by batt Vertical Margin (dB) -27.73	- Value Type peak AVG peak
Factor = Anter EUT Name Femperature Pressure Fest Mode Frequency (MHz) 4804.000 4804.000		ElderLife 23.1 ℃ 960hPa Mode 1 eter Reading (dBµV) 46.19 37.88	Factor (dB) 0.08 0.08	Emiss (dl	Model Na Relative Test Volt Antenna sion Level BµV/m) 46.27 37.96	Humidity age Polarity Limits (dBµV/m) 74 54	61.7% DC 3V by batt Vertical Margin (dB) -27.73 -16.04	– Value Type peak AVG
Factor = Anter EUT Name Femperature Pressure Test Mode Frequency (MHz) 4804.000 4804.000 7206.000		ElderLife 23.1 ℃ 960hPa Mode 1 eter Reading (dBµV) 46.19 37.88 41.47	Factor (dB) 0.08 0.08 2.21	Emiss (dl	Model Na Relative Test Volt Antenna sion Level BµV/m) 46.27 37.96 43.68	Humidity age Polarity Limits (dBµV/m) 74 54 74	61.7% DC 3V by batt Vertical Margin (dB) -27.73 -16.04 -30.32	- Value Type peak AVG peak
Factor = Anter EUT Name Temperature Pressure Test Mode Frequency (MHz) 4804.000 4804.000 7206.000		ElderLife 23.1 ℃ 960hPa Mode 1 eter Reading (dBµV) 46.19 37.88 41.47	Factor (dB) 0.08 0.08 2.21	Emiss (dl	Model Na Relative Test Volt Antenna sion Level BµV/m) 46.27 37.96 43.68	Humidity age Polarity Limits (dBµV/m) 74 54 74	61.7% DC 3V by batt Vertical Margin (dB) -27.73 -16.04 -30.32	- Value Type peak AVG peak

RESULT: Pass



	JT Name ElderLife			Model Name		el001	
Temperature	23.1 ℃	23.1℃		ive Humidity	61.7%	61.7%	
Pressure	960hPa		Test	/oltage	DC 3V by	battery	
Test Mode	Mode 2		Anter	nna Polarity	Horizontal		
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Turc	
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Value Type	
4880.000	46.17	0.08	46.25	74	-27.75	peak	
4880.000	37.58	0.08	37.66	54	-16.34	AVG	
7320.000	41.26	2.21	43.47	74	-30.53	peak	
7320.000	32.47	2.21	34.68	54	-19.32	AVG	
	nna Factor + Cat						
	ElderLife			I Name	el001		
Temperature	23.1 ℃		Relat	ive Humidity	61.7%		
EUT Name Temperature Pressure			Relat			battery	
Temperature Pressure	23.1 ℃		Relat Test V	ive Humidity	61.7%	battery	
Temperature	23.1℃ 960hPa	Factor	Relat Test V	ive Humidity /oltage	61.7%		
Temperature Pressure Test Mode	23.1℃ 960hPa Mode 2	Factor (dB)	Relat Test V Anter	ive Humidity /oltage nna Polarity	61.7% DC 3V by Vertical	battery Value Type	
Temperature Pressure Test Mode Frequency	23.1 °C 960hPa Mode 2 Meter Reading		Relat	ive Humidity /oltage nna Polarity Limits	61.7% DC 3V by Vertical Margin		
Temperature Pressure Test Mode Frequency (MHz)	23.1℃ 960hPa Mode 2 Meter Reading (dBµV)	(dB)	Emission Level (dBµV/m)	ive Humidity /oltage nna Polarity Limits (dBµV/m)	61.7% DC 3V by Vertical Margin (dB)	Value Type	
Temperature Pressure Test Mode Frequency (MHz) 4880.000	23.1℃ 960hPa Mode 2 Meter Reading (dBµV) 46.00	(dB) 0.08	Relation Relation Test N Anter Emission Level (dBµV/m) 46.08	ive Humidity /oltage na Polarity Limits (dBµV/m) 74	61.7% DC 3V by Vertical Margin (dB) -27.92	– Value Type peak	
Temperature Pressure Test Mode Frequency (MHz) 4880.000 4880.000	23.1℃ 960hPa Mode 2 Meter Reading (dBµV) 46.00 37.96	(dB) 0.08 0.08	Relation Test V Anter Emission Level (dBµV/m) 46.08 38.04	ive Humidity /oltage na Polarity Limits (dBµV/m) 74 54	61.7% DC 3V by Vertical Margin (dB) -27.92 -15.96	– Value Type peak AVG	

Radiated Emissions Test Results for Above 1GHz

RESULT: Pass



Temperature			Wode	Model Name		el001	
	23.1 ℃	23.1 ℃		ive Humidity	61.7%		
Pressure	960hPa		Test	/oltage	DC 3V by	DC 3V by battery	
Test Mode	Mode 3		Anter	na Polarity	Horizonta	I	
Frequency	Meter Reading	leter Reading Factor Emissio		I Limits	Margin	Value Type	
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type	
4960.000	46.23	0.08	46.31	74	-27.69	peak	
4960.000	37.63	0.08	37.71	54	-16.29	AVG	
7440.000	41.29	2.21	43.50	74	-30.50	peak	
7440.000	32.06	2.21	34.27	54	-19.73	AVG	
Descrit							
Remark:		La La La Dara					
Factor = Antenr	na Factor + Cab	e Loss – Pre-	amplifier.				
EUT Name	ElderLife		Mode	I Name	el001		
	ElderLife 23.1℃			I Name ive Humidity	el001 61.7%		
Temperature			Relat			^v battery	
Temperature Pressure	23.1℃		Relat Test	ve Humidity	61.7%	v battery	
Temperature Pressure Test Mode	23.1 °C 960hPa Mode 3		Relat Test Anter	ive Humidity /oltage ana Polarity	61.7% DC 3V by Vertical	[,] battery	
Temperature Pressure Test Mode Frequency	23.1 °C 960hPa Mode 3 Meter Reading	Factor	Relat Test V Anter Emission Level	ive Humidity /oltage ina Polarity	61.7% DC 3V by Vertical		
Temperature Pressure Test Mode Frequency (MHz)	23.1 ℃ 960hPa Mode 3 Meter Reading (dBµV)	(dB)	Emission Level (dBµV/m)	ive Humidity /oltage ana Polarity Limits (dBμV/m)	61.7% DC 3V by Vertical Margin (dB)	Value Type	
(MHz) 4960.000	23.1 °C 960hPa Mode 3 Meter Reading (dBµV) 46.26	(dB) 0.08	Relat Test V Anter Emission Level (dBµV/m) 46.34	Limits (dBµV/m) 74	61.7% DC 3V by Vertical Margin (dB) -27.66	Value Type peak	
Temperature Pressure Test Mode Frequency (MHz) 4960.000 4960.000	23.1 °C 960hPa Mode 3 Meter Reading (dBμV) 46.26 37.98	(dB) 0.08 0.08	Relat Test V Anter Emission Level (dBµV/m) 46.34 38.06	Limits (dBµV/m) 74 54	61.7% DC 3V by Vertical Margin (dB) -27.66 -15.94	Value Type peak AVG	
Temperature Pressure Test Mode Frequency (MHz) 4960.000 7440.000	23.1 °C 960hPa Mode 3 Meter Reading (dBµV) 46.26 37.98 41.31	(dB) 0.08 0.08 2.21	Relat Test V Anter Emission Level (dBµV/m) 46.34 38.06 43.52	Limits (dBµV/m) 74 54 74	61.7% DC 3V by Vertical Margin (dB) -27.66 -15.94 -30.48	Value Type peak AVG peak	
Temperature Pressure Test Mode Frequency (MHz) 4960.000 4960.000	23.1 °C 960hPa Mode 3 Meter Reading (dBμV) 46.26 37.98	(dB) 0.08 0.08	Relat Test V Anter Emission Level (dBµV/m) 46.34 38.06	Limits (dBµV/m) 74 54	61.7% DC 3V by Vertical Margin (dB) -27.66 -15.94	Value Type peak AVG	
Temperature Pressure Test Mode Frequency (MHz) 4960.000 7440.000	23.1 °C 960hPa Mode 3 Meter Reading (dBµV) 46.26 37.98 41.31	(dB) 0.08 0.08 2.21	Relat Test V Anter Emission Level (dBµV/m) 46.34 38.06 43.52	Limits (dBµV/m) 74 54 74	61.7% DC 3V by Vertical Margin (dB) -27.66 -15.94 -30.48	Value Type peak AVG peak	

Radiated Emissions Test Results for Above 1GHz

RESULT: Pass

Note:


- 1. The amplitude of other spurious emissions from 1G to 25 GHz which are attenuated more than 20 dB below the permissible value need not be reported.
- 2. Factor = Antenna Factor + Cable loss Pre-amplifier gain, Margin = Emission Level-Limit.
- 3. The "Factor" value can be calculated automatically by software of measurement system.




EUT Name	ElderLife	Model Name	el001
Temperature	25 ℃	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	DC 3V by battery
Test Mode	Mode 1	Antenna Polarity	Horizontal

Band Edge Emission Test Results for Restricted Bands

Test Graph for Peak Measurement

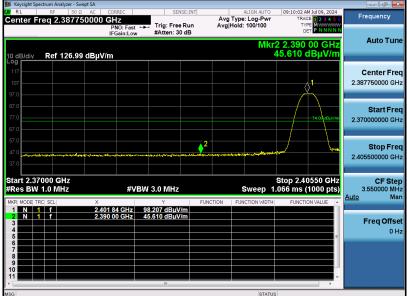


Test Graph for Average Measurement

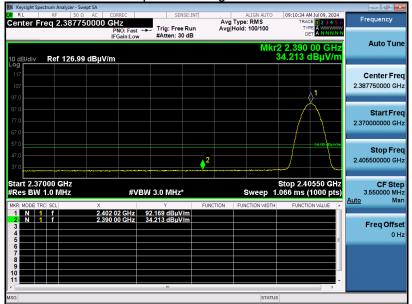

RESULT: Pass




EUT Name	ElderLife	Model Name	el001
Temperature	25℃	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	DC 3V by battery
Test Mode	Mode 1	Antenna Polarity	Vertical

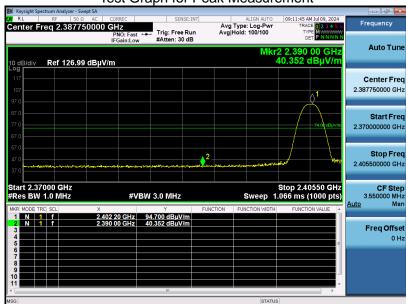


Test Graph for Peak Measurement

Test Graph for Average Measurement

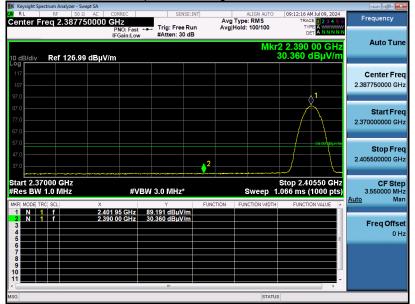


RESULT: Pass






Band Edge Emission	Test Results for Restricted Bands
--------------------	-----------------------------------

EUT Name	ElderLife	Model Name	el001
Temperature	25 ℃	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	DC 3V by battery
Test Mode	Mode 3	Antenna Polarity	Horizontal

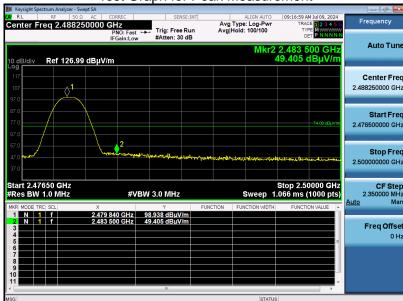

Test Graph for Peak Measurement

Test Graph for Average Measurement

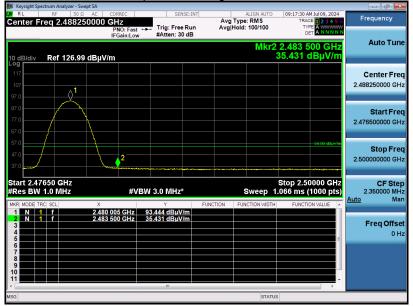


RESULT: Pass




Dand Luge Linission lest Results for Restincted Dands				
EUT Name	ElderLife	Model Name	el001	
Temperature	25 ℃	Relative Humidity	55.4%	
Pressure	960hPa	Test Voltage	DC 3V by battery	
Test Mode	Mode 3	Antenna Polarity	Vertical	

Band Edge Emission Test Results for Restricted Bands

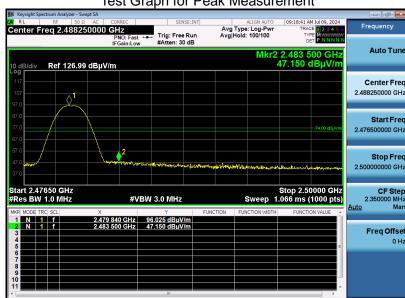

Test Graph for Peak Measurement

Test Graph for Average Measurement

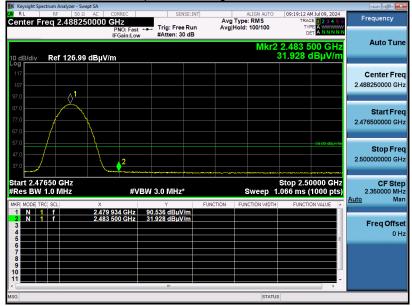

RESULT: Pass

Note: The factor had been edited in the "Input Correction" of the Spectrum Analyzer.



12. AC Power Line Conducted Emission Test

12.1 Measurement Limit


Francisco	Maximum RF Line Voltage			
Frequency	Q.P. (dBµV)	Average (dBµV)		
150kHz~500kHz	66-56	56-46		
500kHz~5MHz	56	46		
5MHz~30MHz	60	50		

Note:

1. The lower limit shall apply at the transition frequency.

2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz

12.2 Measurement Setup (Block Diagram of Configuration)

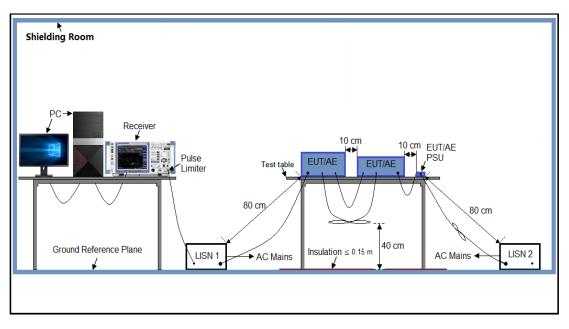



12.3 Preliminary Procedure of Line Conducted Emission Test

- 1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
- 2. Support equipment, if needed, was placed as per ANSI C63.10.
- 3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.
- 4. All support equipment received AC120V/60Hz power from a LISN, if any.
- 5. The EUT received DC 3V power from battery.
- 6. The test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7. Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
- 8. During the above scans, the emissions were maximized by cable manipulation.
- 9. The test mode(s) were scanned during the preliminary test.

Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.

12.4 Final Procedure of Line Conducted Emission Test

- 1. EUT and support equipment was set up on the test bench as per step 2 of the preliminary test.
- A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less – 2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.
- 3. The test data of the worst case condition(s) was reported on the Summary Data page.

12.5 Measurement Results

N/A

Note: The conducted emission tests at AC port are not required for devices which only employ battery power for operation.



Report No.: AGC16535240701FR01 Page 49 of 49

Appendix I: Photographs of Test Setup

Refer to the Report No.: AGC16535240701AP01

Appendix II: Photographs of Test EUT

Refer to the Report No.: AGC16535240701AP02

-----End of Report-----



Conditions of Issuance of Test Reports

1. All samples and goods are accepted by the Attestation of Global Compliance (Shenzhen) Co., Ltd (the "Company") solely for testing and reporting in accordance with the following terms and conditions. The company provides its services on the basis that such terms and conditions constitute express agreement between the company and any person, firm or company requesting its services (the "Clients").

2. Any report issued by Company as a result of this application for testing services (the "Report") shall be issued in confidence to the Clients and the Report will be strictly treated as such by the Company. It may not be reproduced either in its entirety or in part and it may not be used for advertising or other unauthorized purposes without the written consent of the Company. The Clients to whom the Report is issued may, however, show or send it, or a certified copy thereof prepared by the Company to its customer, supplier or other persons directly concerned. The Company will not, without the consent of the Clients, enter into any discussion or correspondence with any third party concerning the contents of the Report, unless required by the relevant governmental authorities, laws or court orders.

3. The Company shall not be called or be liable to be called to give evidence or testimony on the Report in a court of law without its prior written consent, unless required by the relevant governmental authorities, laws or court orders.

4. In the event of the improper use of the report as determined by the Company, the Company reserves the right to withdraw it, and to adopt any other additional remedies which may be appropriate.

5. Samples submitted for testing are accepted on the understanding that the Report issued cannot form the basis of, or be the instrument for, any legal action against the Company.

6. The Company will not be liable for or accept responsibility for any loss or damage however arising from the use of information contained in any of its Reports or in any communication whatsoever about its said tests or investigations.

7. Clients wishing to use the Report in court proceedings or arbitration shall inform the Company to that effect prior to submitting the sample for testing.

8. The Company is not responsible for recalling the electronic version of the original report when any revision is made to them. The Client assumes the responsibility to providing the revised version to any interested party who uses them.

9. Subject to the variable length of retention time for test data and report stored hereinto as otherwise specifically required by individual accreditation authorities, the Company will only keep the supporting test data and information of the test report for a period of six years. The data and information will be disposed of after the aforementioned retention period has elapsed. Under no circumstances shall we provide any data and information which has been disposed of after retention period. Under no circumstances shall we be liable for damage of any kind, including (but not limited to) compensatory damages, lost profits, lost data, or any form of special, incidental, indirect, consequential or punitive damages of any kind, whether based on breach of contract of warranty, tort (including negligence), product liability or otherwise, even if we are informed in advance of the possibility of such damages.