



**FCC TEST REPORT  
FCC ID:2BHFH-M01**

**Report Number..... : ZHT-240624039E**

Date of Test..... June 24, 2024 to July 05, 2024

Date of issue..... : July 05, 2024

Test Result ..... : PASS

**Testing Laboratory..... : Guangdong Zhonghan Testing Technology Co., Ltd.**

Address ..... : Room 104, Building 1, Yibaolai Industrial Park, Qiaotou Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

**Applicant's name ..... : Shenzhen Shi'an Technology Co., Ltd**

Address ..... 511, No. 7 Aiqun Road, Longteng Community, Shiyan Street, Bao'an District, Shenzhen

**Manufacturer's name ..... : Shenzhen Shi'an Technology Co., Ltd**

Address ..... : 511, No. 7 Aiqun Road, Longteng Community, Shiyan Street, Bao'an District, Shenzhen

**Test specification:**

Standard..... : FCC Part 15 Subpart C Section 15.249

Test procedure..... : KDB558074 D01 15.249 Meas Guidance v05r02  
ANSI C63.10:2013

Non-standard test method ..... : N/A

This device described above has been tested by ZHT, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of ZHT, this document may be altered or revised by ZHT, personal only, and shall be noted in the revision of the document.

**Product name..... : mouse**

Trademark ..... : Xnoik

Model/Type reference..... : M01, M02, M03, M04, M05, M06, M07, M08, M09, M10, M11, M12, M13, M14, M15, M16, M17, M18, M19, M20

Model difference..... : M01 is tested model, other models are derivative models .The models are identical in circuit, only different on the model names, size and shape. So the test data of M01 can represent the remaining models.

Ratings..... : Input: Type-C DC 5V or DC 3.7V by battery



**Testing procedure and testing location:**

**Testing Laboratory**.....: **Guangdong Zhonghan Testing Technology Co., Ltd.**

**Address**.....: Room 104, Building 1, Yibaolai Industrial Park, Qiaotou Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

**Tested by (name + signature)**.....: Leon Li

*Leon Li*

**Reviewer (name + signature)**.....: Baret Wu

*Baret Wu*

**Approved (name + signature)**.....: Levi Lee





Table of Contents

Page

1. VERSION ..... 5

2. SUMMARY OF TEST RESULTS ..... 6

    2.1 TEST FACILITY ..... 7

    2.2 MEASUREMENT UNCERTAINTY ..... 7

3. GENERAL INFORMATION ..... 8

    3.1 GENERAL DESCRIPTION OF EUT ..... 8

    3.2 DESCRIPTION OF TEST MODES ..... 10

    3.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED ..... 10

    3.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE) ..... 10

    3.5 EQUIPMENTS LIST FOR ALL TEST ITEMS ..... 11

    4.1 CONDUCTED EMISSION MEASUREMENT ..... 13

        4.1.1 POWER LINE CONDUCTED EMISSION Limits ..... 13

        4.1.2 TEST PROCEDURE ..... 13

        4.1.3 DEVIATION FROM TEST STANDARD ..... 13

        4.1.4 TEST SETUP ..... 14

        4.1.5 EUT OPERATING CONDITIONS ..... 14

        4.1.6 TEST RESULTS ..... 15

    4.2 RADIATED EMISSION MEASUREMENT ..... 17

        4.2.1 RADIATED EMISSION LIMITS ..... 17

        4.2.2 TEST PROCEDURE ..... 18

        4.2.3 DEVIATION FROM TEST STANDARD ..... 18

        4.2.4 TEST SETUP ..... 19

        4.2.5 EUT OPERATING CONDITIONS ..... 20

5.RADIATED BAND EMISSION MEASUREMENT ..... 26

    5.1 TEST REQUIREMENT: ..... 26

    5.2 TEST PROCEDURE ..... 26

    5.3 DEVIATION FROM TEST STANDARD ..... 26

    5.4 TEST SETUP ..... 27

    5.5 EUT OPERATING CONDITIONS ..... 27

    5.6 TEST RESULT ..... 27

    6.1 APPLIED PROCEDURES / LIMIT ..... 28

    6.2 TEST PROCEDURE ..... 28

    6.3 DEVIATION FROM STANDARD ..... 28

    6.4 TEST SETUP ..... 28

    6.5 EUT OPERATION CONDITIONS ..... 28

    6.6 TEST RESULTS ..... 29



Table of Contents

Page

6.ANTENNA REQUIREMENT .....	31
7.TEST SETUP PHOTOS .....	31
8. EUT CONSTRUCTIONAL DETAILS .....	32



1. VERSION

Report No.	Version	Description	Approved
ZHT-240624039E	Rev.01	Initial issue of report	July 05, 2024



2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

FCC Part15 (15.249) , Subpart C			
Standard Section	Test Item	Judgment	Remark
FCC part 15.207	AC Power Line Conducted Emission	PASS	
FCC part 15.249	Channel Bandwidth& 99% OCB	PASS	
FCC part 15.249	Band Edge	PASS	
FCC part 15.205/15.209	Spurious Emission	PASS	
FCC part 15.249 (a)	Field Strength of Fundamental	PASS	

NOTE:

(1)" N/A" denotes test is not applicable in this Test Report



2.1 TEST FACILITY

Guangdong Zhonghan Testing Technology Co., Ltd.  
Add. : Room 104, Building 1, Yibaolai Industrial Park, Qiaotou Community, Fuhai Street, Bao'an District  
Shenzhen, Guangdong, China

FCC Registration Number:255941  
Designation Number: CN0325  
IC Registered No.: 29832  
CAB identifier: CN0143

2.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement  $y \pm U$  · where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of  $k=2$  · providing a level of confidence of approximately 95 % .

No.	Item	Uncertainty
1	Conducted Emission Test	±1.38dB
2	RF power conducted	±0.16dB
3	Spurious emissions conducted	±0.21dB
4	All emissions radiated(9k-30MHz)	±4.68dB
5	All emissions radiated(<1G)	±4.68dB
6	All emissions radiated(>1G)	±4.89dB
7	Temperature	±0.5°C
8	Humidity	±2%
9	Occupied Bandwidth	±4.96dB





### 3. GENERAL INFORMATION

#### 3.1 GENERAL DESCRIPTION OF EUT

Product Name:	mouse
Test Model No.:	M01
Hardware Version:	V1.0
Software Version:	V1.0
Sample(s) Status:	Engineer sample
Operation Frequency:	2405MHz~2475MHz
Channel Numbers:	16
Modulation Type:	GFSK
Antenna Type:	PCB Antenna
Antenna gain:	-0.58dBi
Power supply:	Input: Type-C DC 5V or DC 3.7V by battery





<b>Operation Frequency each of channel</b>			
Channel	Frequency	Channel	Frequency
1	2405	9	2441
2	2408	10	2445
3	2414	11	2453
4	2419	12	2459
5	2422	13	2463
6	2426	14	2466
7	2436	15	2471
8	2439	16	2475

**Note:**

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Channel	Frequency
The lowest channel	2405MHz
The middle channel	2441MHz
The Highest channel	2475MHz




3.2 DESCRIPTION OF TEST MODES


Transmitting mode	Keep the EUT in continuously transmitting mode
Remark: EUT use new battery during the test, the test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and found that the worst case was under the nominal rated supply condition. So the report just shows that condition's data.	

3.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

Conducted Emission

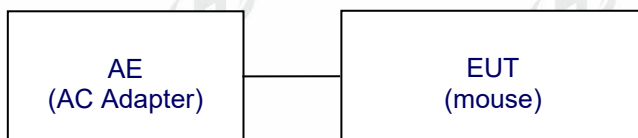

Radiated Emission

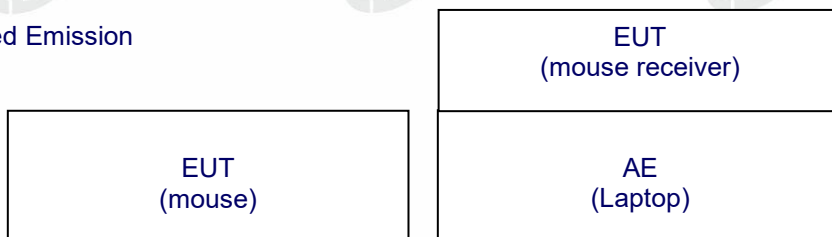

3.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
1	Laptop	Lenovo (Beijing) Co., Ltd	ThinkPad E480	/	AE
2	AC Adapter	Huawei Technologies Co Ltd	HW-050450C00	/	AE

Item	Shielded Type	Ferrite Core	Length	Note

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.



## 3.5 EQUIPMENTS LIST FOR ALL TEST ITEMS

## Radiation Test equipment

Item	Equipment	Manufacturer	Model	Last Cal.	Next Cal.
1	Receiver	R&S	ESCI	May 10, 2024	May 09, 2025
2	Loop antenna	EMCI	LAP600	May 10, 2024	May 09, 2025
3	Amplifier	Schwarzbeck	BBV 9743 B	May 10, 2024	May 09, 2025
4	Amplifier	Schwarzbeck	BBV 9718 B	May 10, 2024	May 09, 2025
5	Bilog Antenna	Schwarzbeck	VULB9168	Aug, 04, 2023	Aug, 03, 2024
6	Horn Antenna	Schwarzbeck	BBHA9120D	May 16, 2024	May 15, 2025
7	Horn Antenna	A.H.SYSTEMS	SAS574	May 10, 2024	May 09, 2025
8	Amplifier	AEROFLEX	100KHz-40GHz	May 10, 2024	May 09, 2025
9	Spectrum Analyzer	R&S	FSV40	May 10, 2024	May 09, 2025
10	966 Anechoic Chamber	EMToni	9m6m6m	Nov. 25, 2021	Nov. 24, 2024
11	Spectrum Analyzer	KEYSIGHT	N9020A	May 10, 2024	May 09, 2025
12	WIDBAND RADIO COMMUNICATION TESTER	R&S	CMW500	May 10, 2024	May 09, 2025
13	Single Generator	Agilent	N5182A	May 10, 2024	May 09, 2025
14	Power Sensor	MWRFtest	MW100-RFCB	May 10, 2024	May 09, 2025
15	Audio analyzer	R&S	UPL	May 10, 2024	May 09, 2025
16	Single Generator	R&S	SMB100A	May 10, 2024	May 09, 2025
17	Power Amplifier Shielding Room	EMToni	2m3m3m	Nov. 25, 2021	Nov. 24, 2024



Conduction Test equipment

Equipment	Manufacturer	Model	Last Cal.	Next Cal.
Receiver	R&S	ESCI	May 10, 2024	May 09, 2025
LISN	R&S	ENV216	May 10, 2024	May 09, 2025
ISN CAT 6	Schwarzbeck	NTFM 8158	May 10, 2024	May 09, 2025
ISN CAT 5	Schwarzbeck	CAT5 8158	May 10, 2024	May 09, 2025
Capacitive Voltage Probe	Schwarzbeck	CVP 9222 C	May 10, 2024	May 09, 2025
Current Transformer Clamp	Schwarzbeck	SW 9605	May 10, 2024	May 09, 2025
CE Shielding Room	EMToni	9m4m3m	Nov. 25, 2021	Nov. 24, 2024



**4. EMC EMISSION TEST**

**4.1 CONDUCTED EMISSION MEASUREMENT**

Test Requirement:	FCC Part15 C Section 15.207
Test Method:	ANSI C63.10:2013
Test Frequency Range:	150KHz to 30MHz
Receiver setup:	RBW=9KHz, VBW=30KHz, Sweep time=auto

**4.1.1 POWER LINE CONDUCTED EMISSION Limits**

FREQUENCY (MHz)	Limit (dBuV)		Standard
	QP	AVG	
0.15 -0.5	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	56.00	46.00	FCC
5.0 -30.0	60.00	50.00	FCC

Note:

(1) \*Decreases with the logarithm of the frequency.

**4.1.2 TEST PROCEDURE**


- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

**4.1.3 DEVIATION FROM TEST STANDARD**

No deviation



#### 4.1.4 TEST SETUP

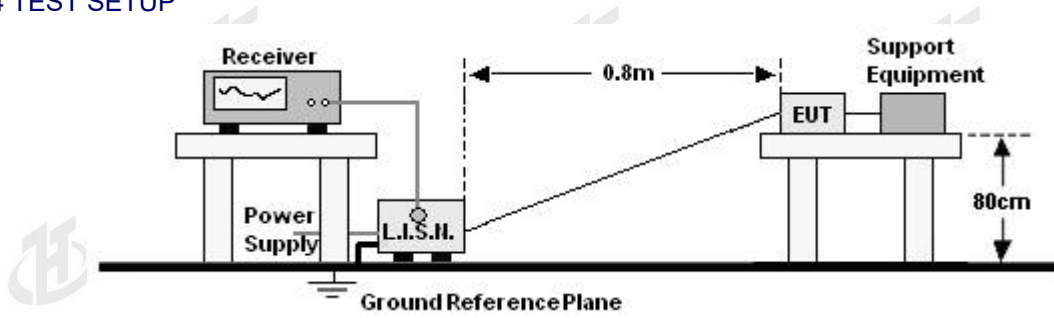

#### 4.1.5 EUT OPERATING CONDITIONS


The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.





4.1.6 TEST RESULTS

Temperature:	24.3℃	Relative Humidity :	50%
Pressure:	101kPa	Phase :	L
Test Voltage:	AC 120V / 60Hz		

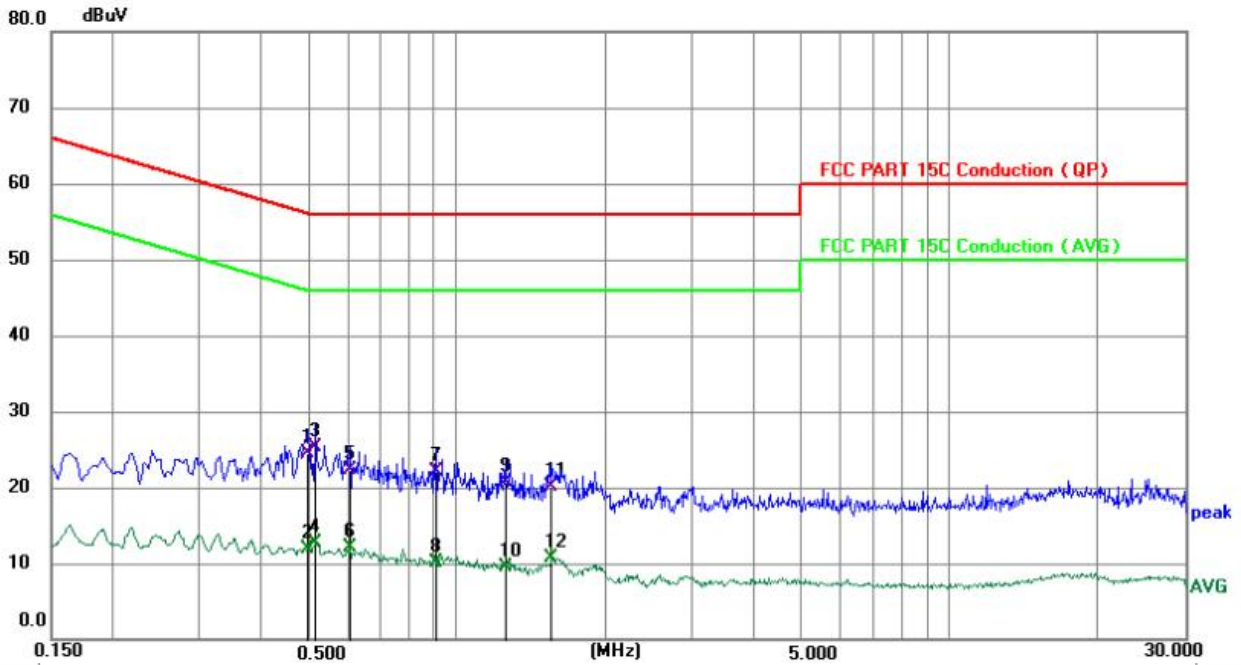


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.4964	14.44	10.02	24.46	56.06	-31.60	QP	P	
2	0.4964	1.86	10.02	11.88	46.06	-34.18	AVG	P	
3 *	0.5144	15.34	10.02	25.36	56.00	-30.64	QP	P	
4	0.5144	2.60	10.02	12.62	46.00	-33.38	AVG	P	
5	0.6045	12.25	10.03	22.28	56.00	-33.72	QP	P	
6	0.6045	2.02	10.03	12.05	46.00	-33.95	AVG	P	
7	0.9060	12.00	10.05	22.05	56.00	-33.95	QP	P	
8	0.9060	0.14	10.05	10.19	46.00	-35.81	AVG	P	
9	1.2524	10.72	10.06	20.78	56.00	-35.22	QP	P	
10	1.2524	-0.63	10.06	9.43	46.00	-36.57	AVG	P	
11	1.5540	10.04	10.06	20.10	56.00	-35.90	QP	P	
12	1.5540	0.67	10.06	10.73	46.00	-35.27	AVG	P	





Temperature:	24.3°C	Relative Humidity :	50%
Pressure:	101kPa	Phase :	N
Test Voltage:	AC 120V / 60Hz		

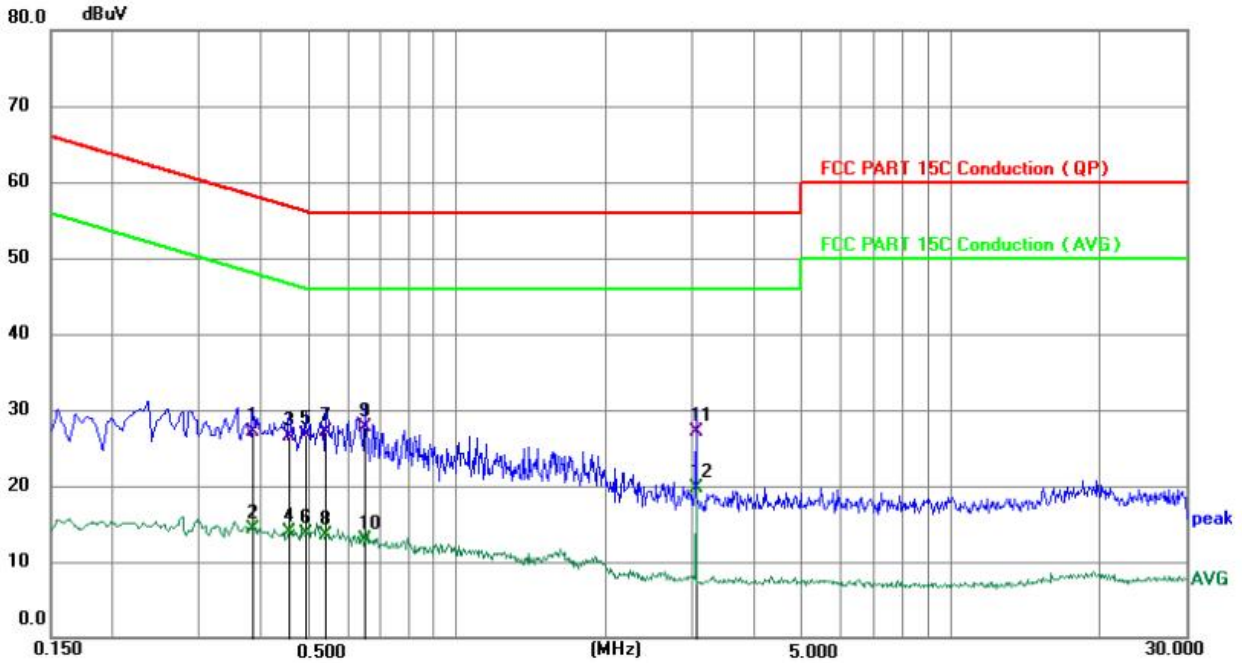

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.3840	17.07	9.98	27.05	58.19	-31.14	QP	P	
2	0.3840	4.25	9.98	14.23	48.19	-33.96	AVG	P	
3	0.4560	16.46	10.01	26.47	56.77	-30.30	QP	P	
4	0.4560	3.90	10.01	13.91	46.77	-32.86	AVG	P	
5	0.4920	16.72	10.02	26.74	56.13	-29.39	QP	P	
6	0.4920	3.68	10.02	13.70	46.13	-32.43	AVG	P	
7	0.5414	17.13	10.02	27.15	56.00	-28.85	QP	P	
8	0.5414	3.51	10.02	13.53	46.00	-32.47	AVG	P	
9	0.6493	17.77	10.03	27.80	56.00	-28.20	QP	P	
10	0.6493	2.84	10.03	12.87	46.00	-33.13	AVG	P	
11	3.0480	17.12	10.07	27.19	56.00	-28.81	QP	P	
12 *	3.0480	9.66	10.07	19.73	46.00	-26.27	AVG	P	

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Measurement Level = Reading level + Correct Factor
4. The test data shows only the worst case ( Low Channel:2405MHz).



4.2 RADIATED EMISSION MEASUREMENT

Test Requirement:	FCC Part15 C Section 15.209				
Test Method:	ANSI C63.10:2013				
Test Frequency Range:	9kHz to 25GHz				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Value
	9KHz-150KHz	Quasi-peak	200Hz	600Hz	Quasi-peak
	150KHz-30MHz	Quasi-peak	9KHz	30KHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	100KHz	300KHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
Peak		1MHz	10Hz	Average	

4.2.1 RADIATED EMISSION LIMITS

Frequencies (MHz)	Field Strength (micровolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT

FREQUENCY (MHz)	Limit (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).



According 15.249, the field strength of emissions from intentional radiators operated within 2400MHz-2483.5 MHz shall not exceed 94dB $\mu$ V/m (50mV/m).

FCC PART 15.249(a)Except as provided in paragraph (b) of this section, the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:

Fundamental Frequency	Field Strength of Fundamental (millivolts/meter)	Field Strength of Harmonics (microvolts/meter)
900-928MHz	50 (94dB $\mu$ V/m @3m)	500 (54dB $\mu$ V/m @3m)
2400-2483.5MHz	50 (94dB $\mu$ V/m @3m)	500 (54dB $\mu$ V/m @3m)
5725-5875MHz	50 (94dB $\mu$ V/m @3m)	500 (54dB $\mu$ V/m @3m)
24.0-24.25GHz	250 (108dB $\mu$ V/m @3m)	2500 (68dB $\mu$ V/m @3m)

4.2.2 TEST PROCEDURE

- a. The measuring distance of at 3 m shall be used for measurements at frequency up to 25GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- b. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-chamber test. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The height of the equipment or of the substitution antenna shall be 0.8m; above 1GHz, the height was 1.5m, the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- e. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- f. For the actual test configuration, please refer to the related Item –EUT Test Photos.
- g. For the radiated emission test above 1GHz:  
Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response.  
The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.  
Note:  
Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported


4.2.3 DEVIATION FROM TEST STANDARD

No deviation




#### 4.2.4 TEST SETUP


##### (A) Radiated Emission Test-Up Frequency Below 30MHz

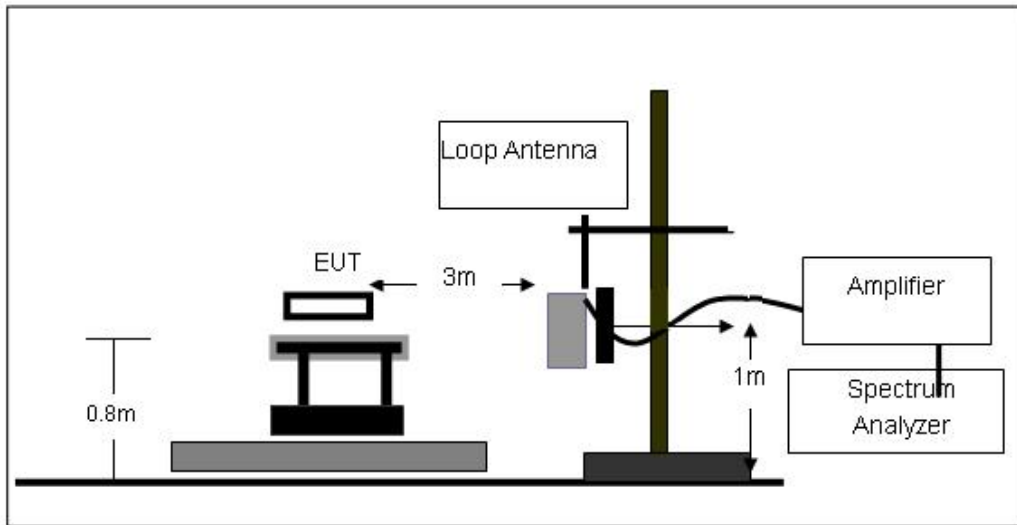

##### (B) Radiated Emission Test-Up Frequency 30MHz~1GHz

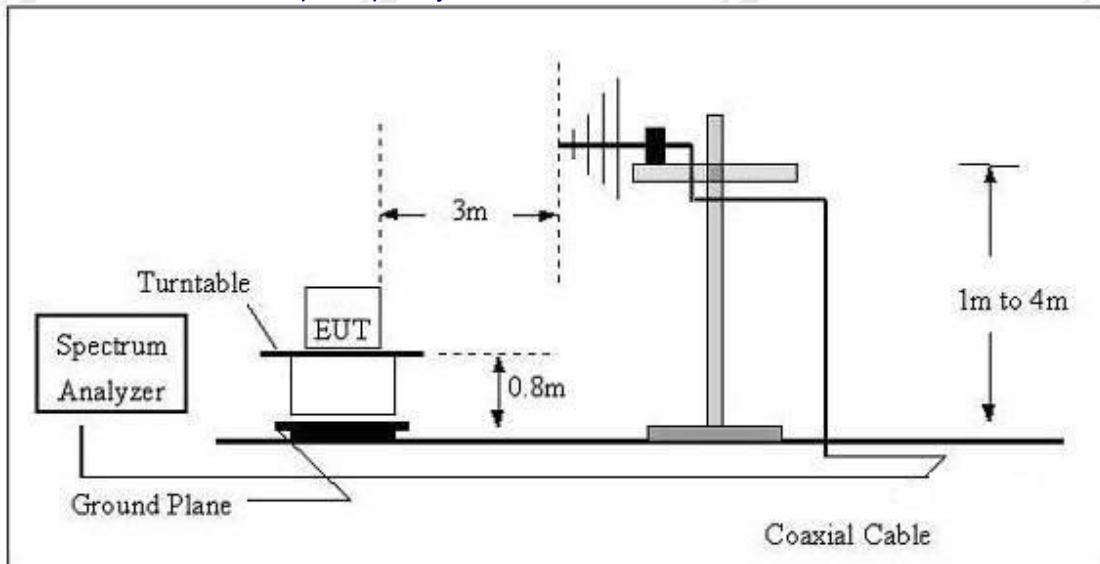

(C) Radiated Emission Test-Up Frequency Above 1GHz

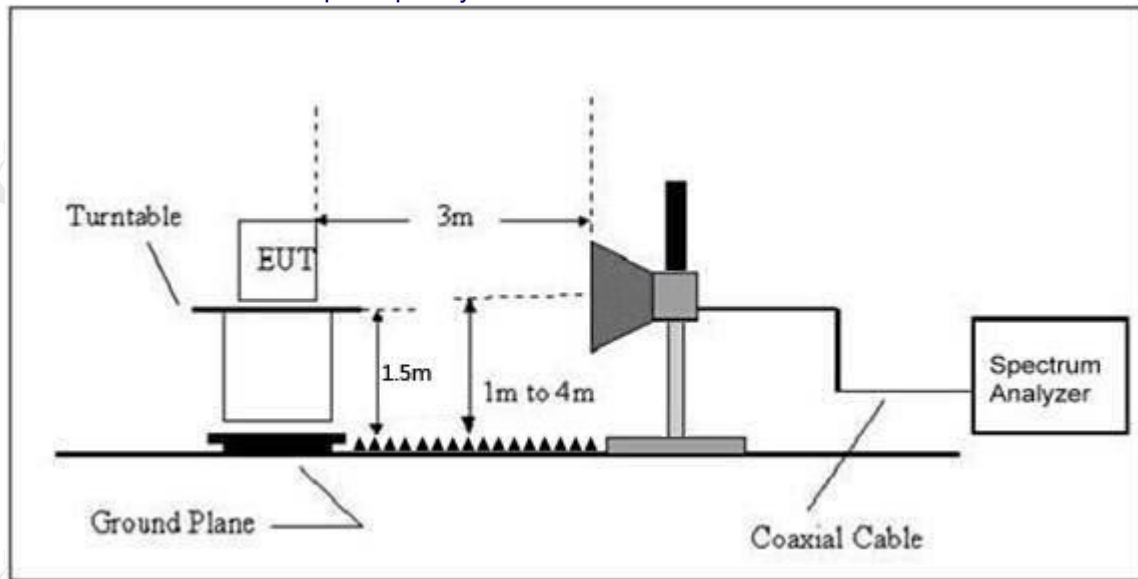

4.2.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

4.2.6 TEST RESULTS (Between 9kHz – 30 MHz)


The emission from 9 kHz to 30MHz was pre-tested and found the result was 20dB lower than the limit, and according to 15.31(o) & RSS-Gen 6.13, the test result no need to reported.





Between 30MHz – 1GHz


Temperature:	25.6°C	Relative Humidity:	47%
Pressure:	101 kPa	Polarization:	Horizontal
Test Voltage:	DC 3.7 V		

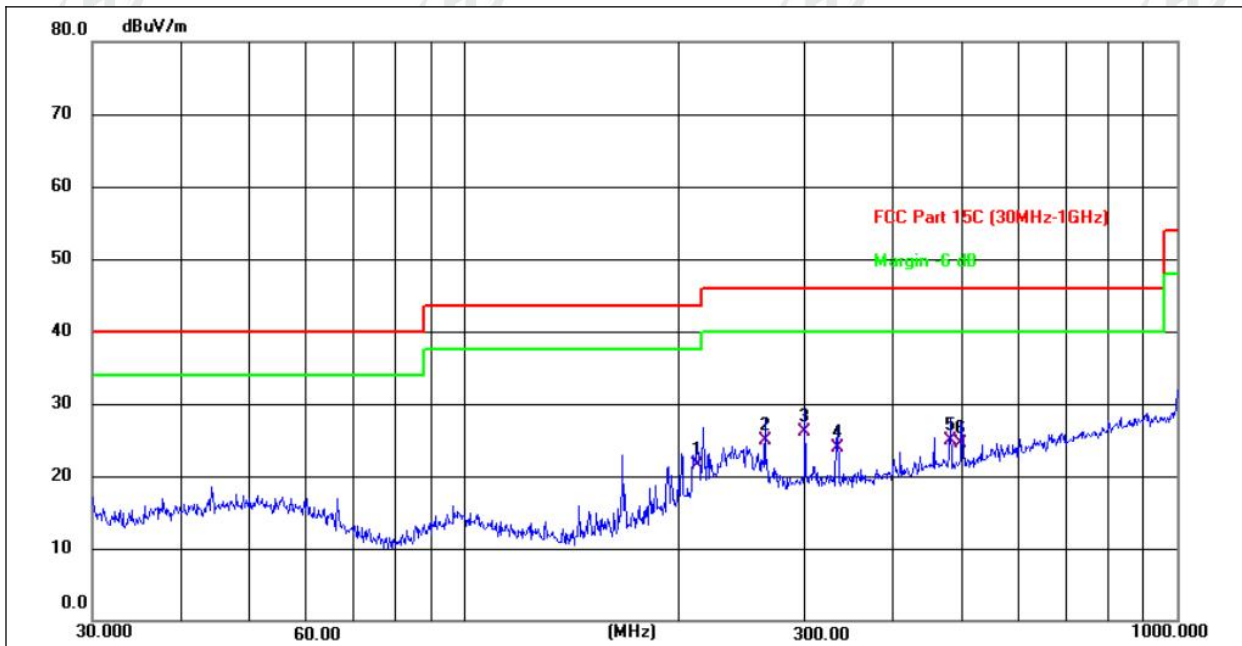

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	212.2694	31.96	-10.43	21.53	43.50	-21.97	QP
2	263.8190	33.68	-8.78	24.90	46.00	-21.10	QP
3 *	300.3672	34.22	-8.03	26.19	46.00	-19.81	QP
4	333.6867	31.22	-7.27	23.95	46.00	-22.05	QP
5	480.5276	29.26	-4.41	24.85	46.00	-21.15	QP
6	497.6764	28.58	-4.12	24.46	46.00	-21.54	QP



Temperature:	25.6°C	Relative Humidity:	47%
Pressure:	101kPa	Polarization:	Vertical
Test Voltage:	DC 3.7 V		

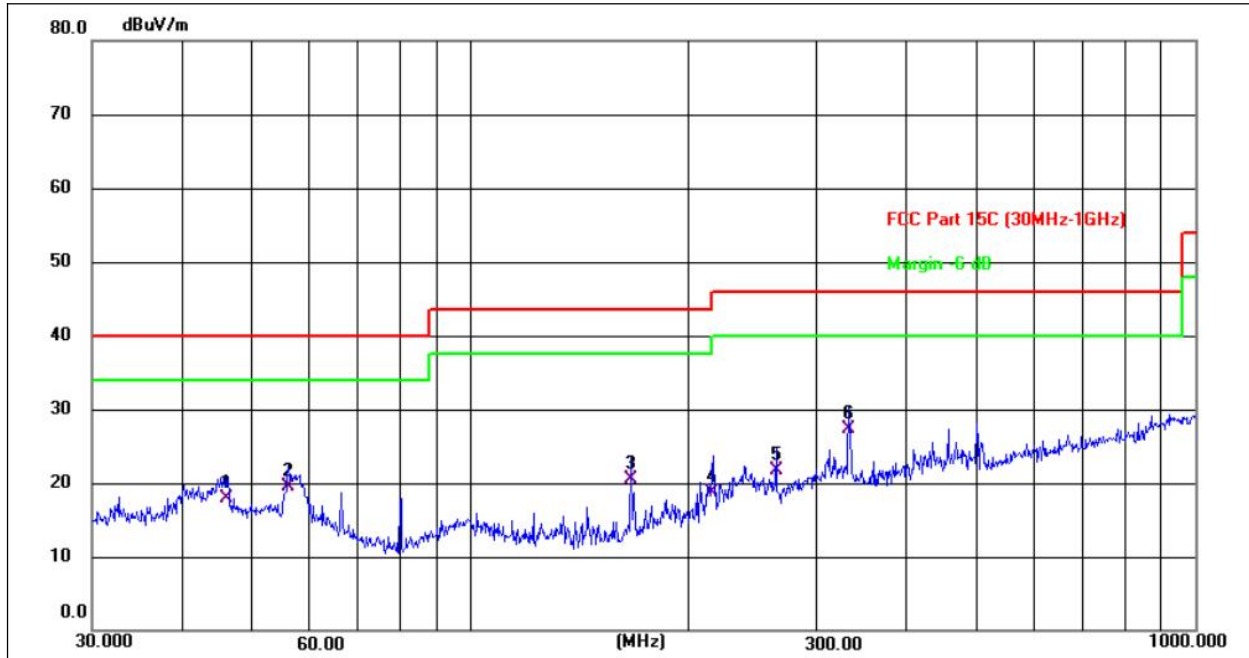

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	46.1779	26.97	-9.10	17.87	40.00	-22.13	QP
2	56.0007	28.81	-9.39	19.42	40.00	-20.58	QP
3	166.0680	33.66	-13.11	20.55	43.50	-22.95	QP
4	215.2678	29.12	-10.33	18.79	43.50	-24.71	QP
5	263.8190	30.45	-8.78	21.67	46.00	-24.33	QP
6 *	332.5187	34.54	-7.29	27.25	46.00	-18.75	QP

Remarks:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.
3. The test data shows only the worst case ( Low Channel:2405MHz).





Fundamental Test

Polar (H/V)	Frequency	Meter Reading	Pre-amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
V	2405	96.94	30.22	4.85	23.98	95.55	114	-18.45	Pk
V	2405	81.77	30.22	4.85	23.98	80.38	94	-13.62	AV
V	2441	91.38	30.22	4.85	23.98	89.99	114	-24.01	Pk
V	2441	80.39	30.22	4.85	23.98	79	94	-15.00	AV
V	2475	94.61	30.22	4.85	23.98	93.22	114	-20.78	Pk
V	2475	82.62	30.22	4.85	23.98	81.23	94	-12.77	AV
H	2405	95.31	30.22	4.85	23.98	93.92	114	-20.08	Pk
H	2405	80.41	30.22	4.85	23.98	79.02	94	-14.98	AV
H	2441	93.78	30.22	4.85	23.98	92.39	114	-21.61	Pk
H	2441	82.77	30.22	4.85	23.98	81.38	94	-12.62	AV
H	2475	92.57	30.22	4.85	23.98	91.18	114	-22.82	Pk
H	2475	80.49	30.22	4.85	23.98	79.1	94	-14.90	AV



1GHz~25GHz

Polar (H/V)	Frequency	Meter Reading	Pre-amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel:2405MHz									
V	4810.00	56.68	30.55	5.77	24.66	56.56	74	-17.44	Pk
V	4810.00	43.17	30.55	5.77	24.66	43.05	54	-10.95	AV
V	7215.00	55.68	30.33	6.32	24.55	56.22	74	-17.78	Pk
V	7215.00	43.64	30.33	6.32	24.55	44.18	54	-9.82	AV
V	9620.00	58.79	30.55	5.77	24.66	58.67	74	-15.33	Pk
V	9620.00	44.38	30.55	5.77	24.66	44.26	54	-9.74	AV
V	12025.00	58.05	30.33	6.32	24.55	58.59	74	-15.41	Pk
V	12025.00	44.34	30.33	6.32	24.55	44.88	54	-9.12	AV
H	4810.00	59.69	30.55	5.77	24.66	59.57	74	-14.43	Pk
H	4810.00	41.55	30.55	5.77	24.66	41.43	54	-12.57	AV
H	7215.00	57.1	30.33	6.32	24.55	57.64	74	-16.36	Pk
H	7215.00	43.9	30.33	6.32	24.55	44.44	54	-9.56	AV
H	9620.00	59.06	30.55	5.77	24.66	58.94	74	-15.06	Pk
H	9620.00	41.01	30.55	5.77	24.66	40.89	54	-13.11	AV
H	12025.00	58.44	30.33	6.32	24.55	58.98	74	-15.02	Pk
H	12025.00	41.05	30.33	6.32	24.55	41.59	54	-12.41	AV

Polar (H/V)	Frequency	Meter Reading	Pre-amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Middle Channel:2441MHz									
V	4882.00	57.44	30.55	5.77	24.66	57.32	74	-16.68	Pk
V	4882.00	41.52	30.55	5.77	24.66	41.4	54	-12.6	AV
V	7323.00	56.12	30.33	6.32	24.55	56.66	74	-17.34	Pk
V	7323.00	44.71	30.33	6.32	24.55	45.25	54	-8.75	AV
V	9764.00	55.9	30.55	5.77	24.66	55.78	74	-18.22	Pk
V	9764.00	44.7	30.55	5.77	24.66	44.58	54	-9.42	AV
V	12205.00	55.45	30.33	6.32	24.55	55.99	74	-18.01	Pk
V	12205.00	44.24	30.33	6.32	24.55	44.78	54	-9.22	AV
H	4882.00	55.81	30.55	5.77	24.66	55.69	74	-18.31	Pk
H	4882.00	44.58	30.55	5.77	24.66	44.46	54	-9.54	AV
H	7323.00	55.15	30.33	6.32	24.55	55.69	74	-18.31	Pk
H	7323.00	44.26	30.33	6.32	24.55	44.8	54	-9.2	AV
H	9764.00	55.46	30.55	5.77	24.66	55.34	74	-18.66	Pk
H	9764.00	42.26	30.55	5.77	24.66	42.14	54	-11.86	AV
H	12205.00	55.26	30.33	6.32	24.55	55.8	74	-18.2	Pk
H	12205.00	42.56	30.33	6.32	24.55	43.1	54	-10.9	AV



Polar (H/V)	Frequency	Meter Reading	Pre-amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
High Channel:2475MHz									
V	4950.00	59.01	30.55	5.77	24.66	58.89	74	-15.11	Pk
V	4950.00	43.18	30.55	5.77	24.66	43.06	54	-10.94	AV
V	7425.00	58.38	30.33	6.32	24.55	58.92	74	-15.08	Pk
V	7425.00	42.72	30.33	6.32	24.55	43.26	54	-10.74	AV
V	9900.00	58.33	30.55	5.77	24.66	58.21	74	-15.79	Pk
V	9900.00	42.15	30.55	5.77	24.66	42.03	54	-11.97	AV
V	12375.00	55.43	30.33	6.32	24.55	55.97	74	-18.03	Pk
V	12375.00	41.96	30.33	6.32	24.55	42.5	54	-11.5	AV
H	4950.00	57	30.55	5.77	24.66	56.88	74	-17.12	Pk
H	4950.00	41.54	30.55	5.77	24.66	41.42	54	-12.58	AV
H	7425.00	59.73	30.33	6.32	24.55	60.27	74	-13.73	Pk
H	7425.00	43.03	30.33	6.32	24.55	43.57	54	-10.43	AV
H	9900.00	56.94	30.55	5.77	24.66	56.82	74	-17.18	Pk
H	9900.00	41.71	30.55	5.77	24.66	41.59	54	-12.41	AV
H	12375.00	56.82	30.33	6.32	24.55	57.36	74	-16.64	Pk
H	12375.00	41.45	30.33	6.32	24.55	41.99	54	-12.01	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,  
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



**5.RADIATED BAND EMISSION MEASUREMENT**

**5.1 TEST REQUIREMENT:**

Test Requirement:	FCC Part15 C Section 15.209 and 15.205				
Test Method:	ANSI C63.10: 2013				
Test Frequency Range:	All of the restrict bands were tested, only the worst band's (2310MHz to 2500MHz) data was showed.				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Value
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Average	1MHz	3MHz	Average

**LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)**

FREQUENCY (MHz)	Limit (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

**Notes:**

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

**5.2 TEST PROCEDURE**

Above 1GHz test procedure as below:

- a. 1. The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- g. Test the EUT in the lowest channel,the Highest channel

**Note:**


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

**5.3 DEVIATION FROM TEST STANDARD**

No deviation

5.4 TEST SETUP

Radiated Emission Test-Up Frequency Above 1GHz

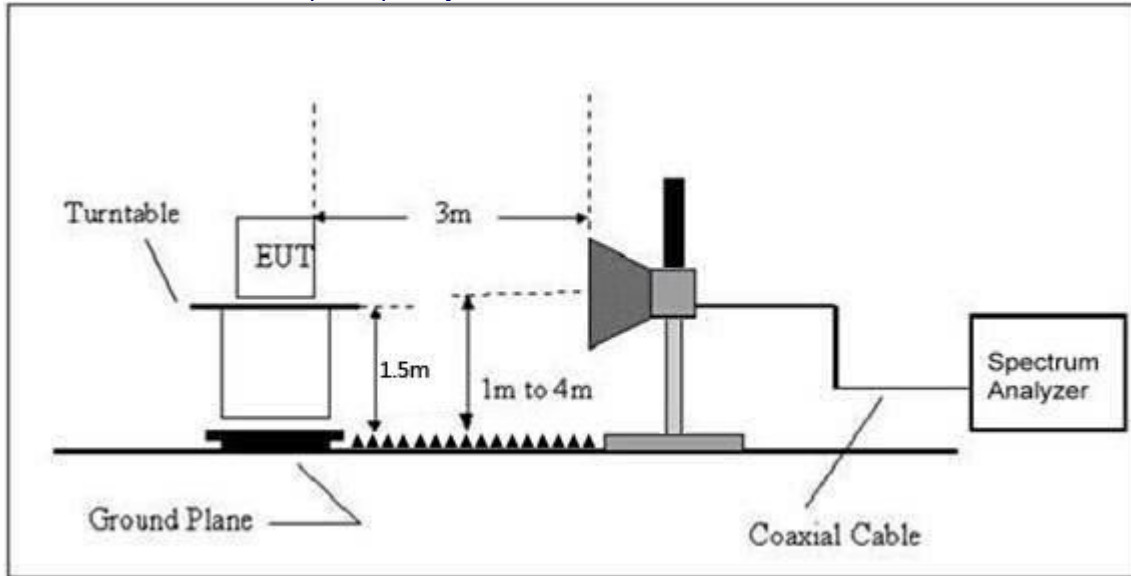

5.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.

5.6 TEST RESULT

	Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector Type	Result
GFSK	Low Channel: 2405MHz										
	H	2390.00	61.46	30.22	4.85	23.98	60.07	74.00	-13.93	PK	PASS
	H	2390.00	48.16	30.22	4.85	23.98	46.77	54.00	-7.23	AV	PASS
	H	2400.00	59.23	30.22	4.85	23.98	57.84	74.00	-16.16	PK	PASS
	H	2400.00	47.74	30.22	4.85	23.98	46.35	54.00	-7.65	AV	PASS
	V	2390.00	60.50	30.22	4.85	23.98	59.11	74.00	-14.89	PK	PASS
	V	2390.00	46.64	30.22	4.85	23.98	45.25	54.00	-8.75	AV	PASS
	V	2400.00	61.30	30.22	4.85	23.98	59.91	74.00	-14.09	PK	PASS
	V	2400.00	47.30	30.22	4.85	23.98	45.91	54.00	-8.09	AV	PASS
	High Channel: 2475MHz										
	H	2483.50	61.07	30.22	4.85	23.98	59.68	74.00	-14.32	PK	PASS
	H	2483.50	47.62	30.22	4.85	23.98	46.23	54.00	-7.77	AV	PASS
	H	2500.00	59.72	30.22	4.85	23.98	58.33	74.00	-15.67	PK	PASS
	H	2500.00	48.29	30.22	4.85	23.98	46.90	54.00	-7.10	AV	PASS
	V	2483.50	62.63	30.22	4.85	23.98	61.24	74.00	-12.76	PK	PASS
	V	2483.50	47.01	30.22	4.85	23.98	45.62	54.00	-8.38	AV	PASS
V	2500.00	60.09	30.22	4.85	23.98	58.70	74.00	-15.30	PK	PASS	
V	2500.00	48.26	30.22	4.85	23.98	46.87	54.00	-7.13	AV	PASS	

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit





6. Channel Bandwidth

Test Requirement:	FCC Part15 C Section 15.249
Test Method:	ANSI C63.10:2013

6.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.249) , Subpart C			
Section	Test Item	Frequency Range (MHz)	Result
15.249(a)(2)	Bandwidth	2400-2483.5	PASS


6.2 TEST PROCEDURE

1. Set RBW = 30 kHz.
2. Set the video bandwidth (VBW)  $\geq 3 \times$  RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

6.3 DEVIATION FROM STANDARD

No deviation.

6.4 TEST SETUP

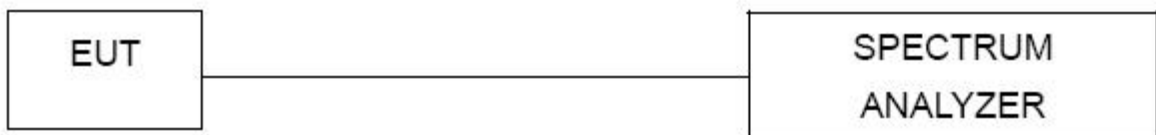

6.5 EUT OPERATION CONDITIONS


The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.





6.6 TEST RESULTS

Temperature :	25.6°C	Relative Humidity :	51%
Test Mode :	GFSK	Test Voltage :	DC 3.7V

Test channel	Channel Bandwidth (MHz)	Result
Lowest	1.129	Pass
Middle	1.125	
Highest	1.127	

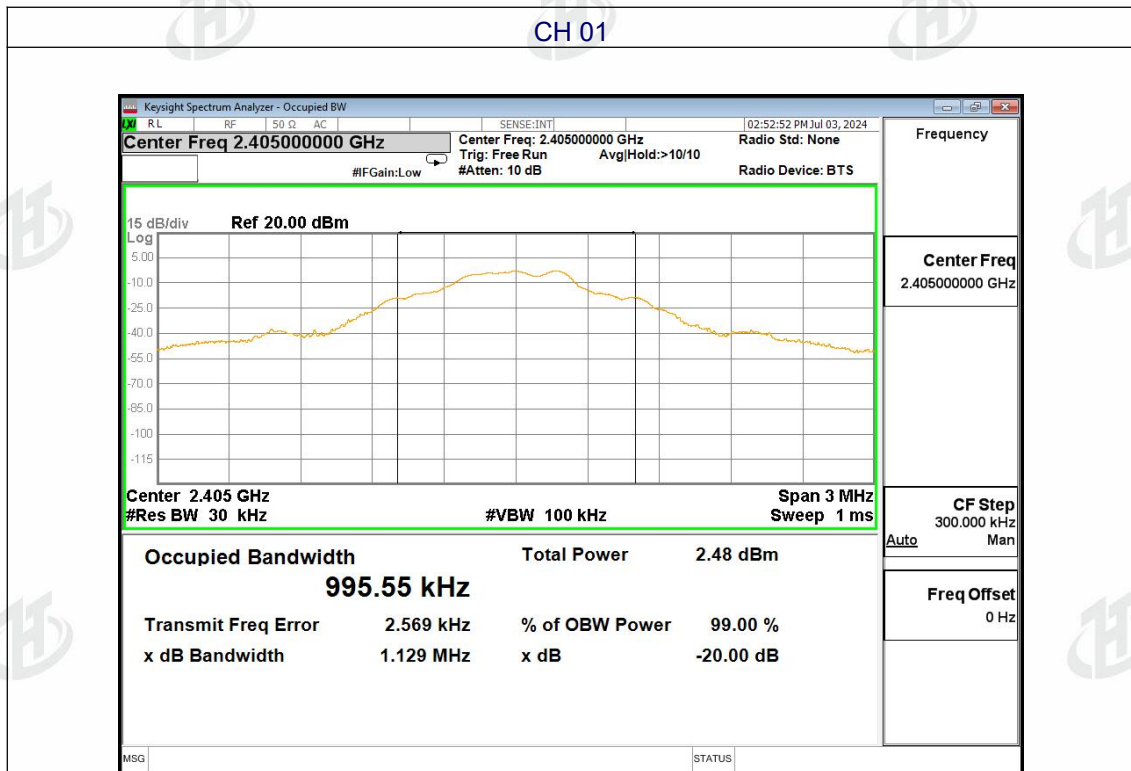



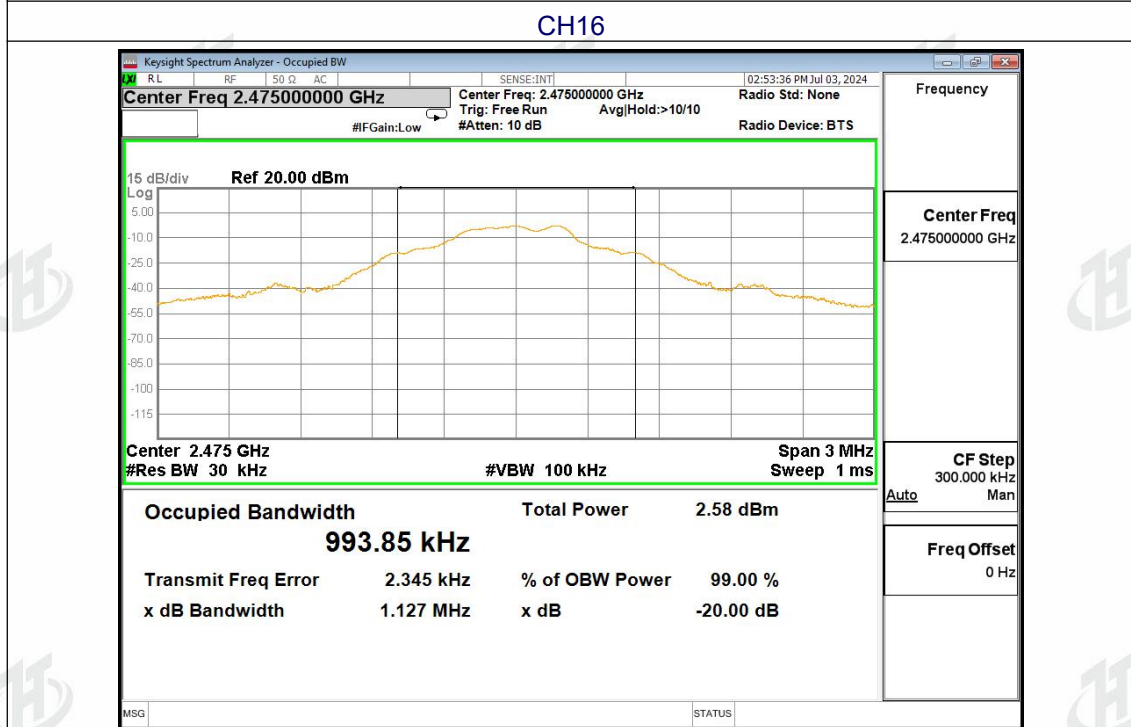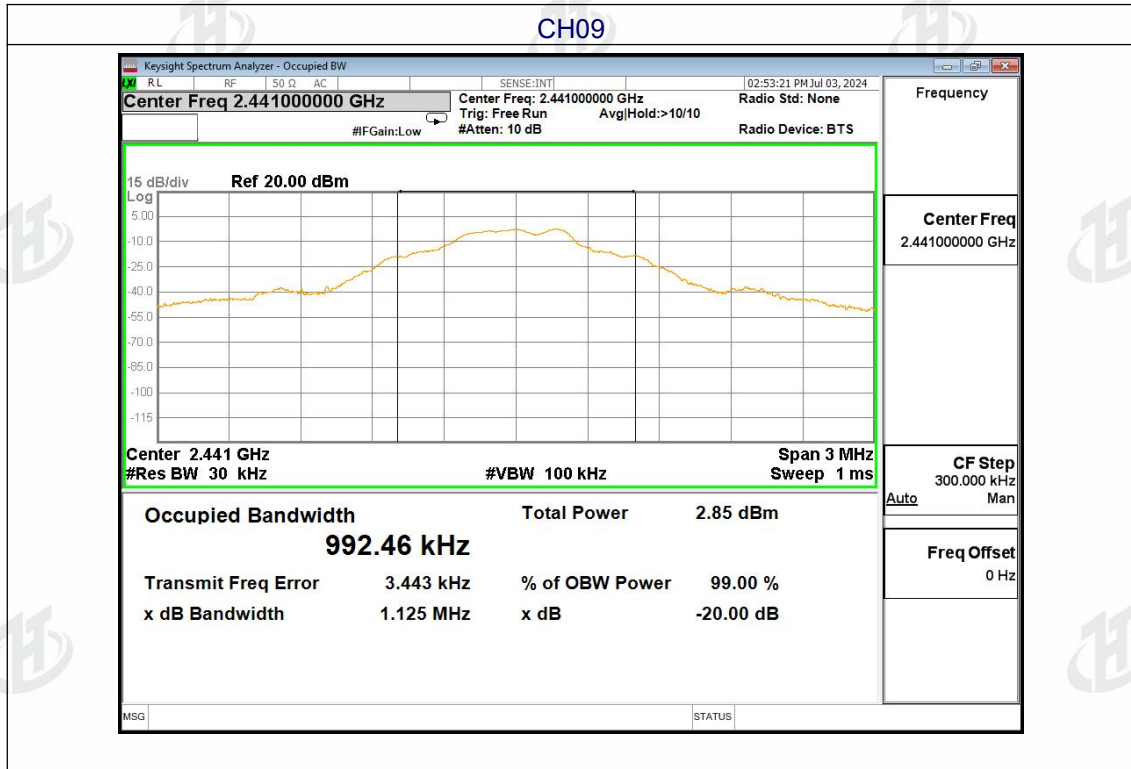



**6.ANTENNA REQUIREMENT**

Standard requirement:	FCC Part15 C Section 15.203
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.	
EUT Antenna:	
The antenna is PCB Antenna, the best case gain of the antennas is -0.58dBi, reference to the appendix II for details	

**7.TEST SETUP PHOTOS**

Reference to the appendix I for details.



### 8. EUT CONSTRUCTIONAL DETAILS

Reference to the appendix II for details.

\*\*\*\*\* END OF REPORT \*\*\*\*\*