

Teison Energy Technology Co., Ltd.

RF TEST REPORT

REPORT TYPE:

FCC Part 15.225 & ISSED RSS-210 RF Report

MODEL:

TS-EDC60, TS-EDC80, TS-EDC90,
TS-EDC120, TS-EDC150, TS-EDC160,
TS-EDC180, TS-EDC200, TS-EDC240

REPORT NUMBER:

2406B0433SHA-001

ISSUE DATE:

November 11, 2024

DOCUMENT CONTROL NUMBER:

TTRF15.225_V1 © 2018 Intertek



Applicant: Teison Energy Technology Co., Ltd.
Meihu Road, Xihu Town, Hanjiang District, Yangzhou City, Jiangsu
Province, China, 225000

Manufacturer: Teison Energy Technology Co., Ltd.
Meihu Road, Xihu Town, Hanjiang District, Yangzhou City, Jiangsu
Province, China, 225000

Factory: Teison Energy Technology Co., Ltd.
Meihu Road, Xihu Town, Hanjiang District, Yangzhou City, Jiangsu
Province, China, 225000

FCC ID: 2BHT2-TSEDC240
IC: 32801-TSEDC240

SUMMARY:

The equipment complies with the requirements according to the following standard(s) or Specification:

47CFR Part 15 (2023): Radio Frequency Devices (Subpart C)

ANSI C63.10 (2020): American National Standard of Procedures for Compliance Testing of
Unlicensed Wireless Devices

RSS-210 Issue 10 (December 2019): Licence-Exempt Radio Apparatus: Category I Equipment

RSS-Gen Issue 5, Amendment 1 (March 2019): General Requirements for Compliance of Radio
Apparatus

PREPARED BY:

REVIEWED BY:

Project Engineer
Scout Gong

Reviewer
Eric Li

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

TEST REPORT

Content

REVISION HISTORY.....	4
MEASUREMENT RESULT SUMMARY	5
1 GENERAL INFORMATION	6
1.1 DESCRIPTION OF EQUIPMENT UNDER TEST (EUT)	6
1.2 TECHNICAL SPECIFICATION.....	7
1.3 DESCRIPTION OF TEST FACILITY.....	8
2 TEST SPECIFICATIONS.....	9
2.1 STANDARDS OR SPECIFICATION	9
2.2 MODE OF OPERATION DURING THE TEST.....	9
2.3 TEST SOFTWARE LIST	9
2.4 TEST PERIPHERALS LIST.....	9
2.5 TEST ENVIRONMENT CONDITION:.....	9
2.6 INSTRUMENT LIST	10
2.7 MEASUREMENT UNCERTAINTY.....	11
3 FUNDAMENTAL EMISSION	12
3.1 LIMIT	12
3.2 MEASUREMENT PROCEDURE	12
3.3 TEST CONFIGURATION	13
3.4 TEST RESULTS OF FUNDAMENTAL EMISSIONS	14
4 SPURIOUS EMISSION	16
4.1 LIMIT	16
4.2 MEASUREMENT PROCEDURE	16
4.3 TEST RESULTS OF RADIATED EMISSIONS	18
5 FREQUENCY STABILITY (TEMPERATURE VARIATION)	25
5.1 TEST LIMIT	25
5.2 TEST CONFIGURATION	25
5.3 TEST PROCEDURE AND TEST SETUP	26
5.4 TEST PROTOCOL.....	26
6 FREQUENCY STABILITY (VOLTAGE VARIATION)	27
6.1 TEST LIMIT	27
6.2 TEST CONFIGURATION	27
6.3 TEST PROCEDURE AND TEST SETUP	27
6.4 TEST PROTOCOL.....	28
7 CONDUCTED EMISSIONS	29
7.1 LIMIT	29
7.2 TEST CONFIGURATION	29
7.3 MEASUREMENT PROCEDURE	30
7.4 TEST RESULTS OF CONDUCTED EMISSIONS.....	31
8 20DB BANDWIDTH	35
8.1 LIMIT	35
8.2 TEST CONFIGURATION.....	35
8.3 TEST PROCEDURE AND TEST SET UP.....	36
8.4 TEST PROTOCOL.....	37
9 ANTENNA REQUIREMENT.....	38

Revision History

Report No.	Version	Description	Issued Date
2406B0433SHA-001	Rev. 01	Initial issue of report	November 11, 2024

Measurement Result Summary

TEST ITEM	FCC REFERENCE	IC REFERENCE	RESULT
Fundamental emission	15.225(a) (b) (c)	RSS 210 B.6	Pass
Spurious emission	15.225(d)	RSS 210 B.6	Pass
Frequency stability	15.225(e)	RSS 210 B.6	Pass
Conducted emissions	15.207	RSS-Gen Issue 5 Clause 8.8	Pass
99% and 20dB Bandwidth	15.215(c)	RSS-Gen Issue 5 Clause 6.6	Pass
Antenna requirement	15.203	RSS-GEN 6.8	Pass

Notes:

1. NA =Not Applicable
2. The determination of the test conclusion is based on IEC Guide 115 in consideration of measurement uncertainty.
3. Additions, Deviations and Exclusions from Standards: None.

1 GENERAL INFORMATION

1.1 Description of Equipment Under Test (EUT)

Product name:	EV Charger
Type/Model:	TS-EDC60, TS-EDC80, TS-EDC90, TS-EDC120, TS-EDC150, TS-EDC160, TS-EDC180, TS-EDC200, TS-EDC240
Description of EUT:	The EUT covered in the report is an EV charger. RFID card reader is incorporated in model for process control. There are 9 models, the electrical circuit design of them is identical, only the output rating is different. Model TS-EDC240 was tested as a representative. Here is the certificate information of the wireless modules which EUT equipped. For the WIFI/BT/BLE module: FCC ID: 2AL6KBL-M8723DS1 and IC: 26005-BLM8723DS1 For the LTE module: FCC ID: XMR201903EG25G and IC:10224A-201903EG25G
Rating:	TS-EDC60: Input 480V 3*76A, Output 150-1000V, 200A, 60kW TS-EDC80: Input 480V 3*102A, Output 150-1000V, 266A, 80kW TS-EDC90: Input 480V 3*115A, Output 150-1000V, 300A, 90kW TS-EDC120: Input 480V 3*152A, Output 150-1000V, 400A, 120kW TS-EDC150: Input 480V 3*190A, Output 150-1000V, 500A, 150kW TS-EDC160: Input 480V 3*203A, Output 150-1000V, 532A, 160kW TS-EDC180: Input 480V 3*228A, Output 150-1000V, 600A, 180kW TS-EDC200: Input 480V 3*255A, Output 150-1000V, 665A, 200kW TS-EDC240: Input 480V 3*305A, Output 150-1000V, 798A, 240kW
EUT type:	☐ Tabletop ☒ Floor standing
Software Version:	/
Hardware Version:	/
Serial numbers:	A240606-57-001
Sample received date:	June 06, 2024
Date of test:	June 06, 2024, to November 11, 2024

1.2 Technical Specification

Frequency Range:	13.56 MHz ~ 13.56 MHz
Modulation:	ASK
Antenna:	PCB antenna

1.3 Description of Test Facility

Name:	Intertek Testing Services (Shanghai FTZ) Co., Ltd.
Address:	Building 86, No. 1198 Qinzhou Road (North), Shanghai 200233, P.R. China
Telephone:	86 21 61278200
Telefax:	86 21 54262353

The test facility is recognized, certified, or accredited by these organizations:	CNAS Accreditation Lab Registration No. CNAS L21189
	FCC Accredited Lab Designation Number: CN0175
	IC Registration Lab CAB identifier.: CN0014
	VCCI Registration Lab Member No: 3598 (Registration No.: R-14243, G-10845, C-14723, T-12252)
	A2LA Accreditation Lab Certificate Number: 3309.02

Test were contracted by the following laboratories:

Subcontractor:

Name:	EMTEK (SHENZHEN) CO., LTD.
Address:	Building 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong. P.R.C.
FCC Accredited Lab Designation Number:	CN1204
IC Registration Lab CAB identifier:	CN0008

2 TEST SPECIFICATIONS

2.1 Standards or specification

47CFR Part 15 (2023)

ANSI C63.10 (2020)

RSS-210 Issue 10 (December 2019)

RSS-Gen Issue 5, Amendment 1 (March 2019)

2.2 Mode of operation during the test

While testing, the internal modulation and continuous transmission was applied.

2.3 Test software list

Test Items	Software	Manufacturer	Version
Conducted emission	SKET Auto EMC Test Software	Keleto	V3.0
Radiated emission	SKET Auto EMC Test Software	Keleto	V3.0

2.4 Test peripherals list

Item No	Description	Band and Model	S/No
1	Resistor Load	-	-

2.5 Test environment condition:

Test items	Temperature	Humidity
Radiated emission	26°C	53% RH
Power line conducted emission	27°C	53% RH

2.6 Instrument list

Conducted Emission					
Used	Equipment	Manufacturer	Type	Internal no.	Due date
☒	EMI Test Receiver	Rohde & Schwarz	ESCI	101045	2025-05-09
☒	PULSE LIMITER	Rohde & Schwarz	ESH3-Z2	100107	2025-05-09
☒	AMN	Schwarzbeck	NNLK 8129	8129203	2025-05-10
☒	V-Network	Rohde & Schwarz	ESH3-Z6	100011	2025-05-10
☒	V-Network	Rohde & Schwarz	ESH3-Z6	100253	2025-05-10
☒	DC LISN	Schwarzbeck	NNHV 8123-400	00398	2025-05-09
☒	DC LISN	Schwarzbeck	NNHV 8123-400	00397	2025-05-09
Radiated Emission					
Used	Equipment	Manufacturer	Type	Internal no.	Due date
☒	Test Receiver	R&S	ESIB 26	EC 3045	2024-11-22
☒	Active loop antenna	Schwarzbeck	FMZB1519	EC 5345	2025-10-15
☒	Semi-anechoic chamber	Albatross project	-	EC 3048	2025-10-07
☒	EMI Test Receiver	Rohde & Schwarz	ESU 26	100154	2025-05-10
☒	Horn antenna	Schwarzbeck	BBHA9120D	9120D-1178	2025-08-27
☒	Pre-Amplifie	SKET	LNPA_0118G-45	SK2019051801	2025-05-10
☒	Loop Antenna	Schwarzbeck	FMZB1519	1519-012	2025-05-10
RF test					
Used	Equipment	Manufacturer	Type	Internal no.	Due date
☒	Spectrum Analyzer	Keysight	N9030B	EC 6078	2025-06-14
☒	Climate chamber	GWS	MT3065	EC 6021	2025-03-06
Additional instrument					
Used	Equipment	Manufacturer	Type	Internal no.	Due date
☒	Thermo-Hygrograph	Testo	175h1	EC 6640	2025-10-27
☒	Thermo-Hygrograph	Testo	175h1	EC 6643	2025-10-27

2.7 Measurement uncertainty

The measurement uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

Measurement	Frequency	Expanded Uncertainty ($k=2$)
Conducted emission at mains ports	9kHz ~ 150kHz	3.52 dB
	150kHz ~ 30MHz	3.19 dB
Radiated Emissions up to 1 GHz	30MHz ~ 1GHz	3.06 dB
Radiated Emissions above 1 GHz	1GHz ~ 6GHz	5.02 dB
	6GHz ~ 18GHz	5.28 dB

3 Fundamental Emission

Test result: **PASS**

3.1 Limit


Frequencies (MHz)	Limit at 30m (dBuV/m)	Limit at 3m (dBuV/m)
13.110 – 13.410	40.50	80.50
13.410 – 13.553	50.50	90.50
13.553 – 13.567	84.00	124.00
13.567 – 13.710	50.50	90.50
13.710 – 14.010	40.50	80.50

3.2 Measurement Procedure

- The EUT was placed on a 0.1m plank above the ground at a 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- Both X and Y axes of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to PK Detect Function and Specified Bandwidth with Maximum Hold Mode.


NOTE:

- The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9kHz at frequency below 30MHz.

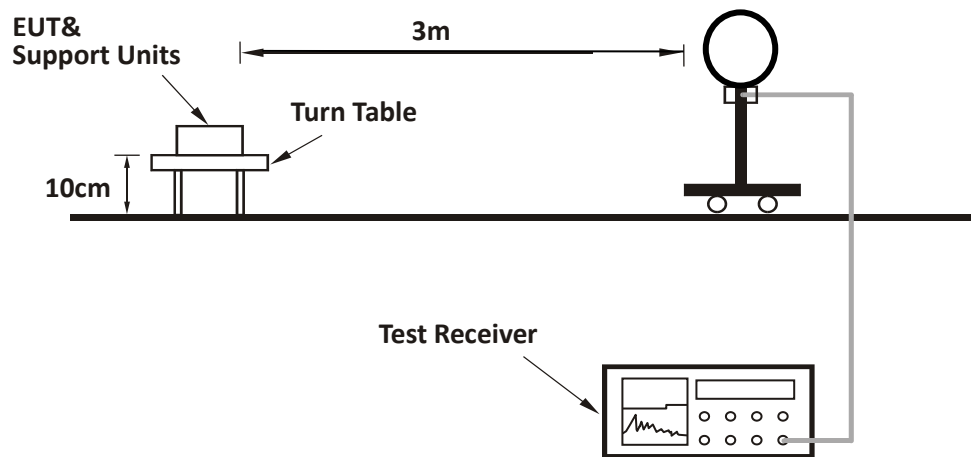
TEST REPORT**3.3 Test Configuration**

3.4 Test Results of Fundamental Emissions


Antenna Polarization: X axis

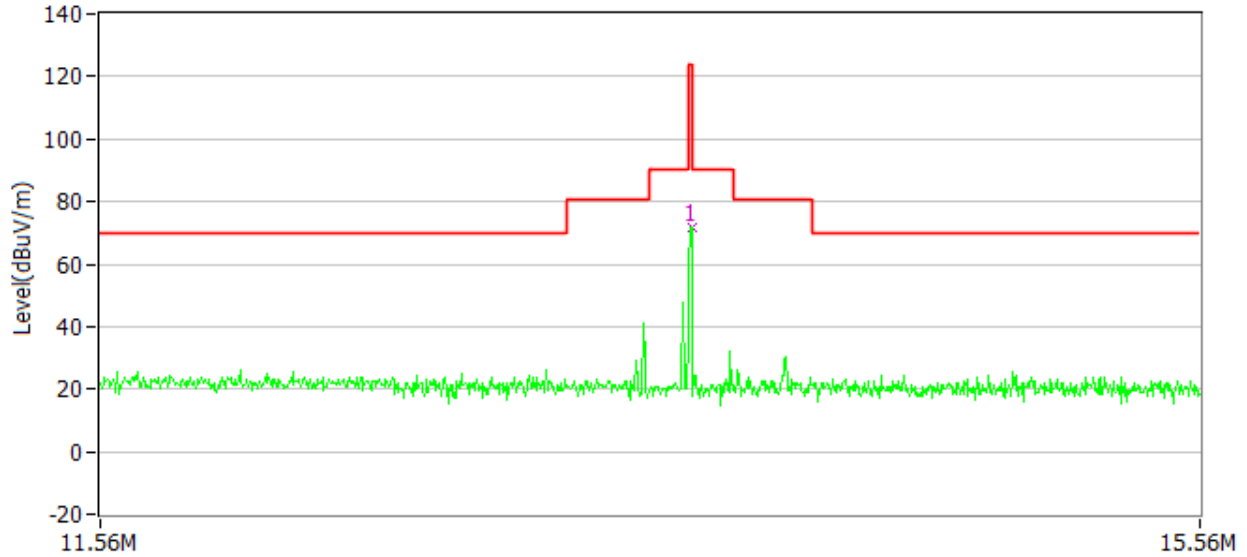

Antenna Polarization: Y axis

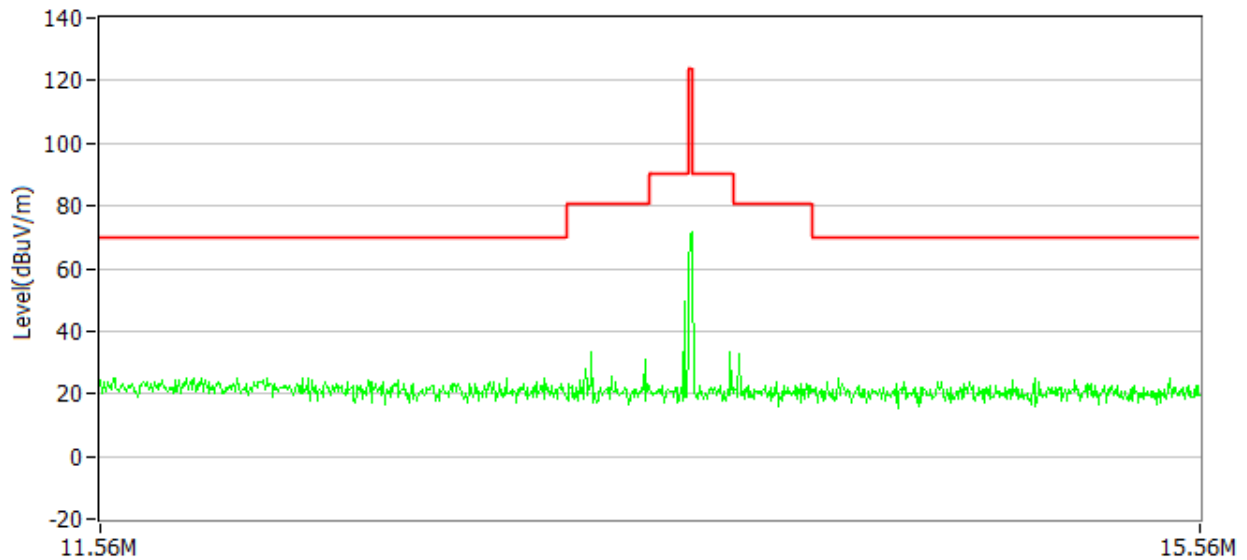

Antenna Polarization: Z axis

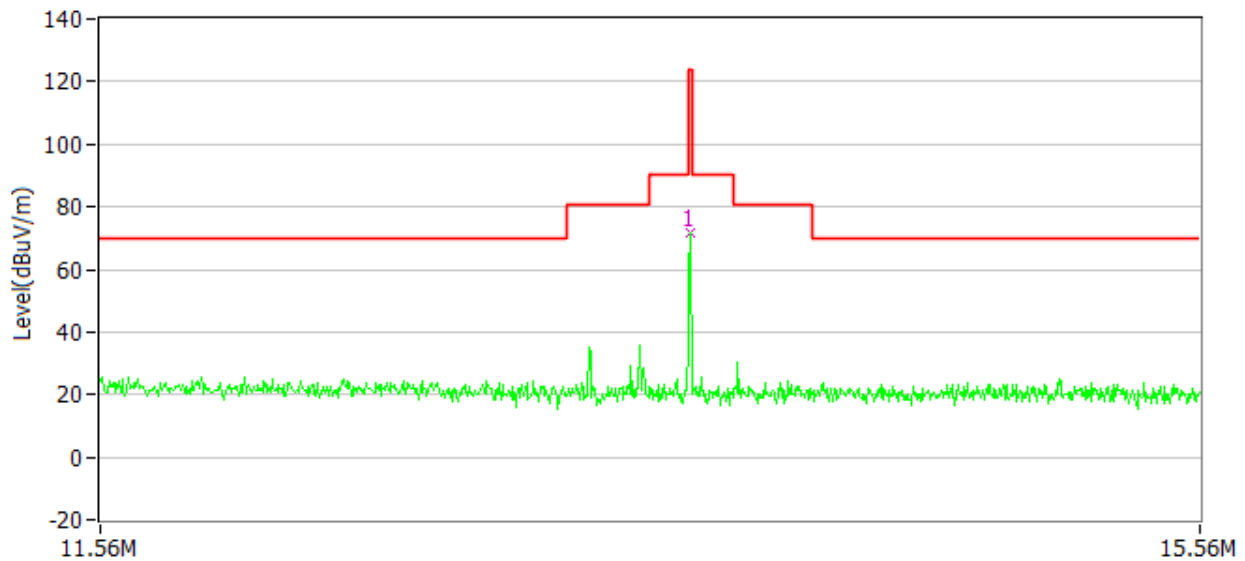

Antenna Polarization	Frequency (MHz)	Corrected Reading (dBuV/m)	Correct Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector
X	13.56	71.70	19.10	124.00	52.30	PK
Y	13.56	71.70	19.10	124.00	52.30	PK
Z	13.56	71.40	19.10	124.00	52.60	PK

Remark:

1. Correct Factor = Antenna Factor + Cable Loss (+ Amplifier, for higher than 1GHz), the value was added to Original Receiver Reading by the software automatically
2. Corrected Reading = Original Receiver Reading + Correct Factor
3. Margin = Limit - Corrected Reading

Example:

Assuming Antenna Factor = 30.20dB/m, Cable Loss = 2.00dB

Gain of Preamplifier = 32.00dB, Original Receiver Reading = 10.00dBuV

Limit = 40.00dBuV/m

Then Correct Factor = $30.20 + 2.00 - 32.00 = 0.20\text{dB/m}$

Corrected Reading = $10\text{dBuV} + 0.20\text{dB/m} = 10.20\text{dBuV/m}$

Margin = $40.00\text{dBuV/m} - 10.20\text{dBuV/m} = 29.80\text{dB}$

4 Spurious Emission

Test result: **PASS**

4.1 Limit

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

4.2 Measurement Procedure

For Radiated emission below 30MHz:

- The EUT was placed on a 0.1m plank above the ground at a 10 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- Both X and Y axes of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

NOTE:

- The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9kHz at frequency below 30MHz.

TEST REPORT**For Radiated emission above 30MHz:**

- a) The EUT was placed on a 0.1m plank above the ground at a 10 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b) The EUT was set 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c) The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d) For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e) The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f) The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.


Note:

- 1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
- 2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
- 3. All modes of operation were evaluated and the worst-case emissions were reported



4.3 Test Results of Radiated Emissions

Test Curve (below 30MHz):



Antenna Polarization: X axis

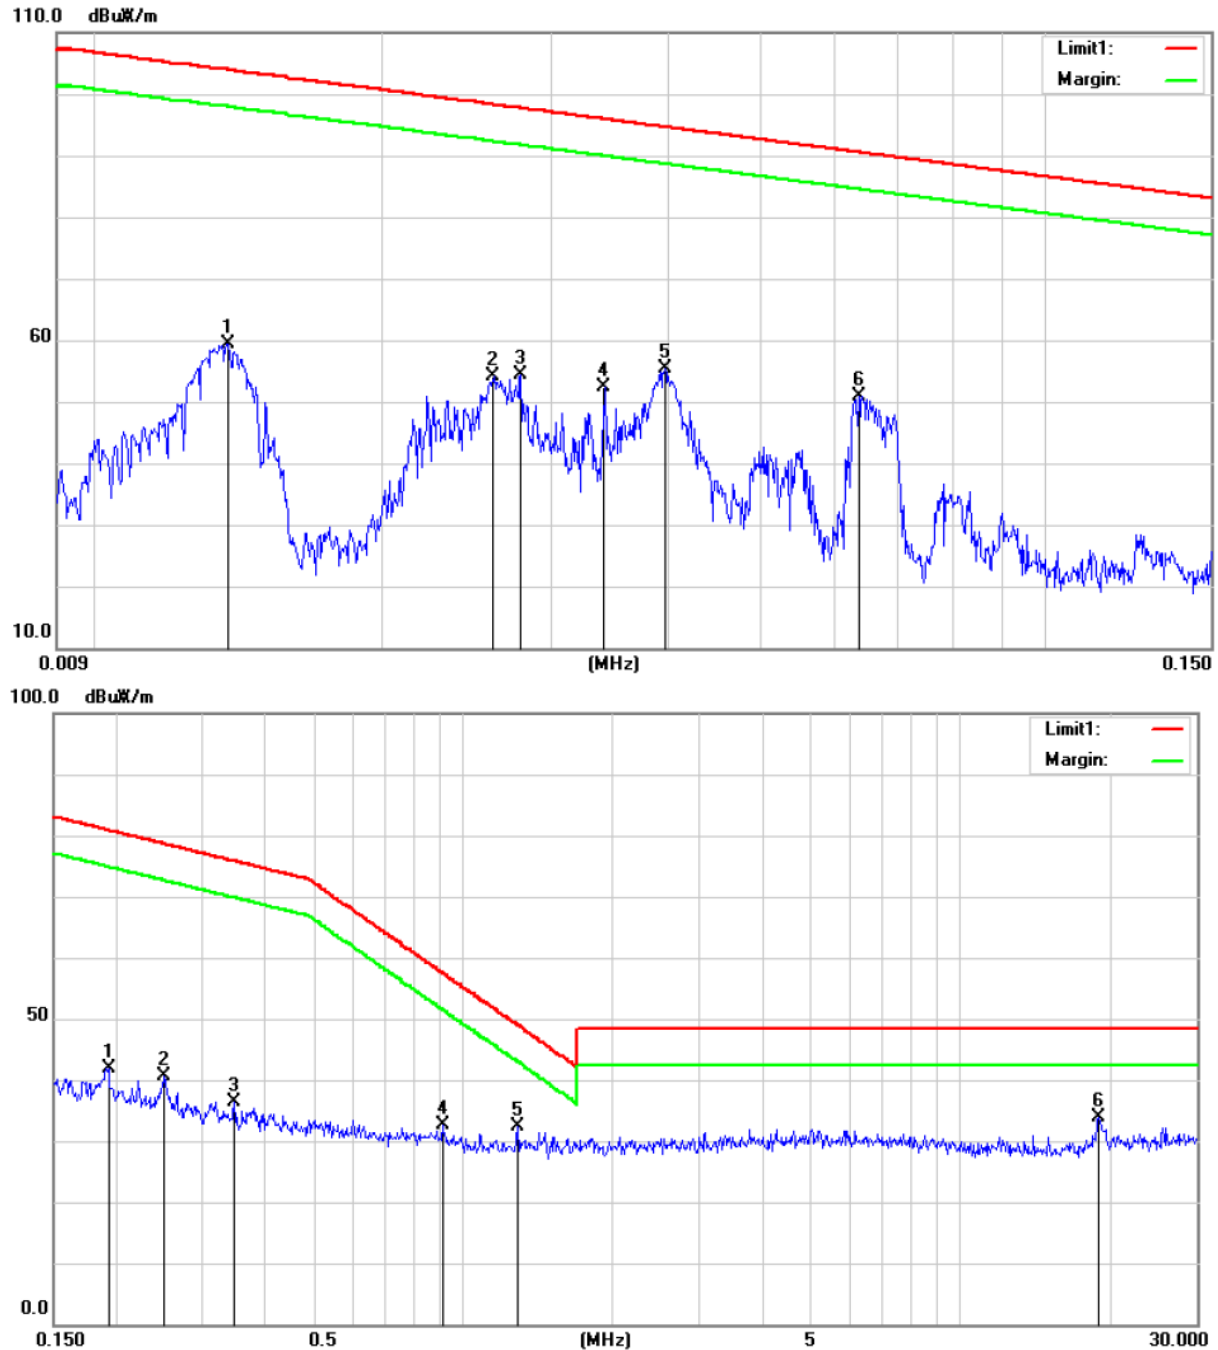

Antenna Polarization: Y axis

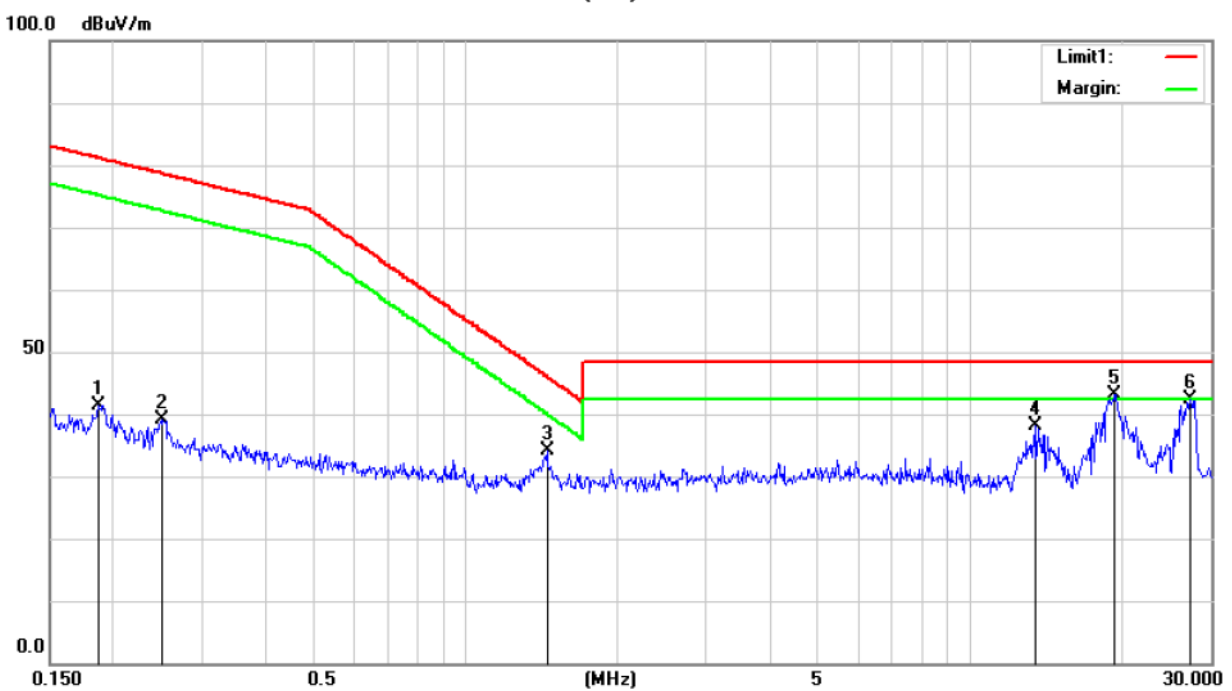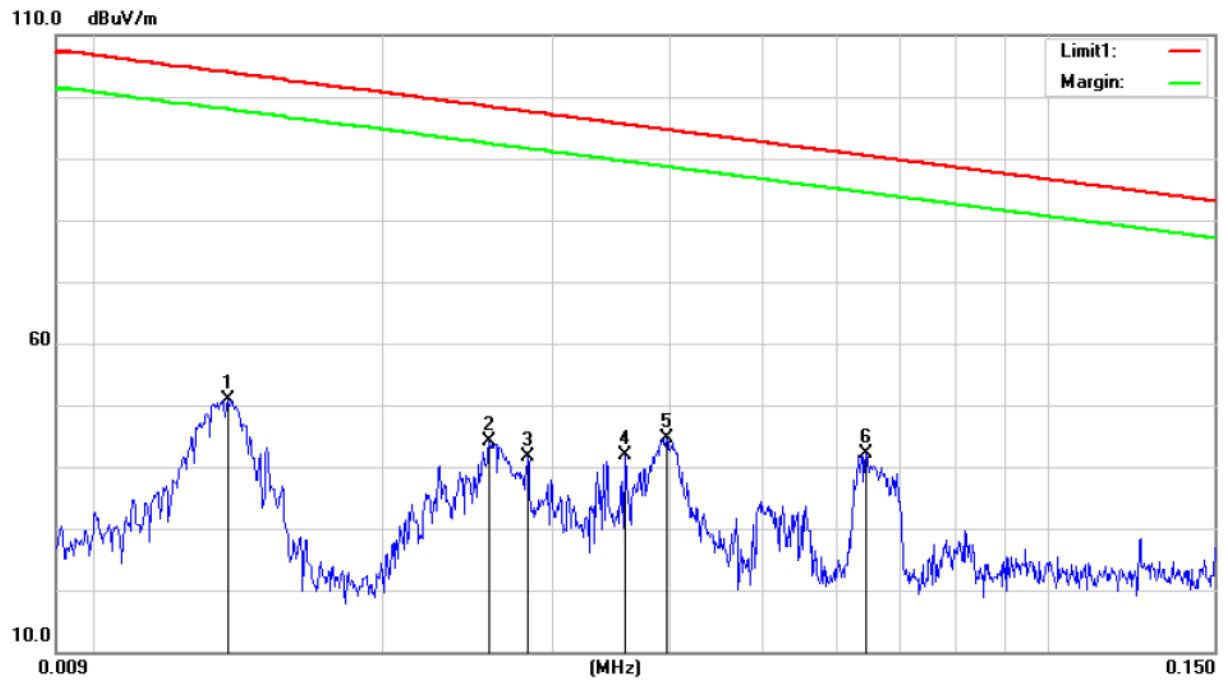

Antenna Polarization: Z axis

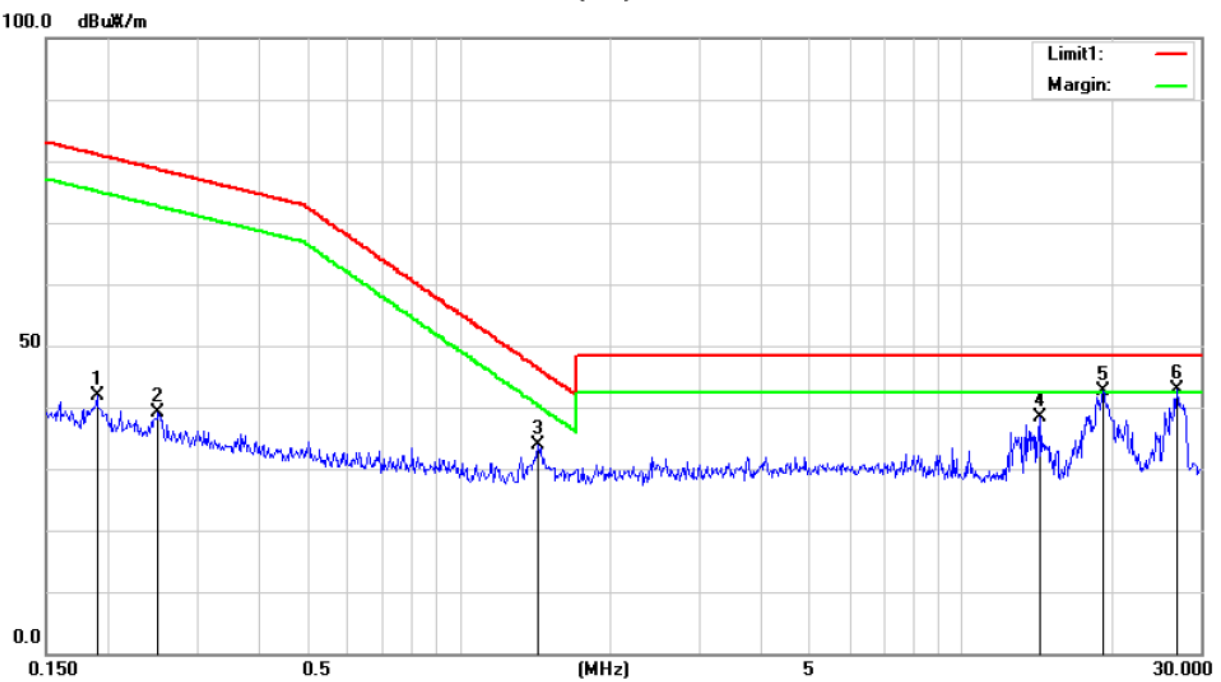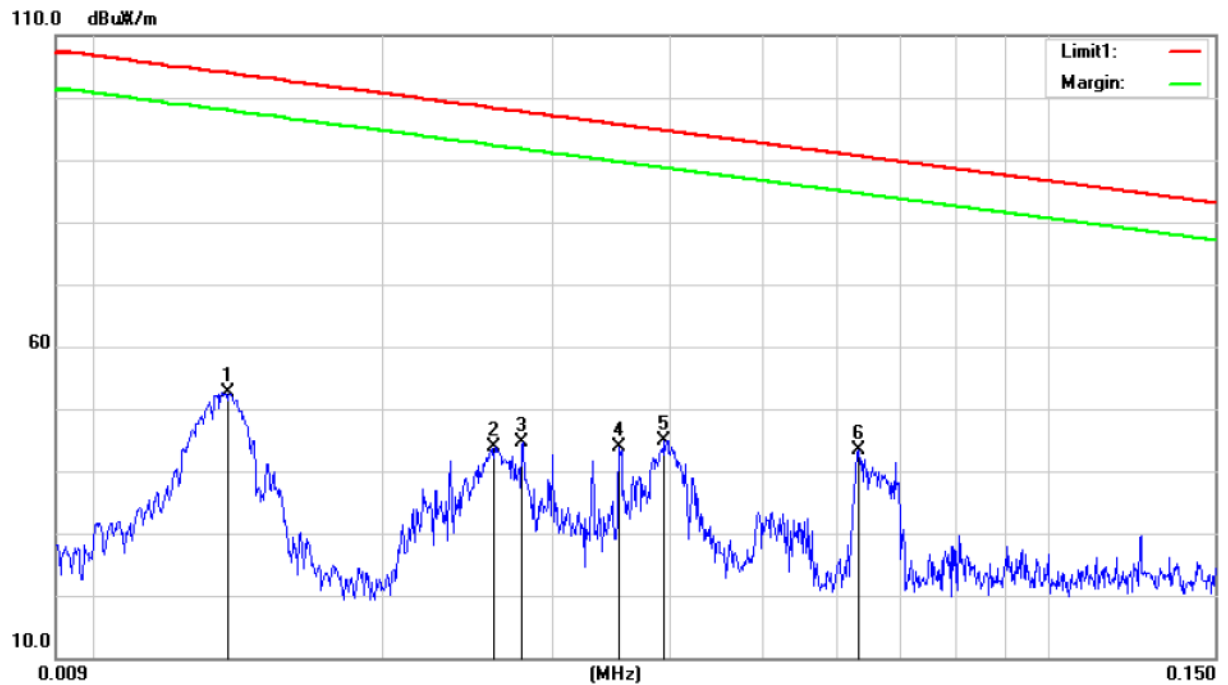

TEST REPORT

Test Data:

Frequency	Limit (dBuV/m)	Corrected Reading (dBuV/m)	Margin (dB)	Reading (dBuV)	Factor (dB/m)	Detector	Polarity
0.0136	103.92	59.35	44.57	38.93	20.42	QP	X
0.0261	98.26	54.17	44.09	33.66	20.51	QP	X
0.0280	97.65	54.42	43.23	33.88	20.54	QP	X
0.0342	95.91	52.43	43.48	31.85	20.58	QP	X
0.0396	94.64	55.29	39.35	34.67	20.62	QP	X
0.0636	90.53	50.97	39.56	30.18	20.79	QP	X
0.1934	80.87	41.93	38.94	21.29	20.64	QP	X
0.2508	78.61	40.54	38.07	19.82	20.72	QP	X
0.3465	75.81	36.43	39.38	15.55	20.88	QP	X
0.9087	57.54	32.71	24.83	11.79	20.92	QP	X
1.2892	48.90	32.45	16.45	11.58	20.87	QP	X
19.0210	48.50	33.91	14.59	13.26	20.65	QP	X
0.0136	103.92	50.85	53.07	30.43	20.42	QP	Y
0.0258	98.36	44.13	54.23	23.62	20.51	QP	Y
0.0283	97.55	41.68	55.87	21.14	20.54	QP	Y
0.0358	95.51	41.79	53.81	21.20	20.59	QP	Y
0.0396	94.64	44.67	49.97	24.05	20.62	QP	Y
0.0643	90.43	42.18	48.25	21.39	20.79	QP	Y
0.1874	81.17	41.48	39.66	20.86	20.62	QP	Y
0.2495	78.66	39.13	39.53	18.41	20.72	QP	Y
1.4485	46.03	34.19	11.84	13.33	20.86	QP	Y
13.4792	48.50	38.03	10.47	17.58	20.45	QP	Y
19.3257	48.50	43.24	5.26	22.57	20.67	QP	Y
27.2711	48.50	42.28	6.22	21.60	20.68	QP	Y
0.0135	103.98	52.69	51.29	32.27	20.42	QP	Z
0.0261	98.26	43.88	54.38	23.37	20.51	QP	Z
0.0280	97.65	44.53	53.12	23.99	20.54	QP	Z
0.0353	95.64	43.83	51.81	23.24	20.59	QP	Z
0.0394	94.68	44.93	49.75	24.31	20.62	QP	Z
0.0632	90.58	43.33	47.25	22.54	20.79	QP	Z
0.1894	81.05	41.82	39.23	21.18	20.64	QP	Z
0.2508	78.61	39.24	39.37	18.52	20.72	QP	Z
1.4333	46.29	33.93	12.36	13.07	20.86	QP	Z
14.3641	48.50	38.38	10.12	18.01	20.37	QP	Z

TEST REPORT

19.1220	48.50	42.59	5.91	21.94	20.64	QP	Z
26.8411	48.50	42.83	5.67	22.07	20.76	QP	Z


Remark:

1. Correct Factor = Antenna Factor + Cable Loss (+ Amplifier, for higher than 1GHz), the value was added to Original Receiver Reading by the software automatically.
2. Corrected Reading = Original Receiver Reading + Correct Factor
3. Margin = Limit - Corrected Reading
4. If the PK Corrected Reading is lower than AV limit, the AV test can be elided.


TEST REPORT

Test Curve (30MHz to 1000MHz):

Horizontal

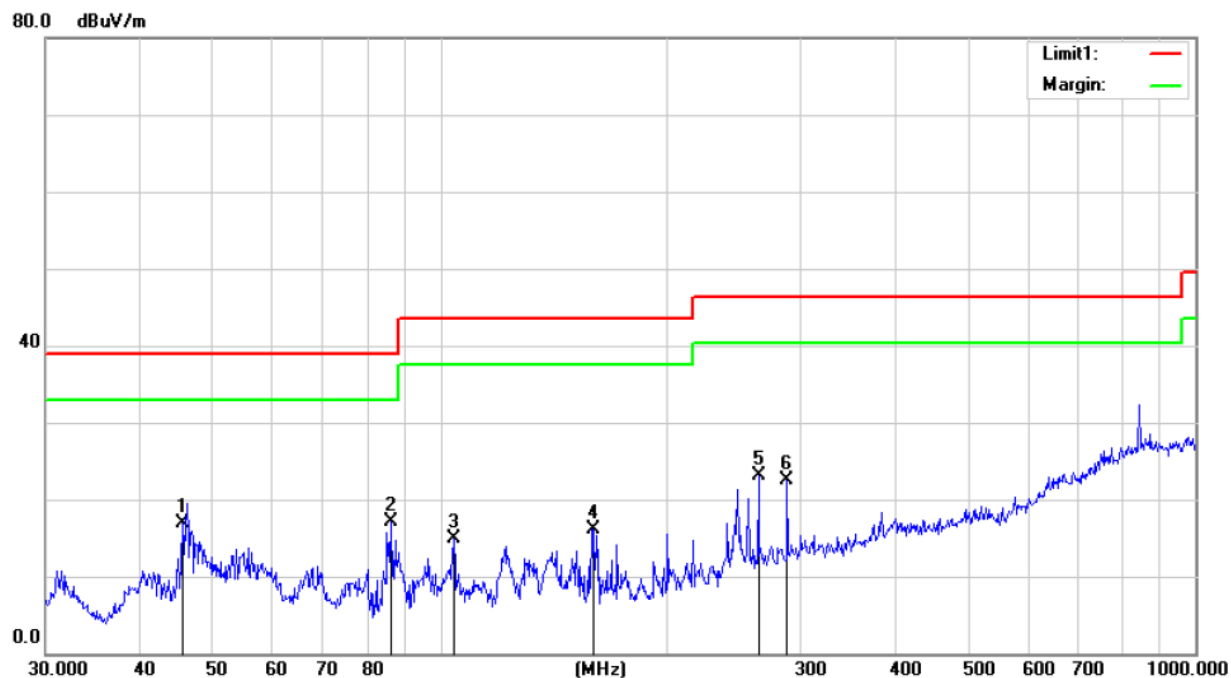

Vertical

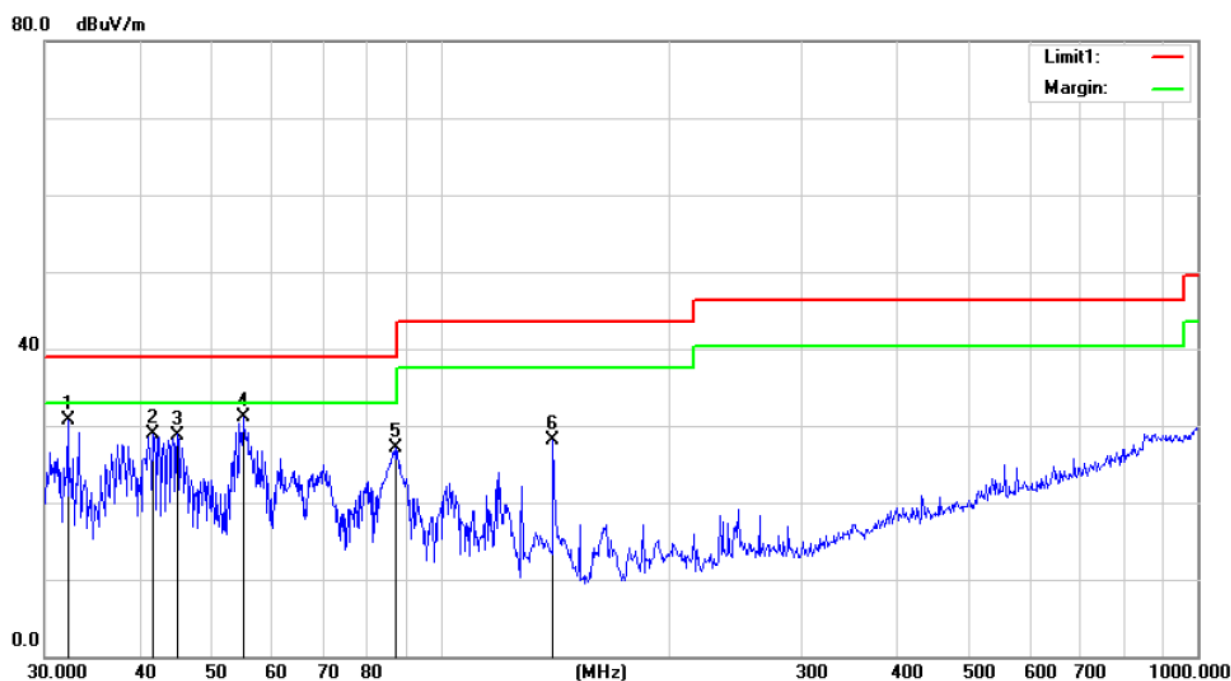

TEST REPORT

Test Data (30MHz to 1000MHz)

Frequency (MHz)	Limit (dBuV/m)	Corrected Reading (dBuV/m)	Margin (dB)	Original Reading (dBuV)	Correct Factor (dB/m)	Detector	Polar
45.5348	39.00	16.91	22.09	45.49	-28.58	QP	Hor
85.8984	39.00	17.08	21.92	49.50	-32.42	QP	Hor
104.1701	43.50	14.99	28.51	44.77	-29.78	QP	Hor
159.2251	43.50	16.16	27.34	47.79	-31.63	QP	Hor
263.8190	46.40	23.02	23.38	49.31	-26.29	QP	Hor
287.9904	46.40	22.44	23.96	46.85	-24.41	QP	Hor
32.1794	39.00	30.66	8.34	61.13	-30.47	QP	Ver
41.7130	39.00	28.98	10.02	57.24	-28.26	QP	Ver
44.9004	39.00	28.80	10.20	56.47	-27.67	QP	Ver
55.0274	39.00	31.15	7.85	59.07	-27.92	QP	Ver
87.1116	39.00	27.07	11.93	58.57	-31.50	QP	Ver
140.8351	43.50	28.08	15.42	60.72	-32.64	QP	Ver

Remark:

1. Correct Factor = Antenna Factor + Cable Loss (+ Amplifier, for higher than 1GHz), the value was added to Original Receiver Reading by the software automatically.
2. Corrected Reading = Original Receiver Reading + Correct Factor
3. Margin = Limit - Corrected Reading
4. If the PK Corrected Reading is lower than AV limit, the AV test can be elided.

Example:

Assuming Antenna Factor = 30.20dB/m, Cable Loss = 2.00dB,
Gain of Preamplifier = 32.00dB, Original Receiver Reading = 10.00dBuV,
Limit = 40.00dBuV/m.
Then Correct Factor = 30.20 + 2.00 – 32.00 = 0.20dB/m;
Corrected Reading = 10dBuV + 0.20dB/m = 10.20dBuV/m;
Margin = 40.00dBuV/m - 10.20dBuV/m = 29.80dB.


5 Frequency Stability (Temperature Variation)

Test result: **PASS**

5.1 Test limit

The frequency tolerance of the carrier signal shall be maintained within $\pm 0.01\%$ of the operating frequency over a temperature variation of -20 degrees to $+50$ degrees C at normal supply voltage.

5.2 Test Configuration

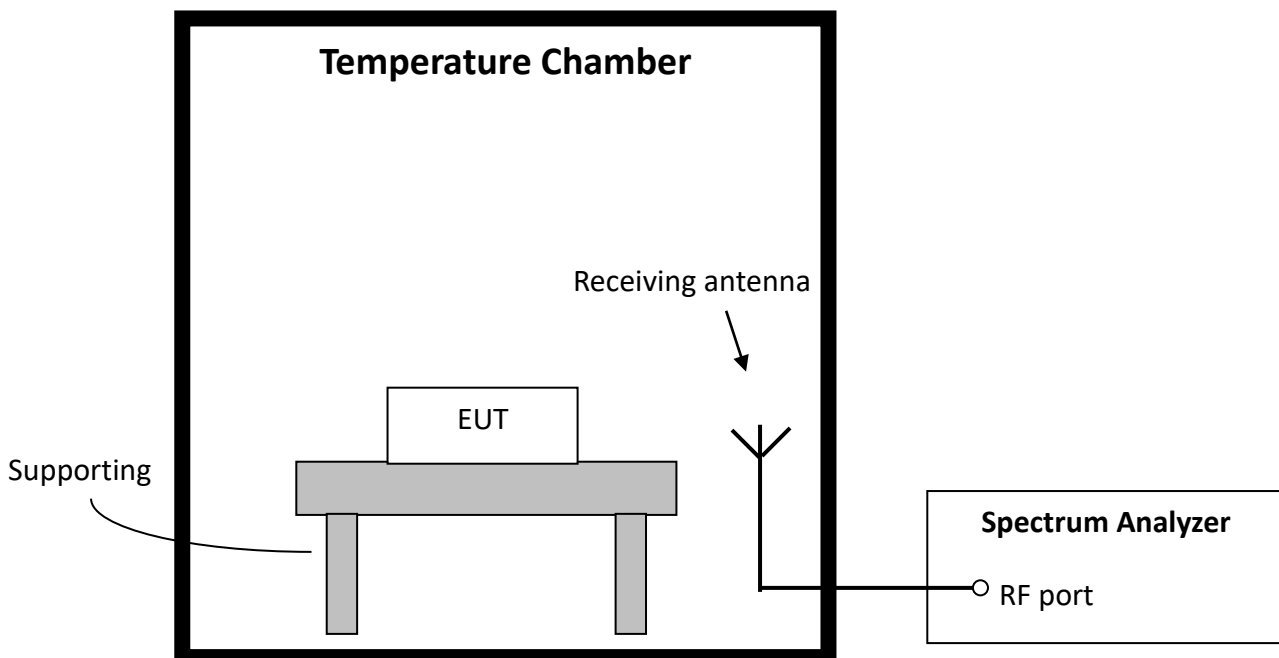

5.3 Test procedure and test setup

Test Procedure as per ANSI 63.10 clause 6.8.1.

5.4 Test protocol

Voltage (V)	Temp (°C)	Freq Measured (MHz)	Freq Nominal (MHz)	Tolerance (%)	Limit (%)
480	-20	13.5605	13.5600	0.0037	± 0.0100
	-10	13.5606		0.0044	
	0	13.5606		0.0044	
	10	13.5607		0.0052	
	20	13.5607		0.0052	
	30	13.5607		0.0052	
	40	13.5606		0.0044	
	50	13.5607		0.0052	


6 Frequency Stability (Voltage Variation)

Test result: **PASS**

6.1 Test limit

The frequency tolerance of the carrier signal shall be maintained within $\pm 0.01\%$ for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. For battery operated equipment, the equipment tests shall be performed using a new battery.

6.2 Test Configuration

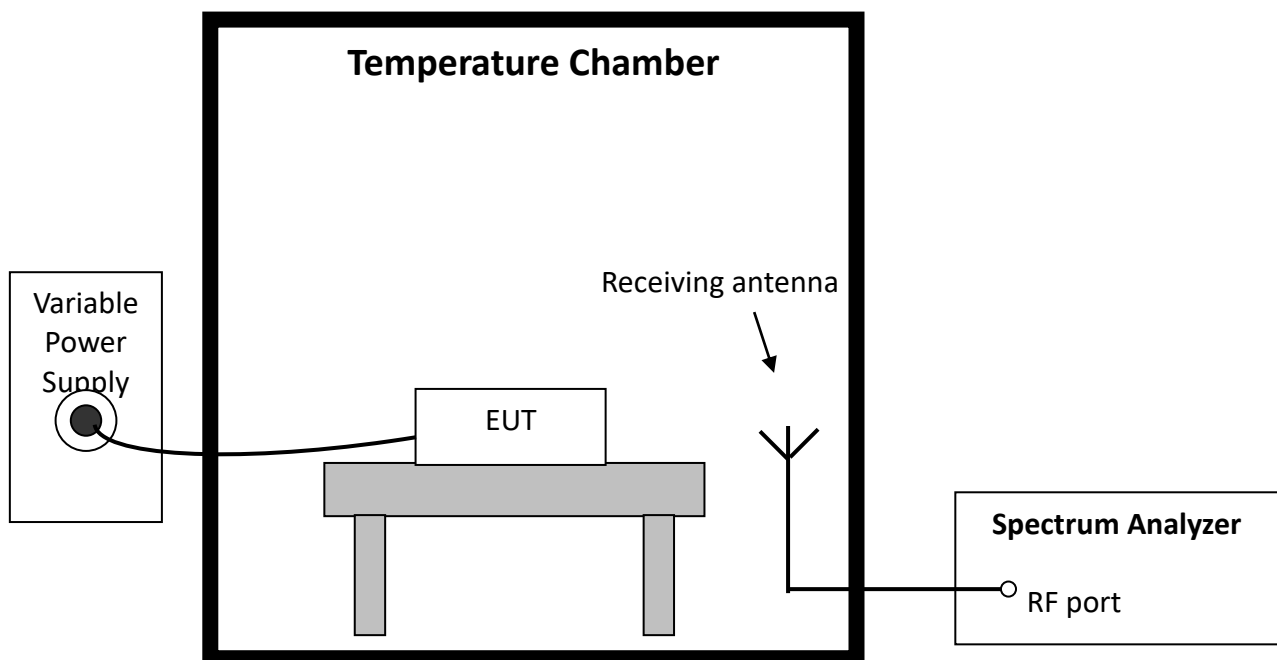

6.3 Test procedure and test setup

Test Procedure as per ANSI 63.10 clause 6.8.2.

6.4 Test protocol

Temp (°C)	Voltage (V)	Freq Measured (MHz)	Freq nominal (MHz)	Tolerance (%)	Limit (%)
20	408	13.5607	13.5600	0.0052	± 0.0100
	480	13.5607		0.0052	
	552	13.5606		0.0044	


7 Conducted emissions

Test result: **PASS**

7.1 Limit

Frequency of Emission (MHz)	Conducted Emissions Limit (dBuV)	
	QP	AV
0.15 ~ 0.5	79	66
0.5 ~ 30	73	60

7.2 Test Configuration

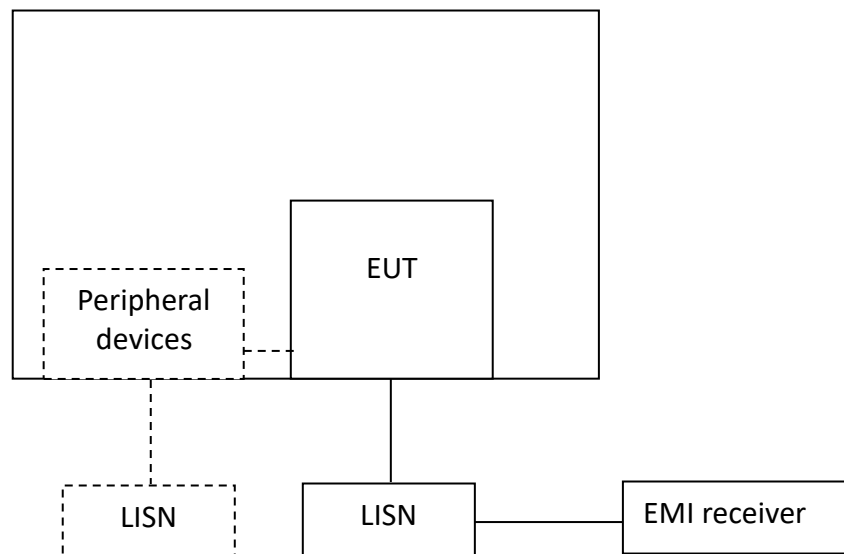

TEST REPORT**7.3 Measurement Procedure**

Measured levels of ac power-line conducted emission shall be the emission voltages from the voltage probe, where permitted, or across the 50 Ω LISN port (to which the EUT is connected), where permitted, terminated into a 50 Ω measuring instrument. All emission voltage and current measurements shall be made on each current-carrying conductor at the plug end of the EUT power cord by the use of mating plugs and receptacles on the LISN, if used. Equipment shall be tested with power cords that are normally supplied or recommended by the manufacturer and that have electrical and shielding characteristics that are the same as those cords normally supplied or recommended by the manufacturer. For those measurements using a LISN, the 50 Ω measuring port is terminated by a measuring instrument having 50 Ω input impedance. All other ports are terminated in 50 Ω loads.

Tabletop devices shall be placed on a platform of nominal size 1 m by 1.5 m, raised 80 cm above the reference ground plane. The vertical conducting plane or wall of an RF-shielded (screened) room shall be located 40 cm to the rear of the EUT. Floor-standing devices shall be placed either directly on the reference ground-plane or on insulating material as described in ANSI C63.4. All other surfaces of tabletop or floor-standing EUTs shall be at least 80 cm from any other grounded conducting surface, including the case or cases of one or more LISNs.


The bandwidth of the test receiver is set at 9 kHz.

TEST REPORT


7.4 Test Results of Conducted Emissions

Test Voltage: AC 480V/60Hz


Test Curve: Line L1

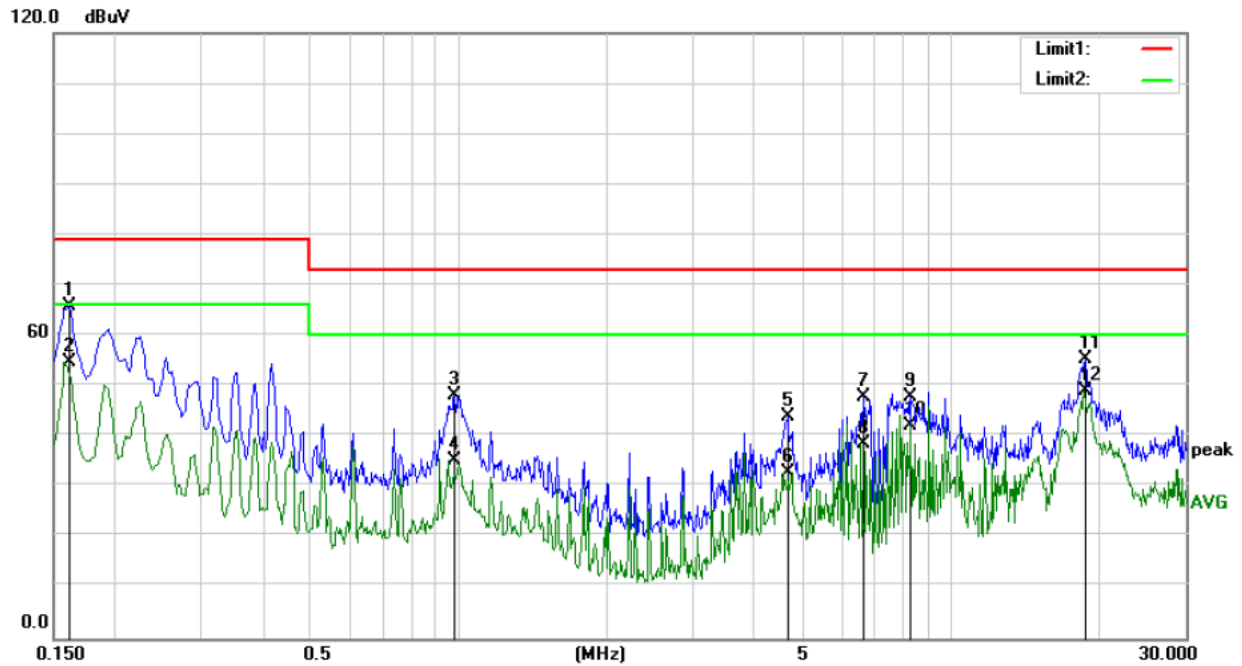

Test Curve: Line L2

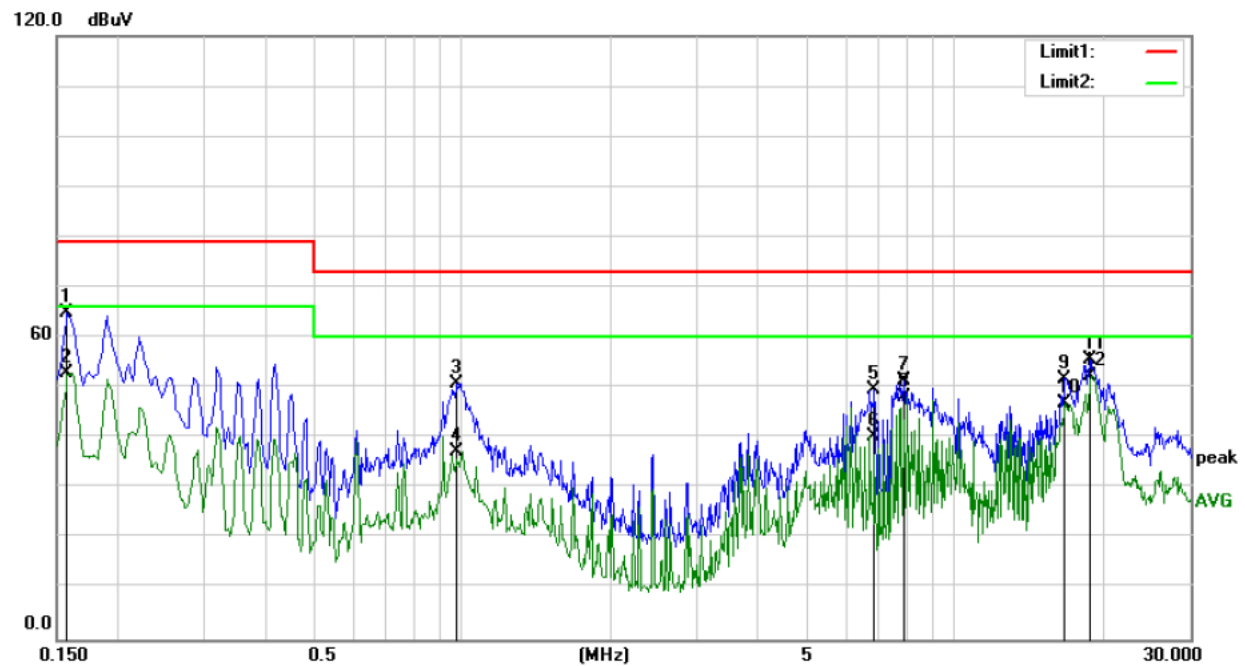

Test Curve: Line L3

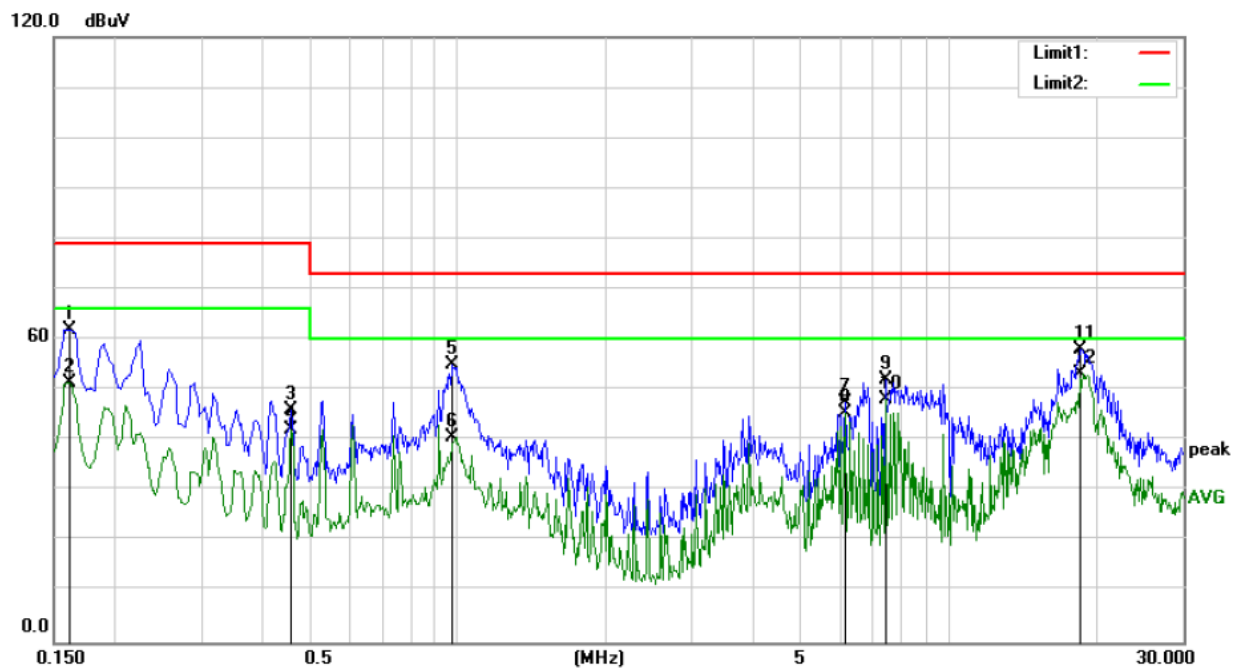

TEST REPORT

Test Data:

Frequency	Limit (dBuV)	Level (dBuV)	Delta (dB)	Original Receiver Reading (dBuV)	Correct Factor (dB)	Detector	Phase
0.1620	79.00	65.96	13.04	55.78	10.18	QP	L1
0.1620	66.00	54.84	11.16	44.66	10.18	AVG	L1
0.9820	73.00	48.14	24.86	37.97	10.17	QP	L1
0.9820	60.00	35.37	24.63	25.20	10.17	AVG	L1
4.6500	73.00	43.94	29.06	33.68	10.26	QP	L1
4.6500	60.00	32.87	27.13	22.61	10.26	AVG	L1
6.6420	73.00	47.73	25.27	37.48	10.25	QP	L1
6.6420	60.00	38.58	21.42	28.33	10.25	AVG	L1
8.3060	73.00	47.93	25.07	37.63	10.30	QP	L1
8.3060	60.00	42.26	17.74	31.96	10.30	AVG	L1
18.8060	73.00	55.35	17.65	44.78	10.57	QP	L1
18.8060	60.00	48.99	11.01	38.42	10.57	AVG	L1
0.1580	79.00	65.07	13.93	54.89	10.18	QP	L2
0.1580	66.00	52.92	13.08	42.74	10.18	AVG	L2
0.9780	73.00	50.96	22.04	40.79	110.17	QP	L2
0.9780	60.00	37.22	22.78	27.05	10.17	AVG	L2
6.8700	73.00	49.71	23.29	39.46	10.25	QP	L2
6.8700	60.00	40.41	19.59	30.16	10.25	AVG	L2
7.8740	73.00	51.35	21.65	41.06	10.29	QP	L2
7.8740	60.00	48.08	11.92	37.79	10.29	AVG	L2
16.7060	73.00	51.90	21.10	41.39	10.51	QP	L2
16.7060	60.00	47.08	12.92	36.57	10.51	AVG	L2
18.8180	73.00	55.57	17.43	45.00	10.57	QP	L2
18.8180	60.00	52.35	7.65	41.78	10.57	AVG	L2
0.1620	79.00	61.99	17.01	51.81	10.18	QP	L3
0.1620	66.00	51.48	14.52	41.30	10.18	AVG	L3
0.4580	79.00	46.05	32.95	35.81	10.24	QP	L3
0.4580	66.00	42.20	23.80	31.96	10.24	AVG	L3
0.9780	73.00	54.94	18.06	44.77	10.17	QP	L3
0.9780	60.00	40.59	19.41	30.42	10.17	AVG	L3
6.1540	73.00	47.60	25.40	37.34	10.26	QP	L3
6.1540	60.00	45.50	14.50	35.24	10.26	AVG	L3
7.4380	73.00	52.16	20.84	41.90	10.26	QP	L3
7.4380	60.00	48.15	11.85	37.89	10.26	AVG	L3
18.5940	73.00	58.04	14.96	47.47	10.57	QP	L3
18.5940	60.00	53.12	6.88	42.55	10.57	AVG	L3

Remark:

1. Correct Factor = LISN Factor + Cable Loss, the value was added to Original Receiver

TEST REPORT

Reading by the software automatically.

2. *Level = Original Receiver Reading + Correct Factor*
3. *Delta = Level – Limit*
4. *If the PK Level is lower than AV limit, the AV test can be elided.*
5. *the emissions of 13.56MHz are the product's RF signal.*


8 20dB Bandwidth

Test result: **PASS**

8.1 Limit

The 20dB bandwidth should be fallen in the allocated operating frequency range.
No limit for 99% bandwidth.

8.2 Test configuration

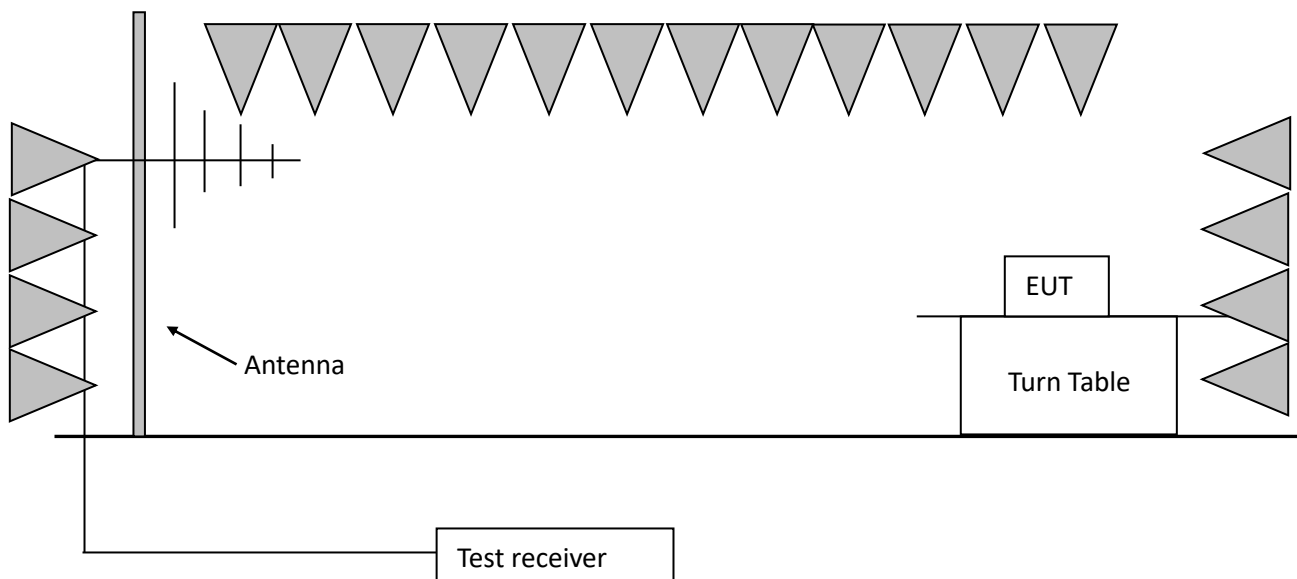

8.3 Test procedure and test set up

The measurement was applied in a 3m semi-anechoic chamber.


The center of the loop antenna shall be 1 m above the horizontal metal ground plane.

The following procedure shall be used for measuring (99 %) power bandwidth:

1. Set center frequency to the nominal EUT channel center frequency.
2. Set RBW = 1 % to 5 % of the OBW
3. Set VBW $\geq 3 \cdot$ RBW
4. Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall
be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
5. Use the 99 % power bandwidth function of the instrument (if available).
6. the 20dB bandwidth is also measured with the same setting.

8.4 Test protocol

	Lower point (MHz)	Higher point (MHz)	Bandwidth (kHz)	Allocated bandwidth (MHz)
20dB Bandwidth	13.560595	13.560820	0.225	13.553 ~ 13.567
Occupied bandwidth	13.560612	13.560804	0.192	13.553 ~ 13.567

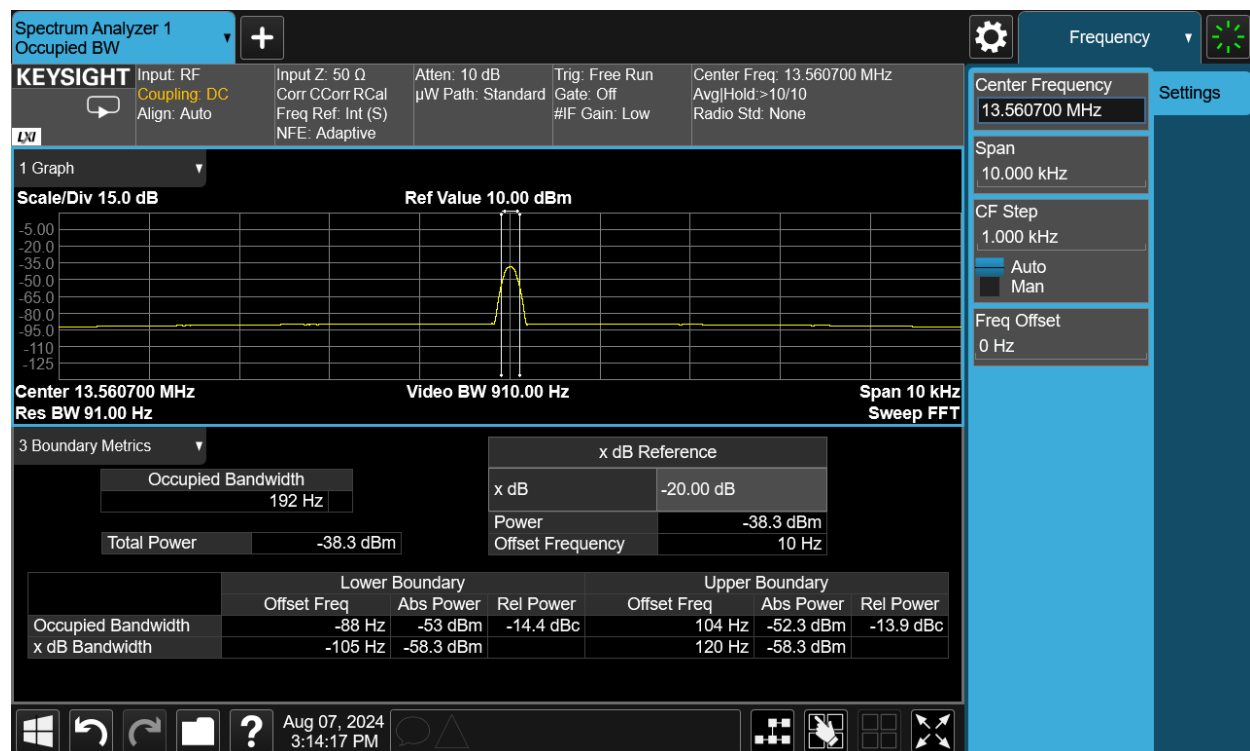

9 Antenna requirement

Requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

Result:

EUT uses permanently attached antenna to the intentional radiator, so it can comply with the provisions of this section.

***** END *****