

Test Plot 1#: GSM 850 Mid Face Up**DUT: Body worn camera; Type: C40; Serial: 2ONF-1;**

Communication System: Generic GPRS-2 slots (0); Frequency: 836.6MHz; Duty Cycle: 1:4
 Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.923$ S/m; $\epsilon_r = 41.591$; $\rho = 1000$ kg/m³;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(9.55, 8.6, 8.54) @ 836.6 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (7x9x1):Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.229 W/kg


Zoom Scan (5x5x7) /Cube 0:Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.79 V/m; Power Drift =0.16dB

Peak SAR (extrapolated) = 0.247 W/kg

SAR(1 g) = 0.188 W/kg; SAR(10 g) = 0.138 W/kg

Maximum value of SAR (measured) = 0.209 W/kg

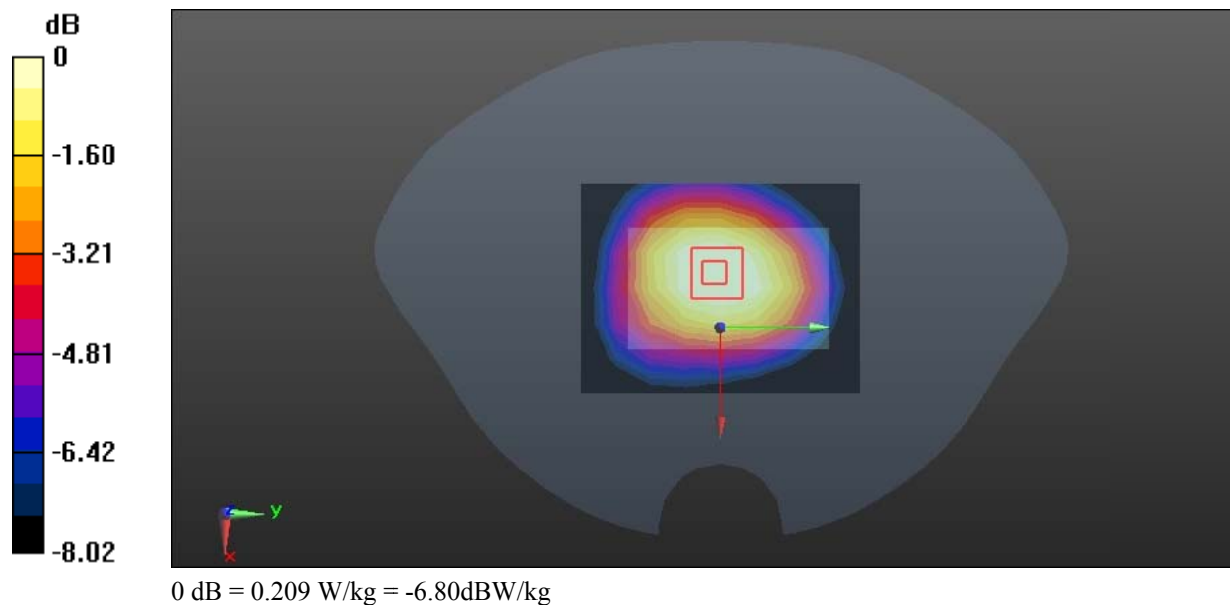

Test Plot 2#: GSM 850 Mid Body Back With Belt Clip**DUT: Body worn camera; Type: C40; Serial: 2ONF-1;**

Communication System: Generic GPRS-2 slots (0); Frequency: 836.6MHz; Duty Cycle: 1:4
 Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.923$ S/m; $\epsilon_r = 41.591$; $\rho = 1000$ kg/m³ ;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(9.55, 8.6, 8.54) @ 836.6 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (7x9x1):Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.218 W/kg


Zoom Scan (5x5x7) /Cube 0:Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.34 V/m; Power Drift =0.05dB

Peak SAR (extrapolated) = 0.340 W/kg

SAR(1 g) = 0.220 W/kg; SAR(10 g) = 0.152 W/kg

Maximum value of SAR (measured) = 0.223 W/kg

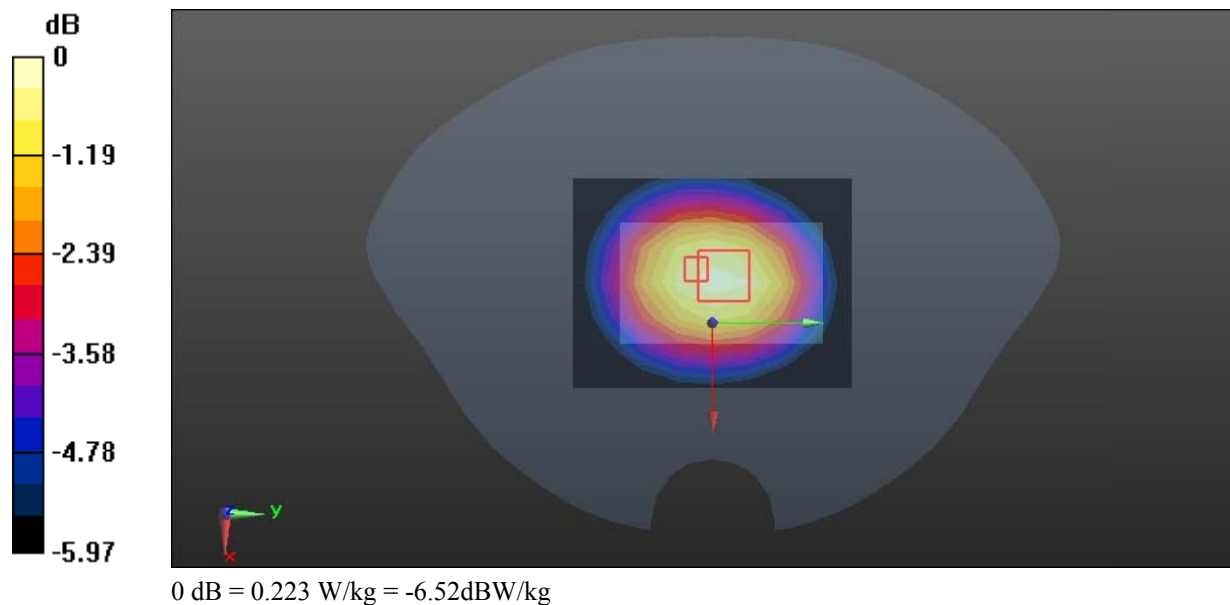

Test Plot 3#: GSM 850 Mid Handheld Front**DUT: Body worn camera; Type: C40; Serial: 2ONF-1;**

Communication System: Generic GPRS-2 slots (0); Frequency: 836.6MHz; Duty Cycle: 1:4
 Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.923$ S/m; $\epsilon_r = 41.591$; $\rho = 1000$ kg/m³ ;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(9.55, 8.6, 8.54) @ 836.6 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (7x9x1):Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.15 W/kg


Zoom Scan (5x5x7) /Cube 0:Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 39.32 V/m; Power Drift =0.12dB

Peak SAR (extrapolated) = 1.21 W/kg

SAR(1 g) = 0.928 W/kg; SAR(10 g) = 0.683 W/kg

Maximum value of SAR (measured) = 1.03 W/kg

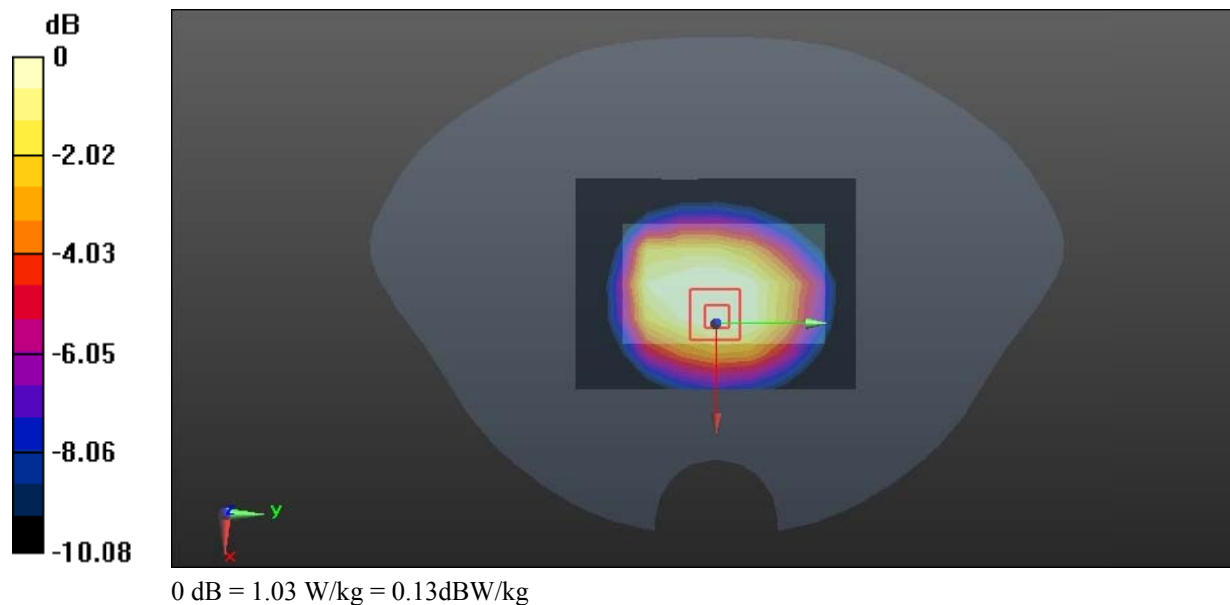

Test Plot 4#: PCS 1900 Mid Face Up**DUT: Body worn camera; Type: C40; Serial: 2ONF-1;**

Communication System: Generic GPRS-3 slots (0); Frequency: 1880MHz; Duty Cycle: 1:2.66

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.375$ S/m; $\epsilon_r = 39.437$; $\rho = 1000$ kg/m³;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(8, 7.27, 7.03) @ 1880 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (7x9x1):Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0907 W/kg


Zoom Scan (5x5x7) /Cube 0:Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.896 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.117 W/kg

SAR(1 g) = 0.083 W/kg; SAR(10 g) = 0.058 W/kg

Maximum value of SAR (measured) = 0.0935 W/kg

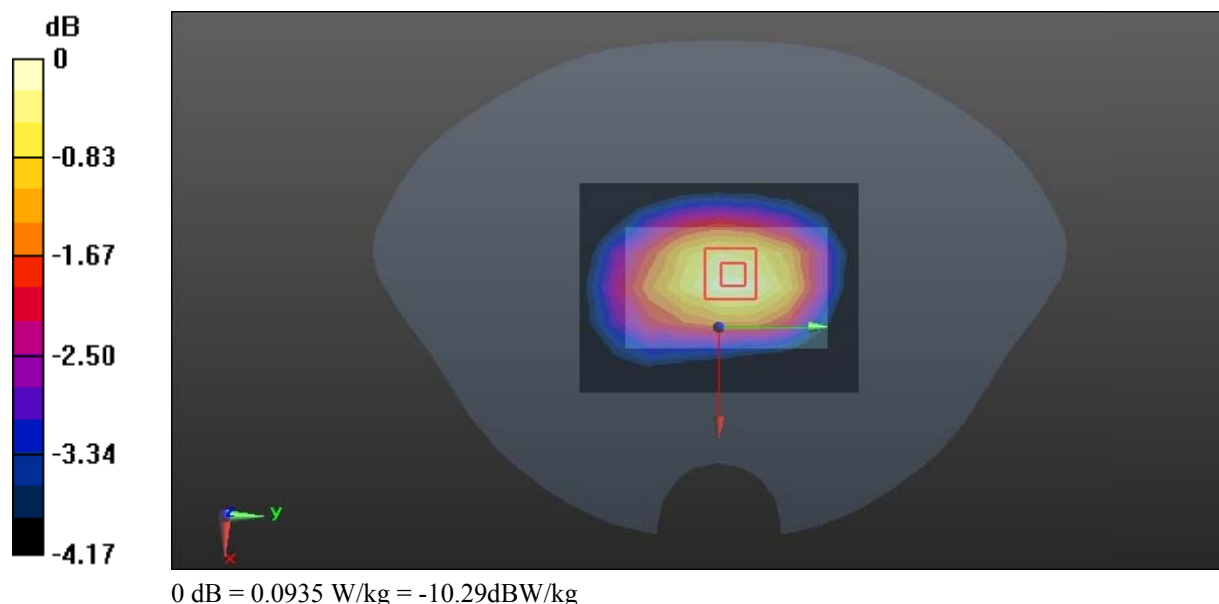

Test Plot 5#: PCS 1900 Mid Body Back With Belt Clip**DUT: Body worn camera; Type: C40; Serial: 2ONF-1;**

Communication System: Generic GPRS-3 slots (0); Frequency: 1880MHz; Duty Cycle: 1:2.66
 Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.375 \text{ S/m}$; $\epsilon_r = 39.437$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(8, 7.27, 7.03) @ 1880 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (7x9x1):Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0661 W/kg


Zoom Scan (5x5x7) /Cube 0:Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.905 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.0890 W/kg

SAR(1 g) = 0.061 W/kg; SAR(10 g) = 0.042 W/kg

Maximum value of SAR (measured) = 0.0700 W/kg

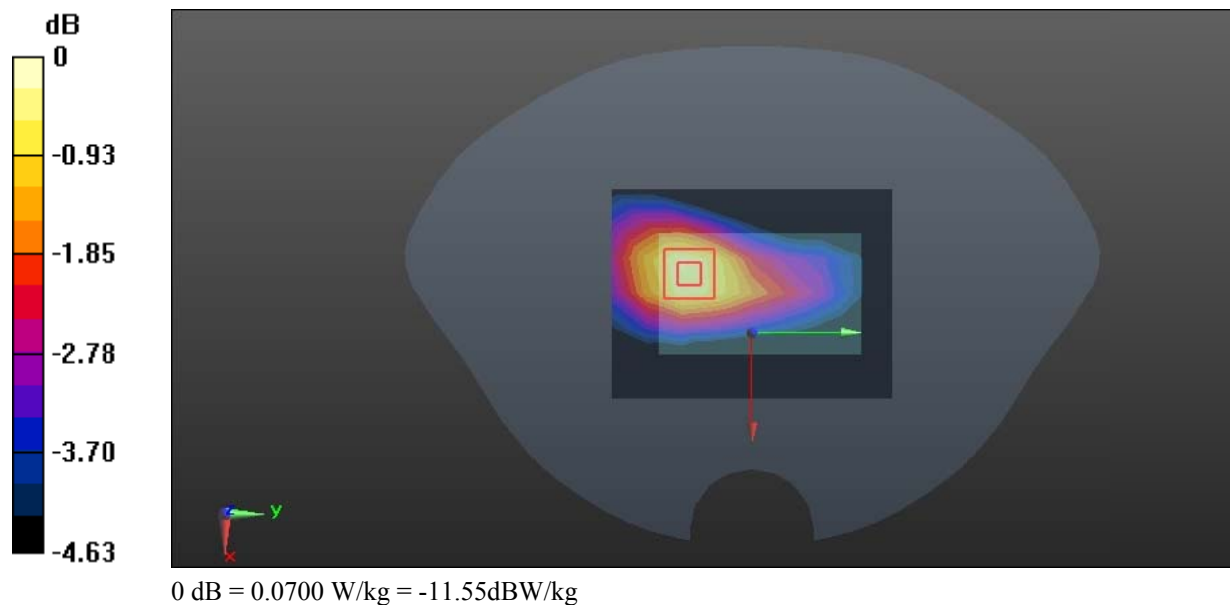

Test Plot 6#: PCS 1900 Mid Handheld Bottom**DUT: Body worn camera; Type: C40; Serial: 2ONF-1;**

Communication System: Generic GPRS-3 slots (0); Frequency: 1880MHz; Duty Cycle: 1:2.66

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.375$ S/m; $\epsilon_r = 39.437$; $\rho = 1000$ kg/m³ ;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(8, 7.27, 7.03) @ 1880 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (7x9x1):Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 3.60 W/kg


Zoom Scan (5x5x7) /Cube 0:Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 50.43 V/m; Power Drift =0.13dB

Peak SAR (extrapolated) = 5.40 W/kg

SAR(1 g) = 3.04 W/kg; SAR(10 g) = 1.61 W/kg

Maximum value of SAR (measured) = 3.64 W/kg

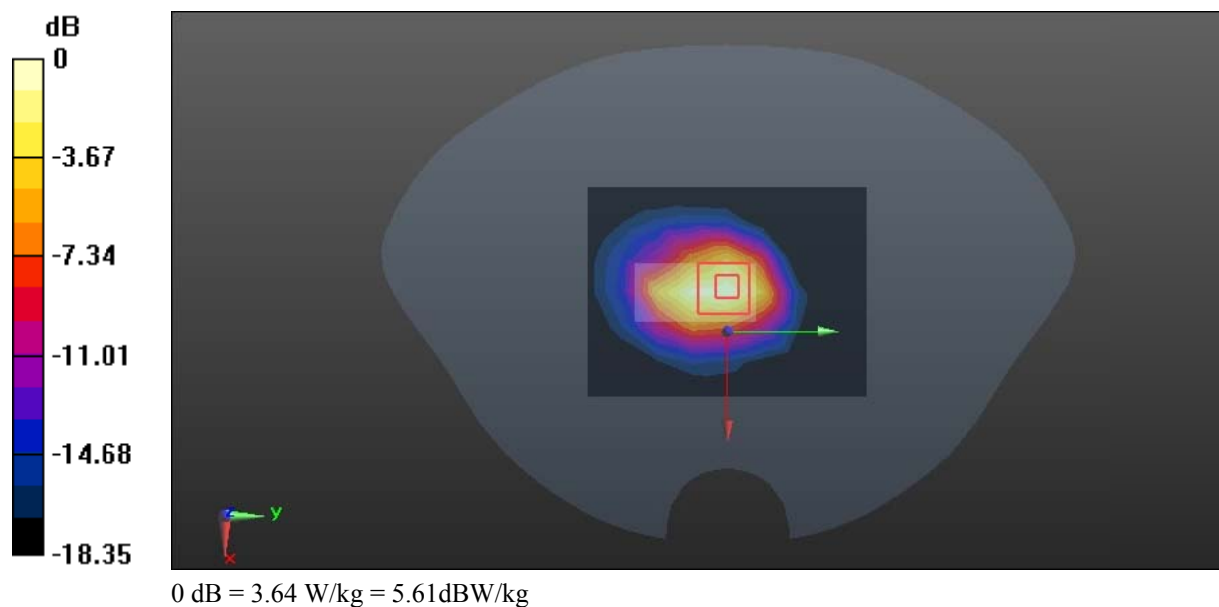

Test Plot 7#: WCDMA Band 2 Mid Face Up**DUT: Body worn camera; Type: C40; Serial: 2ONF-1;**

Communication System: WCDMA (0); Frequency: 1880MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.375$ S/m; $\epsilon_r = 39.437$; $\rho = 1000$ kg/m³ ;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(8, 7.27, 7.03) @ 1880 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (7x9x1):Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.185 W/kg


Zoom Scan (5x5x7) /Cube 0:Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.092 V/m; Power Drift =0.18dB

Peak SAR (extrapolated) = 0.402 W/kg

SAR(1 g) = 0.132 W/kg; SAR(10 g) = 0.070 W/kg

Maximum value of SAR (measured) = 0.170 W/kg

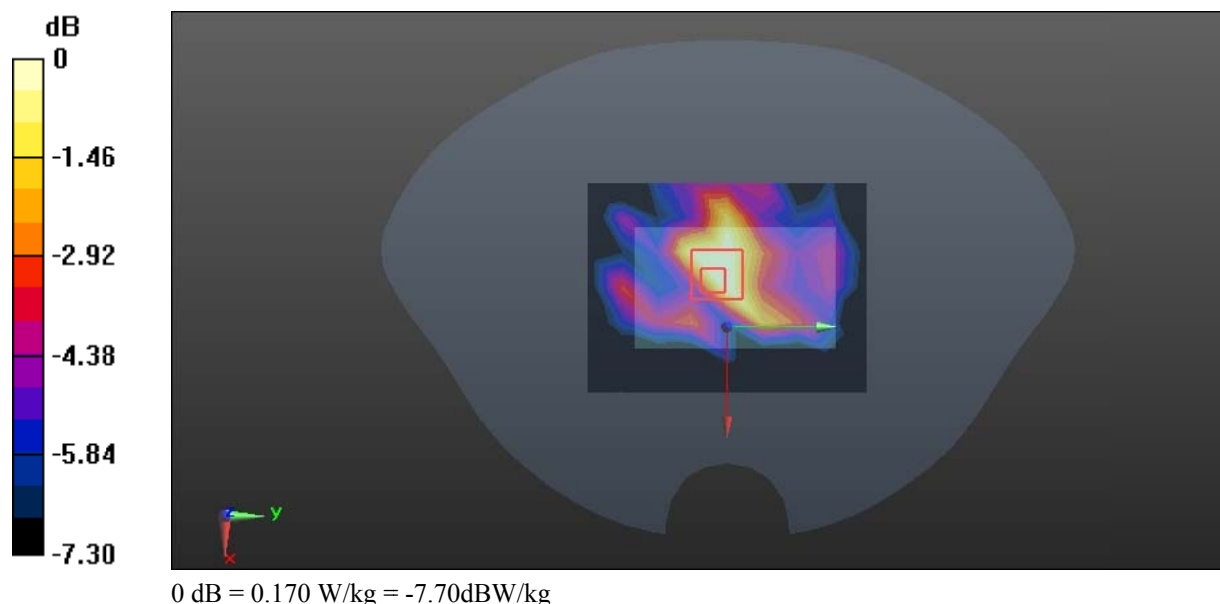

Test Plot 8#: WCDMA Band 2 Mid Body Back With Belt Clip**DUT: Body worn camera; Type: C40; Serial: 2ONF-1;**

Communication System: WCDMA (0); Frequency: 1880MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.375$ S/m; $\epsilon_r = 39.437$; $\rho = 1000$ kg/m³ ;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(8, 7.27, 7.03) @ 1880 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (7x9x1):Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0643 W/kg


Zoom Scan (5x5x7) /Cube 0:Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 1.488 V/m; Power Drift =0.15dB

Peak SAR (extrapolated) = 0.121 W/kg

SAR(1 g) = 0.053 W/kg; SAR(10 g) = 0.031 W/kg

Maximum value of SAR (measured) = 0.0693 W/kg

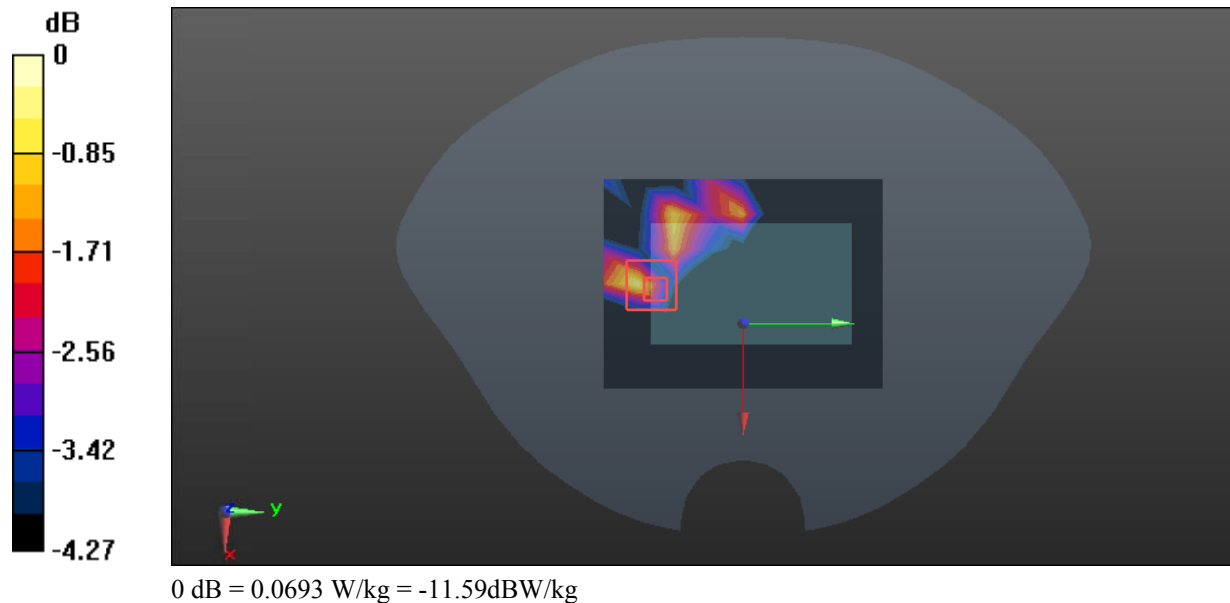

Test Plot 9#: WCDMA Band 2 Mid Handheld Bottom**DUT: Body worn camera; Type: C40; Serial: 2ONF-1;**

Communication System: WCDMA (0); Frequency: 1880MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.375$ S/m; $\epsilon_r = 39.437$; $\rho = 1000$ kg/m³ ;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(8, 7.27, 7.03) @ 1880 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (7x9x1):Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 5.82 W/kg


Zoom Scan (5x5x7) /Cube 0:Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 57.13 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 9.74 W/kg

SAR(1 g) = 5.45 W/kg; SAR(10 g) = 2.78 W/kg

Maximum value of SAR (measured) = 6.74 W/kg

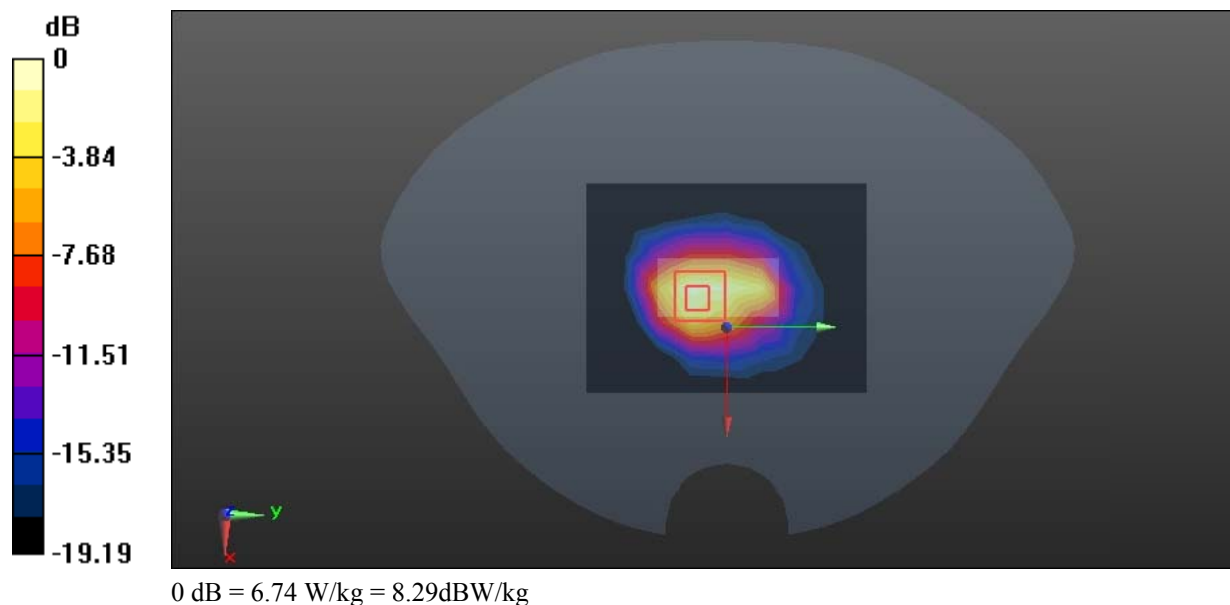

Test Plot 10#: WCDMA Band 4 Mid Face Up**DUT: Body worn camera; Type: C40; Serial: 2ONF-1;**

Communication System: WCDMA (0); Frequency: 1732.6MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1732.6$ MHz; $\sigma = 1.369$ S/m; $\epsilon_r = 39.513$; $\rho = 1000$ kg/m³ ;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(8.54, 7.65, 7.43) @ 1732.6 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (7x9x1):Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.115 W/kg


Zoom Scan (5x5x7) /Cube 0:Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.166 V/m; Power Drift =0.02dB

Peak SAR (extrapolated) = 0.148 W/kg

SAR(1 g) = 0.104 W/kg; SAR(10 g) = 0.071 W/kg

Maximum value of SAR (measured) = 0.120 W/kg

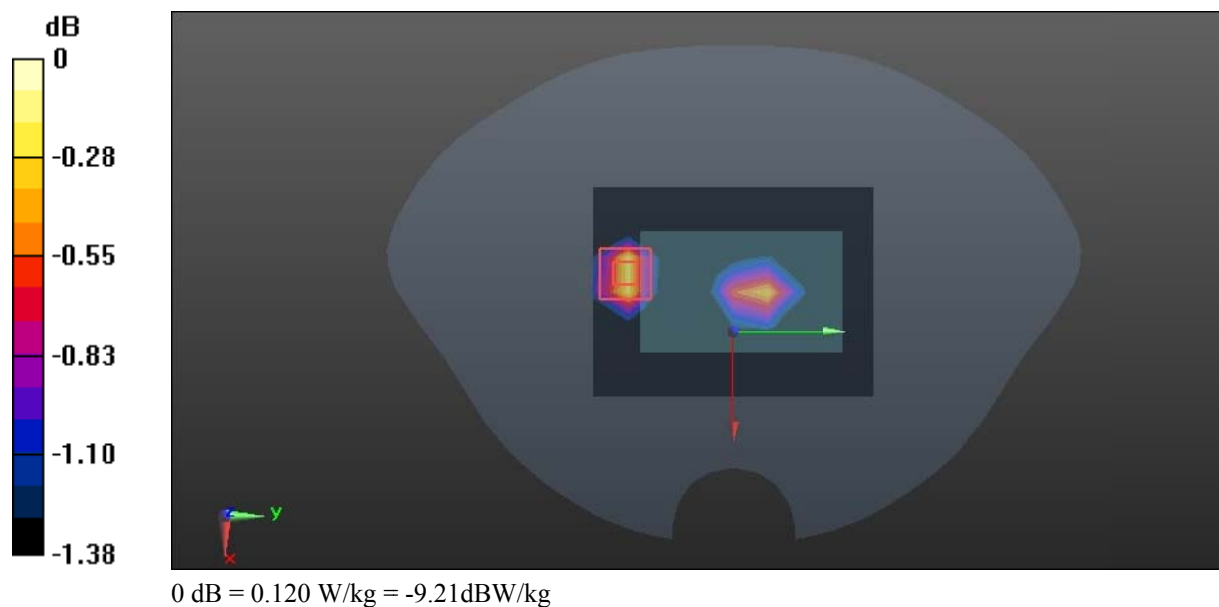

Test Plot 11#: WCDMA Band 4 Mid Body Back With Belt Clip**DUT: Body worn camera; Type: C40; Serial: 2ONF-1;**

Communication System: WCDMA (0); Frequency: 1732.6MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1732.6$ MHz; $\sigma = 1.369$ S/m; $\epsilon_r = 39.513$; $\rho = 1000$ kg/m³ ;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(8.54, 7.65, 7.43) @ 1732.6 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (7x9x1):Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0849 W/kg


Zoom Scan (5x5x7) /Cube 0:Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.365 V/m; Power Drift =0.13dB

Peak SAR (extrapolated) = 0.142 W/kg

SAR(1 g) = 0.067 W/kg; SAR(10 g) = 0.041 W/kg

Maximum value of SAR (measured) = 0.0892 W/kg

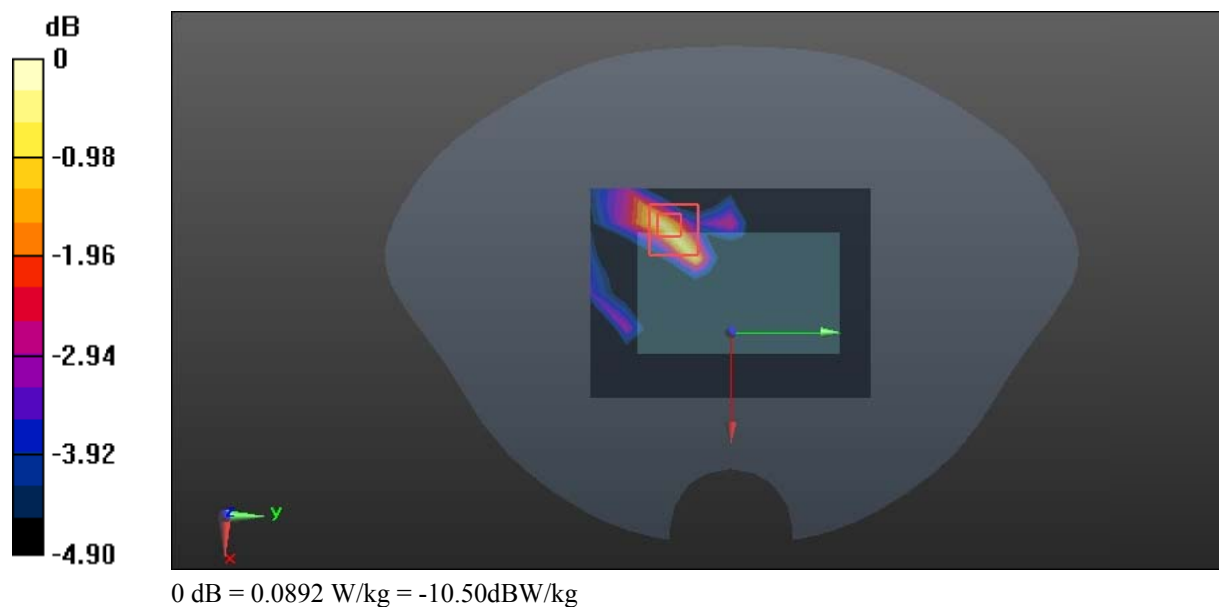

Test Plot 12#: WCDMA Band 4 Mid Handheld Bottom**DUT: Body worn camera; Type: C40; Serial: 2ONF-1;**

Communication System: WCDMA (0); Frequency: 1732.6 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1732.6$ MHz; $\sigma = 1.369$ S/m; $\epsilon_r = 39.513$; $\rho = 1000$ kg/m³ ;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(8.54, 7.65, 7.43) @ 1732.6 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (7x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 4.78 W/kg


Zoom Scan (5x5x7) /Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 56.22 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 9.11 W/kg

SAR(1 g) = 5.07 W/kg; SAR(10 g) = 2.47 W/kg

Maximum value of SAR (measured) = 6.56 W/kg

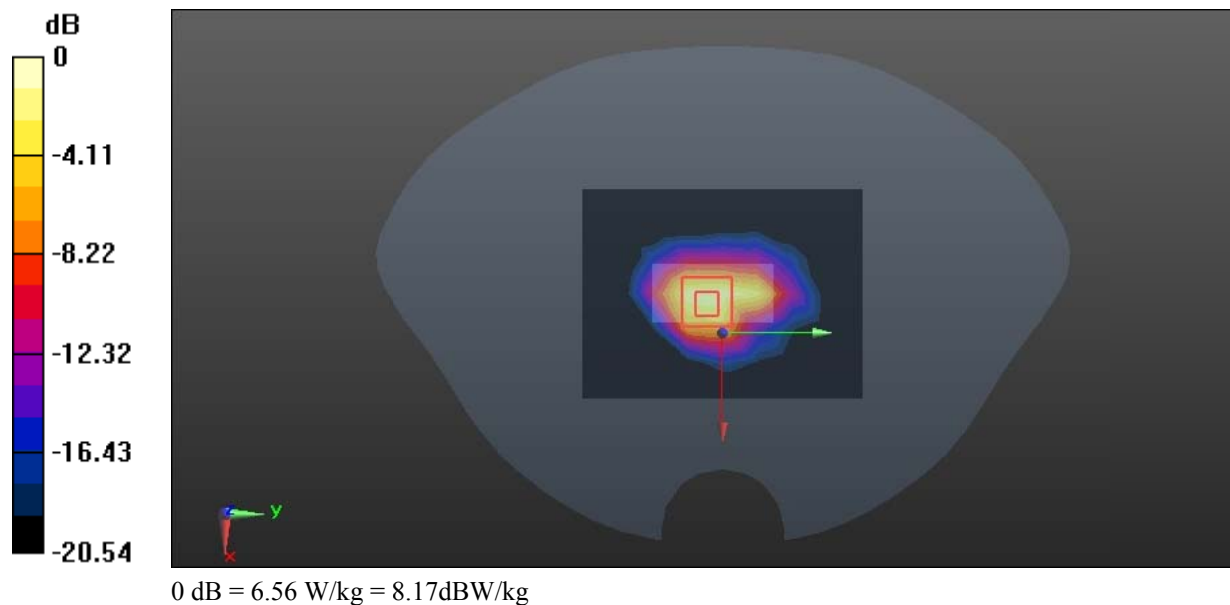

Test Plot 13#: WCDMA Band 5 Mid Face Up**DUT: Body worn camera; Type: C40; Serial: 2ONF-1;**

Communication System: WCDMA (0); Frequency: 836.6 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.923$ S/m; $\epsilon_r = 41.591$; $\rho = 1000$ kg/m³ ;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(9.55, 8.6, 8.54) @ 836.6 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (7x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.387 W/kg


Zoom Scan (5x5x7) /Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 20.68 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 1.27 W/kg

SAR(1 g) = 0.264 W/kg; SAR(10 g) = 0.161 W/kg

Maximum value of SAR (measured) = 0.366 W/kg

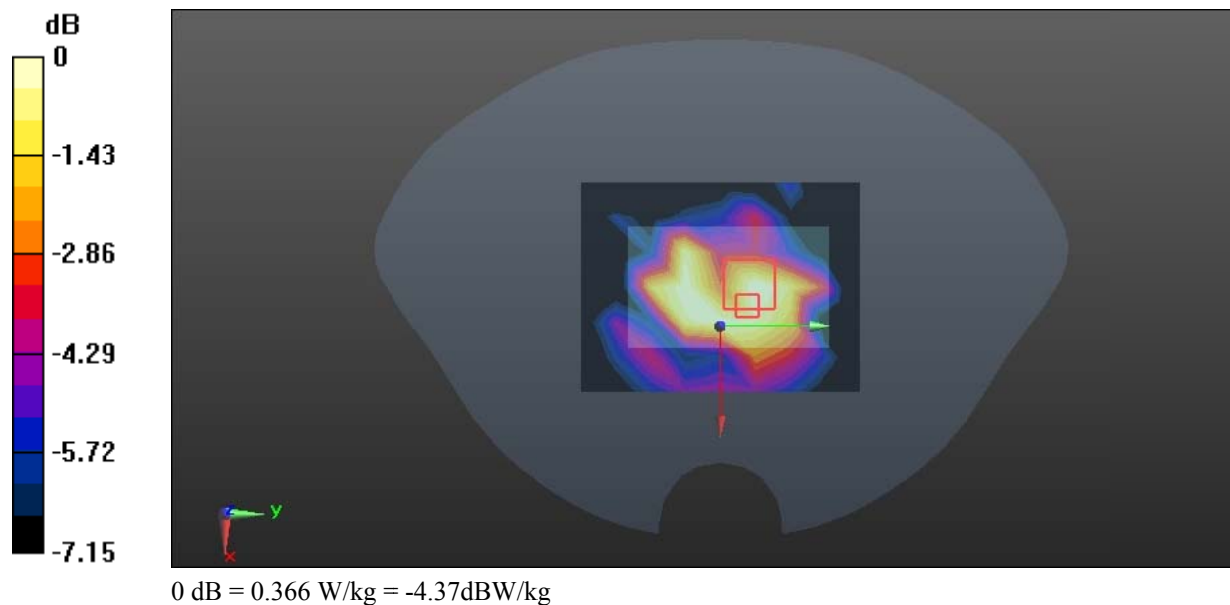

Test Plot 14#: WCDMA Band 5 Mid Body Back With Belt Clip**DUT: Body worn camera; Type: C40; Serial: 2ONF-1;**

Communication System: WCDMA (0); Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.923$ S/m; $\epsilon_r = 41.591$; $\rho = 1000$ kg/m³;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(9.55, 8.6, 8.54) @ 836.6 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (7x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.437 W/kg


Zoom Scan (5x5x7) /Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 20.97 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.844 W/kg

SAR(1 g) = 0.476 W/kg; SAR(10 g) = 0.288 W/kg

Maximum value of SAR (measured) = 0.453 W/kg

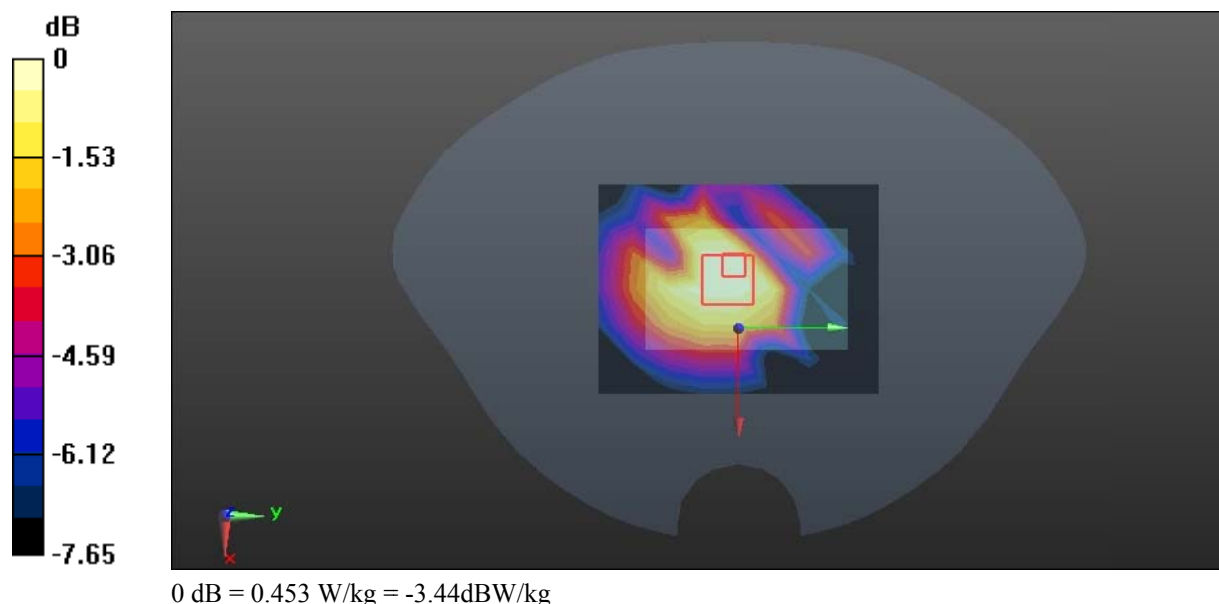

Test Plot 15#: WCDMA Band 5 Mid Handheld Back**DUT: Body worn camera; Type: C40; Serial: 2ONF-1;**

Communication System: WCDMA (0); Frequency: 836.6 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.923$ S/m; $\epsilon_r = 41.591$; $\rho = 1000$ kg/m³ ;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(9.55, 8.6, 8.54) @ 836.6 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (7x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 2.20 W/kg


Zoom Scan (5x5x7) /Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 36.91 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 2.75 W/kg

SAR(1 g) = 1.9 W/kg; SAR(10 g) = 1.31 W/kg

Maximum value of SAR (measured) = 2.15 W/kg

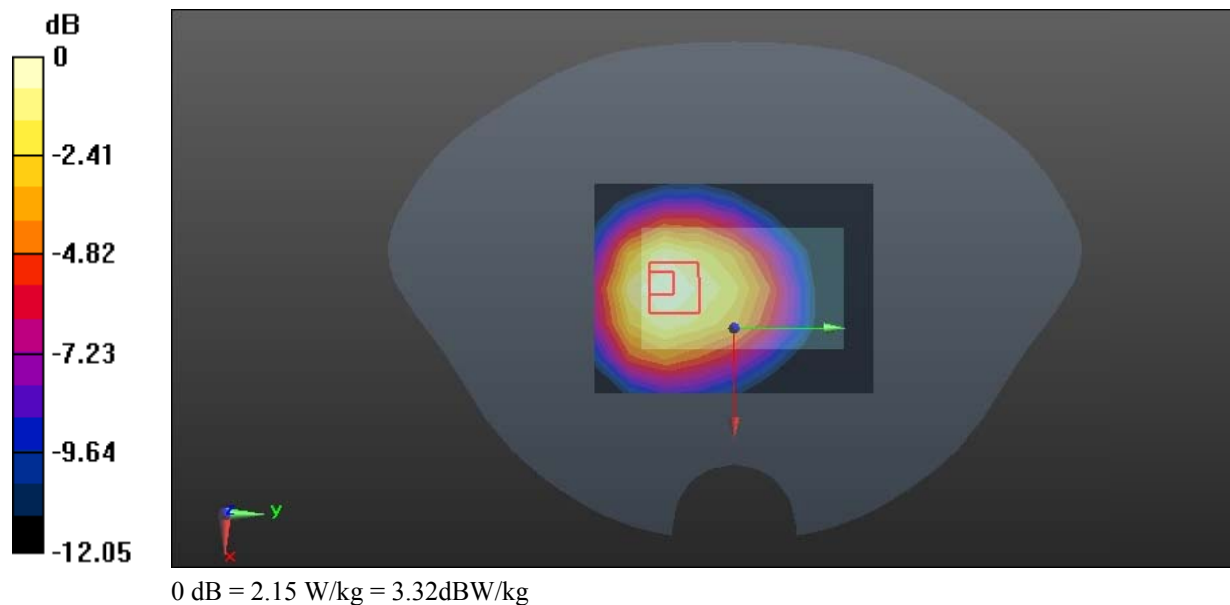

Test Plot 16#: LTE Band 2 1RB Mid Face Up**DUT: Body worn camera; Type: C40; Serial: 2ONF-1;**

Communication System: Generic FDD-LTE (0); Frequency: 1880MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.375$ S/m; $\epsilon_r = 39.437$; $\rho = 1000$ kg/m³;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(8, 7.27, 7.03) @ 1880 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (7x9x1):Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.298 W/kg


Zoom Scan (5x5x7) /Cube 0:Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.23 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.375 W/kg

SAR(1 g) = 0.264 W/kg; SAR(10 g) = 0.182 W/kg

Maximum value of SAR (measured) = 0.301 W/kg

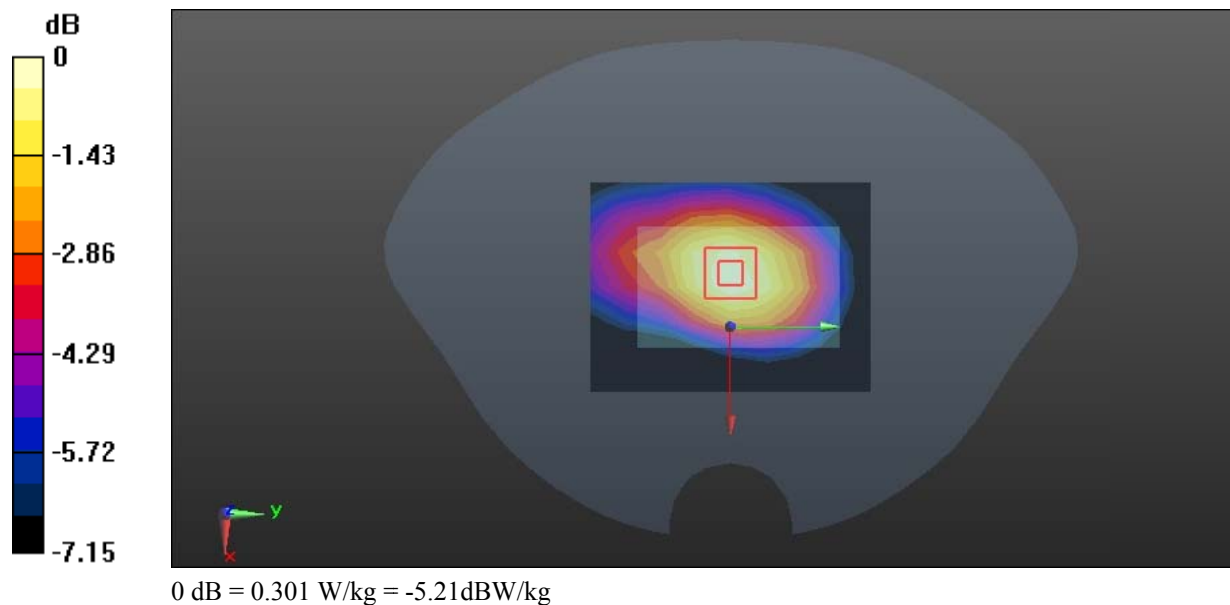

Test Plot 17#: LTE Band 2 1RB Mid Body Back With Belt Clip**DUT: Body worn camera; Type: C40; Serial: 2ONF-1;**

Communication System: Generic FDD-LTE (0); Frequency: 1880MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.375$ S/m; $\epsilon_r = 39.437$; $\rho = 1000$ kg/m³ ;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(8, 7.27, 7.03) @ 1880 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (7x9x1):Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0733 W/kg


Zoom Scan (5x5x7) /Cube 0:Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.871 V/m; Power Drift =0.16dB

Peak SAR (extrapolated) = 0.0980 W/kg

SAR(1 g) = 0.068 W/kg; SAR(10 g) = 0.047 W/kg

Maximum value of SAR (measured) = 0.0775 W/kg

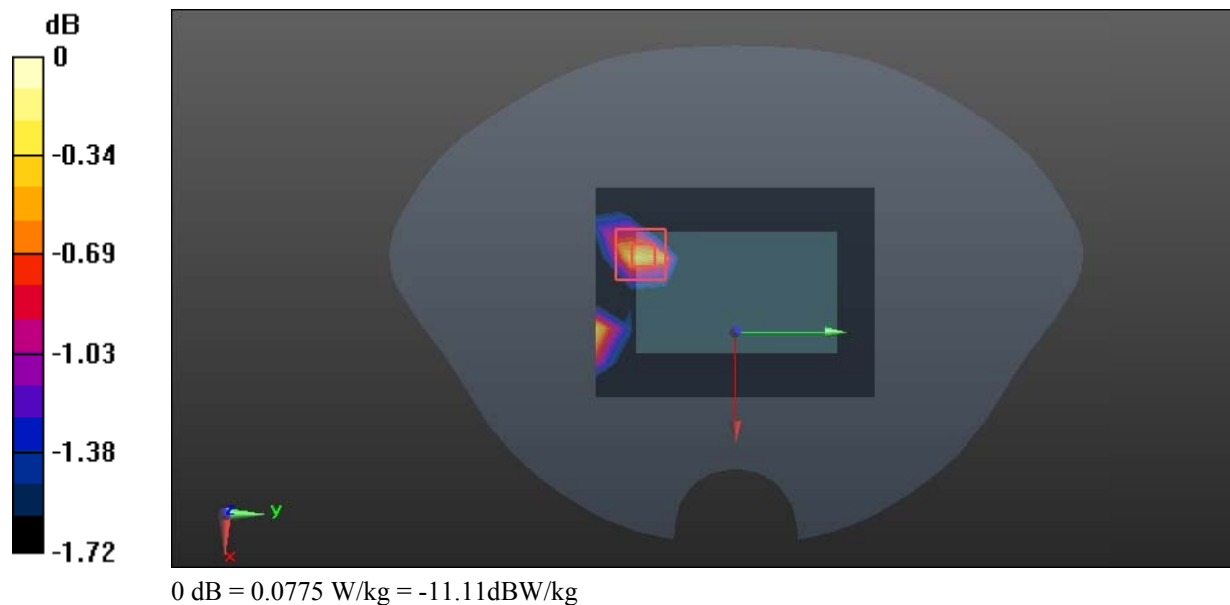

Test Plot 18#: LTE Band 2 50%RB Low Handheld Bottom**DUT: Body worn camera; Type: C40; Serial: 2ONF-1;**

Communication System: Generic FDD-LTE (0); Frequency: 1860MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1860$ MHz; $\sigma = 1.358$ S/m; $\epsilon_r = 39.463$; $\rho = 1000$ kg/m³;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(8, 7.27, 7.03) @ 1860 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (7x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 4.42 W/kg


Zoom Scan (5x5x7) /Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 54.70 V/m; Power Drift = 0.10dB

Peak SAR (extrapolated) = 9.81 W/kg

SAR(1 g) = 5.51 W/kg; SAR(10 g) = 2.8 W/kg

Maximum value of SAR (measured) = 6.97 W/kg

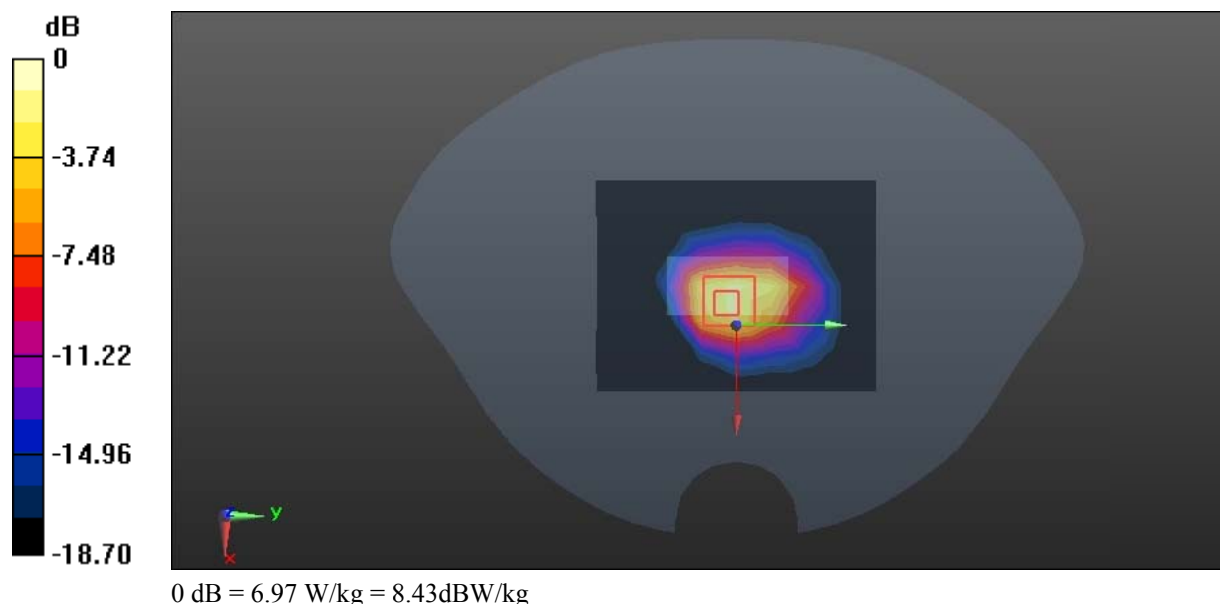

Test Plot 19#: LTE Band 4 1RB Mid Face Up**DUT: Body worn camera; Type: C40; Serial: 2ONF-1;**

Communication System: Generic FDD-LTE (0); Frequency: 1732.5MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1732.5$ MHz; $\sigma = 1.369$ S/m; $\epsilon_r = 39.513$; $\rho = 1000$ kg/m³ ;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(8.54, 7.65, 7.43) @ 1732.5 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (7x9x1):Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.201 W/kg


Zoom Scan (5x5x7) /Cube 0:Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.91 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.246 W/kg

SAR(1 g) = 0.172 W/kg; SAR(10 g) = 0.117 W/kg

Maximum value of SAR (measured) = 0.198 W/kg

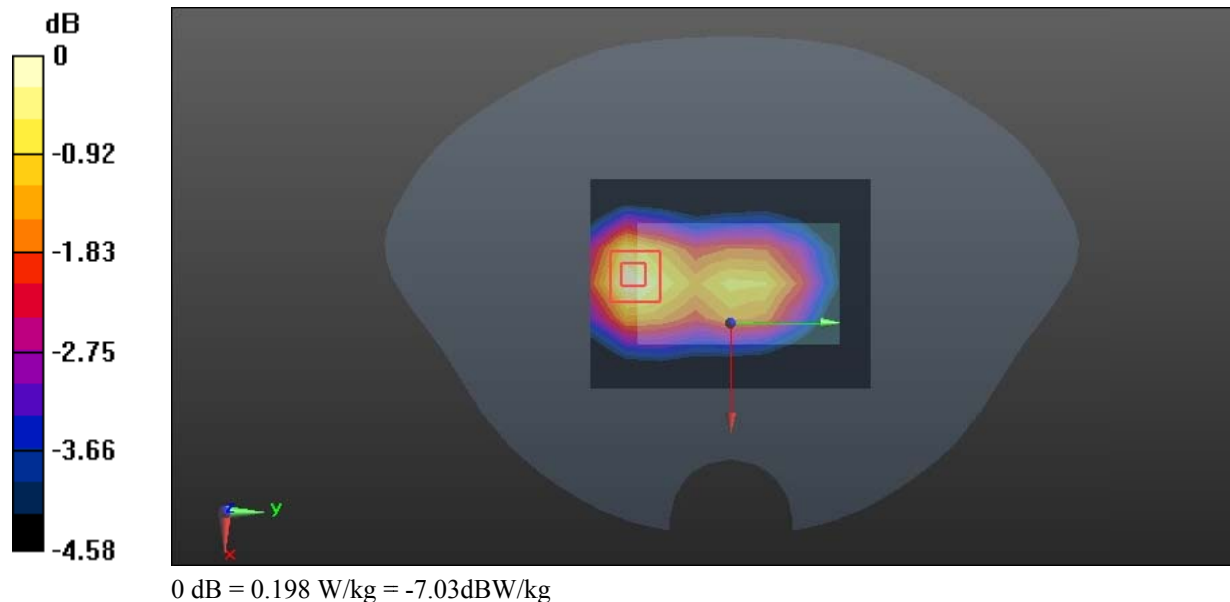

Test Plot 20#: LTE Band 4 50%RB Mid Body Back With Belt Clip**DUT: Body worn camera; Type: C40; Serial: 2ONF-1;**

Communication System: Generic FDD-LTE (0); Frequency: 1732.5 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1732.5$ MHz; $\sigma = 1.369$ S/m; $\epsilon_r = 39.513$; $\rho = 1000$ kg/m³;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(8.54, 7.65, 7.43) @ 1732.5 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (7x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.191 W/kg


Zoom Scan (5x5x7) /Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.29 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.220 W/kg

SAR(1 g) = 0.172 W/kg; SAR(10 g) = 0.129 W/kg

Maximum value of SAR (measured) = 0.191 W/kg

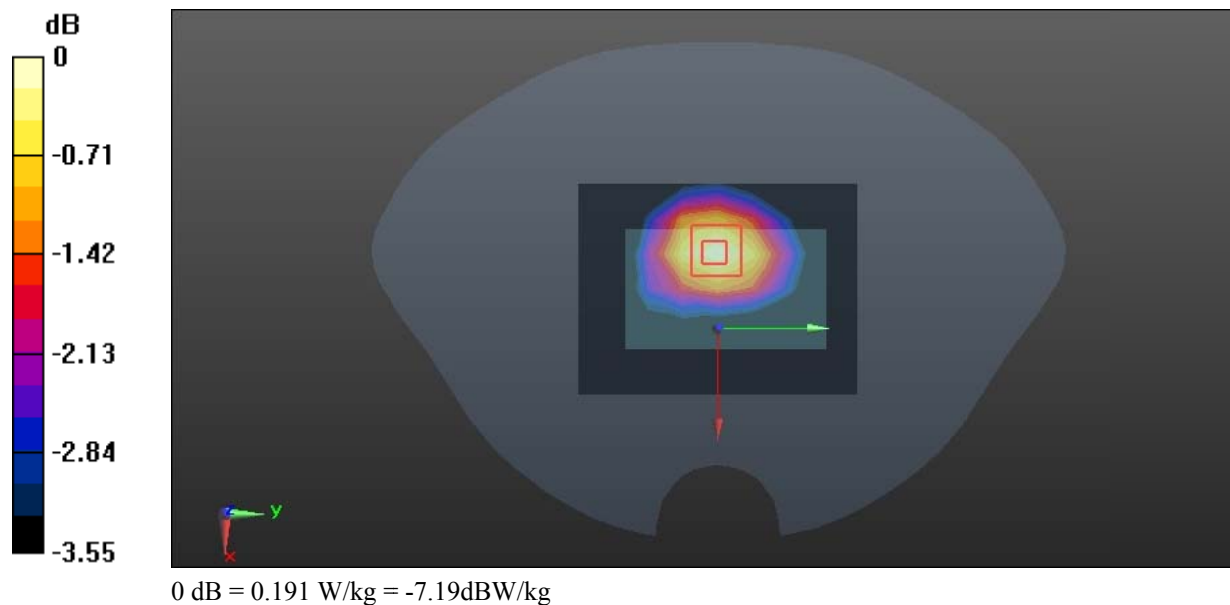

Test Plot 21#: LTE Band 4 1RB High Handheld Bottom**DUT: Body worn camera; Type: C40; Serial: 2ONF-1;**

Communication System: Generic FDD-LTE (0); Frequency: 1745MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1745$ MHz; $\sigma = 1.373$ S/m; $\epsilon_r = 39.482$; $\rho = 1000$ kg/m³;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(8.54, 7.65, 7.43) @ 1745 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (7x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 7.46 W/kg


Zoom Scan (5x5x7) /Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 70.65 V/m; Power Drift = 0.01dB

Peak SAR (extrapolated) = 12.8 W/kg

SAR(1 g) = 6.78 W/kg; SAR(10 g) = 3.24 W/kg

Maximum value of SAR (measured) = 8.91 W/kg

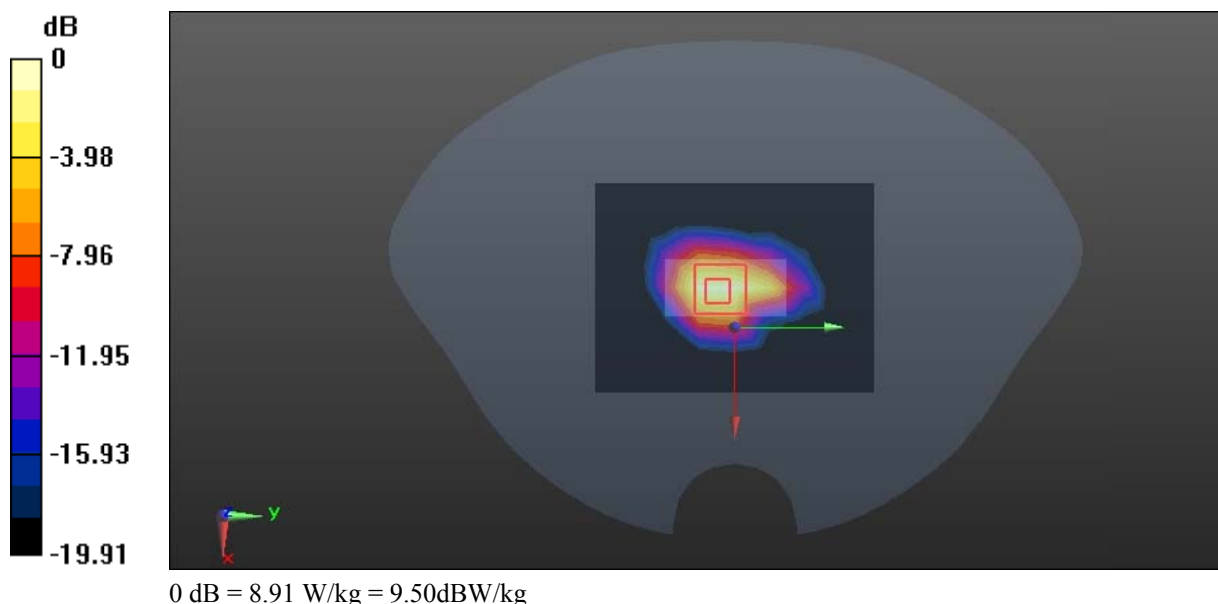

Test Plot 22#: LTE Band 7 50%RB Mid Face Up**DUT: Body worn camera; Type: C40; Serial: 2ONF-1;**

Communication System: Generic FDD-LTE (0); Frequency:2535MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 2535$ MHz; $\sigma = 1.945$ S/m; $\epsilon_r = 40.172$; $\rho = 1000$ kg/m³ ;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(7.61, 6.94, 6.73) @ 2535 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (9x11x1):Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.0901 W/kg


Zoom Scan (7x7x7) /Cube 0:Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.011 V/m; Power Drift =0.10dB

Peak SAR (extrapolated) = 0.124 W/kg

SAR(1 g) = 0.077 W/kg; SAR(10 g) = 0.051 W/kg

Maximum value of SAR (measured) = 0.0897 W/kg

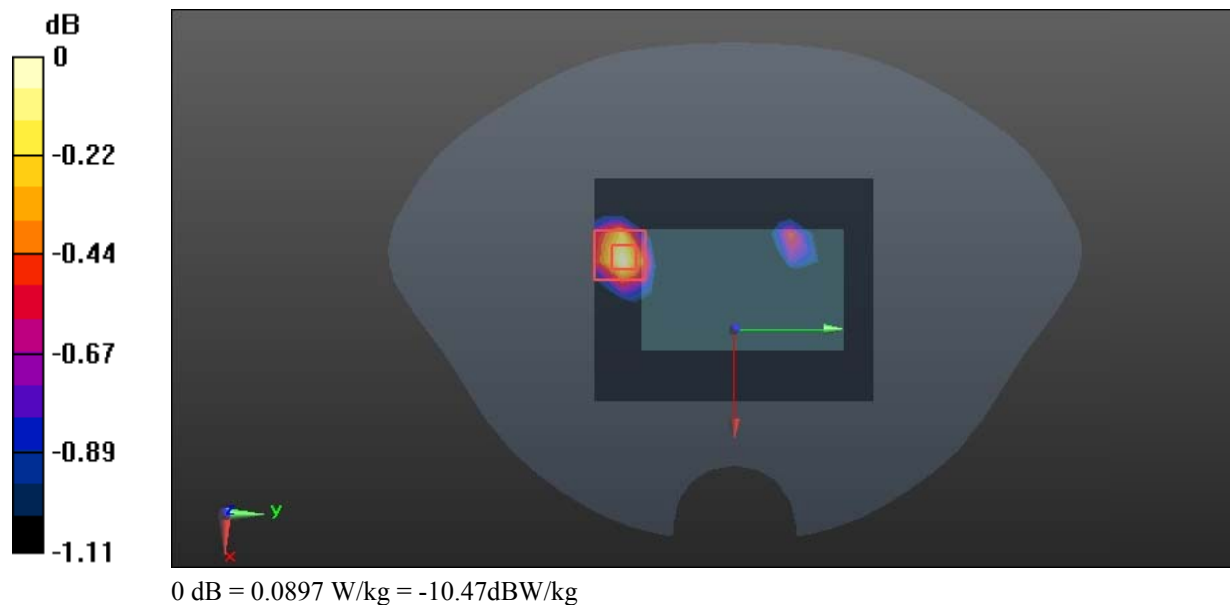

Test Plot 23#: LTE Band 7 1RB Mid Body Back With Belt Clip**DUT: Body worn camera; Type: C40; Serial: 2ONF-1;**

Communication System: Generic FDD-LTE (0); Frequency: 2535 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 2535$ MHz; $\sigma = 1.945$ S/m; $\epsilon_r = 40.172$; $\rho = 1000$ kg/m³;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(7.61, 6.94, 6.73) @ 2535 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x11x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.115 W/kg


Zoom Scan (7x7x7) /Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.923 V/m; Power Drift = 0.05dB

Peak SAR (extrapolated) = 0.154 W/kg

SAR(1 g) = 0.094 W/kg; SAR(10 g) = 0.060 W/kg

Maximum value of SAR (measured) = 0.110 W/kg

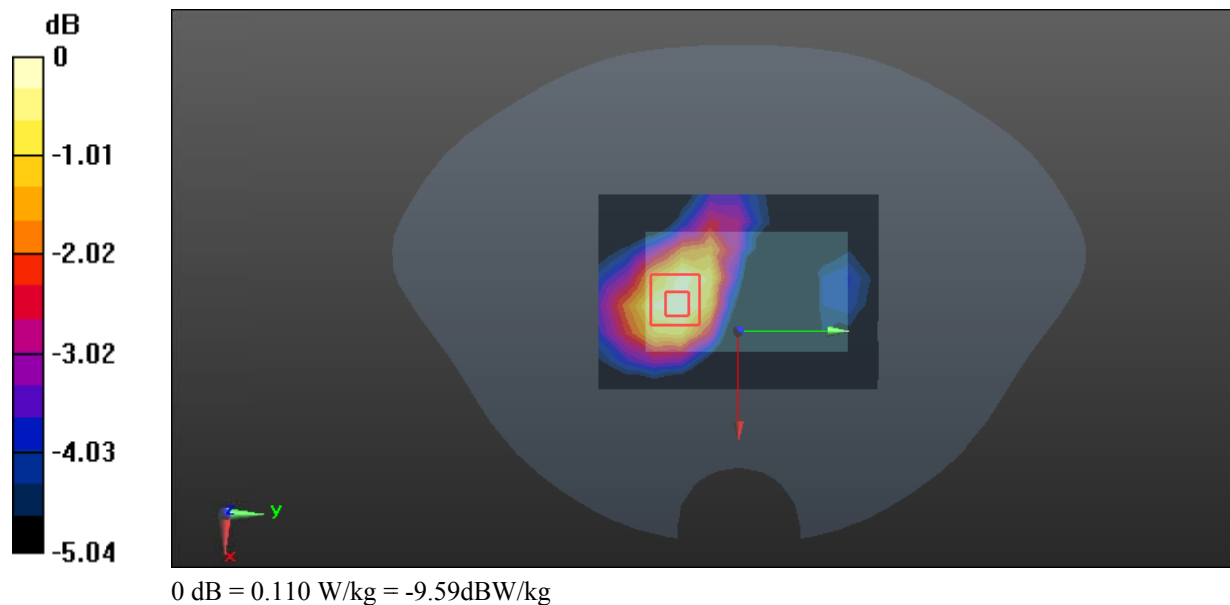

Test Plot 24#: LTE Band 7 1RB Low Handheld Bottom**DUT: Body worn camera; Type: C40; Serial: 2ONF-1;**

Communication System: Generic FDD-LTE (0); Frequency: 2510 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 2510$ MHz; $\sigma = 1.907$ S/m; $\epsilon_r = 40.214$; $\rho = 1000$ kg/m³;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(7.61, 6.94, 6.73) @ 2510 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (9x11x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 5.16 W/kg


Zoom Scan (7x7x7) /Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 47.41 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 17.2 W/kg

SAR(1 g) = 6.59 W/kg; SAR(10 g) = 2.35 W/kg

Maximum value of SAR (measured) = 10.0 W/kg

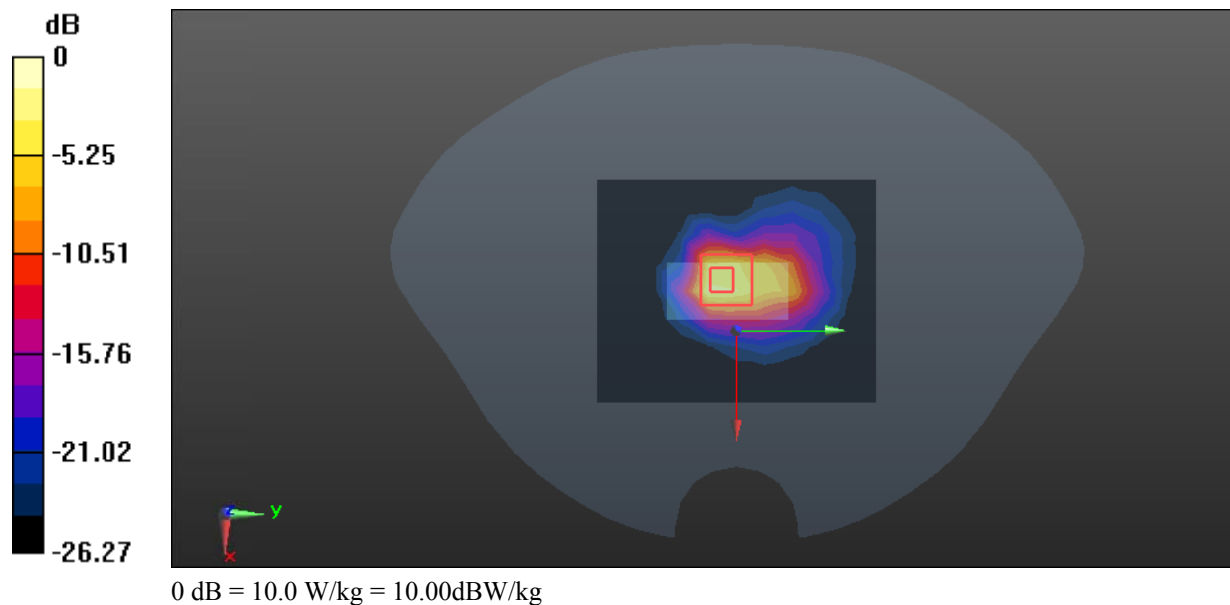

Test Plot 25#: LTE Band 12 50%RB Mid Face Up**DUT: Body worn camera; Type: C40; Serial: 2ONF-1;**

Communication System: Generic FDD-LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.891$ S/m; $\epsilon_r = 43.211$; $\rho = 1000$ kg/m³;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(9.95, 8.96, 8.82) @ 707.5 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (7x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.139 W/kg


Zoom Scan (5x5x7) /Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.32 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.168 W/kg

SAR(1 g) = 0.133 W/kg; SAR(10 g) = 0.103 W/kg

Maximum value of SAR (measured) = 0.146 W/kg

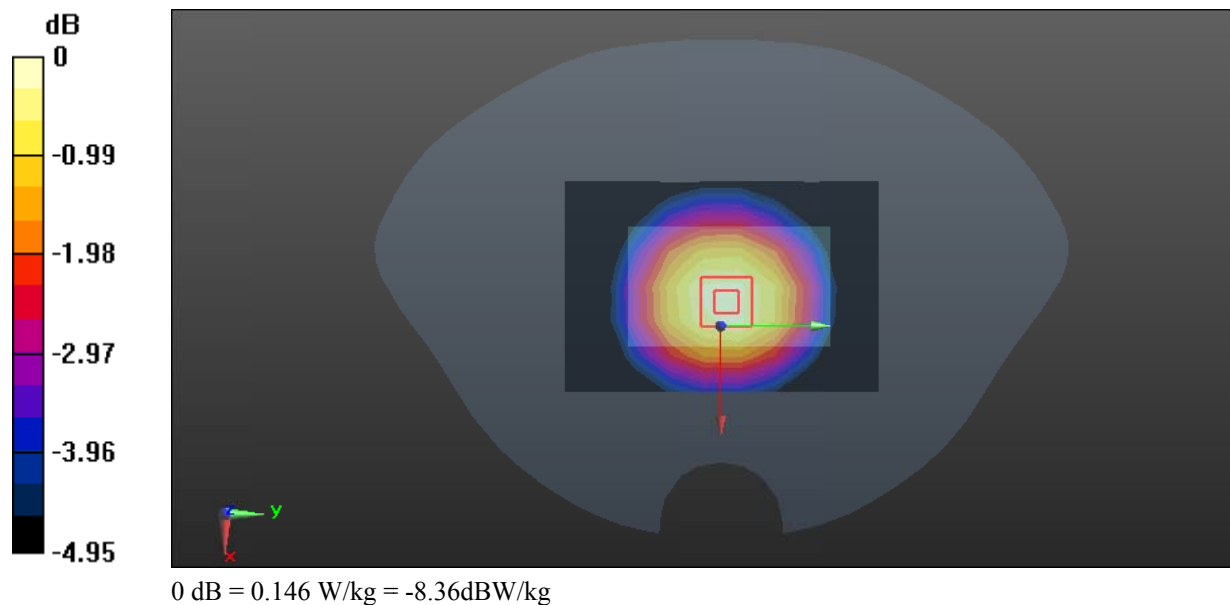

Test Plot 26#: LTE Band 12 50%RB Mid Body Back With Belt Clip**DUT: Body worn camera; Type: C40; Serial: 2ONF-1;**

Communication System: Generic FDD-LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.891$ S/m; $\epsilon_r = 43.211$; $\rho = 1000$ kg/m³;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(9.95, 8.96, 8.82) @ 707.5 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (7x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.105 W/kg


Zoom Scan (5x5x7) /Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.165 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.124 W/kg

SAR(1 g) = 0.095 W/kg; SAR(10 g) = 0.070 W/kg

Maximum value of SAR (measured) = 0.106 W/kg

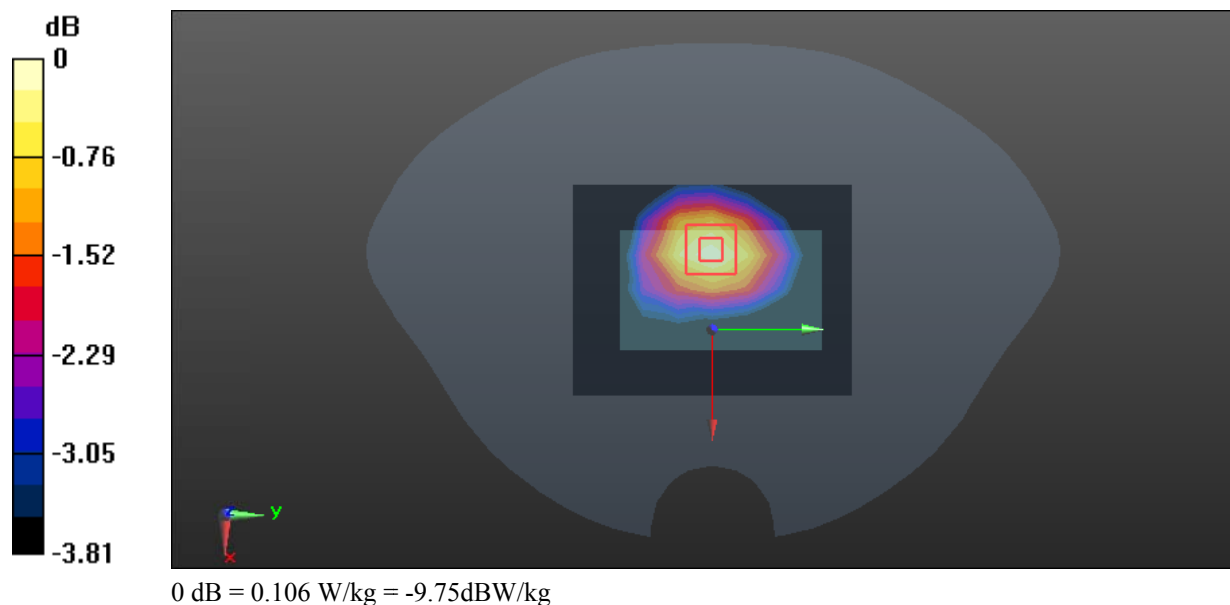

Test Plot 27#: LTE Band 12 50%RB Mid Handheld Left**DUT: Body worn camera; Type: C40; Serial: 2ONF-1;**

Communication System: Generic FDD-LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.891$ S/m; $\epsilon_r = 43.211$; $\rho = 1000$ kg/m³;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(9.95, 8.96, 8.82) @ 707.5 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (7x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.31 W/kg


Zoom Scan (5x5x7) /Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 29.32 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 3.36 W/kg

SAR(1 g) = 1.24 W/kg; SAR(10 g) = 0.632 W/kg

Maximum value of SAR (measured) = 1.61 W/kg

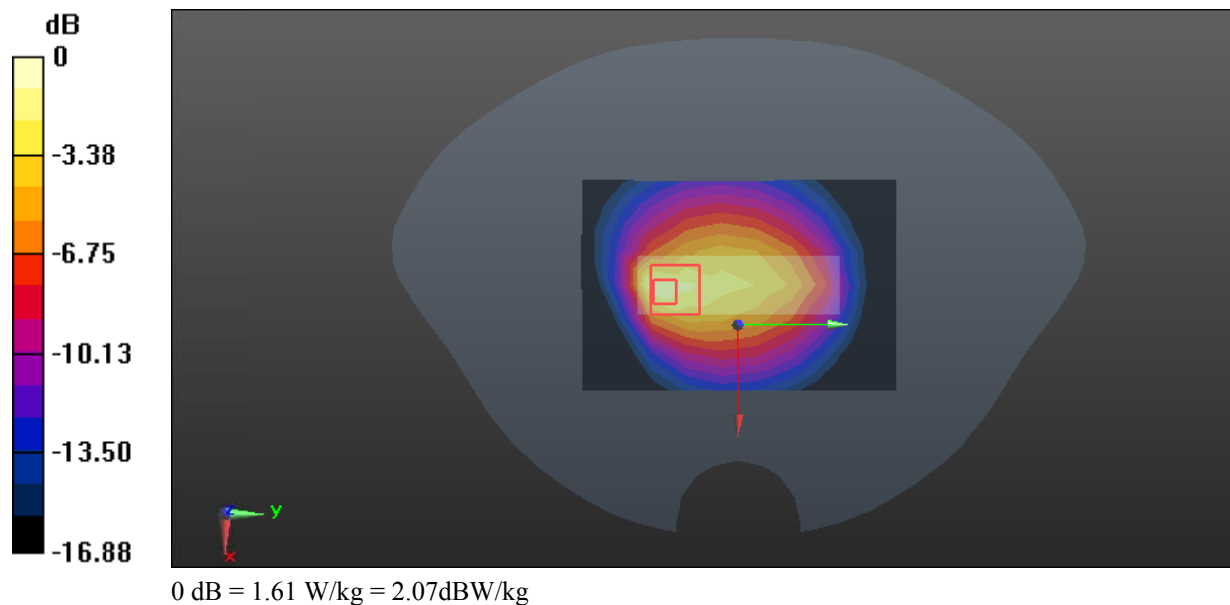

Test Plot 28#: LTE Band 13 1RB Mid Face Up**DUT: Body worn camera; Type: C40; Serial: 2ONF-1;**

Communication System: Generic FDD-LTE (0); Frequency: 782MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 782$ MHz; $\sigma = 0.906$ S/m; $\epsilon_r = 42.259$; $\rho = 1000$ kg/m³;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(9.95, 8.96, 8.82) @ 782 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (7x10x1):Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.104 W/kg


Zoom Scan (5x5x7) /Cube 0:Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.65 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.130 W/kg

SAR(1 g) = 0.102 W/kg; SAR(10 g) = 0.078 W/kg

Maximum value of SAR (measured) = 0.113 W/kg

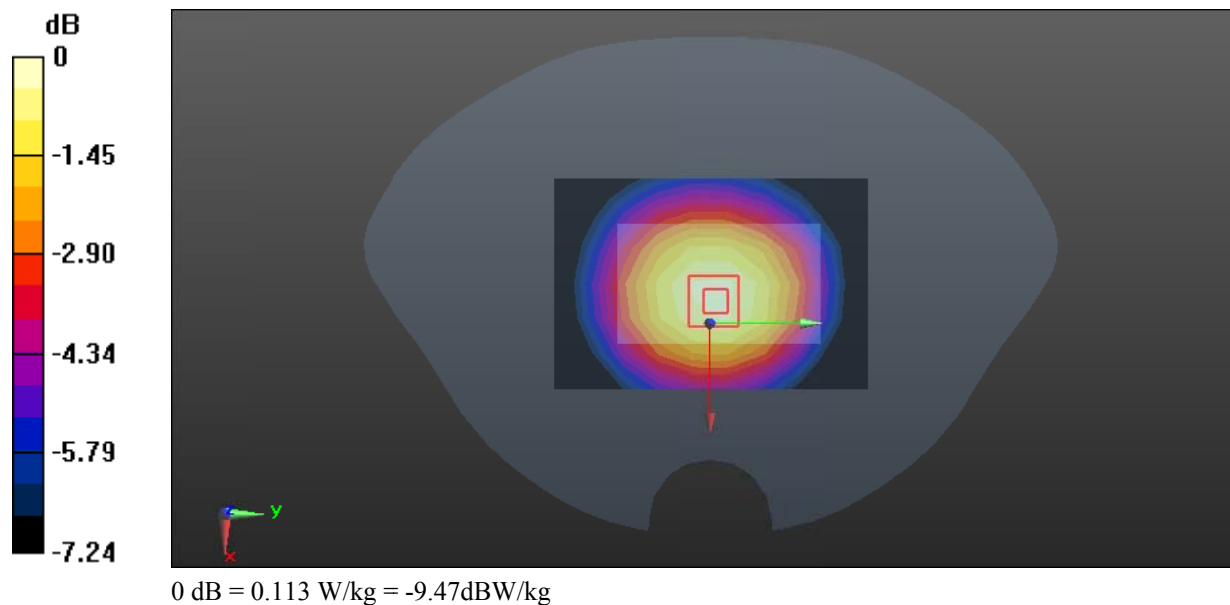

Test Plot 29#: LTE Band 13 50%RB Mid Body Back With Belt Clip**DUT: Body worn camera; Type: C40; Serial: 2ONF-1;**

Communication System: Generic FDD-LTE (0); Frequency:782MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 782$ MHz; $\sigma = 0.906$ S/m; $\epsilon_r = 42.259$; $\rho = 1000$ kg/m³ ;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(9.95, 8.96, 8.82) @ 782 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (7x9x1):Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0880 W/kg


Zoom Scan (5x5x7) /Cube 0:Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.113 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.105 W/kg

SAR(1 g) = 0.081 W/kg; SAR(10 g) = 0.061 W/kg

Maximum value of SAR (measured) = 0.0896 W/kg

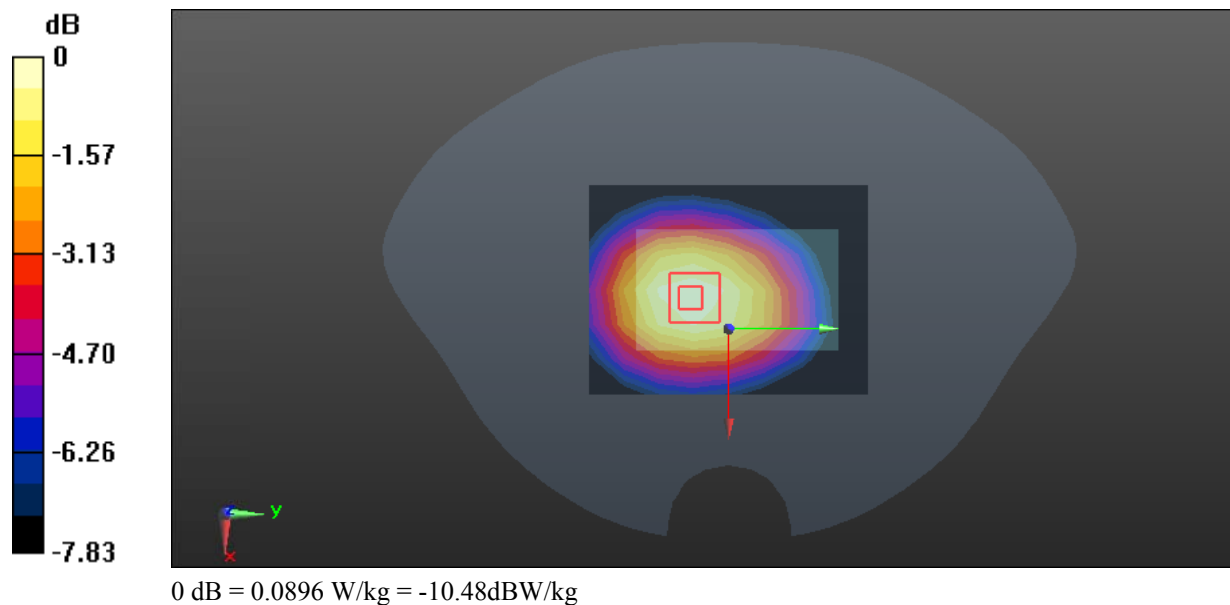

Test Plot 30#: LTE Band 13 50%RB Mid Handheld Right**DUT: Body worn camera; Type: C40; Serial: 2ONF-1;**

Communication System: Generic FDD-LTE (0); Frequency: 782MHz; Duty Cycle: 1:1

Medium parameters used: $f = 782$ MHz; $\sigma = 0.906$ S/m; $\epsilon_r = 42.259$; $\rho = 1000$ kg/m³;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(9.95, 8.96, 8.82) @ 782 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (7x10x1):Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.861 W/kg


Zoom Scan (5x5x7) /Cube 0:Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 28.68 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 1.91 W/kg

SAR(1 g) = 0.783 W/kg; SAR(10 g) = 0.495 W/kg

Maximum value of SAR (measured) = 0.966 W/kg

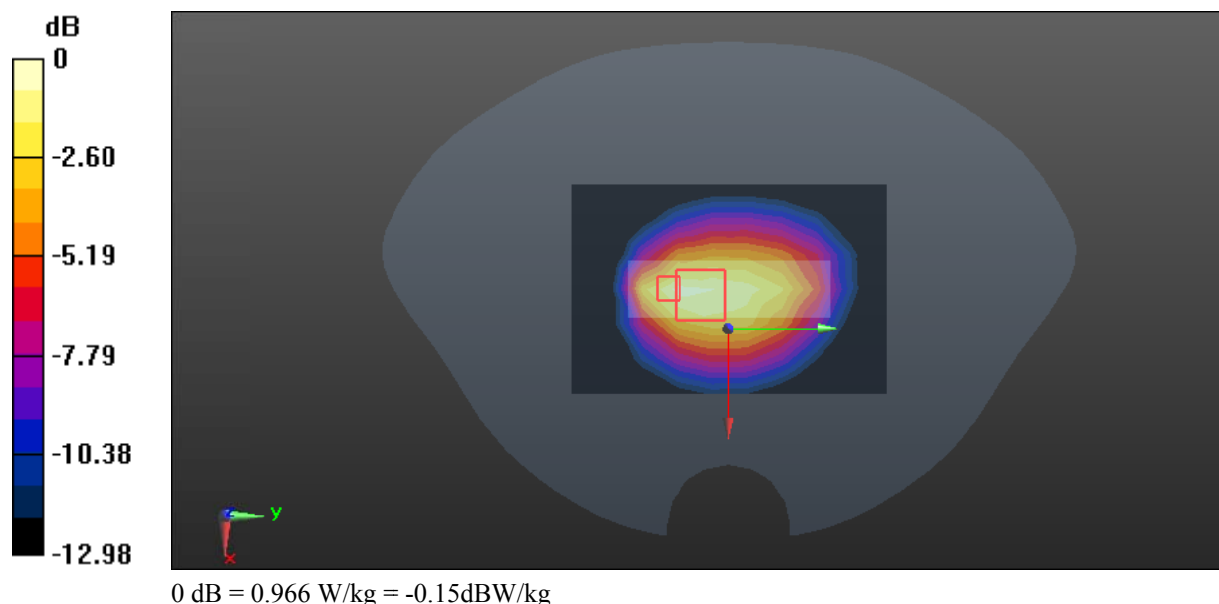

Test Plot 31#: LTE Band 26 50%RB Mid Face Up**DUT: Body worn camera; Type: C40; Serial: 2ONF-1;**

Communication System: Generic FDD-LTE (0); Frequency:831.5MHz; Duty Cycle: 1:1

Medium parameters used: $f = 831.5 \text{ MHz}$; $\sigma = 0.92 \text{ S/m}$; $\epsilon_r = 41.655$; $\rho = 1000 \text{ kg/m}^3$;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(9.55, 8.6, 8.54) @ 831.5 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (7x10x1):Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.286 W/kg


Zoom Scan (5x5x7) /Cube 0:Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 17.08 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.334 W/kg

SAR(1 g) = 0.263 W/kg; SAR(10 g) = 0.200 W/kg

Maximum value of SAR (measured) = 0.288 W/kg

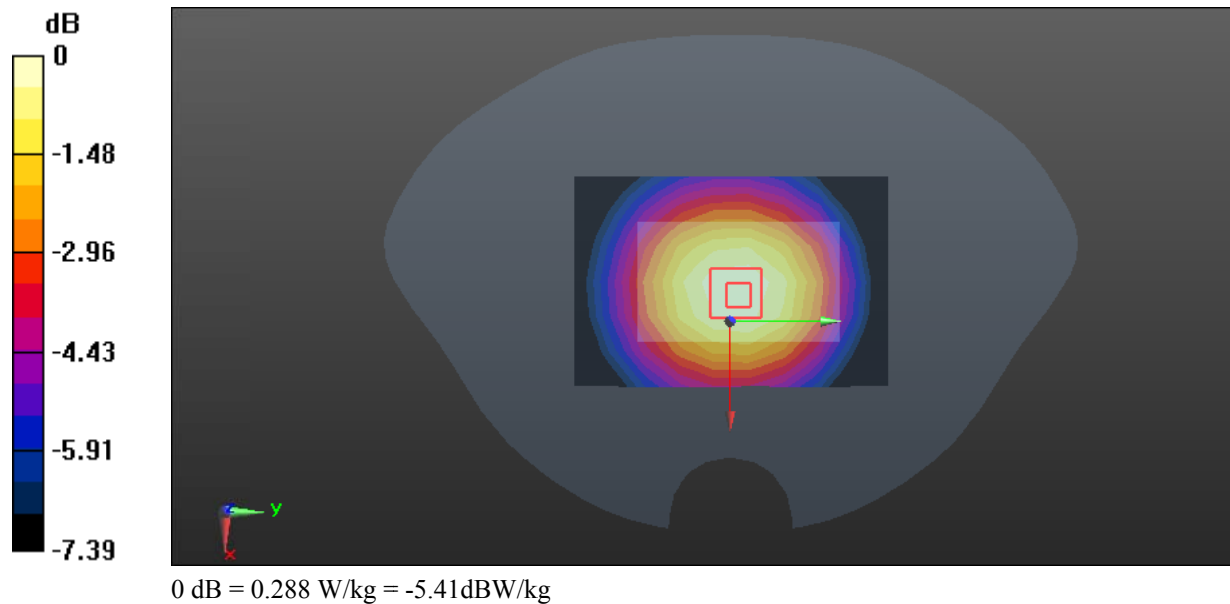

Test Plot 32#: LTE Band 26 50%RB Mid Body Back With Belt Clip**DUT: Body worn camera; Type: C40; Serial: 2ONF-1;**

Communication System: Generic FDD-LTE (0); Frequency: 831.5 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 831.5$ MHz; $\sigma = 0.92$ S/m; $\epsilon_r = 41.655$; $\rho = 1000$ kg/m³;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(9.55, 8.6, 8.54) @ 831.5 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (7x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.522 W/kg


Zoom Scan (5x5x7) /Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 22.62 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.615 W/kg

SAR(1 g) = 0.477 W/kg; SAR(10 g) = 0.354 W/kg

Maximum value of SAR (measured) = 0.530 W/kg

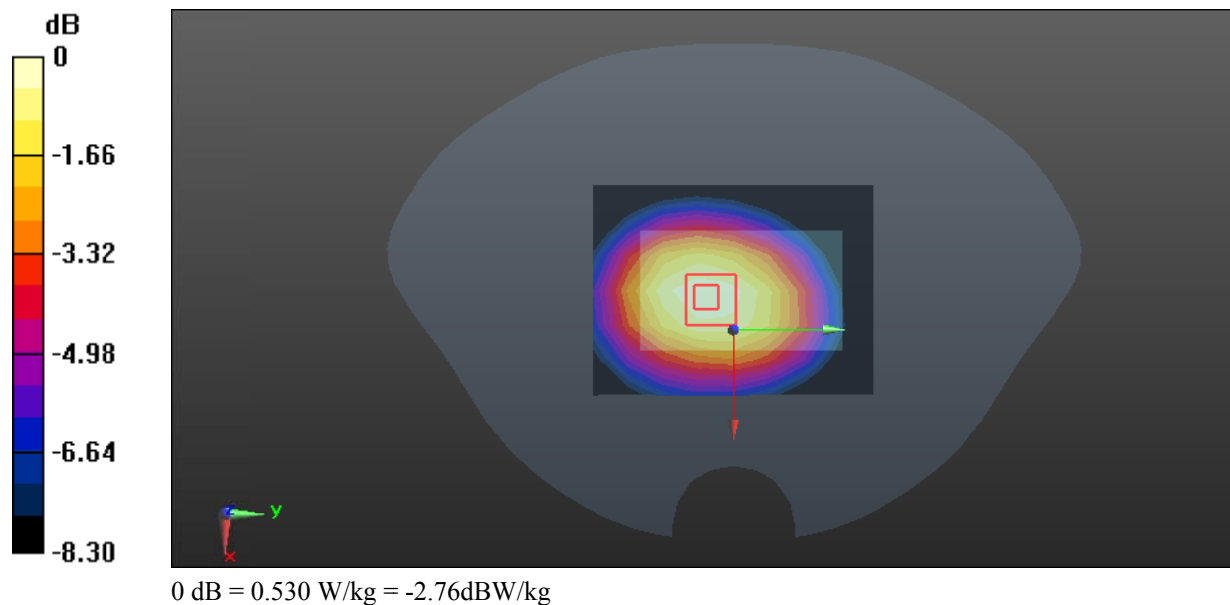

Test Plot 33#: LTE Band 26 50%RB Mid Handheld Front**DUT: Body worn camera; Type: C40; Serial: 2ONF-1;**

Communication System: Generic FDD-LTE (0); Frequency:831.5MHz; Duty Cycle: 1:1
 Medium parameters used: $f=831.5$ MHz; $\sigma = 0.92$ S/m; $\epsilon_r=41.655$; $\rho = 1000$ kg/m³ ;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(9.55, 8.6, 8.54) @ 831.5 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (7x10x1):Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.42 W/kg


Zoom Scan (5x5x7) /Cube 0:Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 37.11 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 1.70 W/kg

SAR(1 g) = 1.3 W/kg; SAR(10 g) = 0.949 W/kg

Maximum value of SAR (measured) = 1.45 W/kg

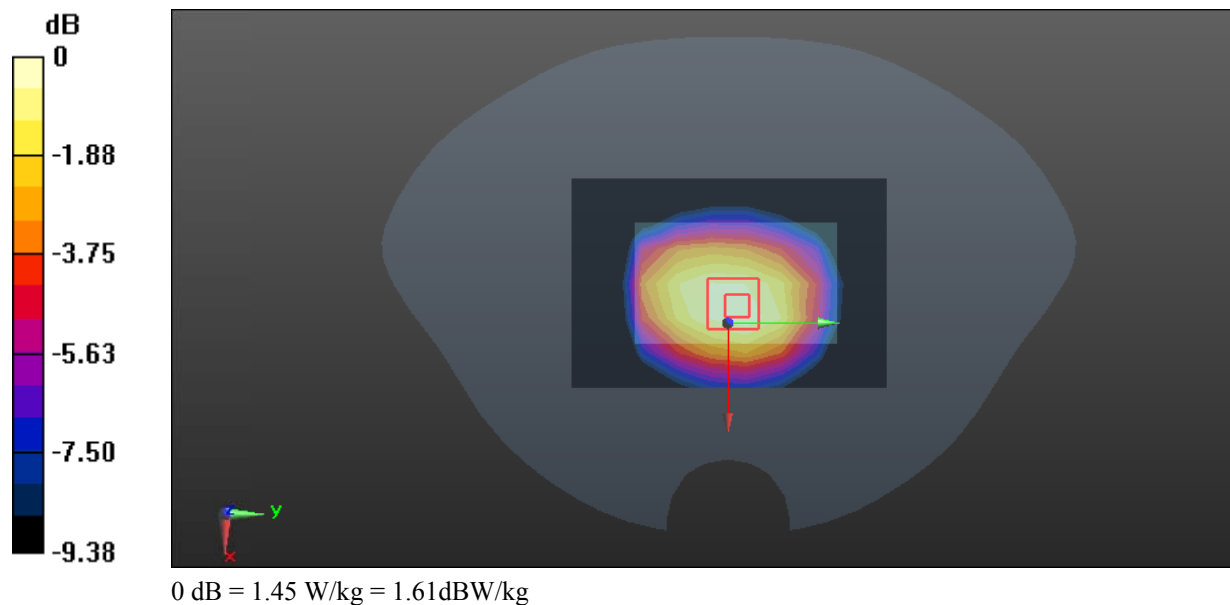

Test Plot 34#: LTE Band 41 1RB Mid Face Up**DUT: Body worn camera; Type: C40; Serial: 2ONF-1;**

Communication System: Generic TDD-LTE (0); Frequency:2593MHz; Duty Cycle: 1:1.58

Medium parameters used: $f = 2593$ MHz; $\sigma = 2.039$ S/m; $\epsilon_r = 40.113$; $\rho = 1000$ kg/m³ ;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(7.61, 6.94, 6.73) @ 2593 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x12x1):Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.0556 W/kg


Zoom Scan (7x7x7) /Cube 0:Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.115 V/m; Power Drift =0.12dB

Peak SAR (extrapolated) = 0.0770 W/kg

SAR(1 g) = 0.050 W/kg; SAR(10 g) = 0.034 W/kg

Maximum value of SAR (measured) = 0.0576 W/kg

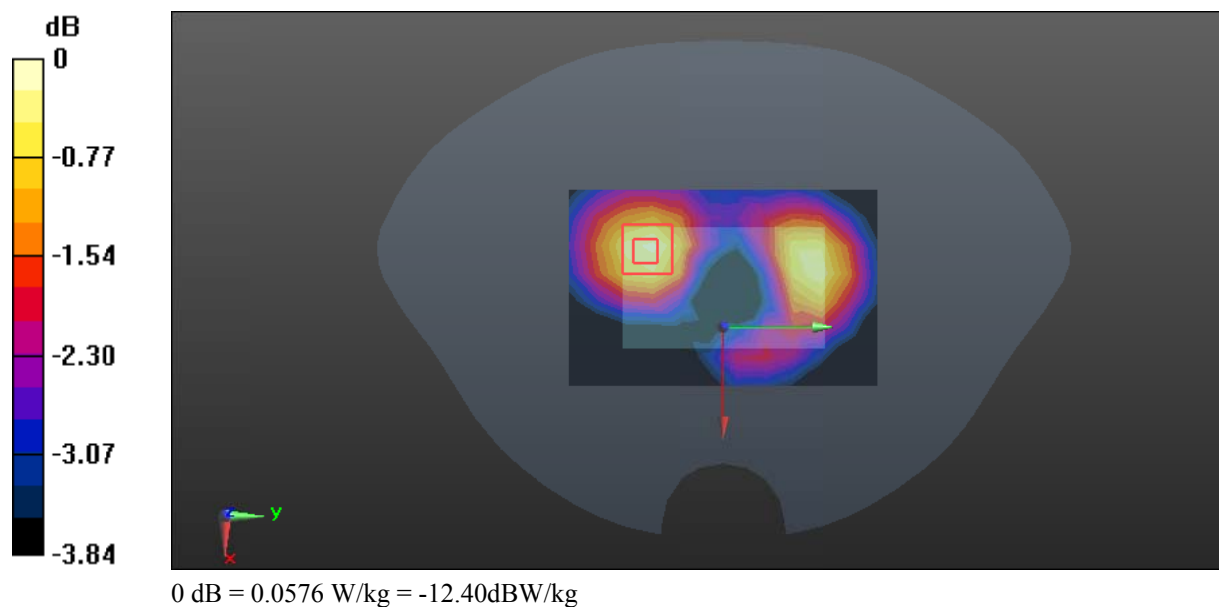

Test Plot 35#: LTE Band 41 1RB Mid Body Back With Belt Clip**DUT: Body worn camera; Type: C40; Serial: 2ONF-1;**

Communication System: Generic TDD-LTE (0); Frequency: 2593 MHz; Duty Cycle: 1:1.58
 Medium parameters used: $f = 2593$ MHz; $\sigma = 2.039$ S/m; $\epsilon_r = 40.113$; $\rho = 1000$ kg/m³;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(7.61, 6.94, 6.73) @ 2593 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x12x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.0745 W/kg


Zoom Scan (7x7x7) /Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.885 V/m; Power Drift = 0.12dB

Peak SAR (extrapolated) = 0.100 W/kg

SAR(1 g) = 0.061 W/kg; SAR(10 g) = 0.039 W/kg

Maximum value of SAR (measured) = 0.0727 W/kg

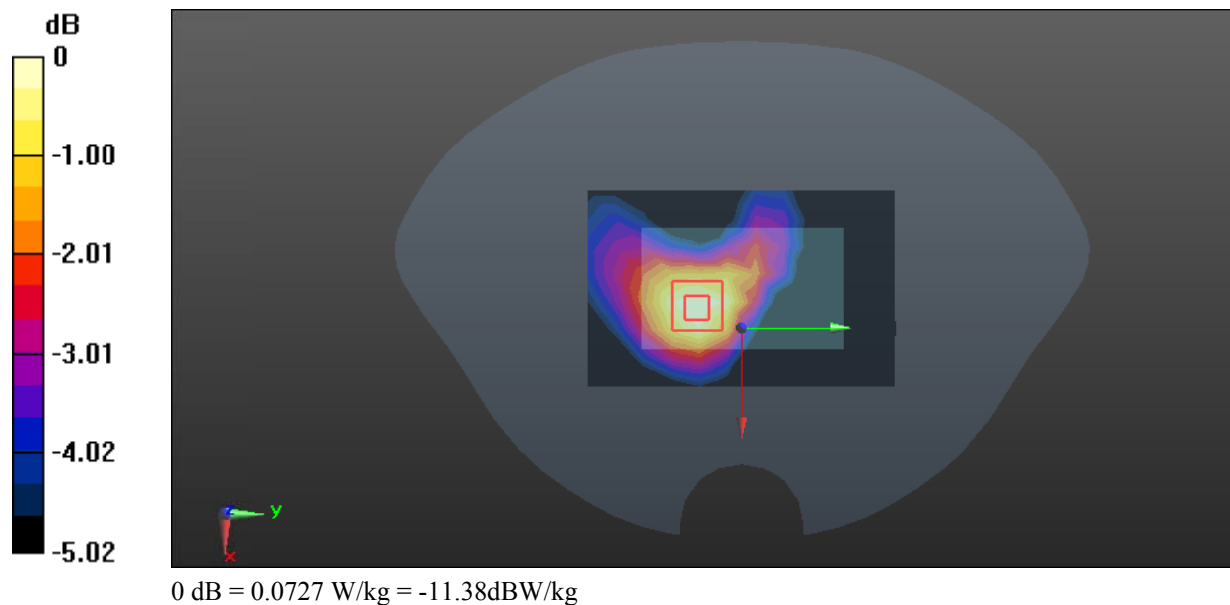

Test Plot 36#: LTE Band 41 1RB Mid Handheld Bottom**DUT: Body worn camera; Type: C40; Serial: 2ONF-1;**

Communication System: Generic TDD-LTE (0); Frequency: 2593 MHz; Duty Cycle: 1:1.58

Medium parameters used: $f = 2593$ MHz; $\sigma = 2.039$ S/m; $\epsilon_r = 40.113$; $\rho = 1000$ kg/m³;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(7.61, 6.94, 6.73) @ 2593 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x12x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 4.16 W/kg


Zoom Scan (7x7x7) /Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 17.82 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 10.9 W/kg

SAR(1 g) = 4.45 W/kg; SAR(10 g) = 1.68 W/kg

Maximum value of SAR (measured) = 6.58 W/kg

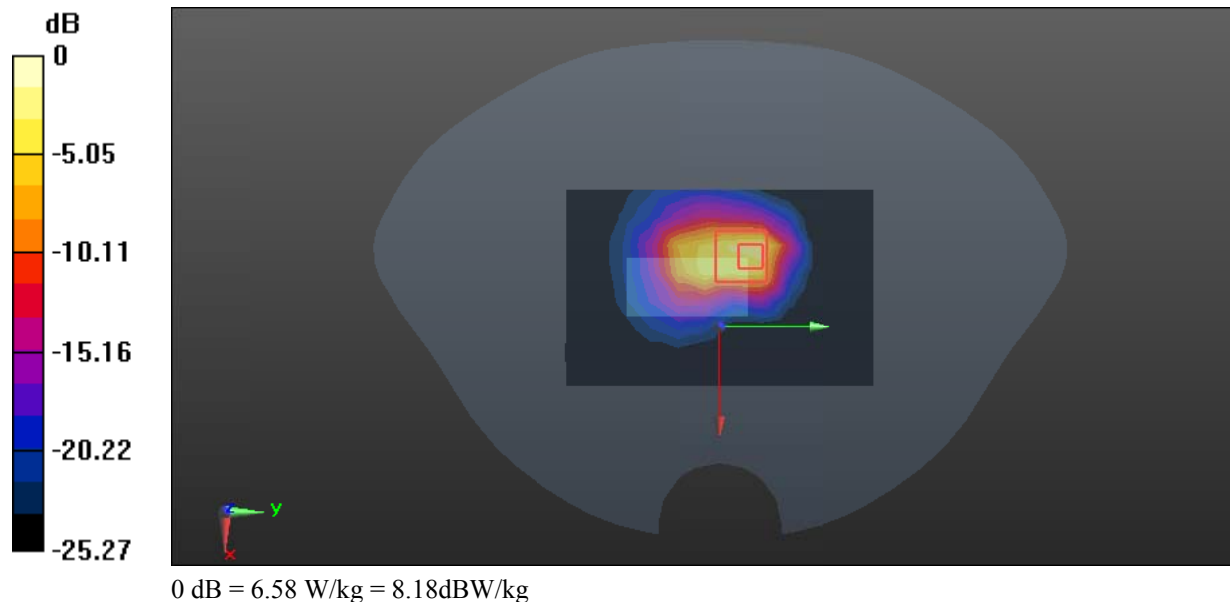

Test Plot 37#: WLAN 2.4G Mid Face Up**DUT: Body worn camera; Type: C40; Serial: 2ONF-1;**

Communication System: 802.11b (0); Frequency: 2437 MHz; Duty Cycle: 1:1.01
 Medium parameters used: $f = 2437$ MHz; $\sigma = 1.818$ S/m; $\epsilon_r = 40.518$; $\rho = 1000$ kg/m³ ;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(7.49, 6.81, 6.61) @ 2437 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x11x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.00854 W/kg


Zoom Scan (7x7x7) /Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 0.8150 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.0130 W/kg

SAR(1 g) = 0.0083 W/kg; SAR(10 g) = 0.00703 W/kg

Maximum value of SAR (measured) = 0.00932 W/kg

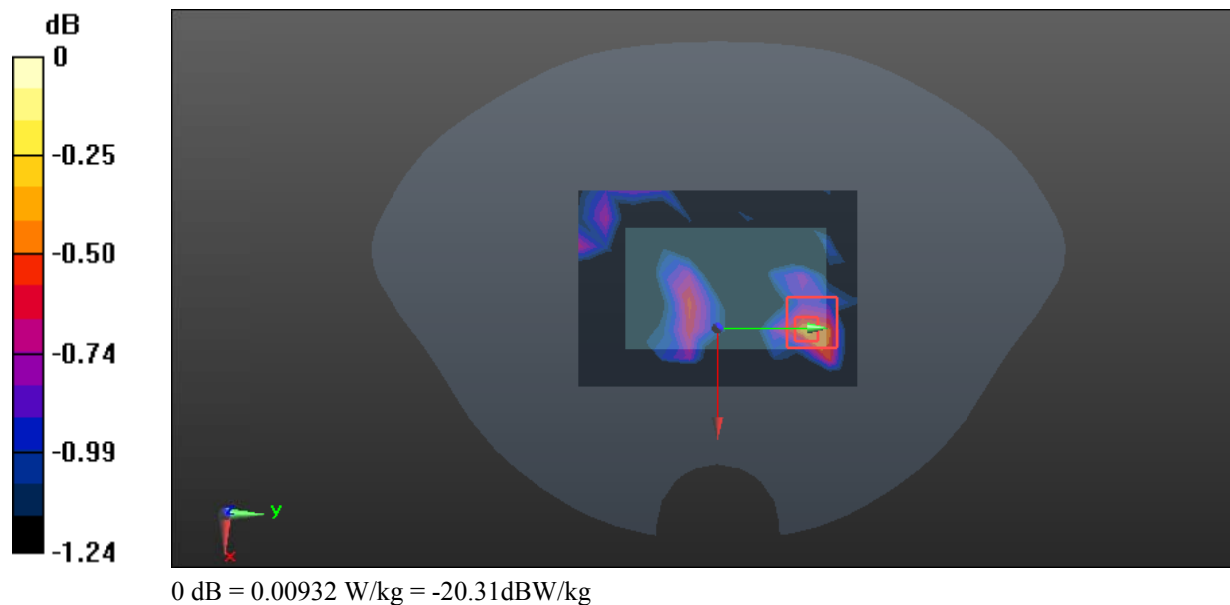

Test Plot 38#: WLAN 2.4G Mid Body Back With Belt Clip**DUT: Body worn camera; Type: C40; Serial: 2ONF-1;**

Communication System: 802.11b (0); Frequency: 2437 MHz; Duty Cycle: 1:1.01
 Medium parameters used: $f = 2437$ MHz; $\sigma = 1.818$ S/m; $\epsilon_r = 40.518$; $\rho = 1000$ kg/m³ ;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(7.49, 6.81, 6.61) @ 2437 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x11x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.0126 W/kg


Zoom Scan (7x7x7) /Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.499 V/m; Power Drift = 0.07dB

Peak SAR (extrapolated) = 0.0170 W/kg

SAR(1 g) = 0.012 W/kg; SAR(10 g) = 0.00944 W/kg

Maximum value of SAR (measured) = 0.0129 W/kg

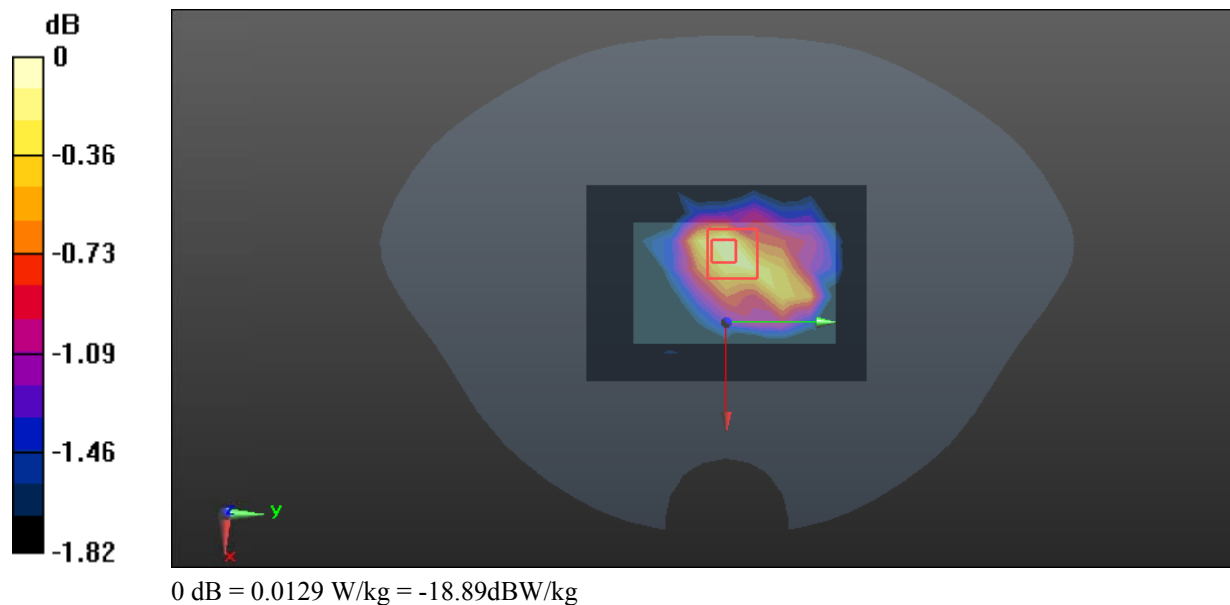

Test Plot 39#: WLAN 2.4G Mid Handheld Right**DUT: Body worn camera; Type: C40; Serial: 2ONF-1;**

Communication System: 802.11b (0); Frequency: 2437 MHz; Duty Cycle: 1:1.01
 Medium parameters used: $f = 2437$ MHz; $\sigma = 1.818$ S/m; $\epsilon_r = 40.518$; $\rho = 1000$ kg/m³ ;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(7.49, 6.81, 6.61) @ 2437 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (9x11x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.135 W/kg


Zoom Scan (7x7x7) /Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.703 V/m; Power Drift = 0.03dB

Peak SAR (extrapolated) = 0.316 W/kg

SAR(1 g) = 0.140 W/kg; SAR(10 g) = 0.066 W/kg

Maximum value of SAR (measured) = 0.185 W/kg

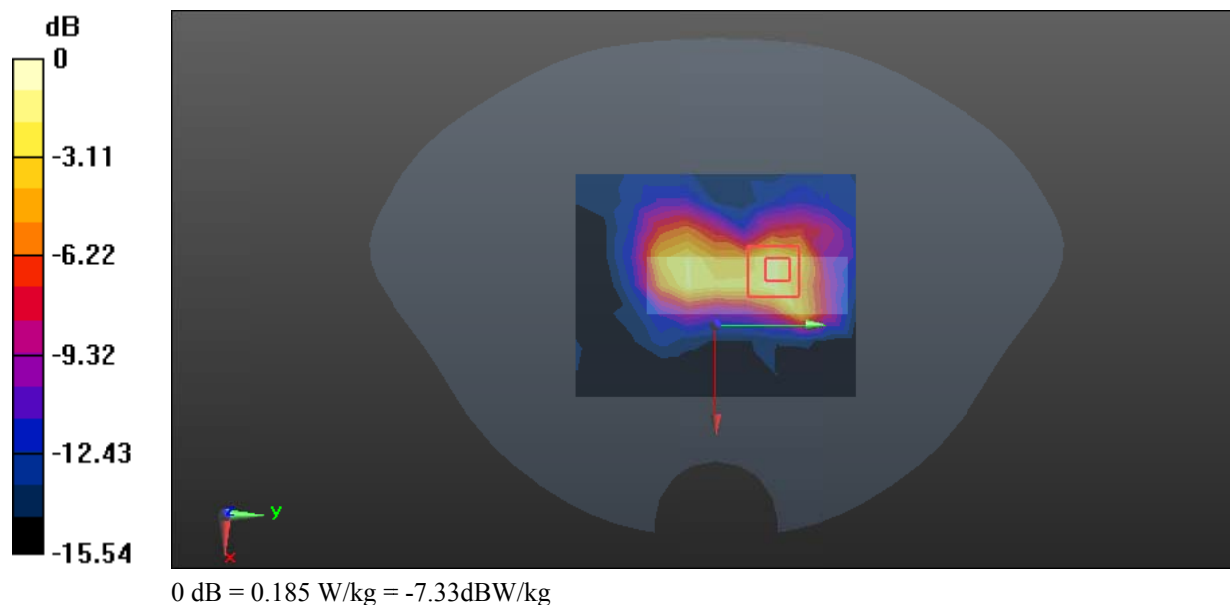

Test Plot 40#: 5.2G WLAN Mid Face Up**DUT: Body worn camera; Type: C40; Serial: 2ONF-1;**

Communication System: 802.11n20 (0); Frequency:5200MHz; Duty Cycle: 1:1.02
 Medium parameters used: $f = 5200$ MHz; $\sigma = 4.621$ S/m; $\epsilon_r = 36.98$; $\rho = 1000$ kg/m³ ;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(5.62, 5.1, 4.97) @ 5200 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (10x13x1):Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.257 W/kg


Zoom Scan (8x8x16) /Cube 0:Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 6.114 V/m; Power Drift =0.06dB

Peak SAR (extrapolated) = 0.384 W/kg

SAR(1 g) = 0.132 W/kg; SAR(10 g) = 0.059 W/kg

Maximum value of SAR (measured) = 0.255 W/kg

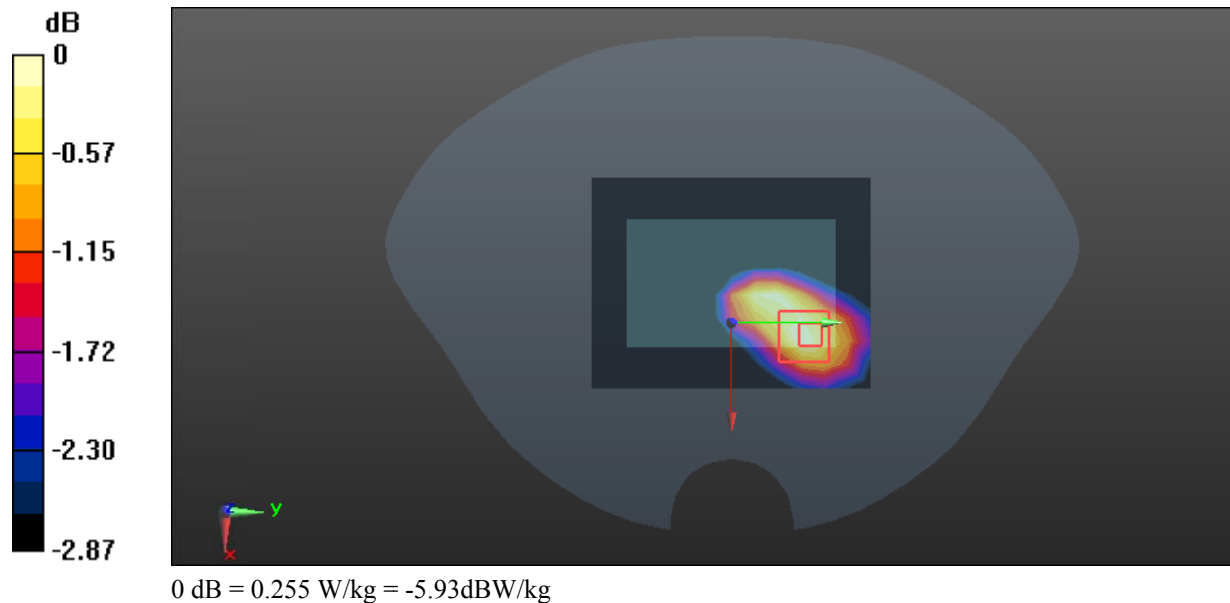

Test Plot 41#: 5.2G WLAN Mid Body Back With Belt Clip**DUT: Body worn camera; Type: C40; Serial: 2ONF-1;**

Communication System: 802.11n20 (0); Frequency:5200MHz; Duty Cycle: 1:1.02
 Medium parameters used: $f = 5200$ MHz; $\sigma = 4.621$ S/m; $\epsilon_r = 36.98$; $\rho = 1000$ kg/m³ ;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(5.62, 5.1, 4.97) @ 5200 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (10x13x1):Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.297 W/kg


Zoom Scan (8x8x16) /Cube 0:Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.365 V/m; Power Drift =0.20dB

Peak SAR (extrapolated) = 0.434 W/kg

SAR(1 g) = 0.155 W/kg; SAR(10 g) = 0.064 W/kg

Maximum value of SAR (measured) = 0.305 W/kg

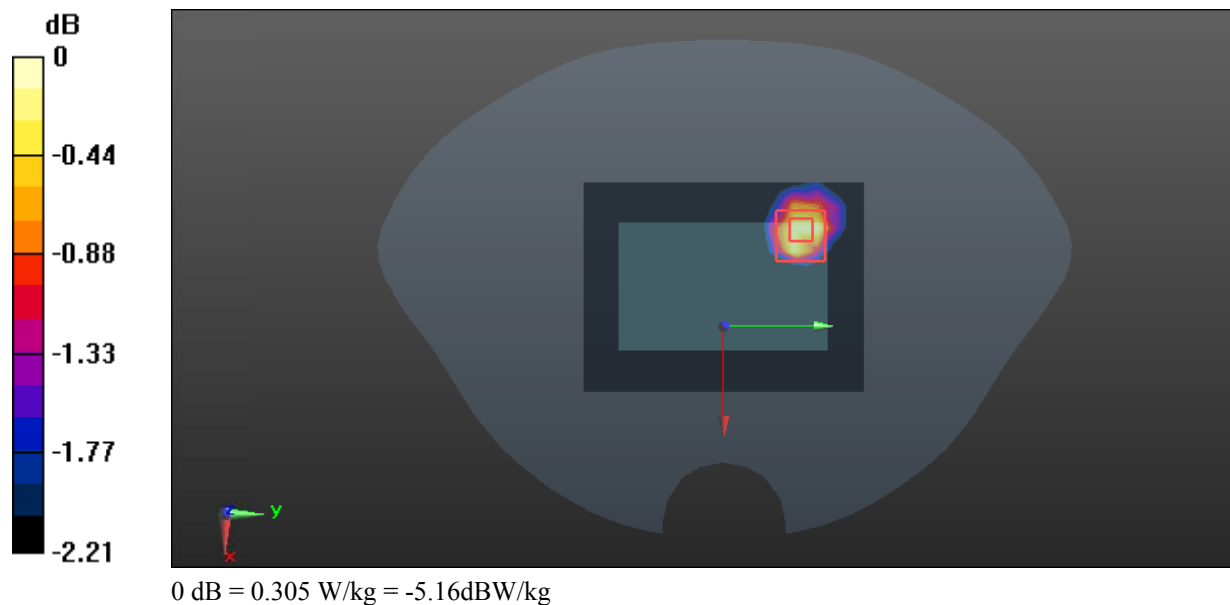

Test Plot 42#: 5.2G WLAN Mid Handheld Right**DUT: Body worn camera; Type: C40; Serial: 2ONF-1;**

Communication System: 802.11n20 (0); Frequency:5200MHz; Duty Cycle: 1:1.02
 Medium parameters used: $f = 5200$ MHz; $\sigma = 4.621$ S/m; $\epsilon_r = 36.98$; $\rho = 1000$ kg/m³ ;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(5.62, 5.1, 4.97) @ 5200 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (7x13x1):Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 6.33 W/kg


Zoom Scan (8x8x16) /Cube 0:Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 10.89 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 10.4 W/kg

SAR(1 g) = 3.22 W/kg; SAR(10 g) = 1.21 W/kg

Maximum value of SAR (measured) = 6.79 W/kg

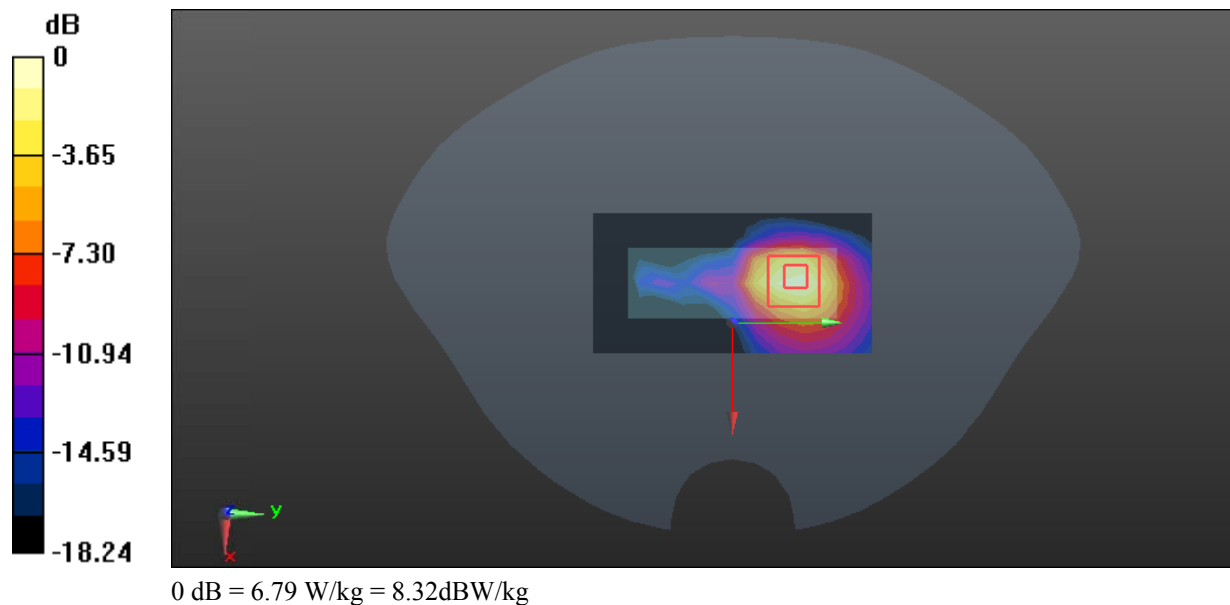

Test Plot 43#: 5.3G WLAN Mid Face Up**DUT: Body worn camera; Type: C40; Serial: 2ONF-1;**

Communication System: 802.11n20 (0); Frequency:5280MHz; Duty Cycle: 1:1.02
 Medium parameters used: $f = 5280$ MHz; $\sigma = 4.692$ S/m; $\epsilon_r = 36.793$; $\rho = 1000$ kg/m³ ;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(5.62, 5.1, 4.97) @ 5280 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (10x13x1):Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.197 W/kg


Zoom Scan (8x8x16) /Cube 0:Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 5.994 V/m; Power Drift =0.15dB

Peak SAR (extrapolated) = 0.255 W/kg

SAR(1 g) = 0.098 W/kg; SAR(10 g) = 0.042 W/kg

Maximum value of SAR (measured) = 0.201 W/kg

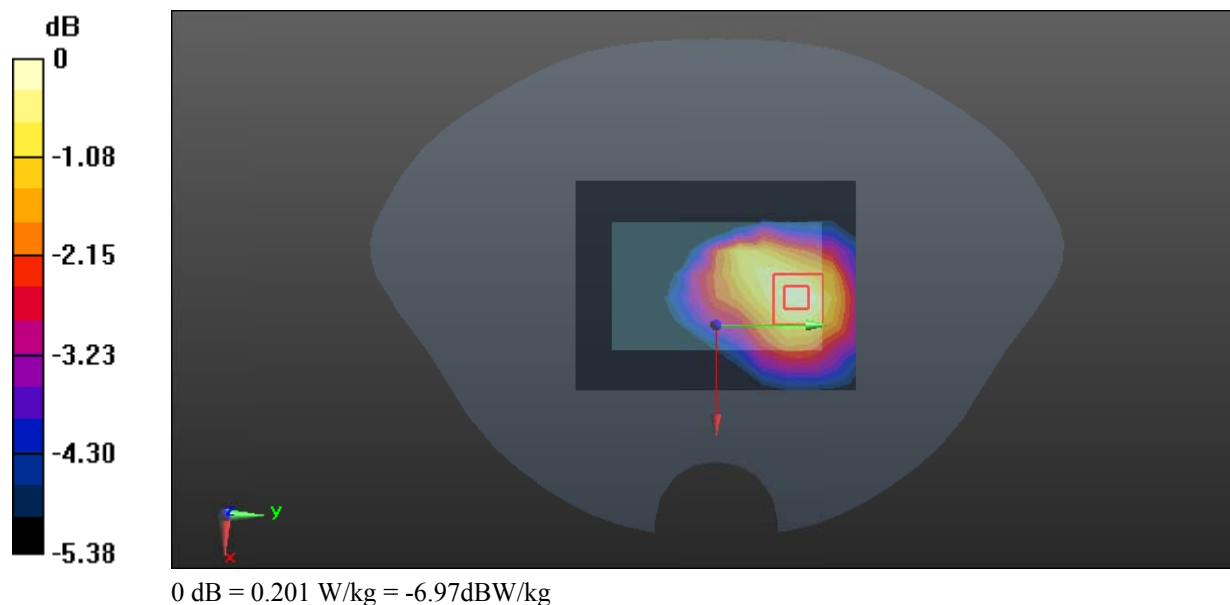

Test Plot 44#: 5.3G WLAN Mid Body Back With Belt Clip**DUT: Body worn camera; Type: C40; Serial: 2ONF-1;**

Communication System: 802.11n20 (0); Frequency:5280MHz; Duty Cycle: 1:1.02
 Medium parameters used: $f = 5280$ MHz; $\sigma = 4.692$ S/m; $\epsilon_r = 36.793$; $\rho = 1000$ kg/m³ ;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(5.62, 5.1, 4.97) @ 5280 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (10x13x1):Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.246 W/kg


Zoom Scan (8x8x16) /Cube 0:Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.585 V/m; Power Drift =0.15dB

Peak SAR (extrapolated) = 0.491 W/kg

SAR(1 g) = 0.117 W/kg; SAR(10 g) = 0.045 W/kg

Maximum value of SAR (measured) = 0.250 W/kg

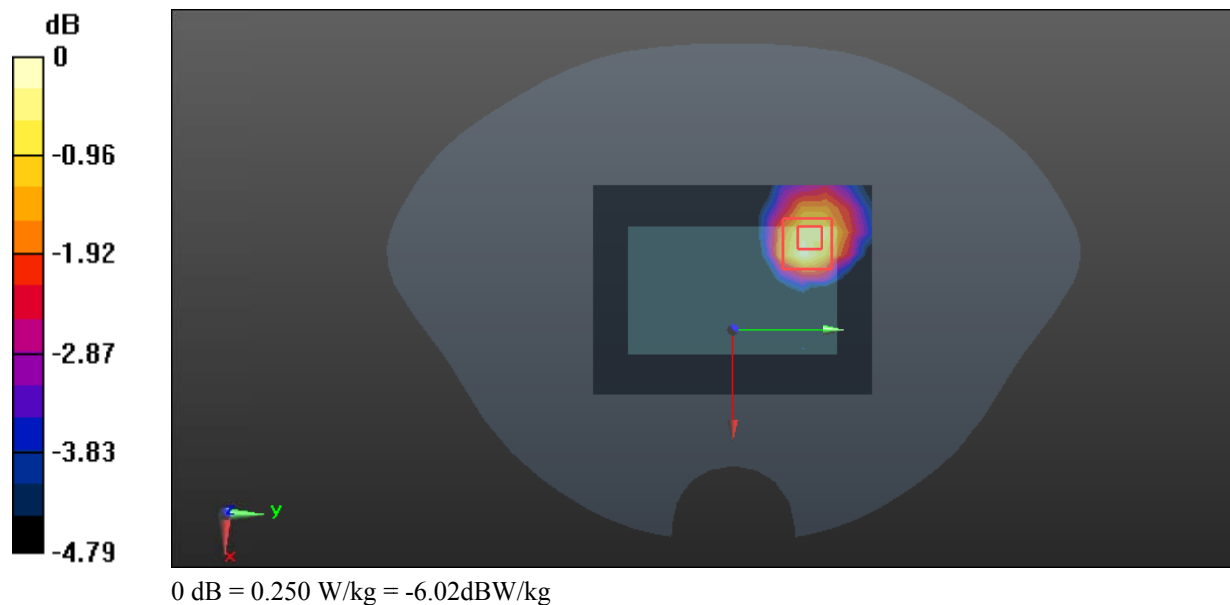

Test Plot 45#: 5.3G WLAN Mid Handheld Right**DUT: Body worn camera; Type: C40; Serial: 2ONF-1;**

Communication System: 802.11n20 (0); Frequency:5280MHz; Duty Cycle: 1:1.02
 Medium parameters used: $f = 5280$ MHz; $\sigma = 4.692$ S/m; $\epsilon_r = 36.793$; $\rho = 1000$ kg/m³ ;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(5.62, 5.1, 4.97) @ 5280 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (7x13x1):Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 4.14 W/kg


Zoom Scan (8x8x16) /Cube 0:Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 10.92 V/m; Power Drift =0.05dB

Peak SAR (extrapolated) = 7.45 W/kg

SAR(1 g) = 2.25 W/kg; SAR(10 g) = 0.855 W/kg

Maximum value of SAR (measured) = 4.82 W/kg

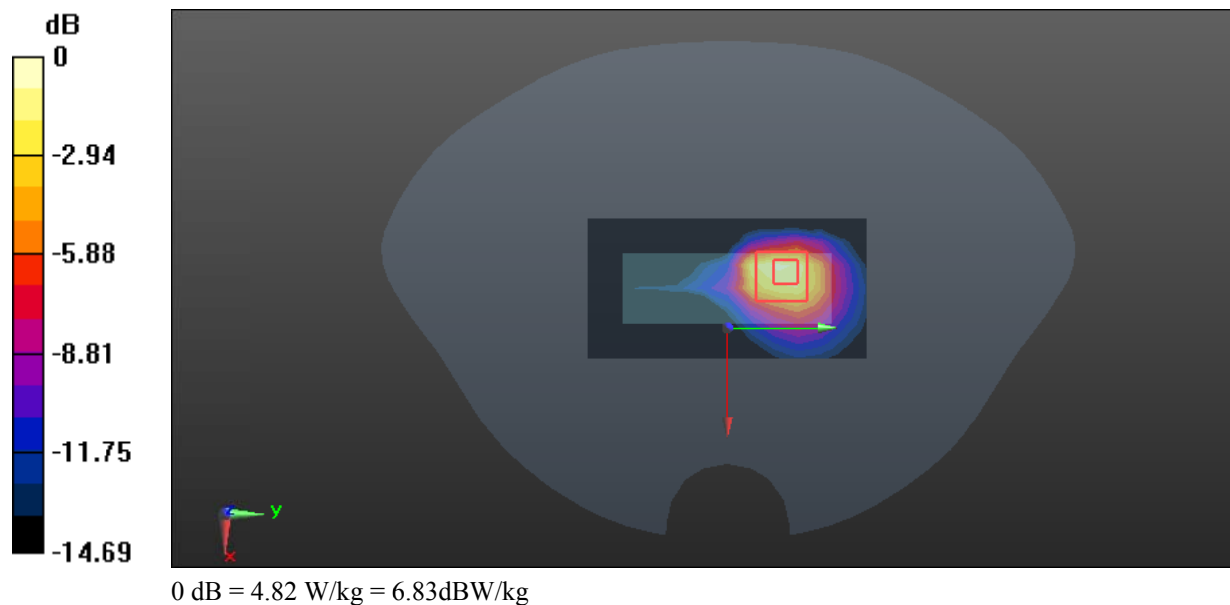

Test Plot 46#: 5.6G WLAN Mid Face Up**DUT: Body worn camera; Type: C40; Serial: 2ONF-1;**

Communication System: 802.11n40 (0); Frequency:5590MHz; Duty Cycle: 1:1.04
 Medium parameters used: $f = 5590$ MHz; $\sigma = 5.058$ S/m; $\epsilon_r = 36.054$; $\rho = 1000$ kg/m³ ;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(4.94, 4.48, 4.39) @ 5590 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (10x13x1):Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.0685 W/kg


Zoom Scan (8x8x16) /Cube 0:Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 1.970 V/m; Power Drift =0.14dB

Peak SAR (extrapolated) = 0.292 W/kg

SAR(1 g) = 0.024 W/kg; SAR(10 g) = 0.010 W/kg

Maximum value of SAR (measured) = 0.0686 W/kg

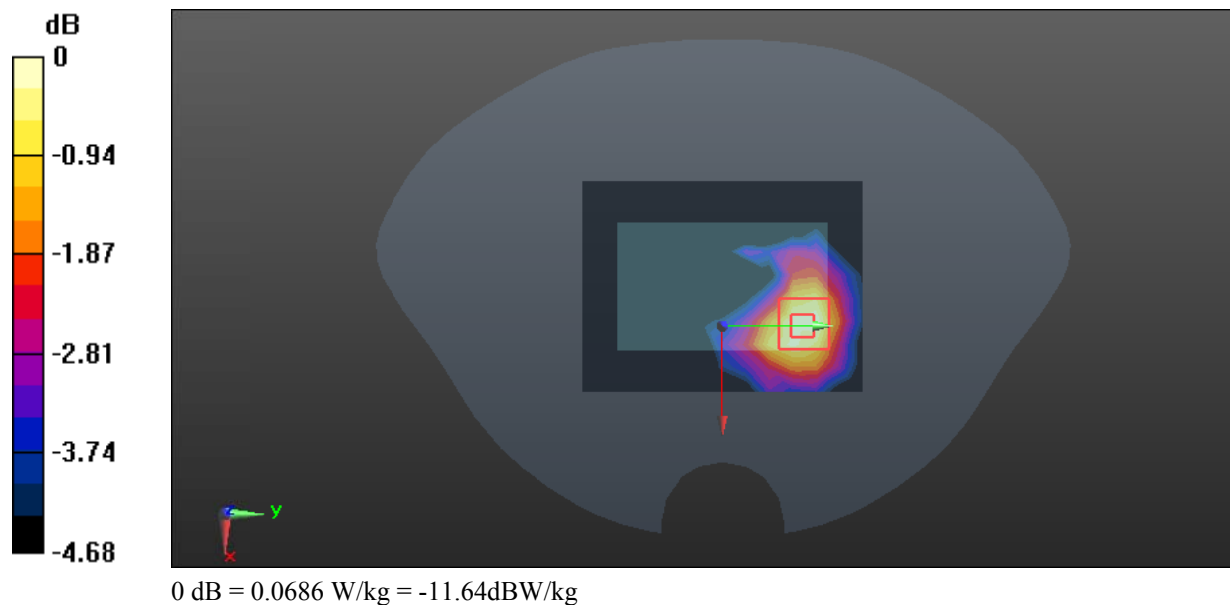

Test Plot 47#: 5.6G WLAN Mid Body Back With Belt Clip**DUT: Body worn camera; Type: C40; Serial: 2ONF-1;**

Communication System: 802.11n40 (0); Frequency:5590MHz; Duty Cycle: 1:1.04
 Medium parameters used: $f = 5590$ MHz; $\sigma = 5.058$ S/m; $\epsilon_r = 36.054$; $\rho = 1000$ kg/m³ ;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(4.94, 4.48, 4.39) @ 5590 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (10x13x1):Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.166 W/kg


Zoom Scan (8x8x16) /Cube 0:Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.772 V/m; Power Drift =0.19dB

Peak SAR (extrapolated) = 0.535 W/kg

SAR(1 g) = 0.064 W/kg; SAR(10 g) = 0.023 W/kg

Maximum value of SAR (measured) = 0.158 W/kg

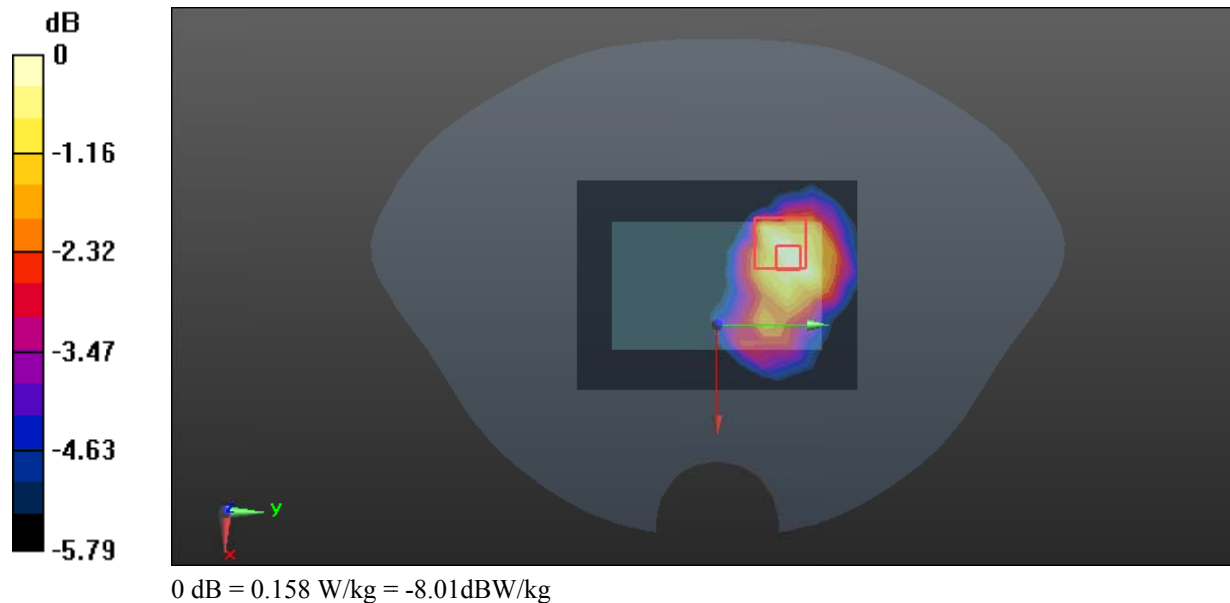

Test Plot 48#: 5.6G WLAN Mid Handheld Right**DUT: Body worn camera; Type: C40; Serial: 2ONF-1;**

Communication System: 802.11n40 (0); Frequency:5590MHz; Duty Cycle: 1:1.04
 Medium parameters used: $f = 5590$ MHz; $\sigma = 5.058$ S/m; $\epsilon_r = 36.054$; $\rho = 1000$ kg/m³ ;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(4.94, 4.48, 4.39) @ 5590 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (7x13x1):Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 3.12 W/kg


Zoom Scan (8x8x16) /Cube 0:Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 26.57 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 6.12 W/kg

SAR(1 g) = 1.66 W/kg; SAR(10 g) = 0.563 W/kg

Maximum value of SAR (measured) = 3.76 W/kg

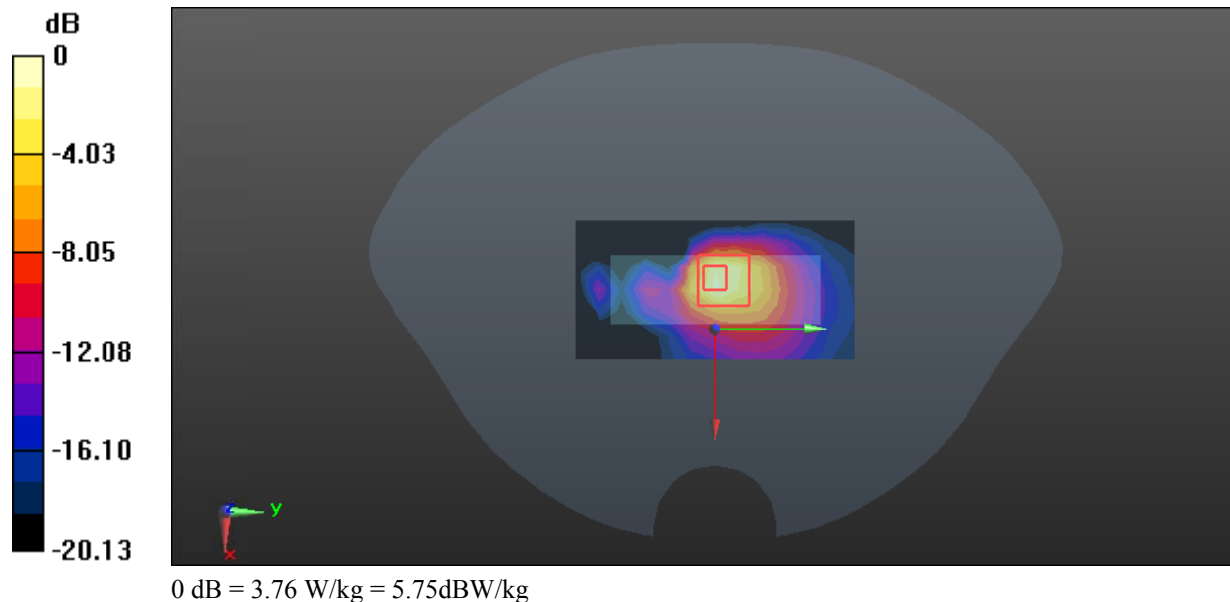

Test Plot 49#: 5.8G WLAN Low Face Up**DUT: Body worn camera; Type: C40; Serial: 2ONF-1;**

Communication System: 802.11n40 (0); Frequency:5755MHz; Duty Cycle: 1:1.04
 Medium parameters used: $f = 5755$ MHz; $\sigma = 5.269$ S/m; $\epsilon_r = 35.721$; $\rho = 1000$ kg/m³ ;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(5.04, 4.65, 4.62) @ 5755 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (10x13x1):Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.0640 W/kg


Zoom Scan (8x8x16) /Cube 0:Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 1.813 V/m; Power Drift =0.07dB

Peak SAR (extrapolated) = 0.291 W/kg

SAR(1 g) = 0.024 W/kg; SAR(10 g) = 0.00859 W/kg

Maximum value of SAR (measured) = 0.0687 W/kg

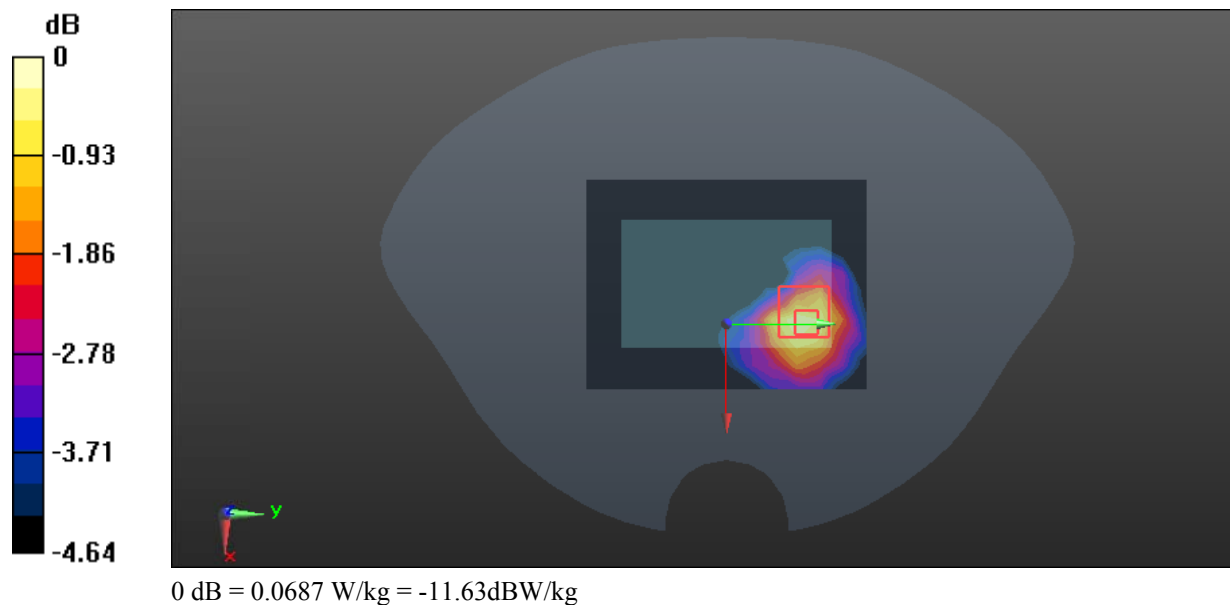

Test Plot 50#: 5.8G WLAN Low Body Back With Belt Clip**DUT: Body worn camera; Type: C40; Serial: 2ONF-1;**

Communication System: 802.11n40 (0); Frequency: 5755 MHz; Duty Cycle: 1:1.04
 Medium parameters used: $f = 5755$ MHz; $\sigma = 5.269$ S/m; $\epsilon_r = 35.721$; $\rho = 1000$ kg/m³ ;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(5.04, 4.65, 4.62) @ 5755 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (10x13x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.136 W/kg


Zoom Scan (8x8x16) /Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.828 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.558 W/kg

SAR(1 g) = 0.050 W/kg; SAR(10 g) = 0.019 W/kg

Maximum value of SAR (measured) = 0.138 W/kg

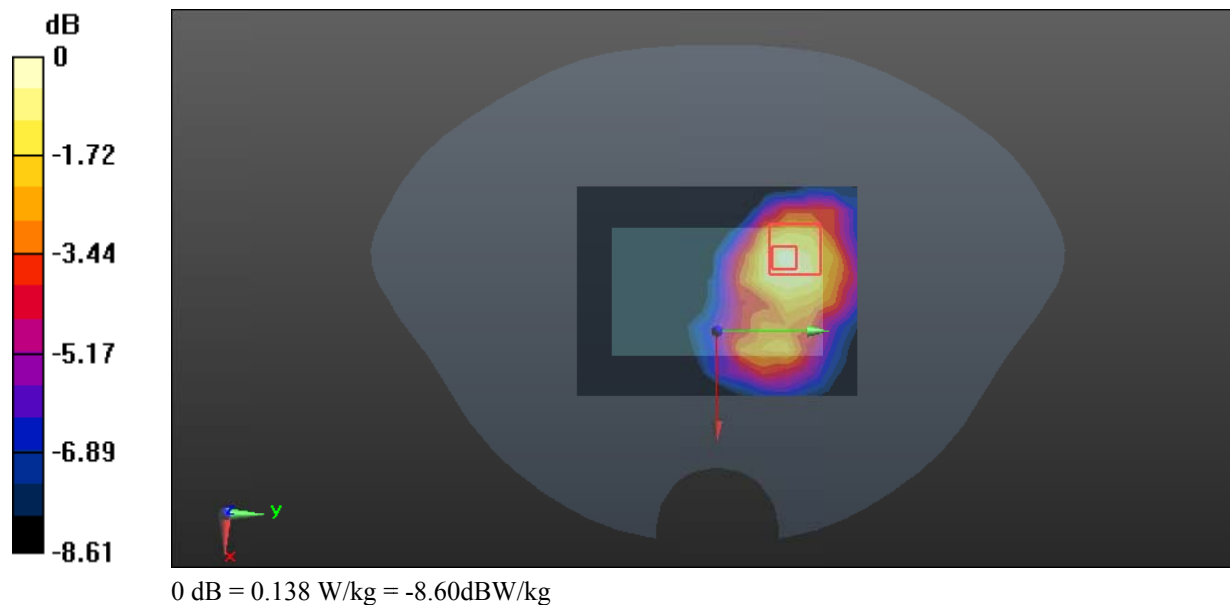

Test Plot 51#: 5.8G WLAN Low Handheld Right**DUT: Body worn camera; Type: C40; Serial: 2ONF-1;**

Communication System: 802.11n40 (0); Frequency: 5755 MHz; Duty Cycle: 1:1.04
 Medium parameters used: $f = 5755$ MHz; $\sigma = 5.269$ S/m; $\epsilon_r = 35.721$; $\rho = 1000$ kg/m³ ;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(5.04, 4.65, 4.62) @ 5755 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (7x13x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 2.92 W/kg

Zoom Scan (8x8x16) /Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 26.04 V/m; Power Drift = 0.09dB

Peak SAR (extrapolated) = 5.78 W/kg

SAR(1 g) = 1.58 W/kg; SAR(10 g) = 0.526 W/kg

Maximum value of SAR (measured) = 3.73 W/kg

