


PCB Antenna Specification


Summary

Central Frequency	2450	MHz
Bandwidth	120 (Min.)	MHz
Peak Gain	-1.2	dBi
Impedance	50	Ohm
Operating Temperature	-40~+85	°C

Antenna Photo

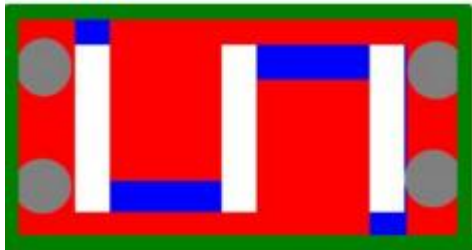

Horizontal: 2400 MHz 2450 MHz 2500 MHz
Power (dBm)
Max: 0 Min: -40 Scale: 5/div

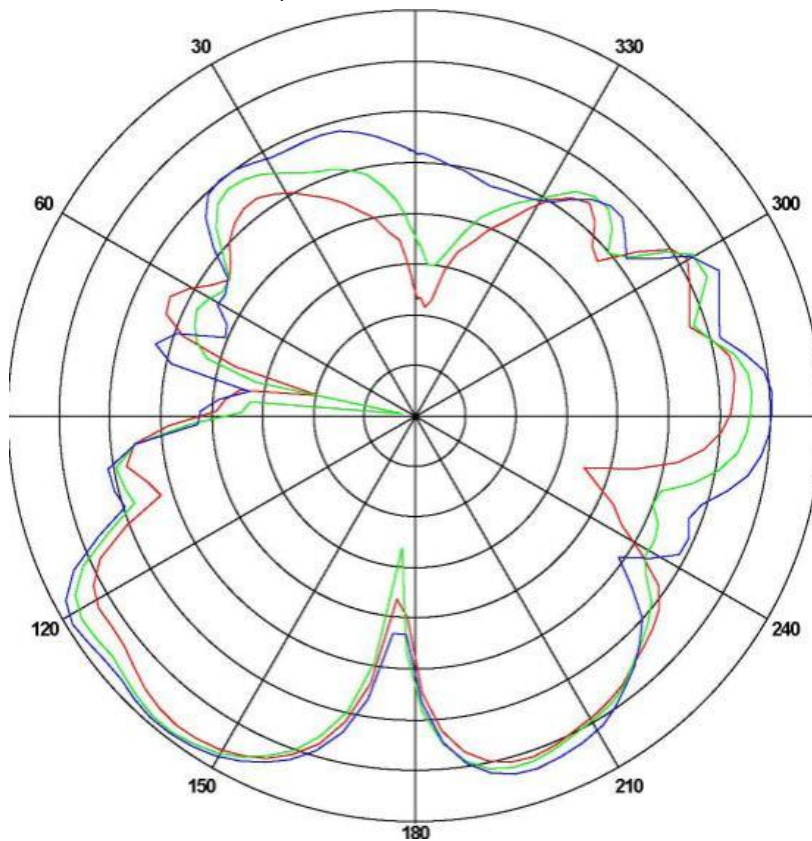


Frequency (MHz)	Gain(dB)		
	Max	Min	Avg
2400	-1.26174	-30.0801	-7.18716
2450	-0.765802	-36.5604	-7.48023
2500	-0.585582	-22.0315	-6.59127

Vertical: 2400 MHz 2450 MHz 2500 MHz

Power (dBm)

Max: 0 Min: -30 Scale: 5/div

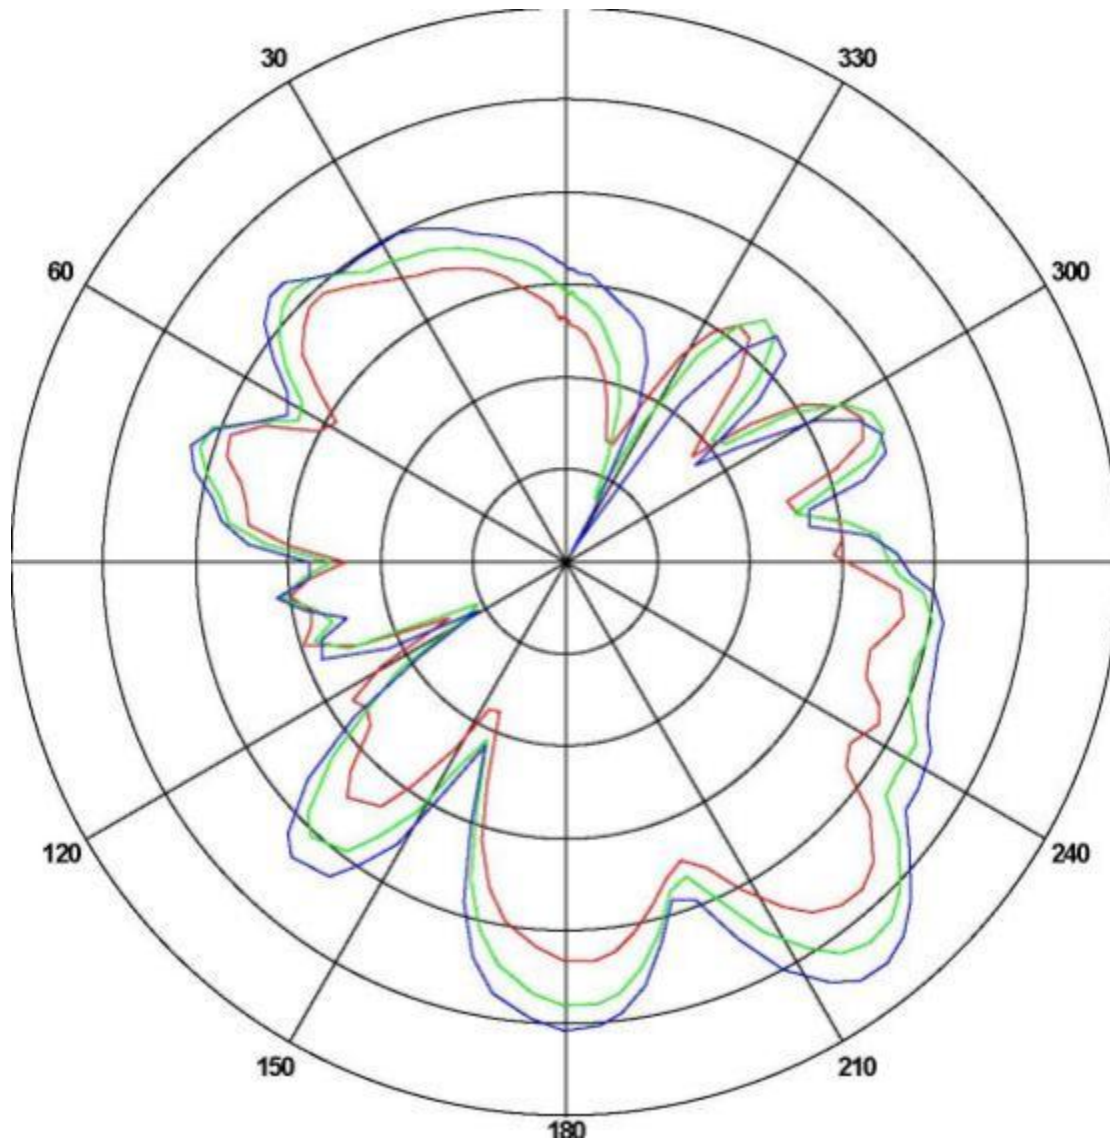


Frequency (MHz)	Gain(dB)		
	Max	Min	Avg
2400	-5.2537	-22.1424	-12.4294
2450	-2.4652	-24.5837	-10.4702
2500	-1.86120	-29.5214	-9.20432


Return Loss



The Environment of Antenna Radiation Pattern

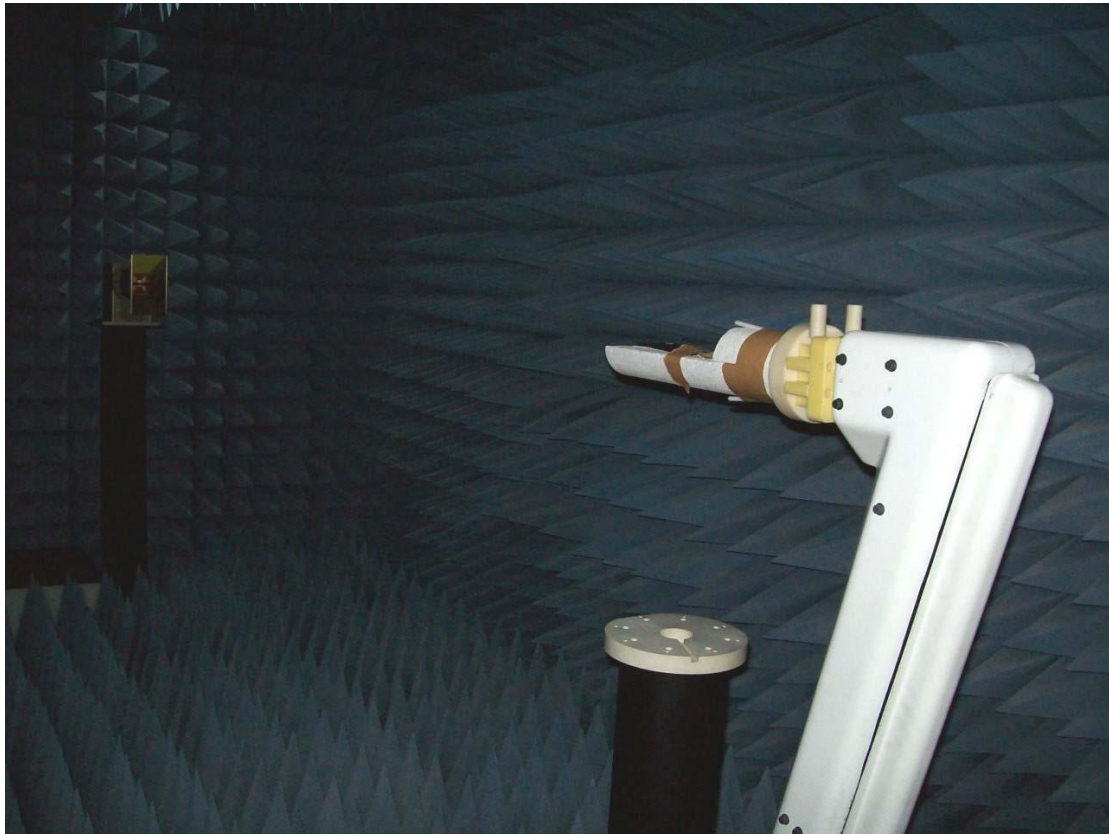


3D radiation pattern diagram

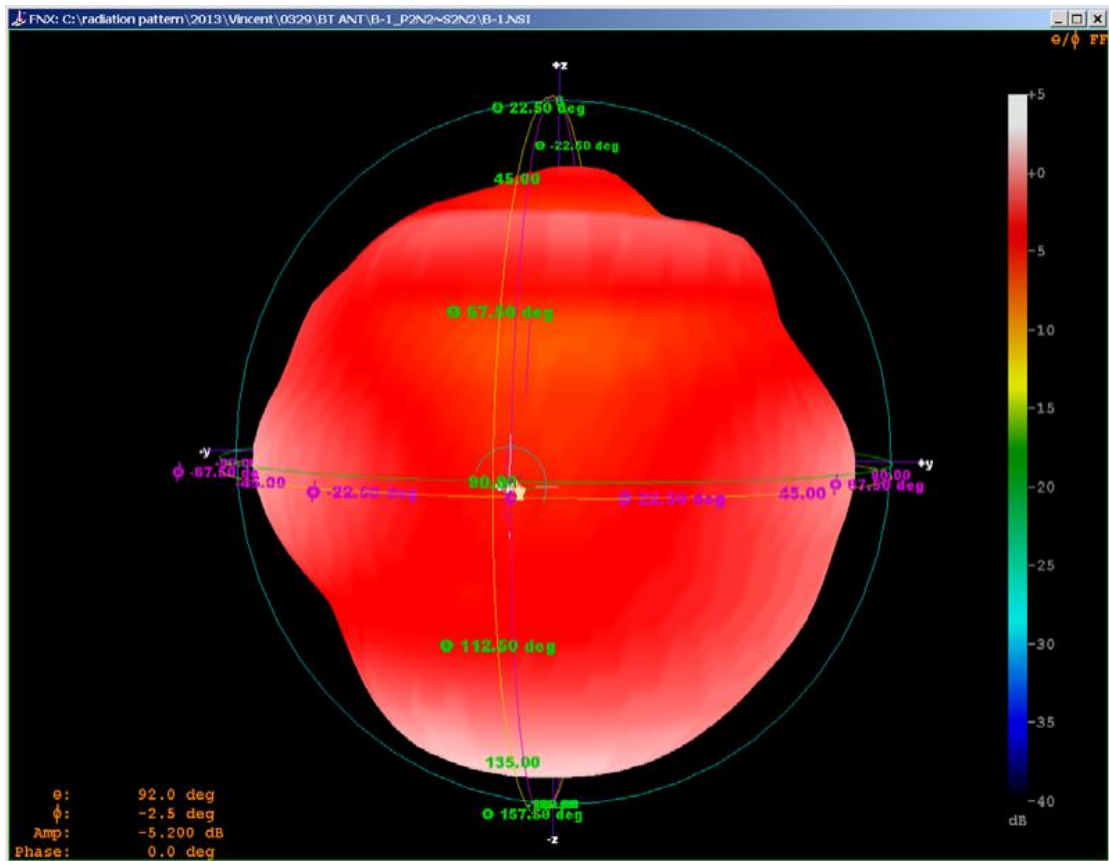

XY-plane

Far-field Power Distribution(H+V) on X-Y Plane


Plot Peak Gain(H+V)= 1.35 dBi; Plot AvgGain(H+V)= -0.48dBi @2.44000 GHz

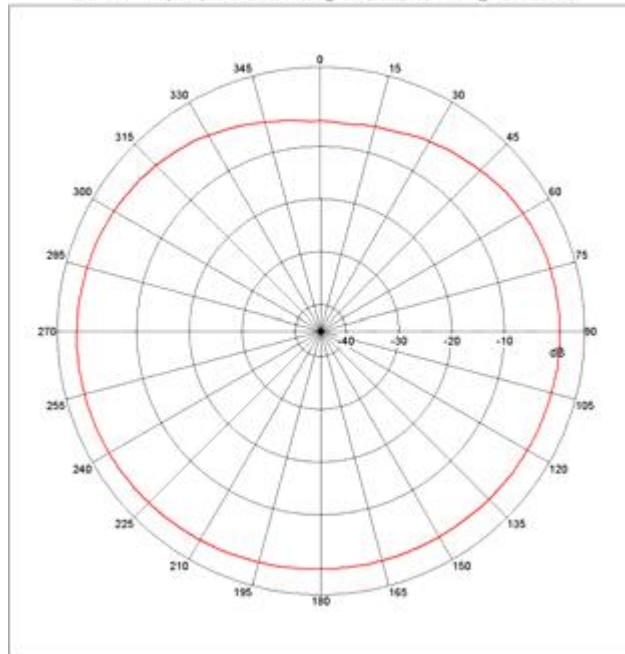

XZ-plane

Far-field Power Distribution(H+V) on X-Z Plane

Plot Peak Gain(H+V)= 1.68 dBi; Plot AvgGain(H+V)= -3.83dBi @2.44000 GHz

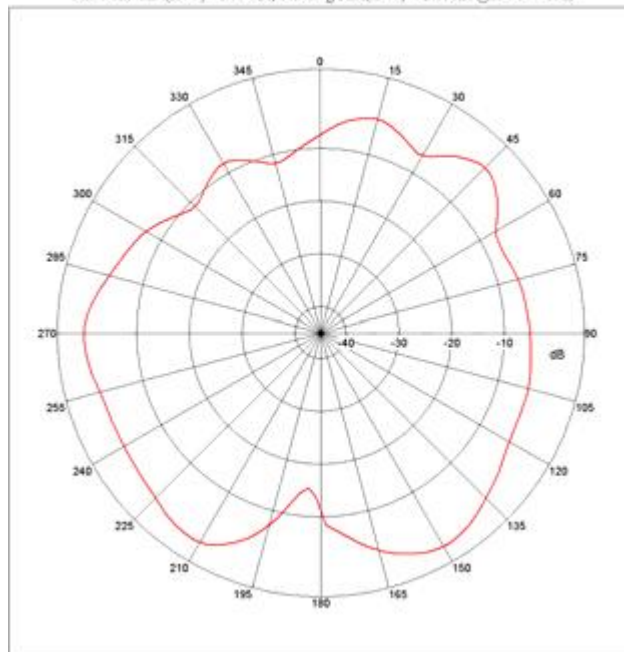

YZ-plane

Far-field Power Distribution(H+V) on Y-Z Plane
Plot Peak Gain(H+V)= 1.11 dBi; Plot AvgGain(H+V)= -2.99dBi @2.44000 GHz

