

深圳市三盛创电子科技有限公司

Shenzhen Sansheng Chuang electronic Technology Co., LTD

承 認 書 (specification)

客 戶:
CUSTOMER: 中立冠达【深圳】智能有限公司

客 戶 料 號:
CUST P/N: ZLGD-A1-0326

三盛创 料 號:
FINE P/N: I40-6.5uH 单线圈 0.08*24P*2P*11TS

產 品 型 號:
DESC: Φ 40MMX5.3MMX0.8MM 开槽

日 期:
DATE: 2024.05.13

版 本:
Version: A.0

擬制 PREPARED BY	審核 CHECKED BY	批准 APPROVED BY	客戶承認 CUSTOMER APPROVE
郭柳	安帅印	安帅印	

深圳市三盛创电子科技有限公司

Shenzhen Sansheng Chuang electronic Technology Co., LTD

工廠地址: 深圳市光明区玉塘街道玉律社区大洋一路 19 号 2 楼

Factory address: 2nd Floor, No. 19, Dayang Road, Yulu Community,
Yutang Street, Guangming District, Shenzhen

Version Change History

SPECIFICATION

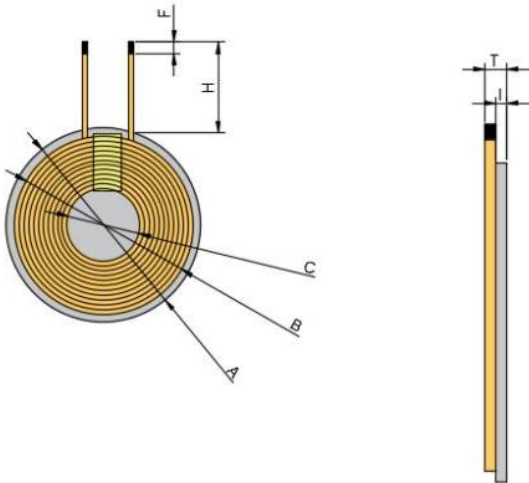
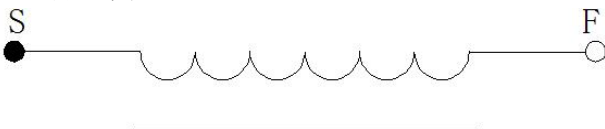
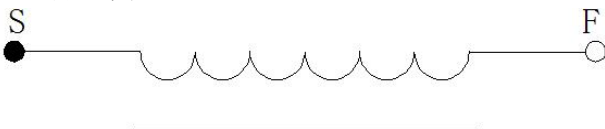
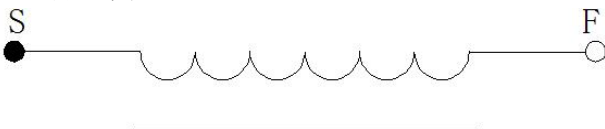
產品型號:

Φ 20.5x38-7.7uH-0.08*24P-5mm

版本

客戶 CUST:

中立冠达

DESC			Rev: A.0	客户料号 CUST P/N:	ZLGD-A1-0326																																																																																												
一、尺寸 DIMENSION:(mm)  <tr><td>A</td><td>40±0.5</td></tr> <tr><td>B</td><td>38±1.0</td></tr> <tr><td>C</td><td>20.5±0.5</td></tr> <tr><td>F</td><td>3±1.0</td></tr> <tr><td>H</td><td>5±1.5</td></tr> <tr><td>I</td><td>0.8±0.1</td></tr> <tr><td>T</td><td>1.8±0.2</td></tr> <tr><td></td><td></td></tr> <tr><td></td><td></td></tr> <tr><td colspan="4" rowspan="10"> 二、原理图 SCHEMATIC DIAGRAM:  <tr><td colspan="2" rowspan="9"> 注: 1.Cross out wire; 2.Wrap 5mm(ref) high temperature adhesive paper around the cable outlet 1-2Ts; 3.线 The coil is attached to the circular hard magnetic disc with groove, the magnetic disc size is 40 ±0.5mm, and the inner hole 5.3mm, The thickness is 0.8±0.1mm。 </td></tr><tr></tr><tr></tr><tr></tr><tr></tr><tr></tr><tr></tr><tr></tr><tr></tr><tr><td colspan="4">三、绕线参数 Winding Specification:</td></tr><tr><td>序号 NO.</td><td colspan="2">端子 TERMINAL</td><td>线径 WIRE</td><td>圈数 Turns</td><td>绕线方向 Winding Direction</td></tr><tr><td>1</td><td>S</td><td>F</td><td>热风线 0.08*24P</td><td>11Ts</td><td>CCW</td></tr><tr><td colspan="6">四、电气特性 ELECTRICAL CHARACTERISTICS:</td></tr><tr><td colspan="6">温度 TEMPERATURE:25±10°C, 湿度 RELATIVE HUMIDITY:65±20%</td></tr><tr><td>序号 NO.</td><td>项目 ITEM</td><td>端子 TERMINAL</td><td>标准 SPECIFICATION</td><td>测试条件 TEST FREQUENCY</td><td>测试仪器 TEST EQUIPMENTS</td></tr><tr><td>1</td><td>IND.</td><td>S-F</td><td>4.8uH ±10%单独线圈</td><td>100KHz/1.0V</td><td>LCZ METER 1062B</td></tr><tr><td>2</td><td>IND.</td><td>S-F</td><td>7.7uH ±10%加磁片</td><td>100KHz/1.0V</td><td>LCZ METER 1062B</td></tr><tr><td>3</td><td>DCR</td><td>S-F</td><td>≤99m Ω</td><td>100KHz/1.0V</td><td>LCZ METER 502B</td></tr><tr><td>4</td><td>Q</td><td>S-F</td><td>≥40</td><td>100KHz/1.0V</td><td>LCZ METER 502B</td></tr><tr><td colspan="3">拟制/日期 PREPARED BY/DATE</td><td colspan="3">审核/日期 CHECKED BY/DATE</td></tr><tr><td colspan="3">郭柳 2024.05.13</td><td colspan="3">安帅印 2024.05.13</td></tr></td></tr>				A	40±0.5	B	38±1.0	C	20.5±0.5	F	3±1.0	H	5±1.5	I	0.8±0.1	T	1.8±0.2					二、原理图 SCHEMATIC DIAGRAM:  <tr><td colspan="2" rowspan="9"> 注: 1.Cross out wire; 2.Wrap 5mm(ref) high temperature adhesive paper around the cable outlet 1-2Ts; 3.线 The coil is attached to the circular hard magnetic disc with groove, the magnetic disc size is 40 ±0.5mm, and the inner hole 5.3mm, The thickness is 0.8±0.1mm。 </td></tr> <tr></tr> <tr></tr> <tr></tr> <tr></tr> <tr></tr> <tr></tr> <tr></tr> <tr></tr> <tr><td colspan="4">三、绕线参数 Winding Specification:</td></tr> <tr><td>序号 NO.</td><td colspan="2">端子 TERMINAL</td><td>线径 WIRE</td><td>圈数 Turns</td><td>绕线方向 Winding Direction</td></tr> <tr><td>1</td><td>S</td><td>F</td><td>热风线 0.08*24P</td><td>11Ts</td><td>CCW</td></tr> <tr><td colspan="6">四、电气特性 ELECTRICAL CHARACTERISTICS:</td></tr> <tr><td colspan="6">温度 TEMPERATURE:25±10°C, 湿度 RELATIVE HUMIDITY:65±20%</td></tr> <tr><td>序号 NO.</td><td>项目 ITEM</td><td>端子 TERMINAL</td><td>标准 SPECIFICATION</td><td>测试条件 TEST FREQUENCY</td><td>测试仪器 TEST EQUIPMENTS</td></tr> <tr><td>1</td><td>IND.</td><td>S-F</td><td>4.8uH ±10%单独线圈</td><td>100KHz/1.0V</td><td>LCZ METER 1062B</td></tr> <tr><td>2</td><td>IND.</td><td>S-F</td><td>7.7uH ±10%加磁片</td><td>100KHz/1.0V</td><td>LCZ METER 1062B</td></tr> <tr><td>3</td><td>DCR</td><td>S-F</td><td>≤99m Ω</td><td>100KHz/1.0V</td><td>LCZ METER 502B</td></tr> <tr><td>4</td><td>Q</td><td>S-F</td><td>≥40</td><td>100KHz/1.0V</td><td>LCZ METER 502B</td></tr> <tr><td colspan="3">拟制/日期 PREPARED BY/DATE</td><td colspan="3">审核/日期 CHECKED BY/DATE</td></tr> <tr><td colspan="3">郭柳 2024.05.13</td><td colspan="3">安帅印 2024.05.13</td></tr>				注: 1.Cross out wire; 2.Wrap 5mm(ref) high temperature adhesive paper around the cable outlet 1-2Ts; 3.线 The coil is attached to the circular hard magnetic disc with groove, the magnetic disc size is 40 ±0.5mm, and the inner hole 5.3mm, The thickness is 0.8±0.1mm。		三、绕线参数 Winding Specification:				序号 NO.	端子 TERMINAL		线径 WIRE	圈数 Turns	绕线方向 Winding Direction	1	S	F	热风线 0.08*24P	11Ts	CCW	四、电气特性 ELECTRICAL CHARACTERISTICS:						温度 TEMPERATURE:25±10°C, 湿度 RELATIVE HUMIDITY:65±20%						序号 NO.	项目 ITEM	端子 TERMINAL	标准 SPECIFICATION	测试条件 TEST FREQUENCY	测试仪器 TEST EQUIPMENTS	1	IND.	S-F	4.8uH ±10%单独线圈	100KHz/1.0V	LCZ METER 1062B	2	IND.	S-F	7.7uH ±10%加磁片	100KHz/1.0V	LCZ METER 1062B	3	DCR	S-F	≤99m Ω	100KHz/1.0V	LCZ METER 502B	4	Q	S-F	≥40	100KHz/1.0V	LCZ METER 502B	拟制/日期 PREPARED BY/DATE			审核/日期 CHECKED BY/DATE			郭柳 2024.05.13			安帅印 2024.05.13		
				A	40±0.5																																																																																												
				B	38±1.0																																																																																												
				C	20.5±0.5																																																																																												
				F	3±1.0																																																																																												
				H	5±1.5																																																																																												
				I	0.8±0.1																																																																																												
				T	1.8±0.2																																																																																												
二、原理图 SCHEMATIC DIAGRAM:  <tr><td colspan="2" rowspan="9"> 注: 1.Cross out wire; 2.Wrap 5mm(ref) high temperature adhesive paper around the cable outlet 1-2Ts; 3.线 The coil is attached to the circular hard magnetic disc with groove, the magnetic disc size is 40 ±0.5mm, and the inner hole 5.3mm, The thickness is 0.8±0.1mm。 </td></tr> <tr></tr> <tr></tr> <tr></tr> <tr></tr> <tr></tr> <tr></tr> <tr></tr> <tr></tr> <tr><td colspan="4">三、绕线参数 Winding Specification:</td></tr> <tr><td>序号 NO.</td><td colspan="2">端子 TERMINAL</td><td>线径 WIRE</td><td>圈数 Turns</td><td>绕线方向 Winding Direction</td></tr> <tr><td>1</td><td>S</td><td>F</td><td>热风线 0.08*24P</td><td>11Ts</td><td>CCW</td></tr> <tr><td colspan="6">四、电气特性 ELECTRICAL CHARACTERISTICS:</td></tr> <tr><td colspan="6">温度 TEMPERATURE:25±10°C, 湿度 RELATIVE HUMIDITY:65±20%</td></tr> <tr><td>序号 NO.</td><td>项目 ITEM</td><td>端子 TERMINAL</td><td>标准 SPECIFICATION</td><td>测试条件 TEST FREQUENCY</td><td>测试仪器 TEST EQUIPMENTS</td></tr> <tr><td>1</td><td>IND.</td><td>S-F</td><td>4.8uH ±10%单独线圈</td><td>100KHz/1.0V</td><td>LCZ METER 1062B</td></tr> <tr><td>2</td><td>IND.</td><td>S-F</td><td>7.7uH ±10%加磁片</td><td>100KHz/1.0V</td><td>LCZ METER 1062B</td></tr> <tr><td>3</td><td>DCR</td><td>S-F</td><td>≤99m Ω</td><td>100KHz/1.0V</td><td>LCZ METER 502B</td></tr> <tr><td>4</td><td>Q</td><td>S-F</td><td>≥40</td><td>100KHz/1.0V</td><td>LCZ METER 502B</td></tr> <tr><td colspan="3">拟制/日期 PREPARED BY/DATE</td><td colspan="3">审核/日期 CHECKED BY/DATE</td></tr> <tr><td colspan="3">郭柳 2024.05.13</td><td colspan="3">安帅印 2024.05.13</td></tr>				注: 1.Cross out wire; 2.Wrap 5mm(ref) high temperature adhesive paper around the cable outlet 1-2Ts; 3.线 The coil is attached to the circular hard magnetic disc with groove, the magnetic disc size is 40 ±0.5mm, and the inner hole 5.3mm, The thickness is 0.8±0.1mm。		三、绕线参数 Winding Specification:				序号 NO.	端子 TERMINAL		线径 WIRE	圈数 Turns	绕线方向 Winding Direction	1	S	F	热风线 0.08*24P	11Ts	CCW	四、电气特性 ELECTRICAL CHARACTERISTICS:						温度 TEMPERATURE:25±10°C, 湿度 RELATIVE HUMIDITY:65±20%						序号 NO.	项目 ITEM	端子 TERMINAL	标准 SPECIFICATION	测试条件 TEST FREQUENCY	测试仪器 TEST EQUIPMENTS	1	IND.	S-F	4.8uH ±10%单独线圈	100KHz/1.0V	LCZ METER 1062B	2	IND.	S-F	7.7uH ±10%加磁片	100KHz/1.0V	LCZ METER 1062B	3	DCR	S-F	≤99m Ω	100KHz/1.0V	LCZ METER 502B	4	Q	S-F	≥40	100KHz/1.0V	LCZ METER 502B	拟制/日期 PREPARED BY/DATE			审核/日期 CHECKED BY/DATE			郭柳 2024.05.13			安帅印 2024.05.13																								
						注: 1.Cross out wire; 2.Wrap 5mm(ref) high temperature adhesive paper around the cable outlet 1-2Ts; 3.线 The coil is attached to the circular hard magnetic disc with groove, the magnetic disc size is 40 ±0.5mm, and the inner hole 5.3mm, The thickness is 0.8±0.1mm。																																																																																											
三、绕线参数 Winding Specification:																																																																																																	
序号 NO.	端子 TERMINAL		线径 WIRE	圈数 Turns	绕线方向 Winding Direction																																																																																												
1	S	F	热风线 0.08*24P	11Ts	CCW																																																																																												
四、电气特性 ELECTRICAL CHARACTERISTICS:																																																																																																	
温度 TEMPERATURE:25±10°C, 湿度 RELATIVE HUMIDITY:65±20%																																																																																																	
序号 NO.	项目 ITEM	端子 TERMINAL	标准 SPECIFICATION	测试条件 TEST FREQUENCY	测试仪器 TEST EQUIPMENTS																																																																																												
1	IND.	S-F	4.8uH ±10%单独线圈	100KHz/1.0V	LCZ METER 1062B																																																																																												
2	IND.	S-F	7.7uH ±10%加磁片	100KHz/1.0V	LCZ METER 1062B																																																																																												
3	DCR	S-F	≤99m Ω	100KHz/1.0V	LCZ METER 502B																																																																																												
4	Q	S-F	≥40	100KHz/1.0V	LCZ METER 502B																																																																																												
拟制/日期 PREPARED BY/DATE			审核/日期 CHECKED BY/DATE																																																																																														
郭柳 2024.05.13			安帅印 2024.05.13																																																																																														