

Appendix Test Data for BLE (Conducted Measurement)

Product Name: LEXIP MANUFACTURED BY STEELPLAY - ADVENTURE TWINPADS
BLACK

Trade Mark: LEXIP

Test Model: JVASWI00106

FCC ID: 2BKUW-JVASWI00106

Environmental Conditions

Temperature:	22.5℃
Relative Humidity:	56%
ATM Pressure:	100.0 kPa
Test Engineer:	Tony lu
Supervised by:	Max zhang
NOTE	N/A

1. Duty Cycle



1.1 Test Result



1.1.1 Ant1



Ant1							
Mode	TX Type	Frequency (MHz)	T_on (ms)	Period (ms)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	Max. DC Variation (%)
1M	SISO	2402	2.135	2.499	85.43	0.68	0.13
		2440	2.135	2.499	85.43	0.68	0.13
		2480	2.135	2.499	85.43	0.68	0.13
2M	SISO	2402	1.083	2.500	43.32	3.63	0.20
		2440	1.085	2.502	43.37	3.63	0.11
		2480	1.083	2.500	43.32	3.63	0.20

1.2 Test Graph

1.2.1 Ant1

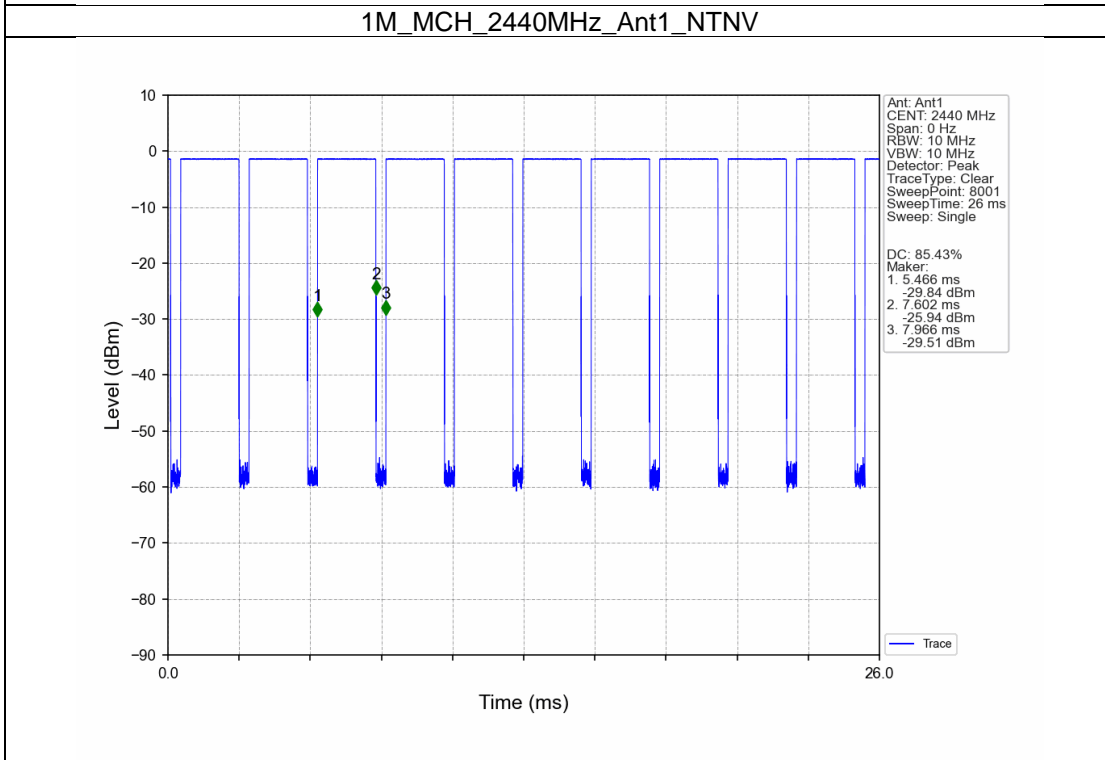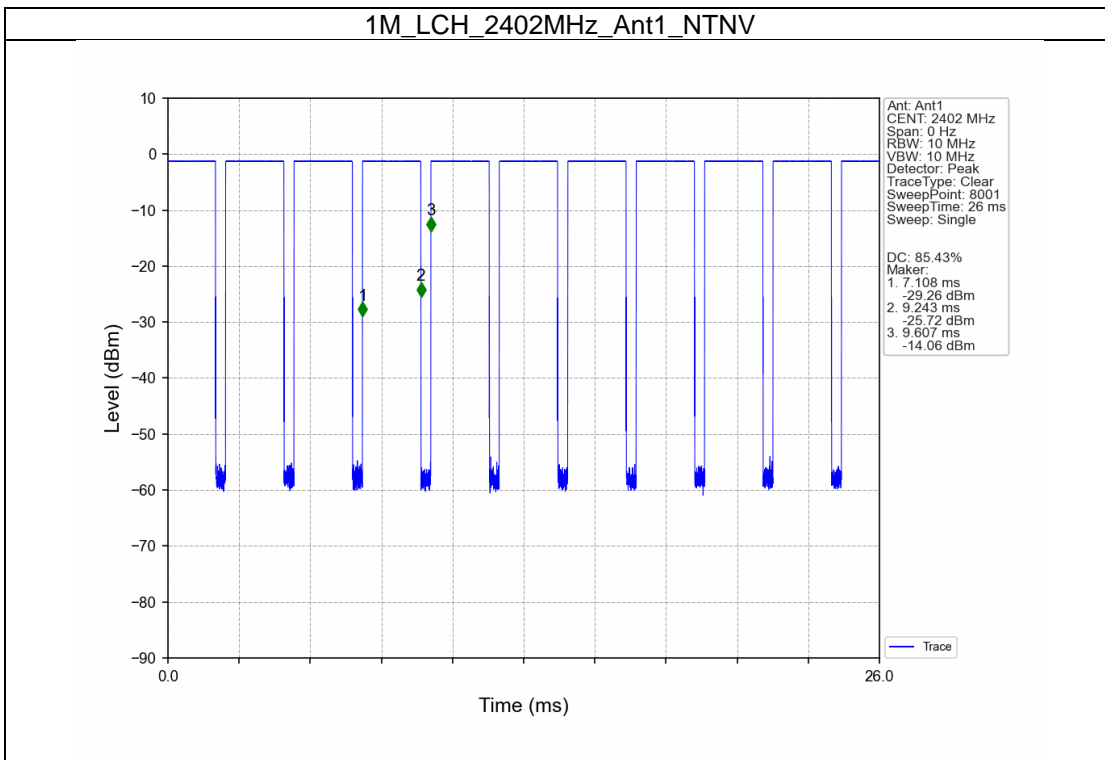

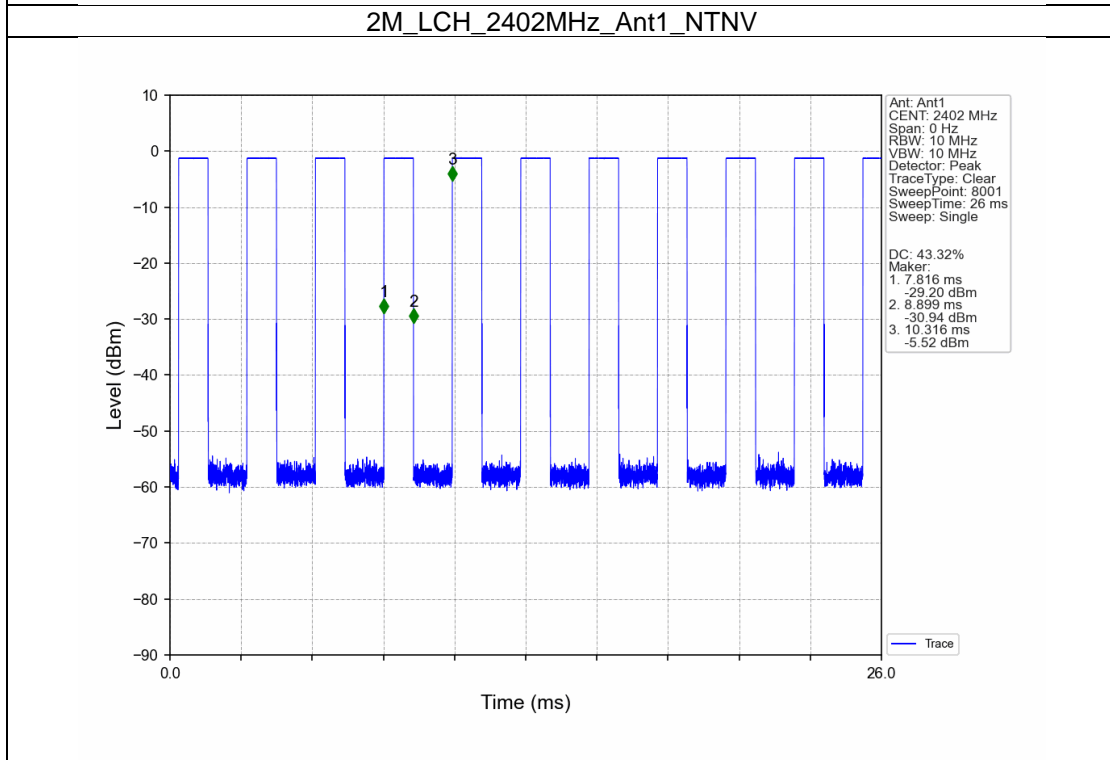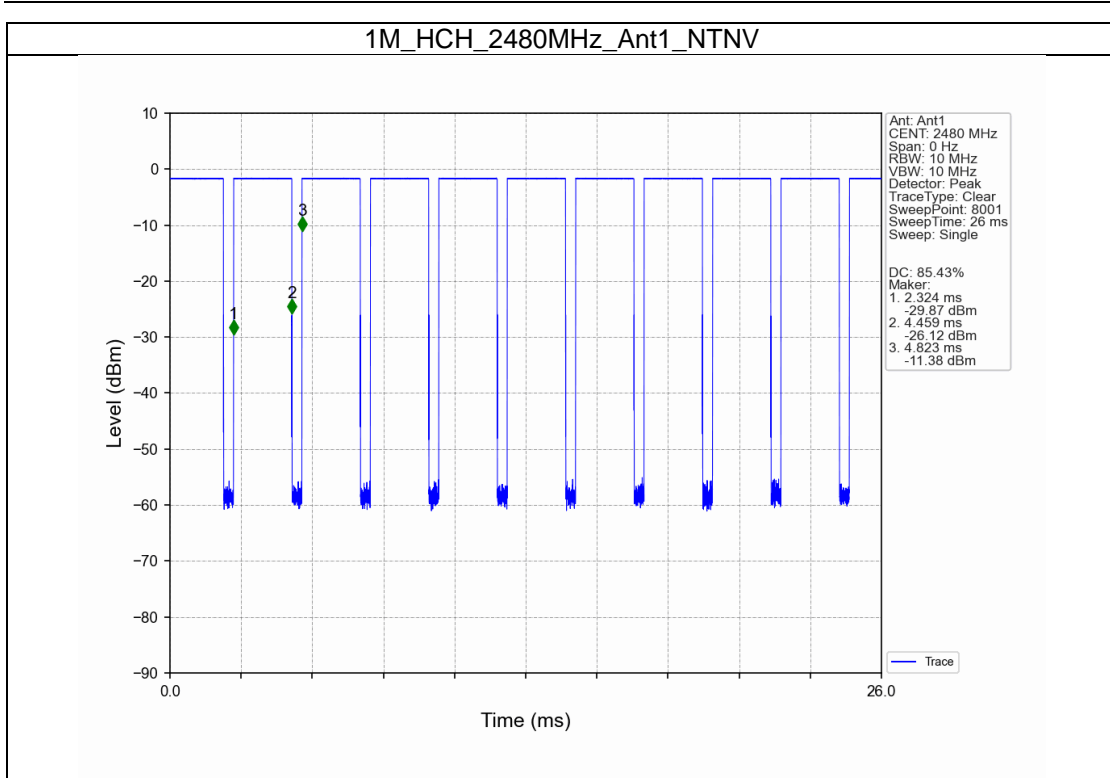

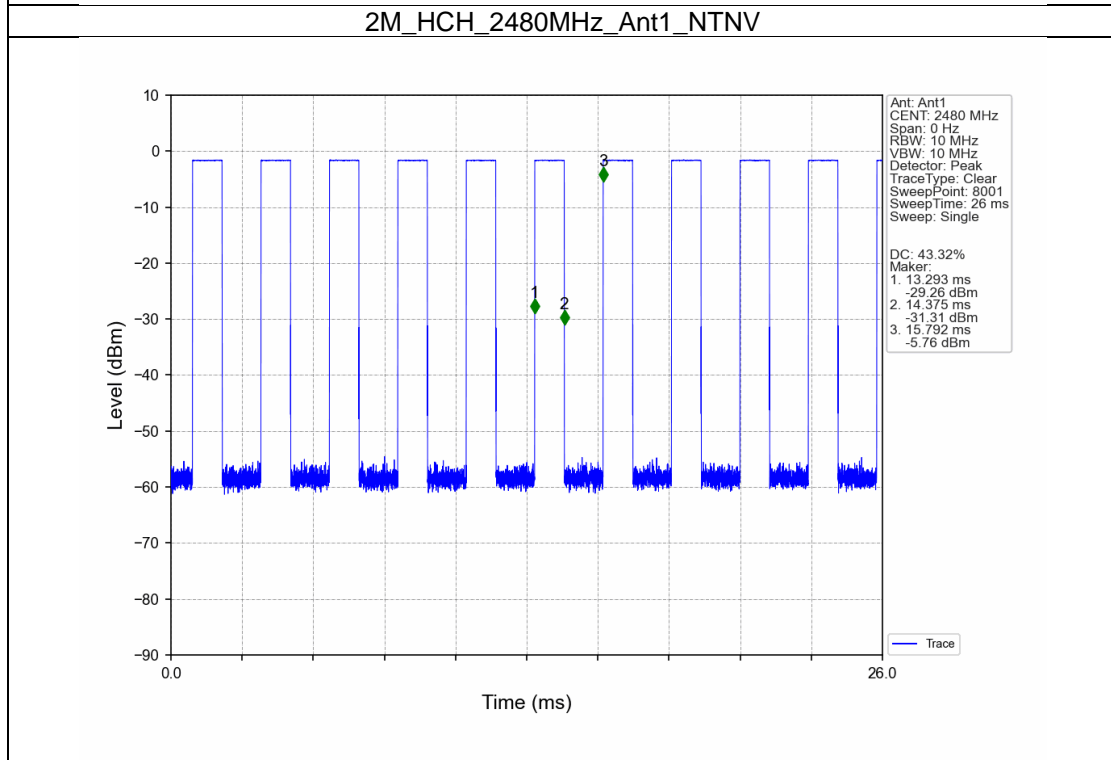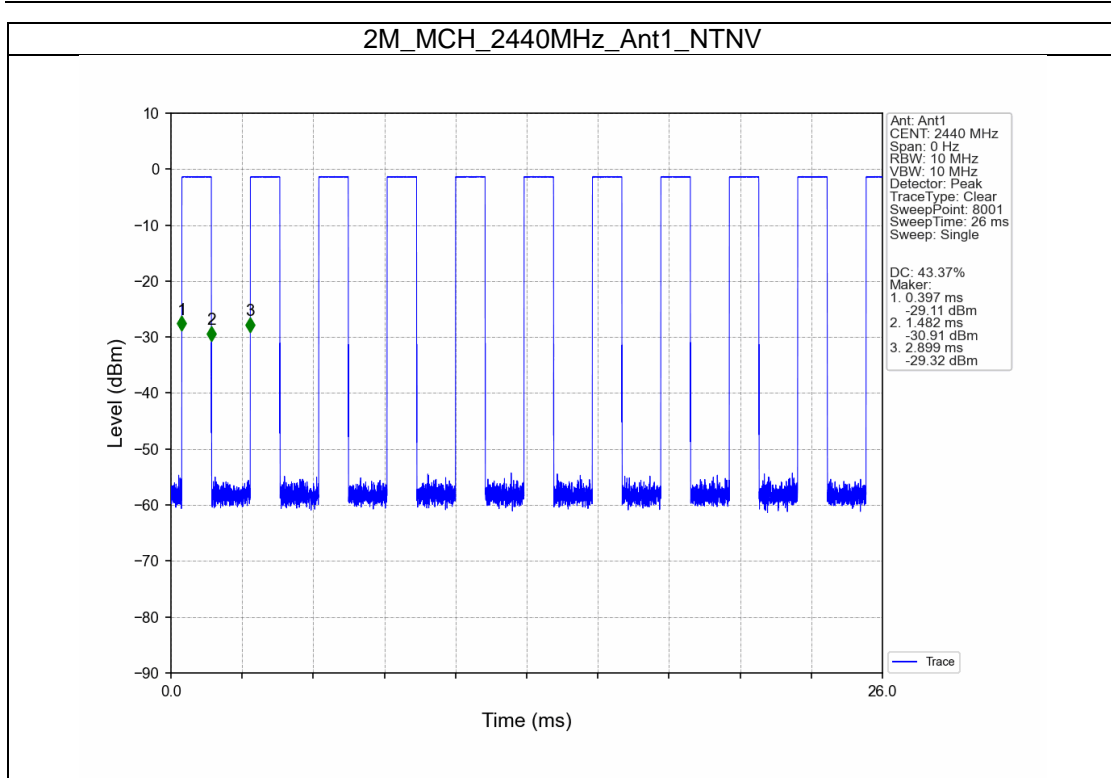

2. Bandwidth

2.1 Test Result

2.1.1 OBW



Mode	TX Type	Frequency (MHz)	ANT	99% Occupied Bandwidth (MHz)		Verdict
				Result	Limit	
1M	SISO	2402	1	1.124	/	Pass
		2440	1	1.157	/	Pass
		2480	1	1.206	/	Pass
2M	SISO	2402	1	2.067	/	Pass
		2440	1	2.071	/	Pass
		2480	1	2.082	/	Pass



2.1.2 6dB BW



Mode	TX Type	Frequency (MHz)	ANT	6dB Bandwidth (MHz)		Verdict
				Result	Limit	
1M	SISO	2402	1	0.717	≥ 0.5	Pass
		2440	1	0.738	≥ 0.5	Pass
		2480	1	0.747	≥ 0.5	Pass
2M	SISO	2402	1	1.232	≥ 0.5	Pass
		2440	1	1.225	≥ 0.5	Pass
		2480	1	1.233	≥ 0.5	Pass

2.2 Test Graph



2.2.1 OBW

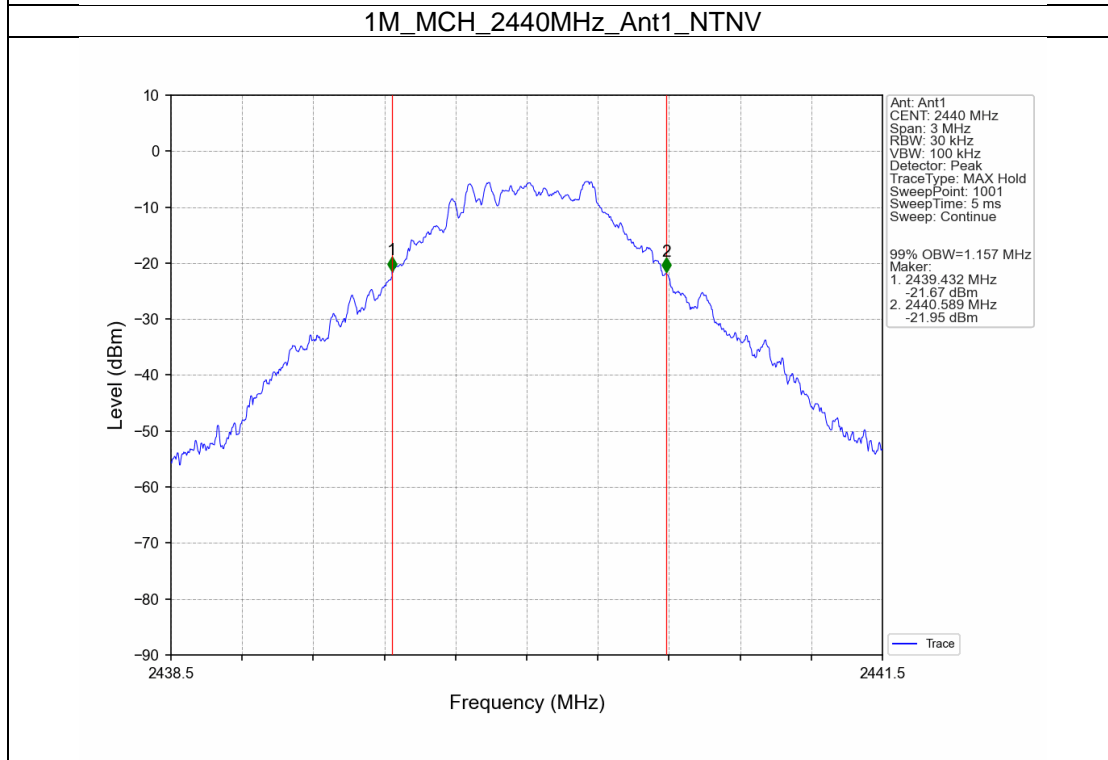
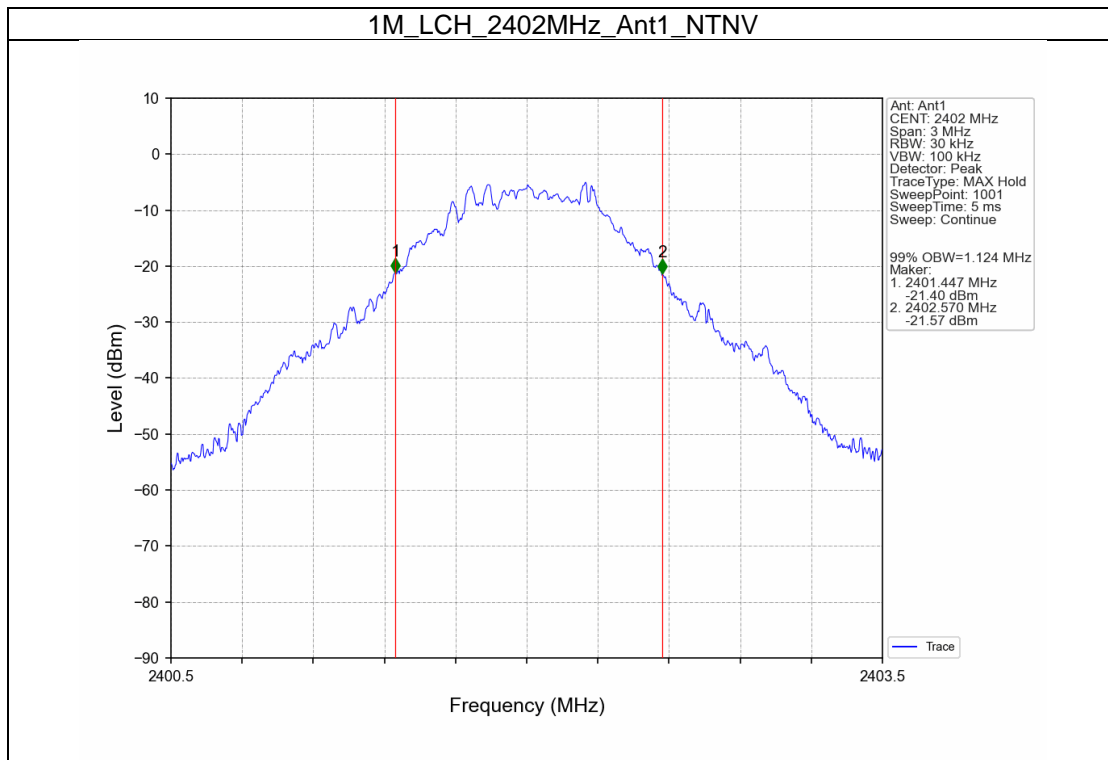


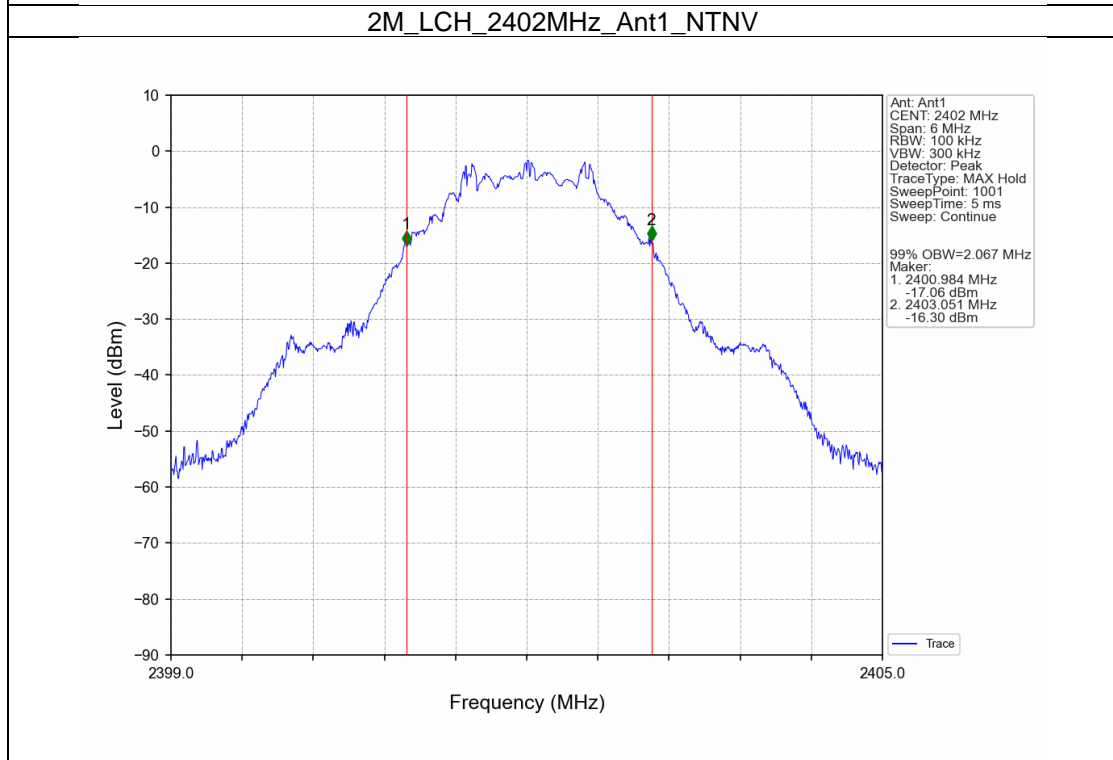
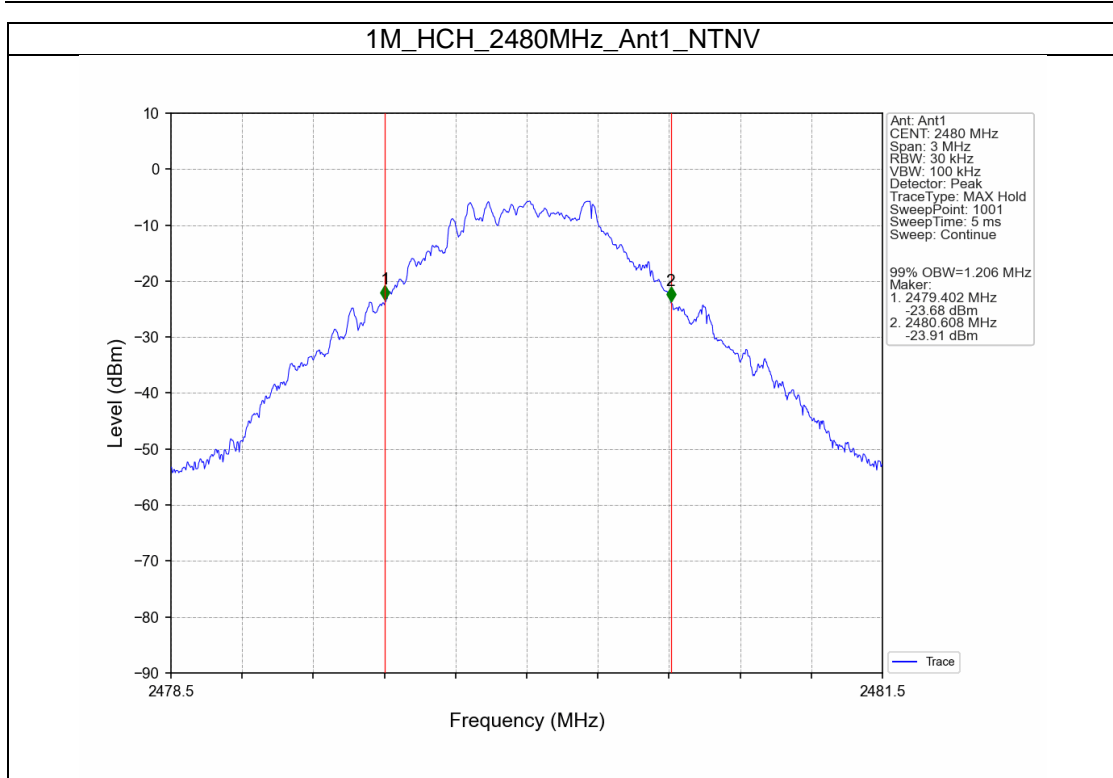


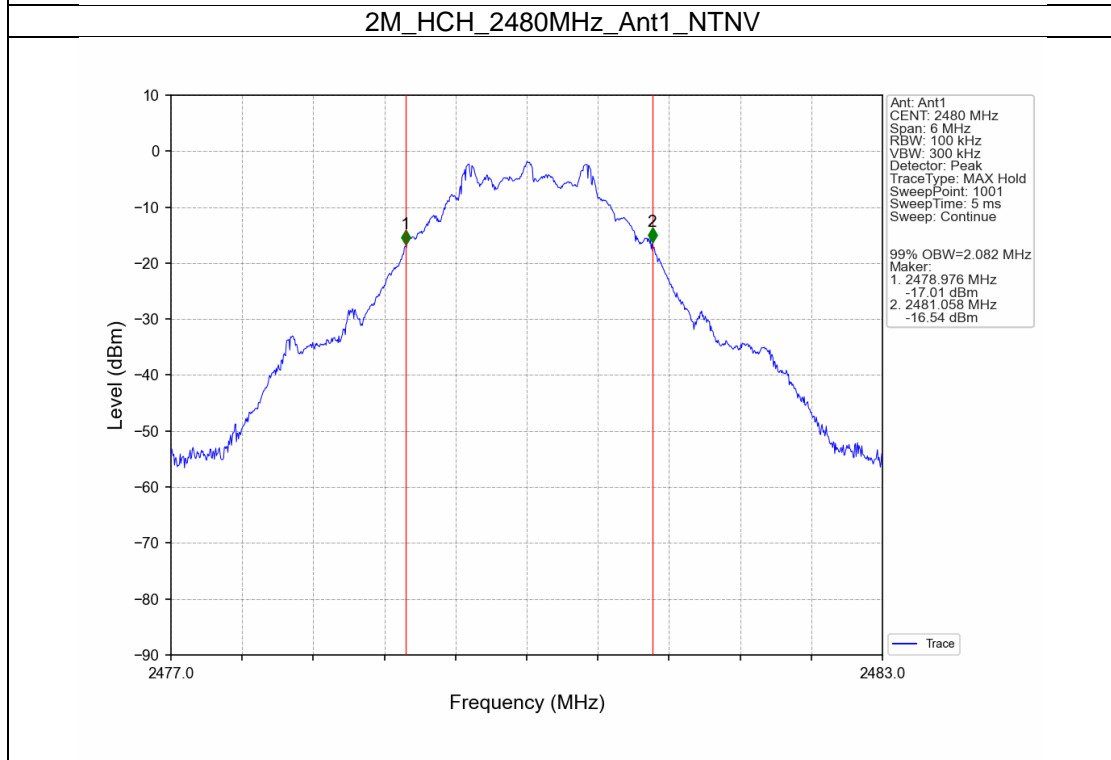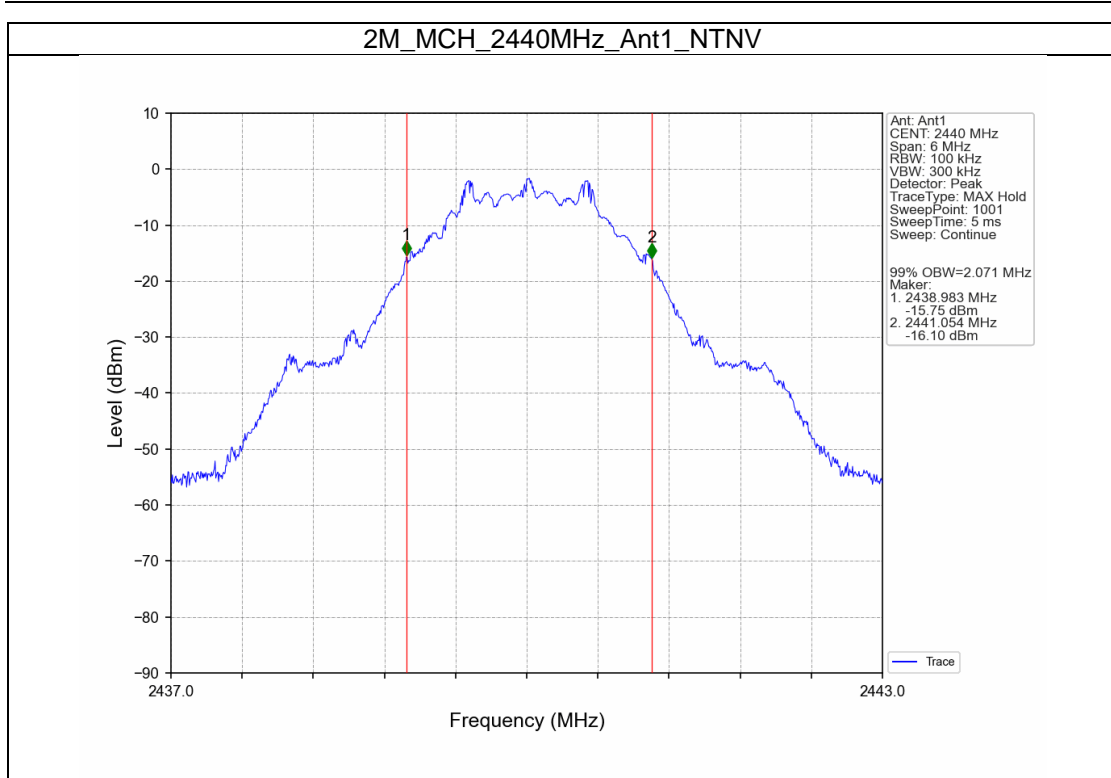

2.2.2 6dB BW

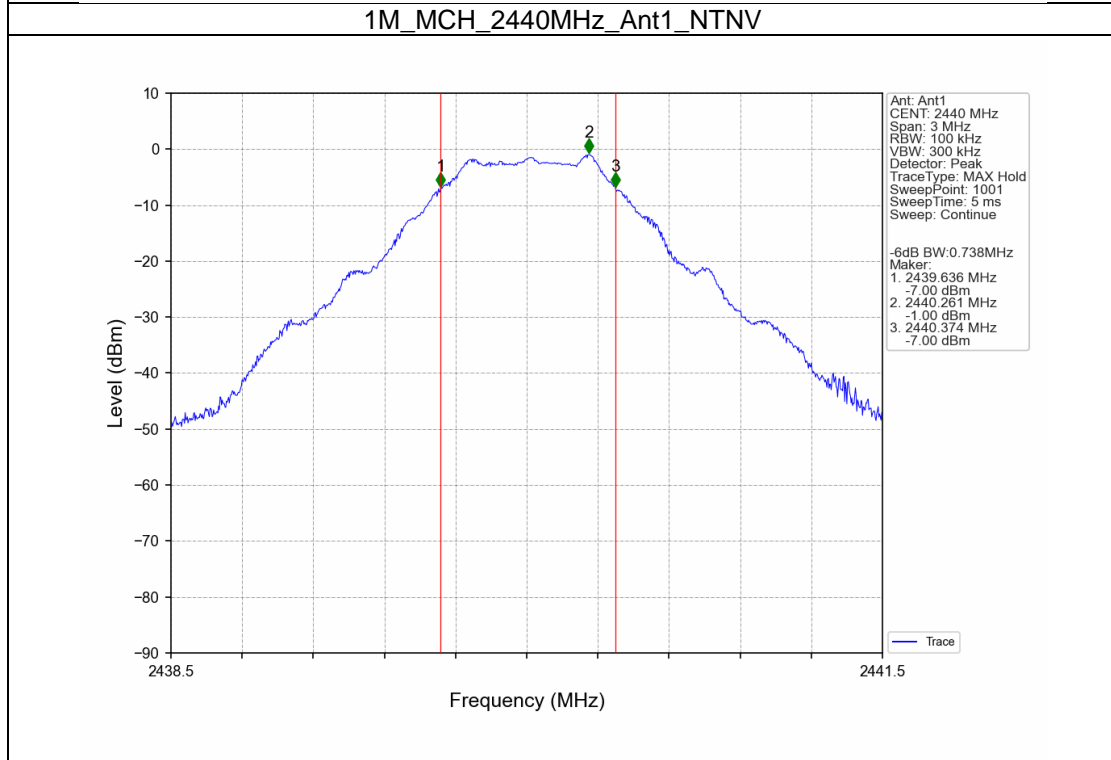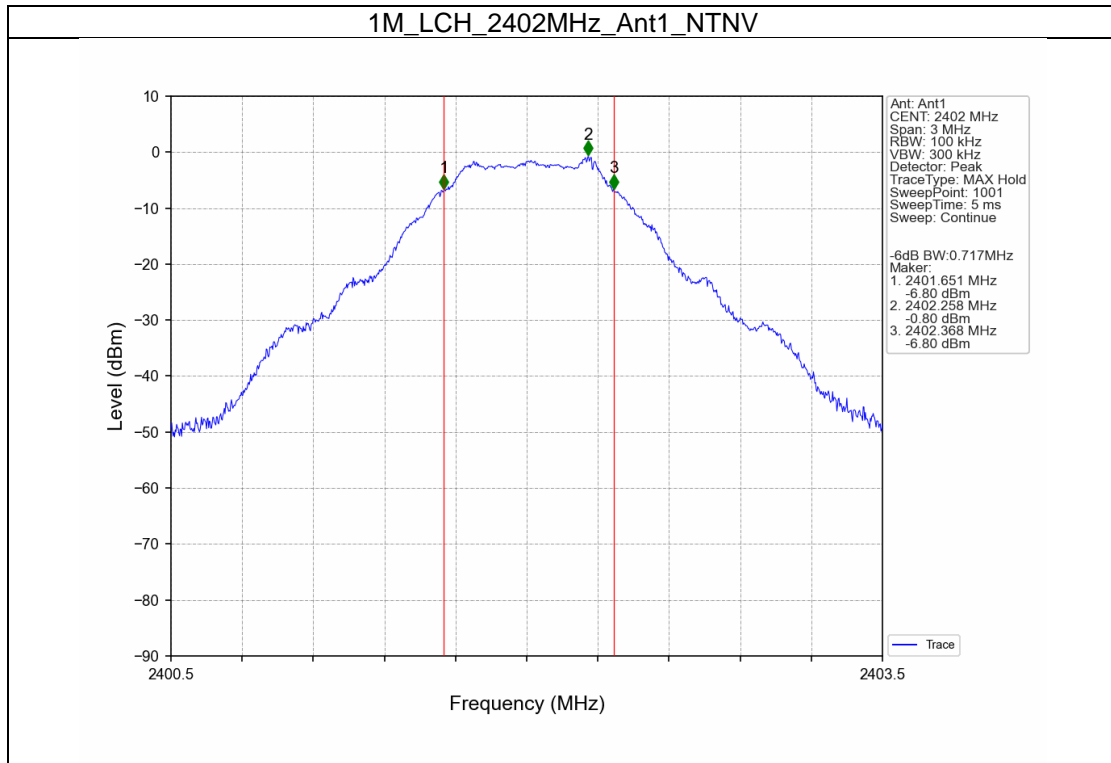

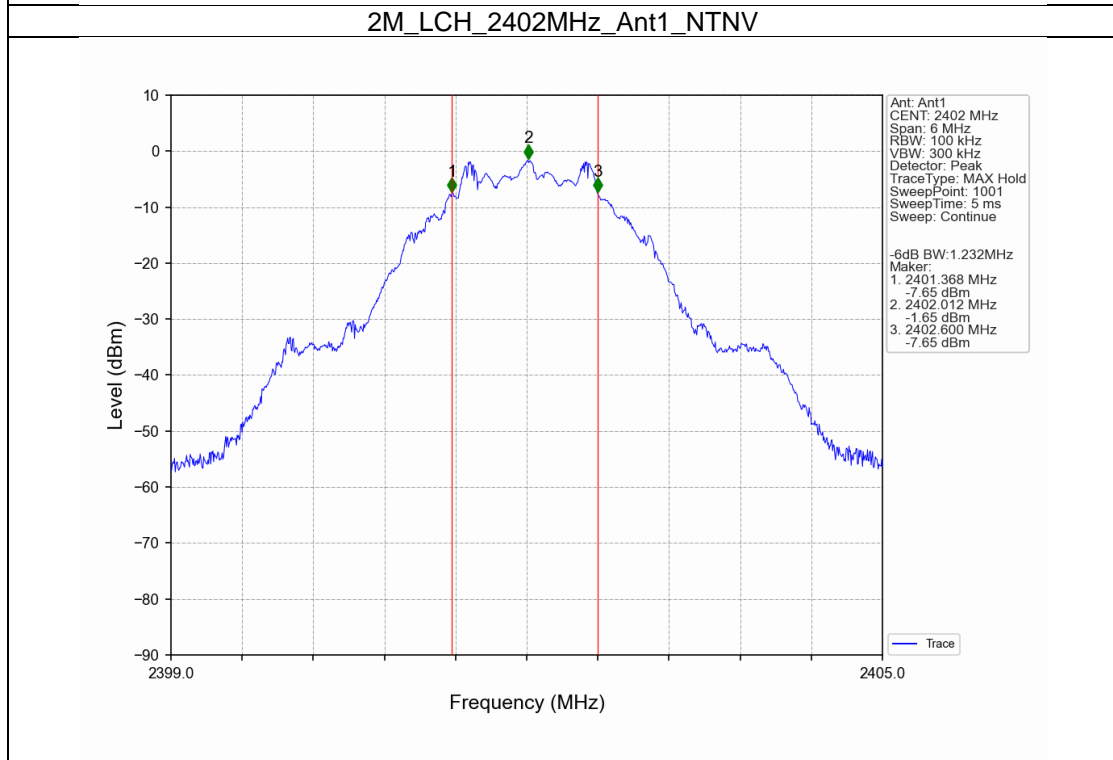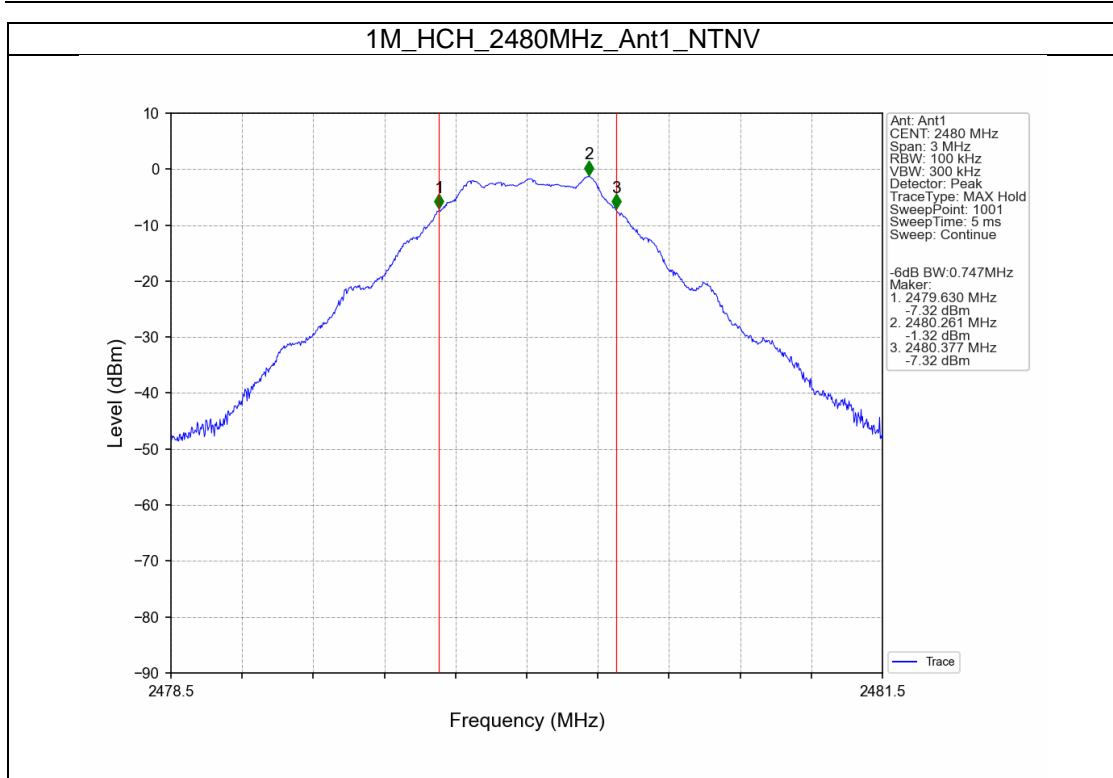

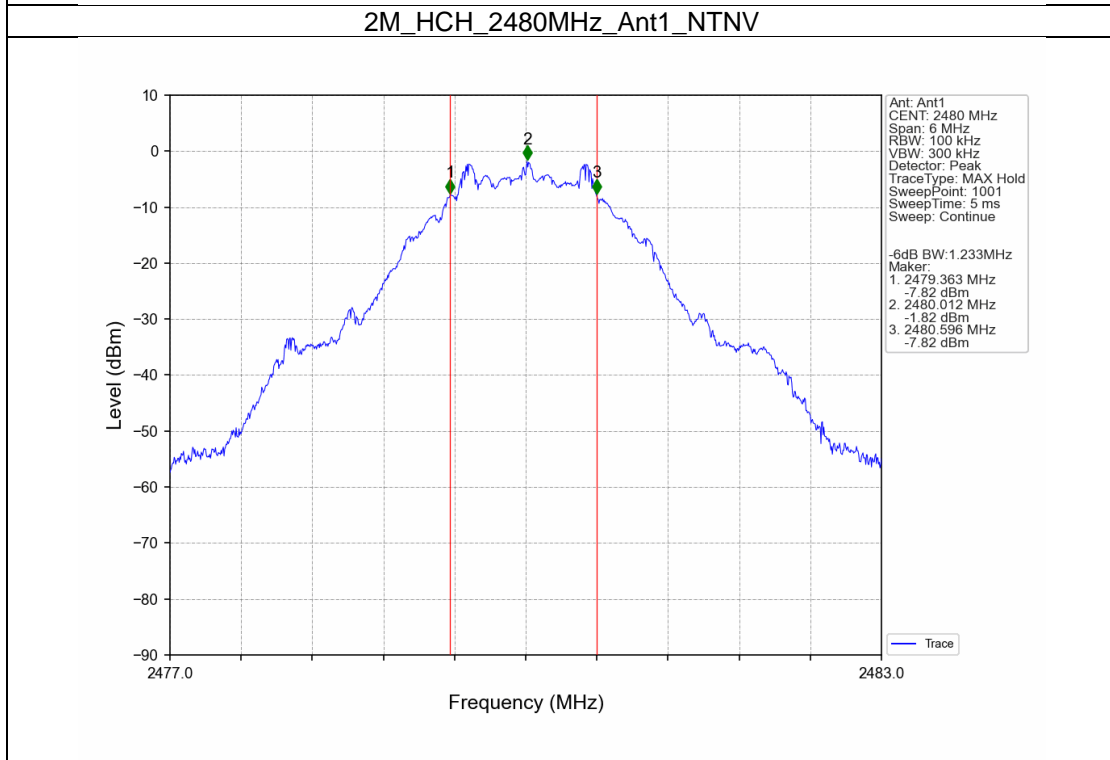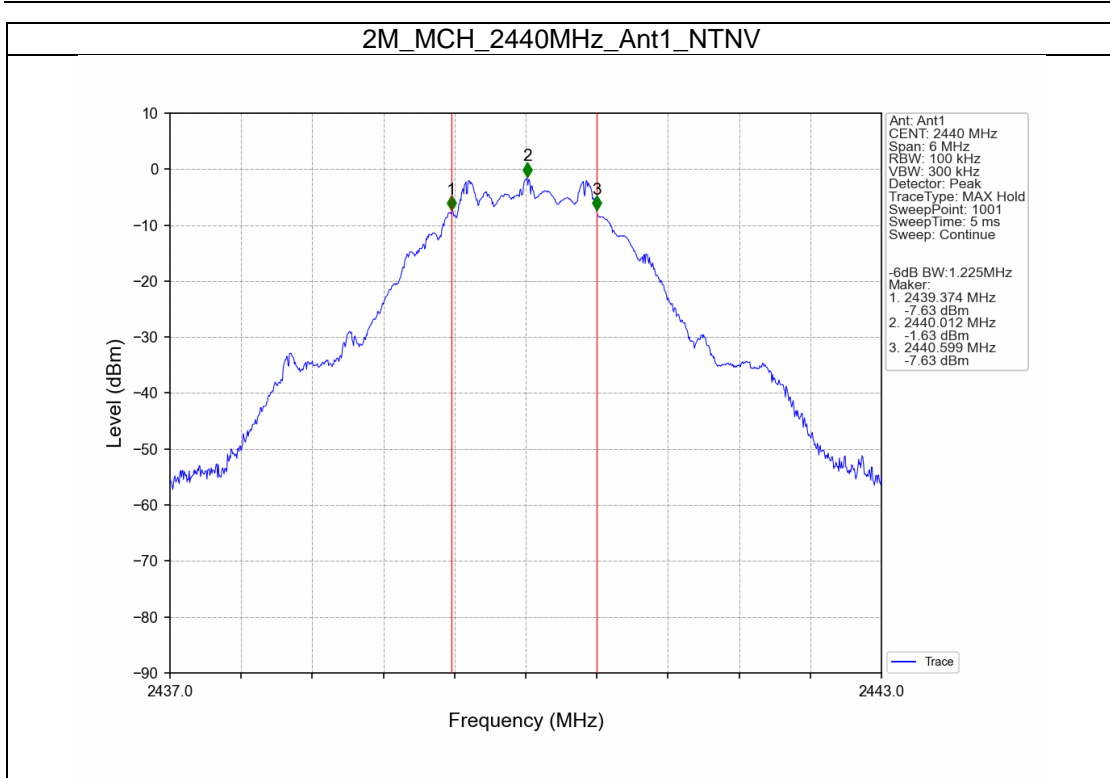

3. Maximum Conducted Output Power

3.1 Test Result



3.1.1 Power



Mode	TX Type	Frequency (MHz)	Maximum Peak Conducted Output Power (dBm)		Verdict
			ANT1	Limit	
1M	SISO	2402	-1.04	<=30	Pass
		2440	-1.20	<=30	Pass
		2480	-1.47	<=30	Pass
2M	SISO	2402	-0.94	<=30	Pass
		2440	-1.09	<=30	Pass
		2480	-1.37	<=30	Pass



Note1: Antenna Gain: Ant1: 4.33dBi;

3.2 Test Graph

3.2.1 Power

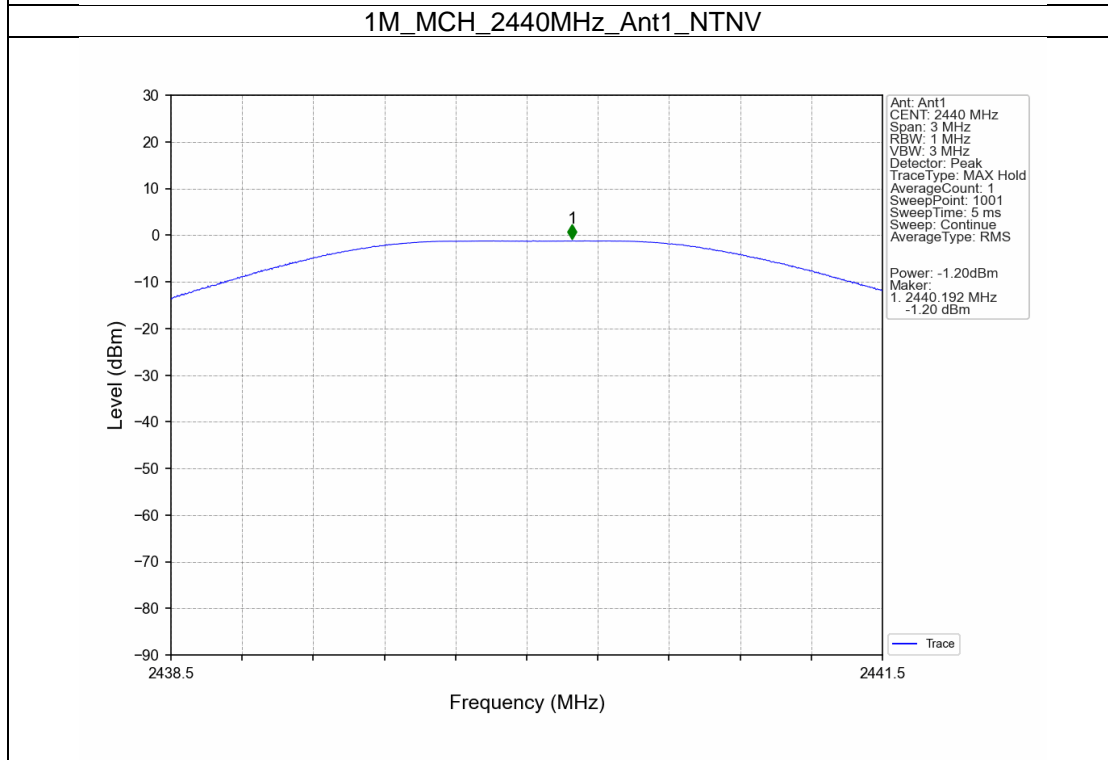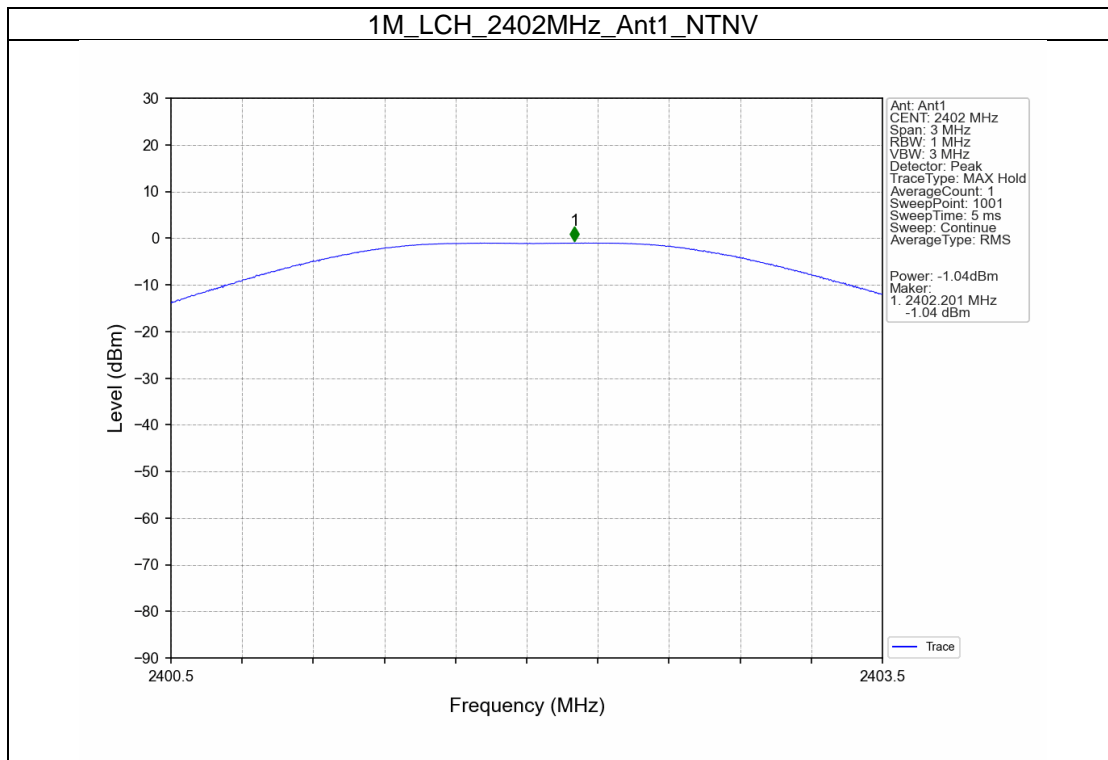

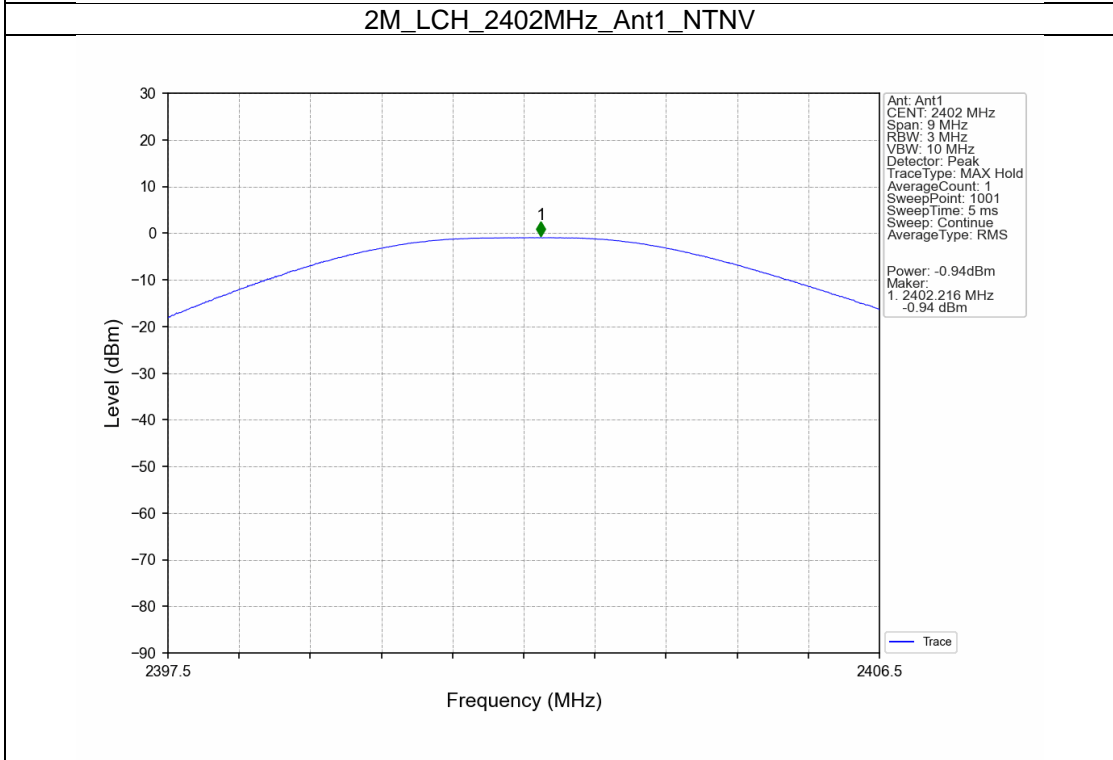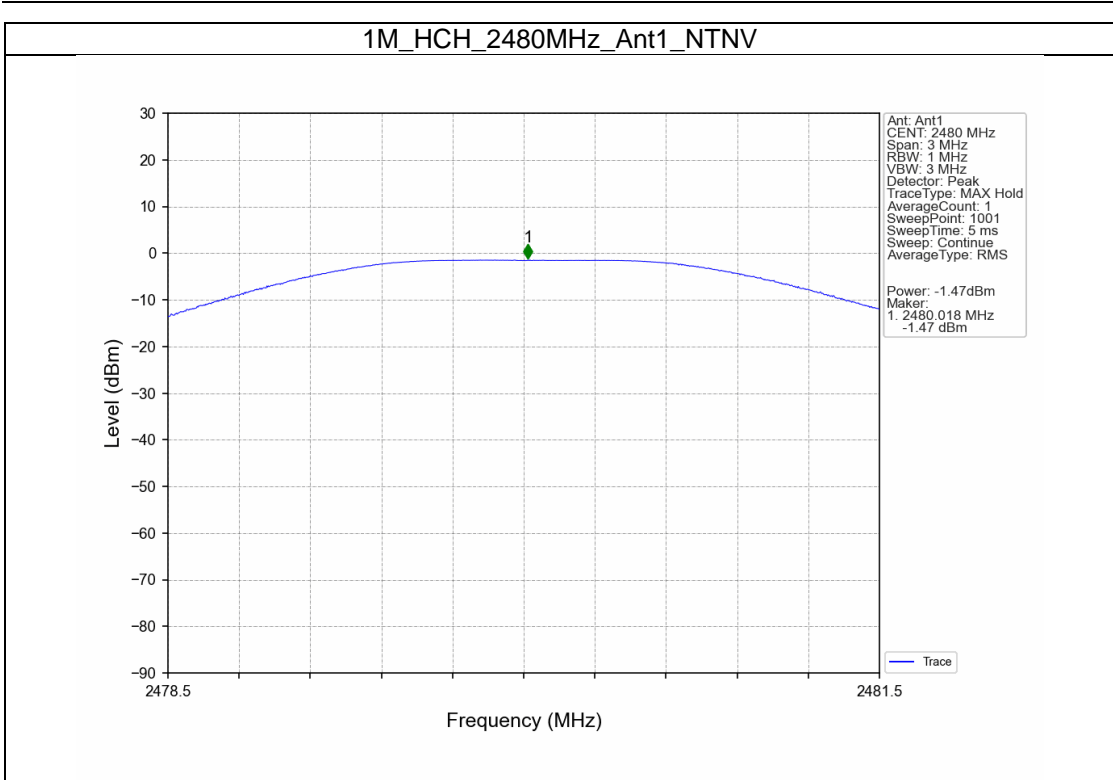

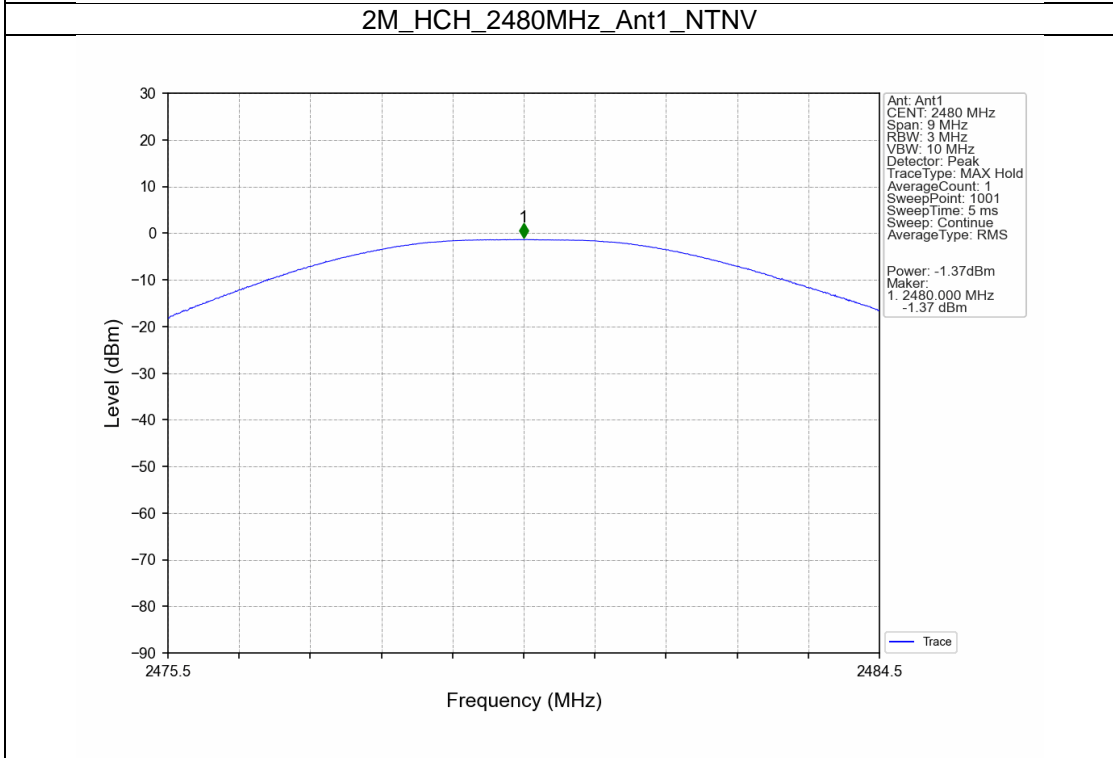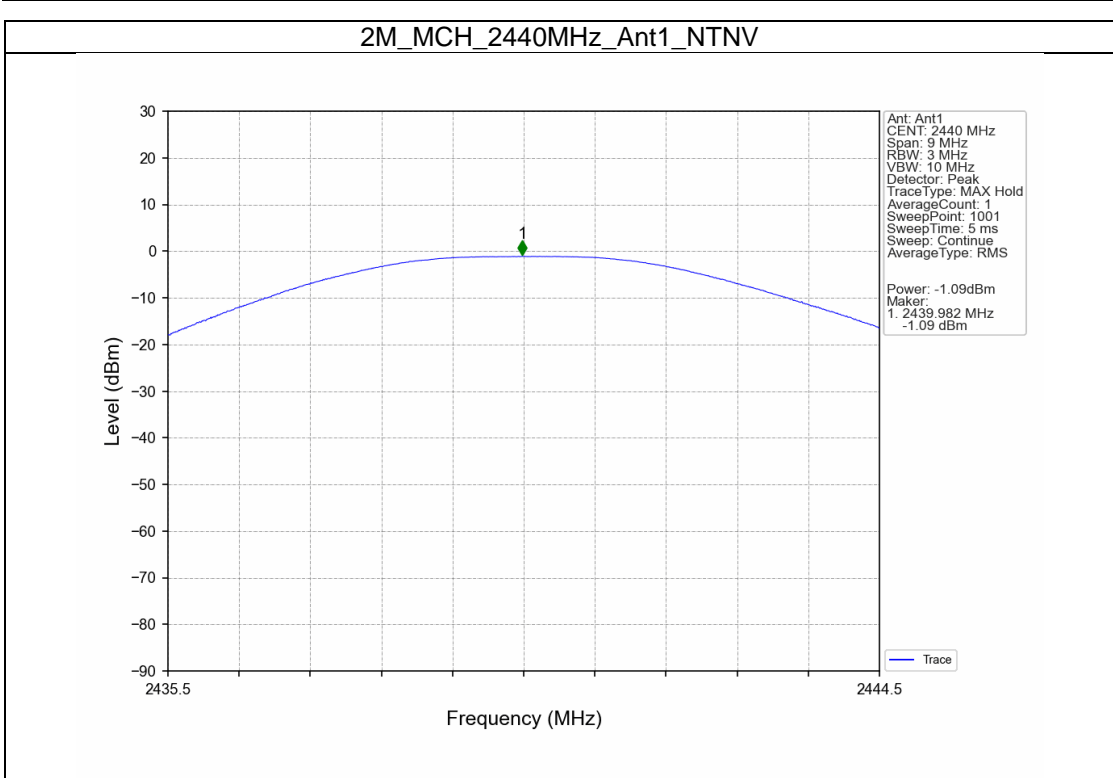

4. Maximum Power Spectral Density

4.1 Test Result



4.1.1 PSD



Mode	TX Type	Frequency (MHz)	Maximum PSD (dBm/3kHz)		Verdict
			ANT1	Limit	
1M	SISO	2402	-16.49	<=8	Pass
		2440	-16.48	<=8	Pass
		2480	-16.70	<=8	Pass
2M	SISO	2402	-20.53	<=8	Pass
		2440	-19.87	<=8	Pass
		2480	-20.73	<=8	Pass



Note1: Antenna Gain: Ant1: 4.33dBi;

4.2 Test Graph

4.2.1 PSD

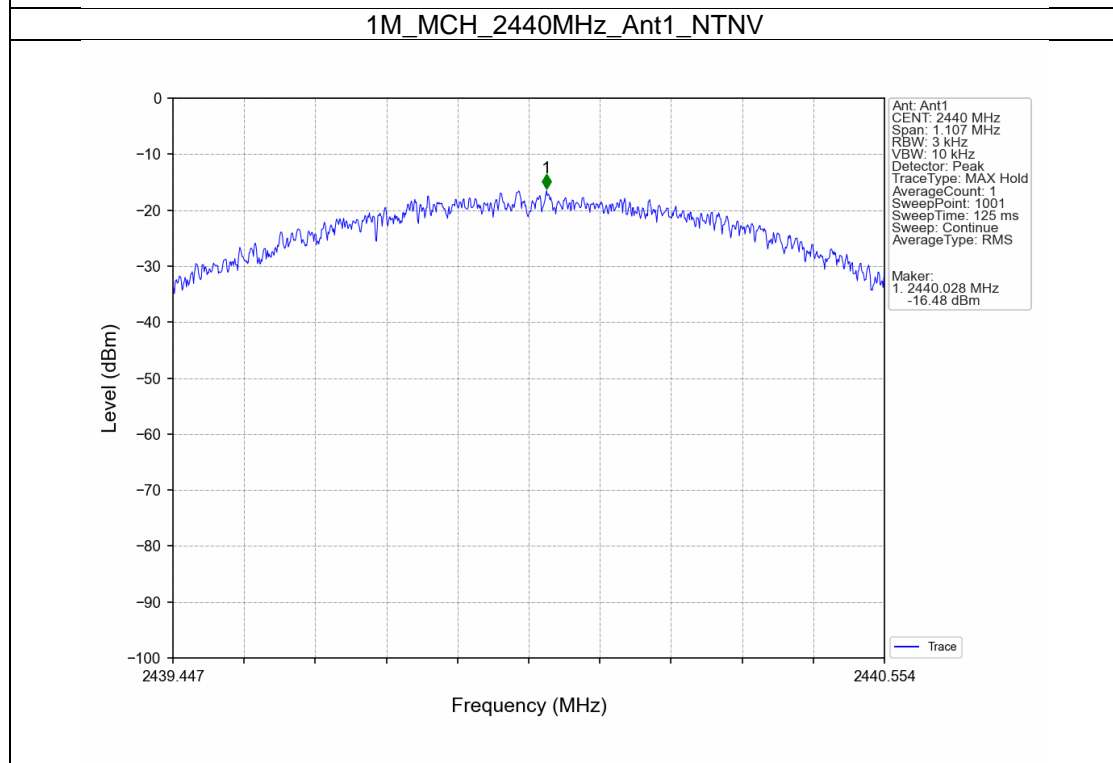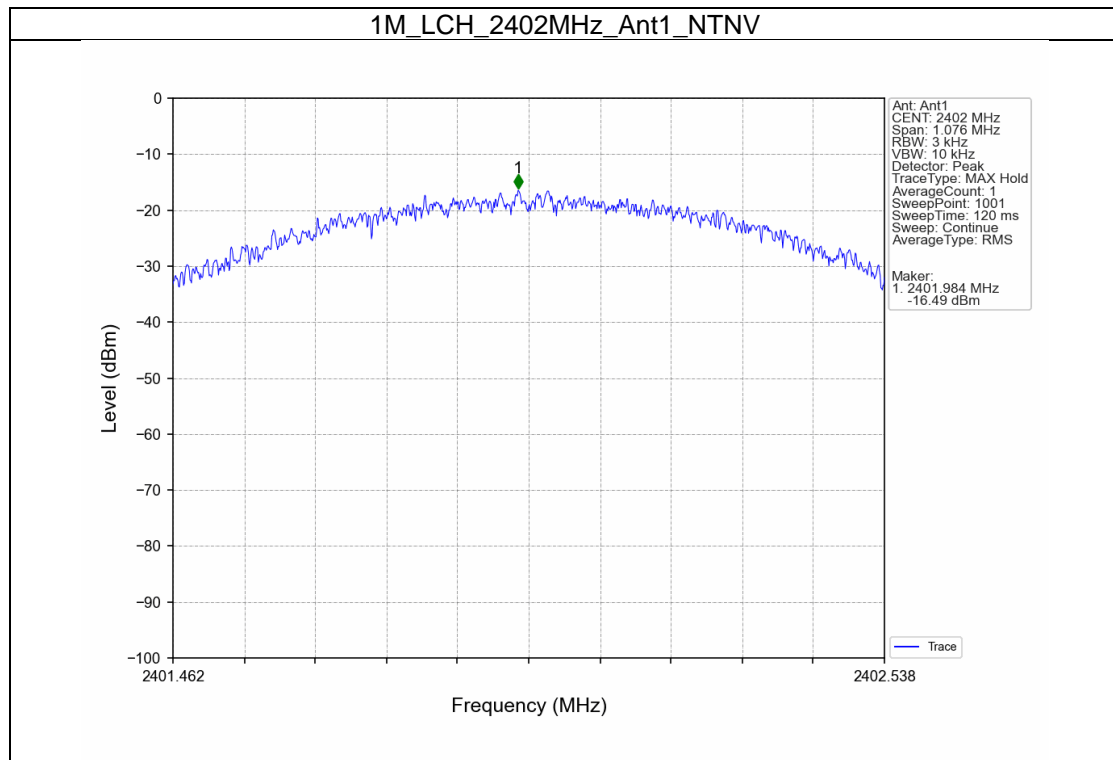

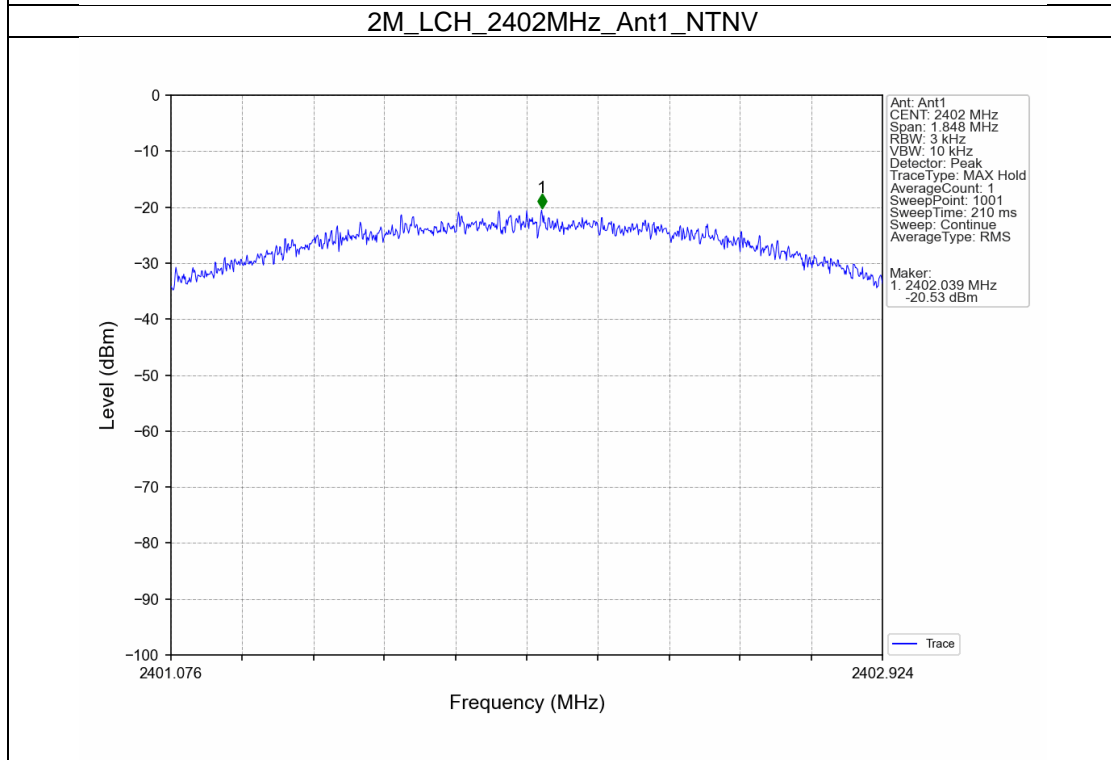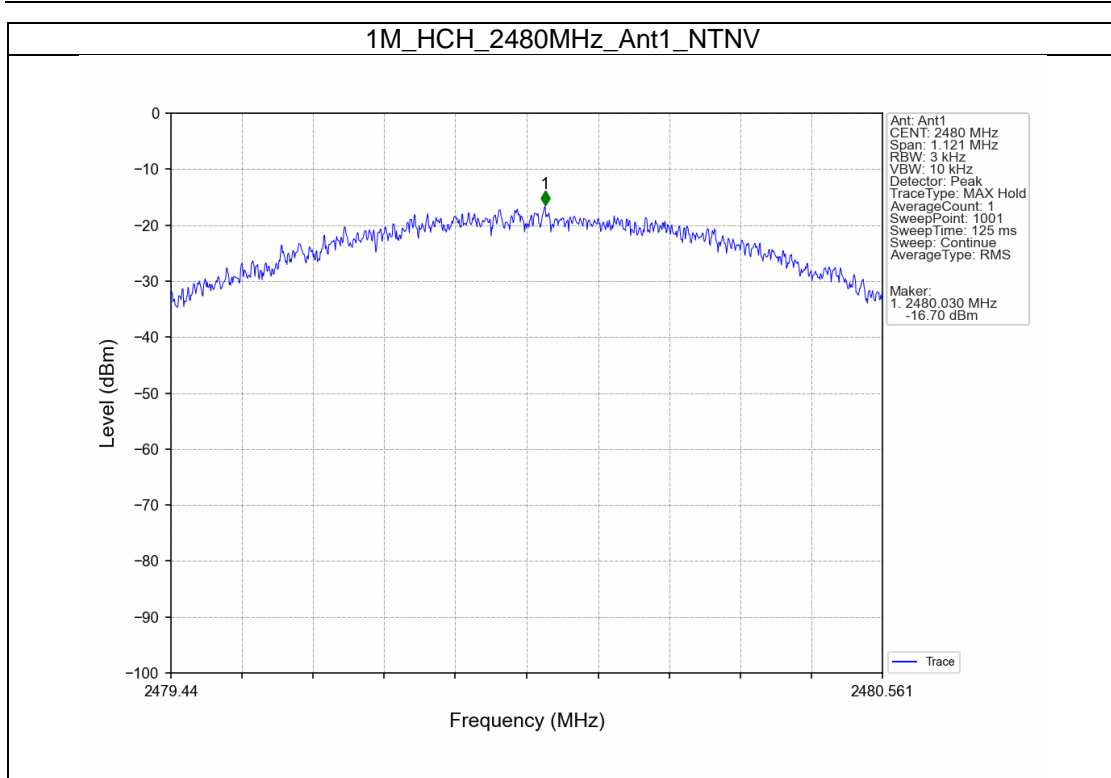

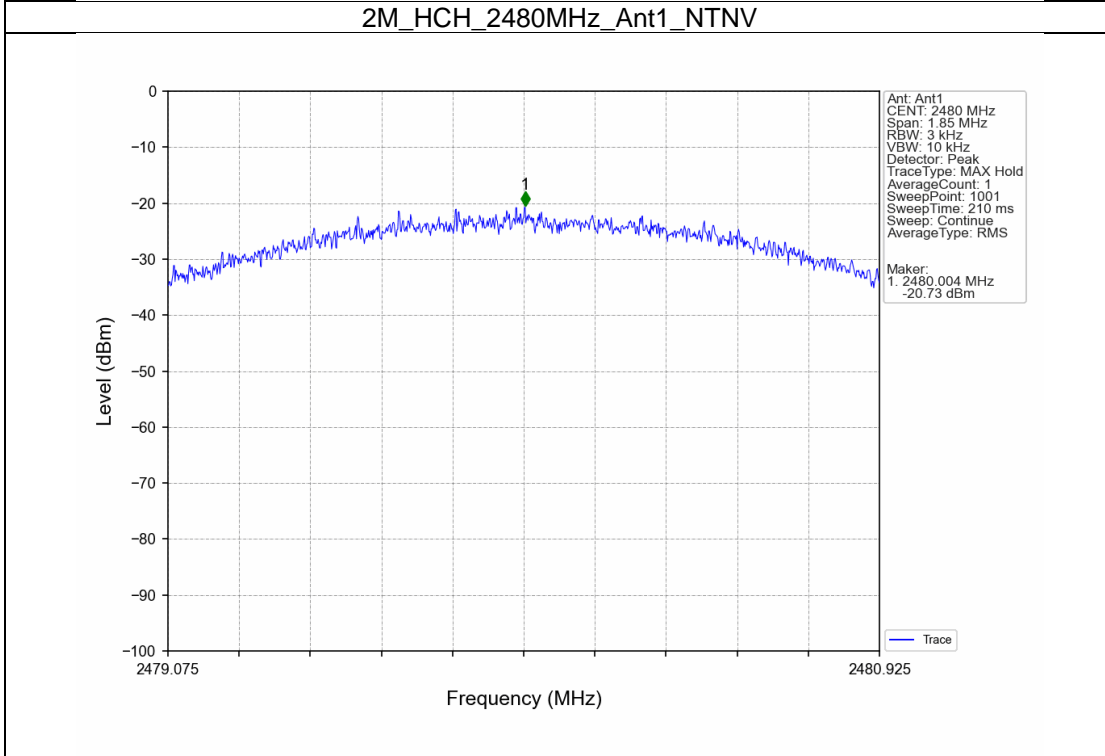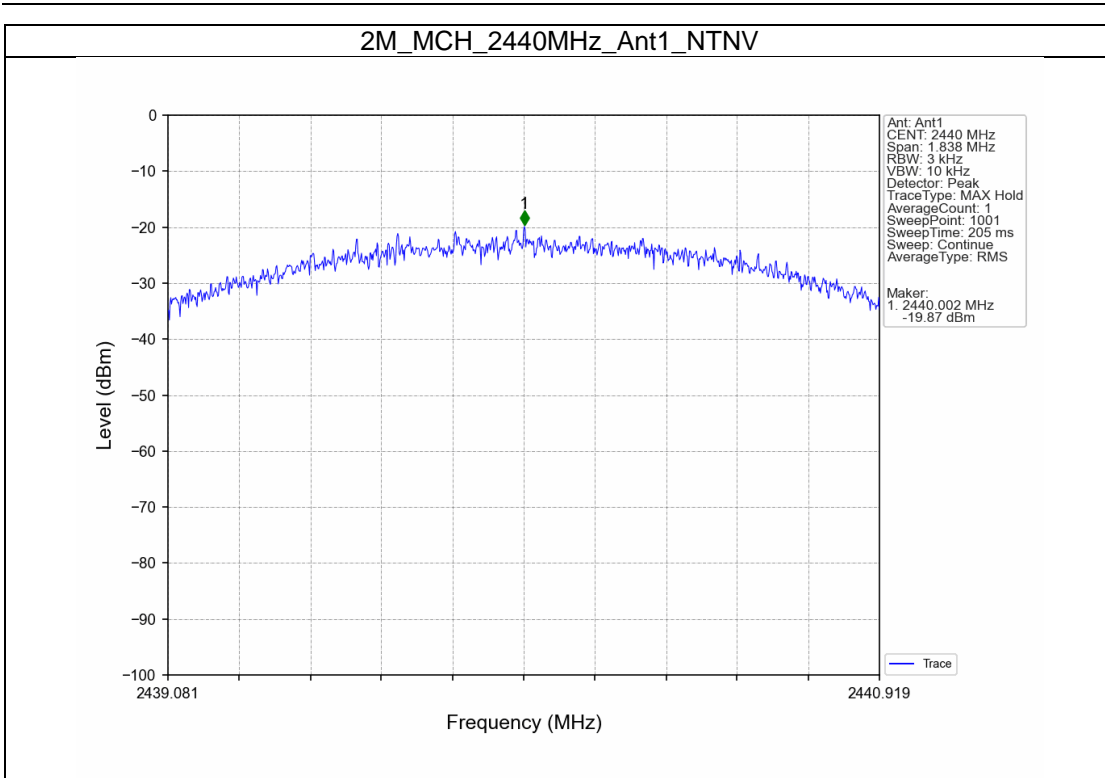

5. Unwanted Emissions In Non-restricted Frequency Bands

5.1 Test Result

5.1.1 Ref

Mode	TX Type	Frequency (MHz)	ANT	Level of Reference (dBm)
1M	SISO	2402	1	-0.82
		2440	1	-1.00
		2480	1	-1.34
2M	SISO	2402	1	-1.59
		2440	1	-1.61
		2480	1	-1.84

Note1: Refer to FCC Part 15.247 (d) and ANSI C63.10-2020, the channel contains the maximum PSD level was used to establish the reference level.



5.1.2 CSE



Mode	TX Type	Frequency (MHz)	ANT	Level of Reference (dBm)	Limit (dBm)	Verdict
1M	SISO	2402	1	-0.82	-20.82	Pass
		2440	1	-0.82	-20.82	Pass
		2480	1	-0.82	-20.82	Pass
2M	SISO	2402	1	-1.59	-21.59	Pass
		2440	1	-1.59	-21.59	Pass
		2480	1	-1.59	-21.59	Pass



Note1: Refer to FCC Part 15.247 (d) and ANSI C63.10-2020, the channel contains the maximum PSD level was used to establish the reference level.

5.2 Test Graph



5.2.1 Ref

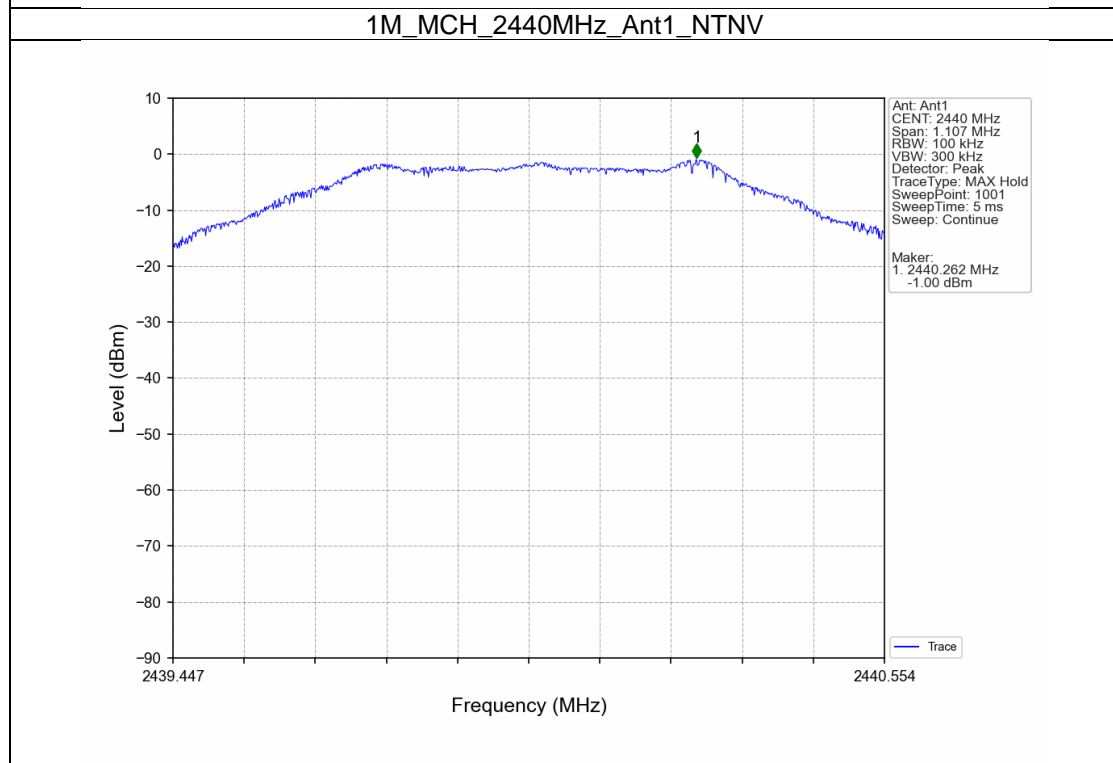
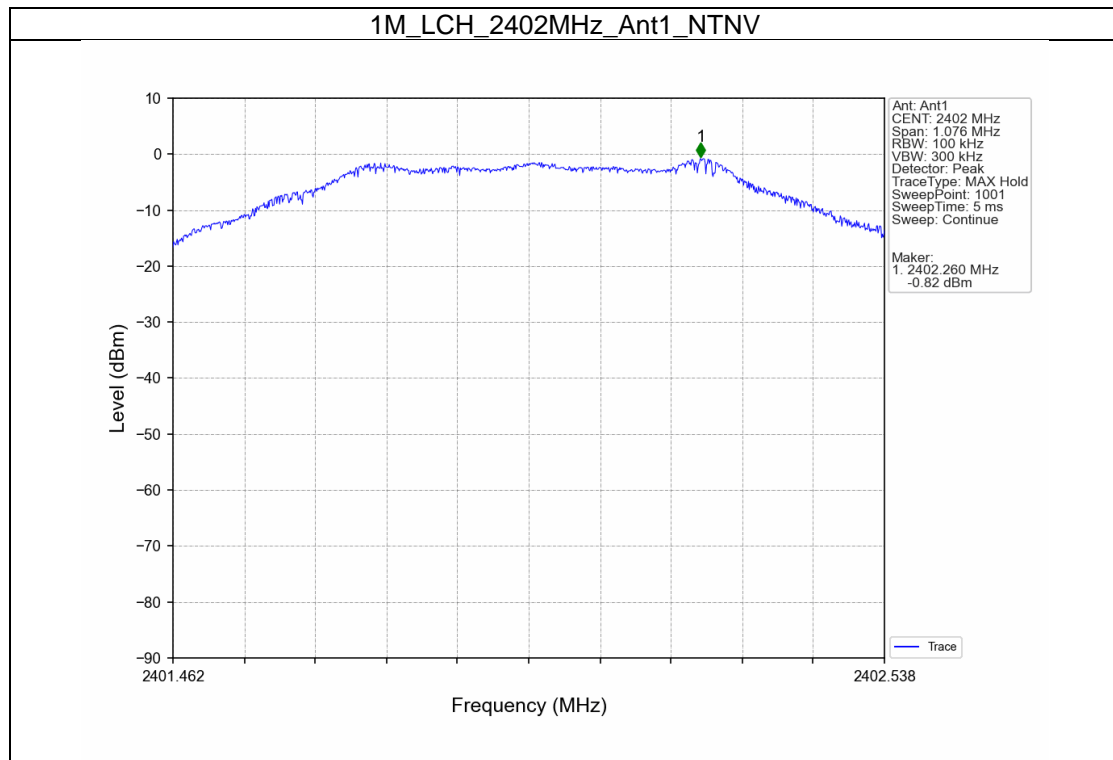


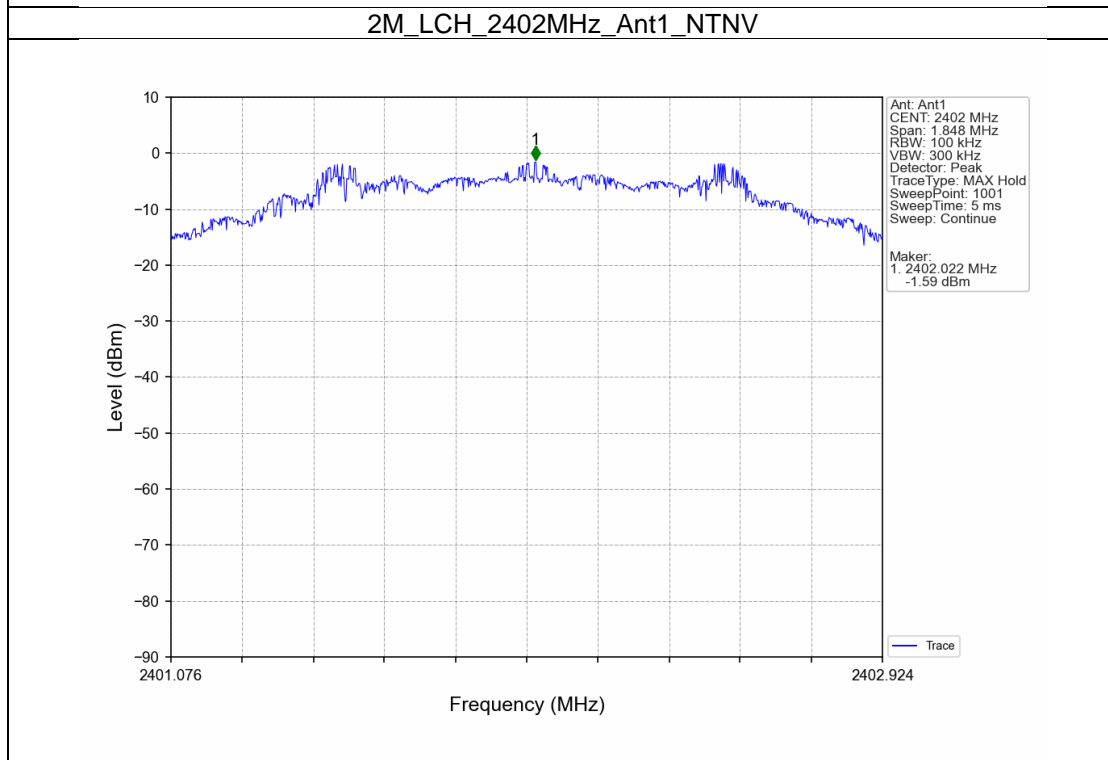
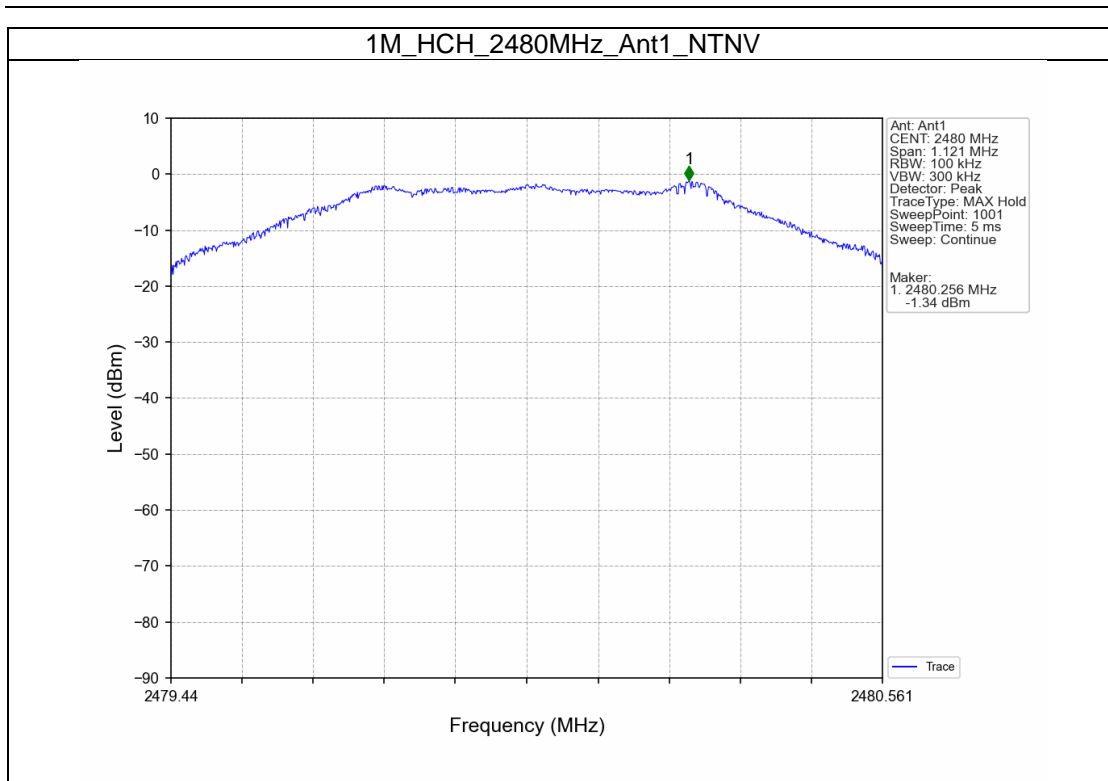


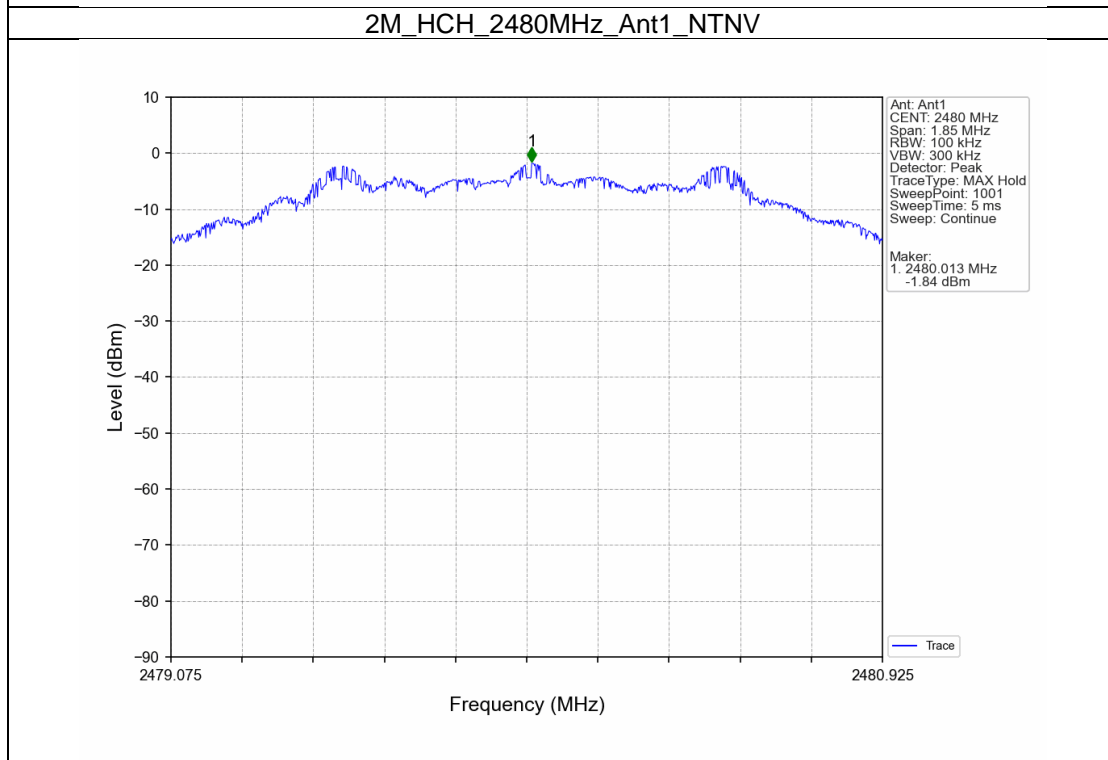
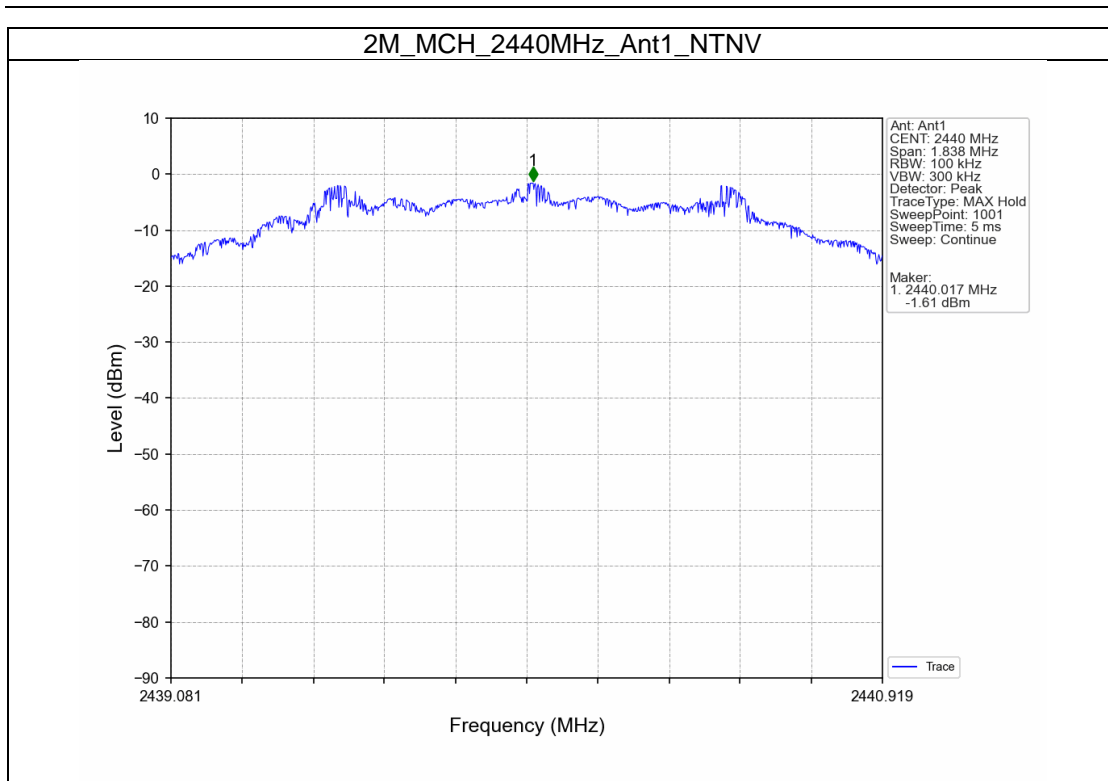




5.2.2 CSE

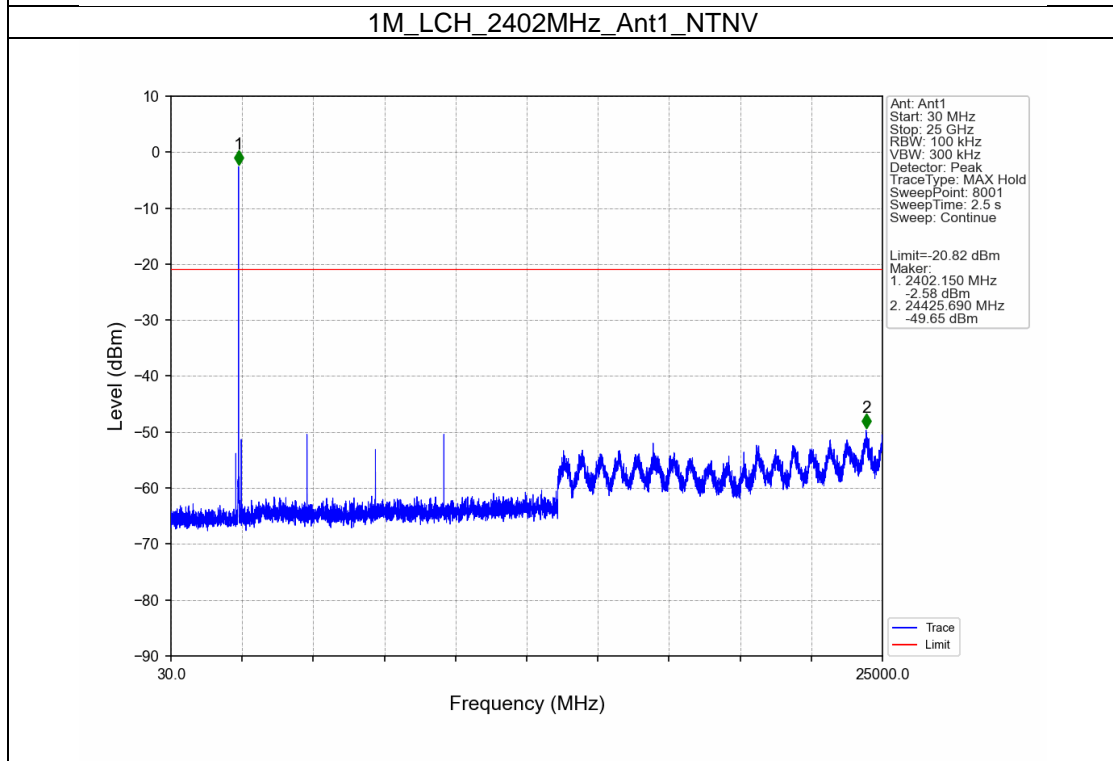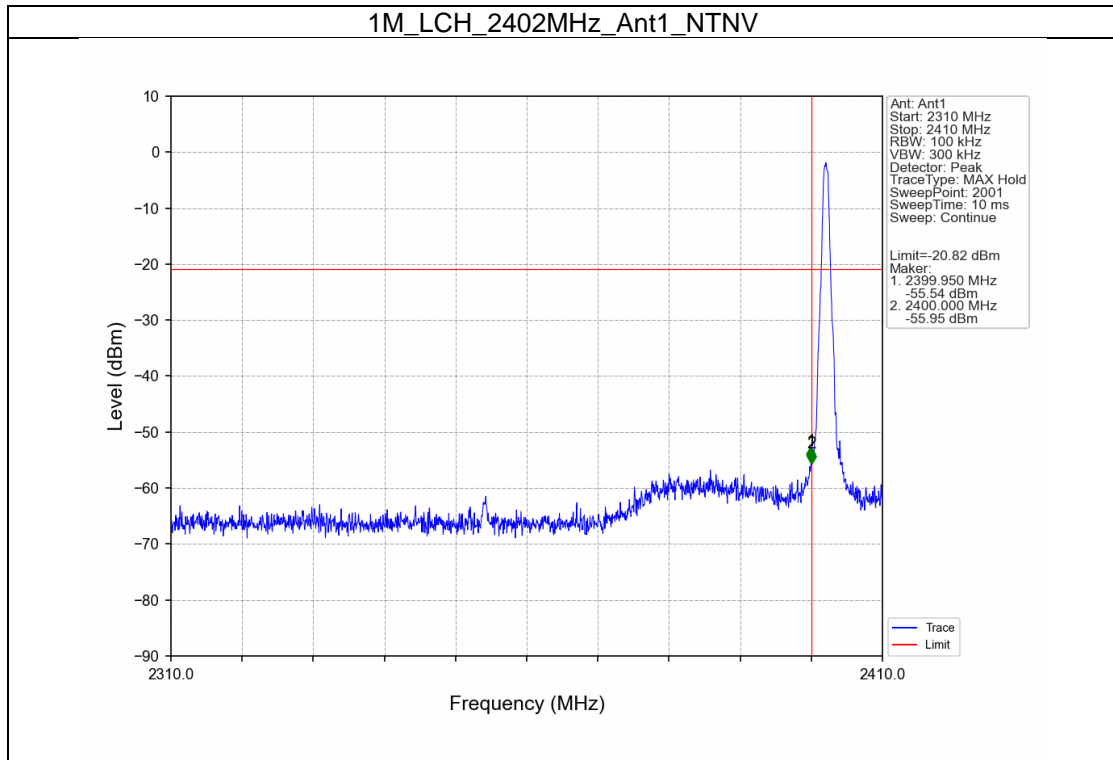

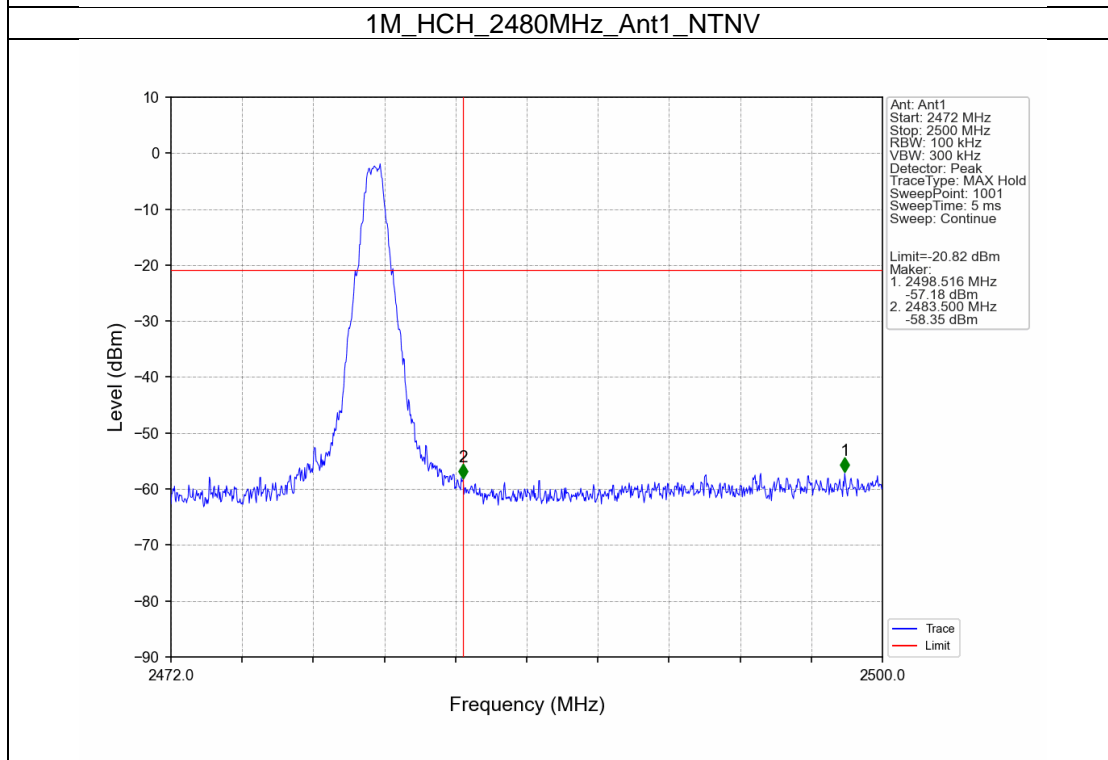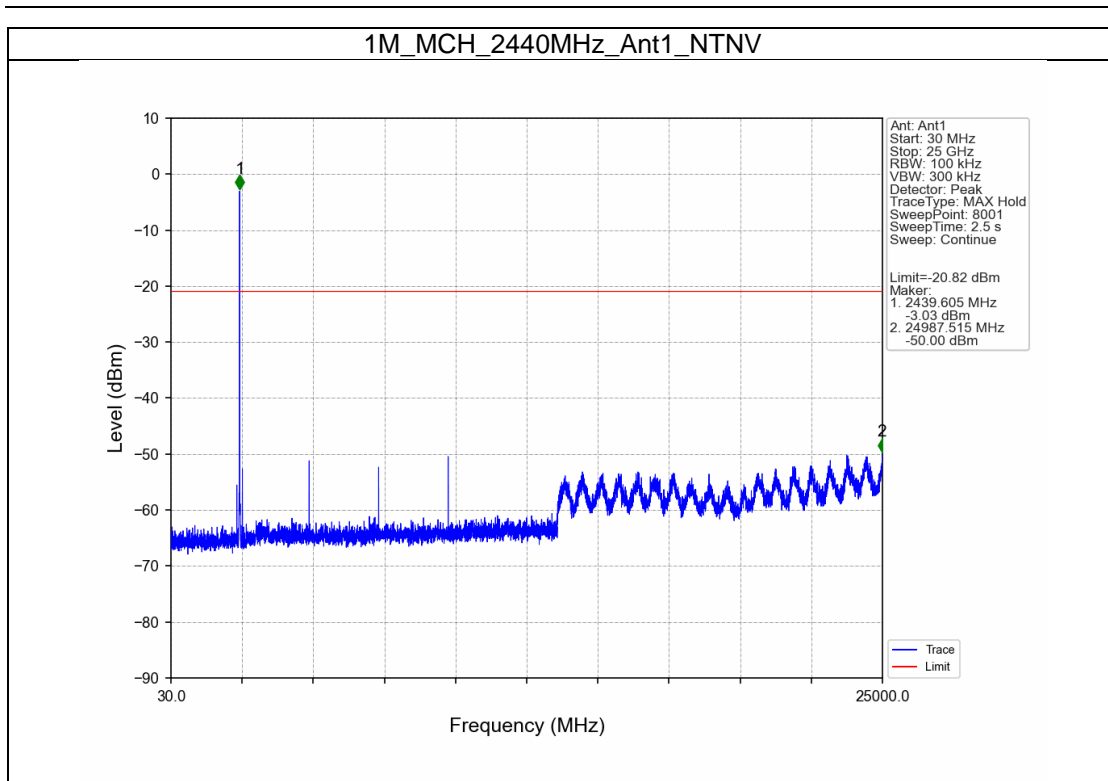

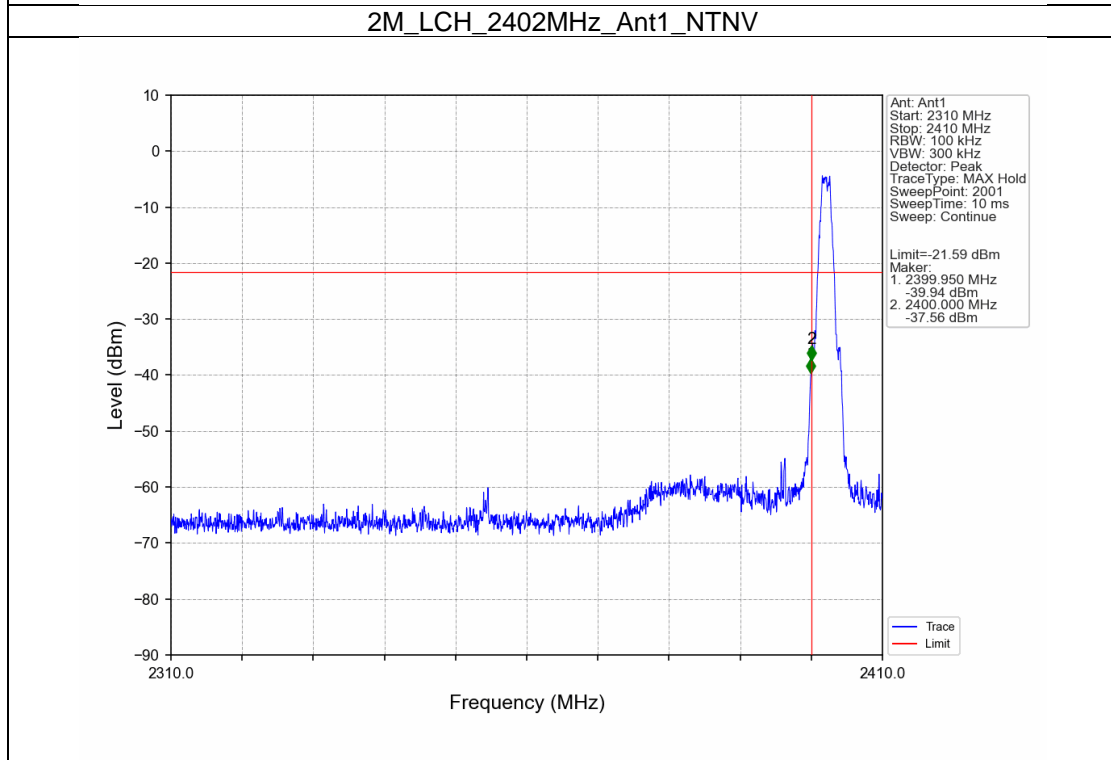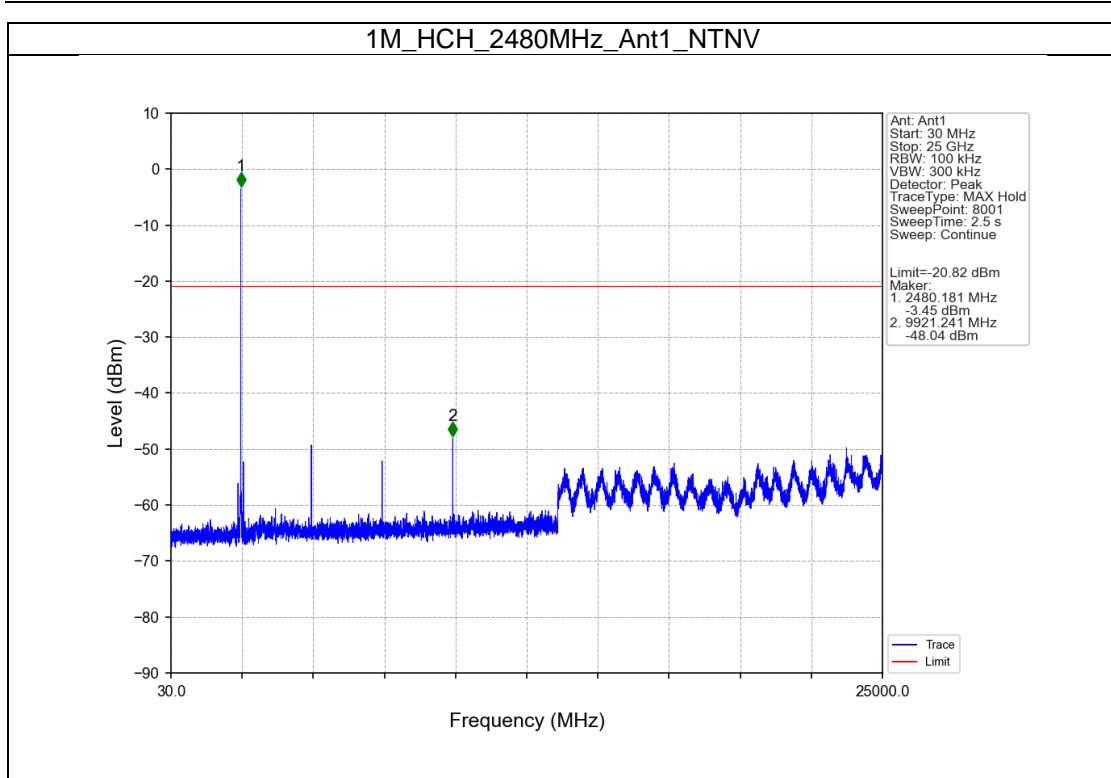

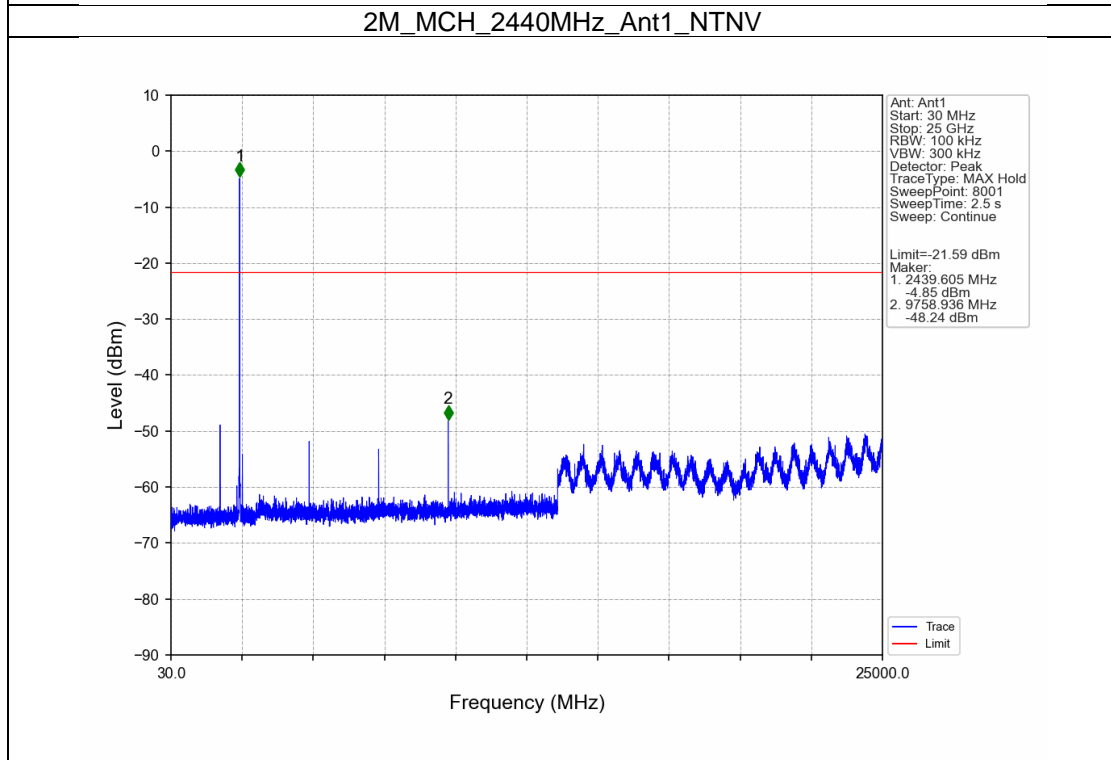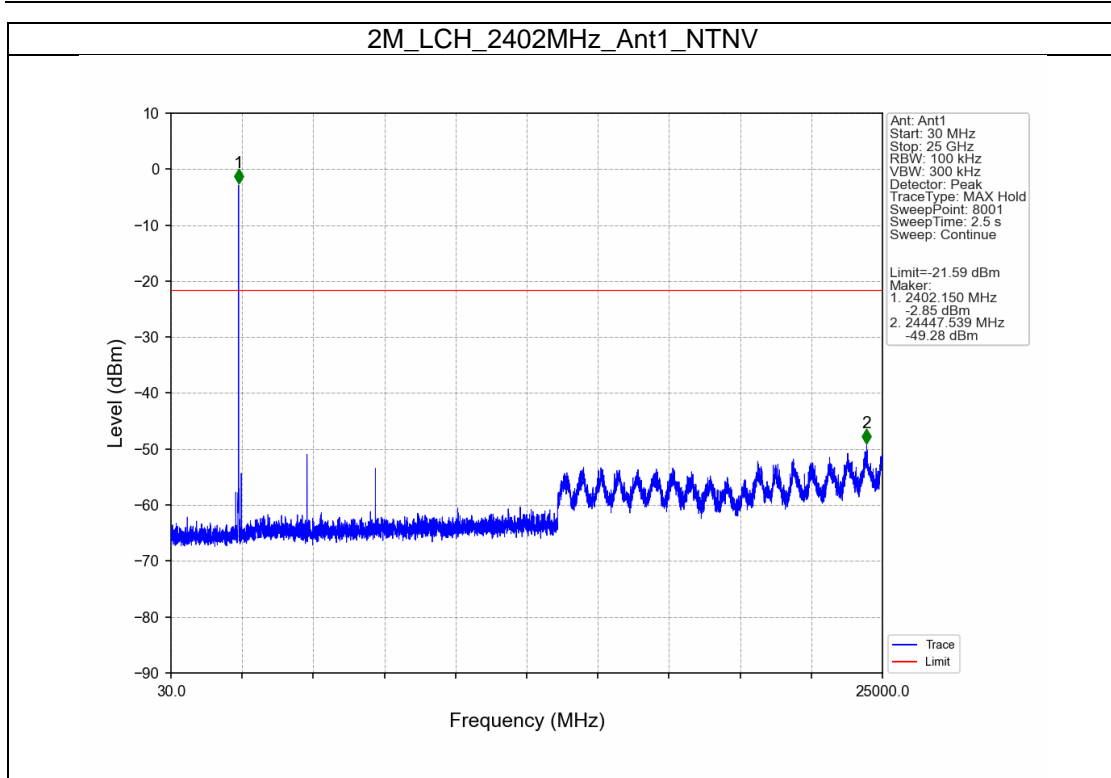

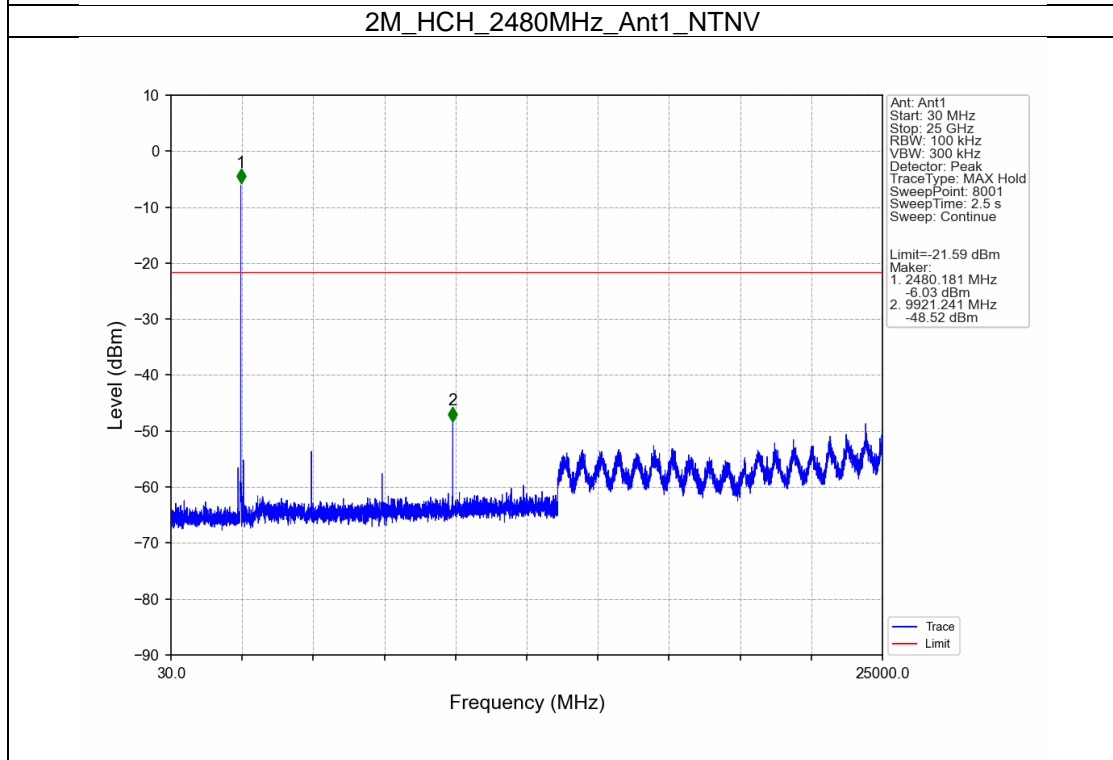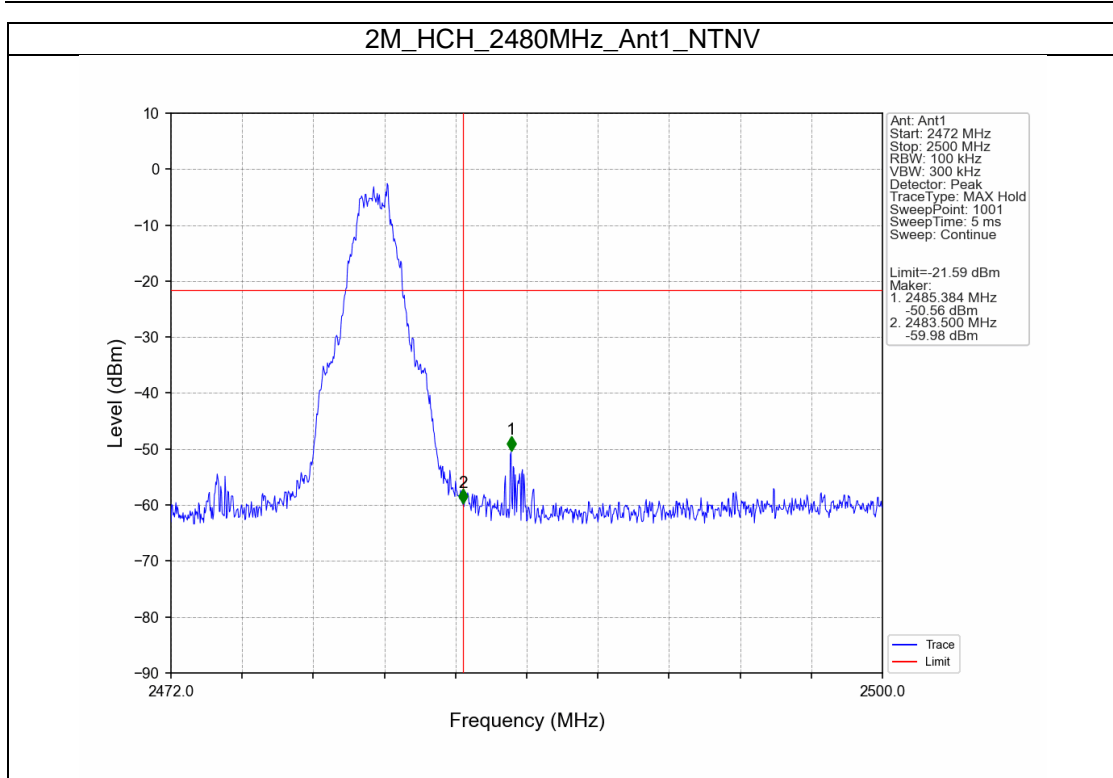

6. Form731

6.1 Test Result

6.1.1 Form731

Lower Freq (MHz)	High Freq (MHz)	MAX Power (W)	MAX Power (dBm)
2402	2480	0.0008	-0.94