

# FCC Test Report

**Applicant** : Easy RFID Technologies Ltd

---

**Address** : 581, No. 93 Qianjin Second Road, 81st District, Hexi Community, Xixiang Street, Bao'an District, Shenzhen, 518000, China

---

**Product Name** : 4 Ports UHF RFID Tag Quality Measurement Instrument

---

**Report Date** : Oct. 22, 2024

---



**Shenzhen Anbotek Compliance Laboratory Limited**



# Contents

- 1. General Information ..... 6
  - 1.1. Client Information ..... 6
  - 1.2. Description of Device (EUT) ..... 6
  - 1.3. Auxiliary Equipment Used During Test ..... 7
  - 1.4. Description of Test Modes ..... 7
  - 1.5. Description Of Test Setup ..... 8
  - 1.6. Test Equipment List ..... 9
  - 1.7. Measurement Uncertainty ..... 10
  - 1.8. Description of Test Facility ..... 10
  - 1.9.Disclaimer ..... 11
- 2. Summary of Test Results ..... 12
- 3. Conducted Emission Test ..... 13
  - 3.1. Test Standard and Limit ..... 13
  - 3.2. Test Setup ..... 13
  - 3.3. Test Procedure ..... 13
  - 3.4. Test Data ..... 13
- 4. Radiation Spurious Emission and Band Edge ..... 16
  - 4.1. Test Standard and Limit ..... 16
  - 4.2. Test Setup ..... 16
  - 4.3. Test Procedure ..... 17
  - 4.4. Test Data ..... 18
- 5. Maximum Peak Output Power Test ..... 24
  - 5.1. Test Standard and Limit ..... 24
  - 5.2. Test Setup ..... 24
  - 5.3. Test Procedure ..... 24
  - 5.4. Test Data ..... 24
- 6. 20dB Occupy Bandwidth Test ..... 26
  - 6.1. Test Standard ..... 26
  - 6.2. Test Setup ..... 26
  - 6.3. Test Procedure ..... 26
  - 6.4. Test Data ..... 26
- 7. Carrier Frequency Separation Test ..... 28
  - 7.1. Test Standard and Limit ..... 28
  - 7.2. Test Setup ..... 28
  - 7.3. Test Procedure ..... 28
  - 7.4. 7.4. Test Data ..... 28
- 8. Number of Hopping Channel Test ..... 30
  - 8.1. Test Standard and Limit ..... 30



8.2. Test Setup ..... 30  
8.3. Test Procedure ..... 30  
8.4. Test Data ..... 30  
9. Dwell Time Test ..... 32  
9.1. Test Standard and Limit ..... 32  
9.2. Test Setup ..... 32  
9.3. Test Procedure ..... 32  
9.4. Test Data ..... 32  
10. 100kHz Bandwidth of Frequency Band Edge Requirement ..... 34  
10.1. Test Standard and Limit ..... 34  
10.2. Test Setup ..... 34  
10.3. Test Procedure ..... 34  
10.4. Test Data ..... 34  
11. Antenna Requirement ..... 37  
11.1. Test Standard and Requirement ..... 37  
11.2. Antenna Connected Construction ..... 37  
APPENDIX I -- TEST SETUP PHOTOGRAPH ..... 38  
APPENDIX II -- EXTERNAL PHOTOGRAPH ..... 38  
APPENDIX III -- INTERNAL PHOTOGRAPH ..... 38



# TEST REPORT

Applicant : Easy RFID Technologies Ltd  
Manufacturer : Easy RFID Technologies Ltd  
Product Name : 4 Ports UHF RFID Tag Quality Measurement Instrument  
Model No. : EZ-Tagchecker, EZ-Tagchecker-B, EZ710R-4  
Trade Mark : N/A  
Rating(s) : Input: 12V=700mA  
Test Standard(s) : 47 CFR Part 15.247  
Test Method(s) : ANSI C63.10: 2020

The device described above is tested by Shenzhen Anbotek Compliance Laboratory Limited to determine the maximum emission levels emanating from the device and the severe levels of the device can endure and its performance criterion. The measurement results are contained in this test report and Shenzhen Anbotek Compliance Laboratory Limited is assumed full of responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT (Equipment Under Test) is technically compliant with the 47 CFR Part 15.247 requirements.

This report applies to above tested sample only and shall not be reproduced in part without written approval of Shenzhen Anbotek Compliance Laboratory Limited.


Date of Receipt

Aug. 30, 2024

Date of Test

Aug. 30, 2024 to Sept. 24, 2024

Prepared By



(Nianxiu Chen)

Approved &amp; Authorized Signer



(Kingkong Jin)



### Revision History

| Report Version | Description     | Issued Date   |
|----------------|-----------------|---------------|
| R00            | Original Issue. | Oct. 22, 2024 |
|                |                 |               |
|                |                 |               |



## 1. General Information

### 1.1. Client Information

|              |   |  |
|--------------|---|--|
| Applicant    | : | Easy RFID Technologies Ltd   |
| Address      | : | 581, No. 93 Qianjin Second Road, 81st District, Hexi Community, Xixiang Street, Bao'an District, Shenzhen, 518000, China |
| Manufacturer | : | Easy RFID Technologies Ltd   |
| Address      | : | 581, No. 93 Qianjin Second Road, 81st District, Hexi Community, Xixiang Street, Bao'an District, Shenzhen, 518000, China |
| Factory      | : | Shenzhen REALID Intelligent Technology Co., Ltd  |
| Address      | : | A506, Building A, Mingyou Centre, Yuye Community, Xixiang Street, Bao'an District, Shenzhen, China                       |

### 1.2. Description of Device (EUT)

|                   |   |  |
|-------------------|---|--|
| Product Name      | : | 4 Ports UHF RFID Tag Quality Measurement Instrument  |
| Model No.         | : | EZ-Tagchecker, EZ-Tagchecker-B, EZ710R-4<br>(Note: All samples are the same except the model number, so we prepare "EZ-Tagchecker" for test only.) |
| Trade Mark        | : | N/A  |
| Test Power Supply | : | DC 12V from Adapter input AC 120V/60Hz   |
| Test Sample No.   | : | 1-2-1(Normal Sample), 1-2-2(Engineering Sample)  |
| Adapter           | : | N.A.   |

#### RF Specification

|                     |   |  |
|---------------------|---|--|
| Operation Mode      | : | <input type="checkbox"/> DSSS <input checked="" type="checkbox"/> FHSS |
| Operation Frequency | : | 902~928MHz   |
| Number of Channel   | : | 50 Channels  |
| Modulation Type     | : | ASK  |
| Antenna Type        | : | External Antenna   |
| Antenna Gain(Peak)  | : | 3dBi   |

**Remark:** 1) All of the RF specification are provided by customer.

2) For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

3) The 4 antennas cannot transmit at the same time. For example, when using antenna 1, only antenna 1 can transmit. During the test, pre-scan all antennas, only the worst case(antenna 4) is recorded in the report.



### 1.3. Auxiliary Equipment Used During Test

| Title   | Manufacturer                                      | Model No.      | Serial No. |
|---------|---|----------------|------------|
| Adapter | SHENZHEN GOSPELL<br>DIGITAL TECHNOLOGY<br>CO.,LTD | G0957C-120-300 | /          |

### 1.4. Description of Test Modes

| Channel | Freq. (MHz) | Channel | Freq. (MHz) | Channel | Freq. (MHz) | Channel | Freq. (MHz) | Channel | Freq. (MHz) |
|---------|-------------|---------|-------------|---------|-------------|---------|-------------|---------|-------------|
| 1       | 902.75      | 11      | 907.75      | 21      | 912.75      | 31      | 917.75      | 41      | 922.75      |
| 2       | 903.25      | 12      | 908.25      | 22      | 913.25      | 32      | 918.25      | 42      | 923.25      |
| 3       | 903.75      | 13      | 908.75      | 23      | 913.75      | 33      | 918.75      | 43      | 923.75      |
| 4       | 904.25      | 14      | 909.25      | 24      | 914.25      | 34      | 919.25      | 44      | 924.25      |
| 5       | 904.75      | 15      | 909.75      | 25      | 914.75      | 35      | 919.75      | 45      | 924.75      |
| 6       | 905.25      | 16      | 910.25      | 26      | 915.25      | 36      | 920.25      | 46      | 925.25      |
| 7       | 905.75      | 17      | 910.75      | 27      | 915.75      | 37      | 920.75      | 47      | 925.75      |
| 8       | 906.25      | 18      | 911.25      | 28      | 916.25      | 38      | 921.25      | 48      | 926.25      |
| 9       | 906.75      | 19      | 911.75      | 29      | 916.75      | 39      | 921.75      | 49      | 926.75      |
| 10      | 907.25      | 20      | 912.25      | 30      | 917.25      | 40      | 922.25      | 50      | 927.25      |


Note:

1. The engineering test program was provided and the EUT was programmed to be in continuously transmitting mode.
2. EUT was tested with Channel 1, 25 and 50.




### 1.5. Description Of Test Setup

CE

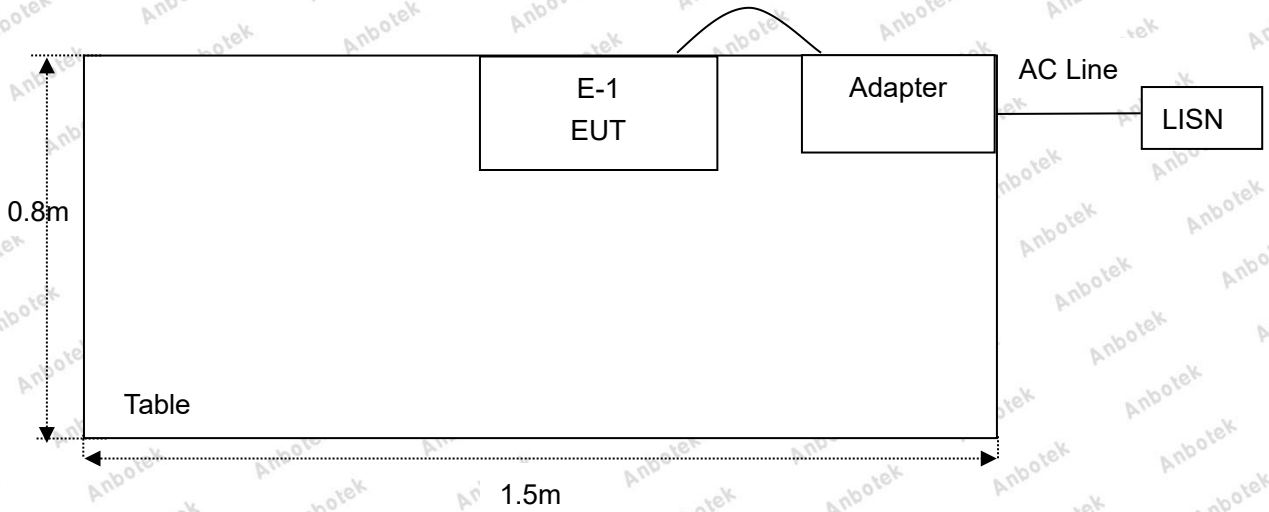

RE

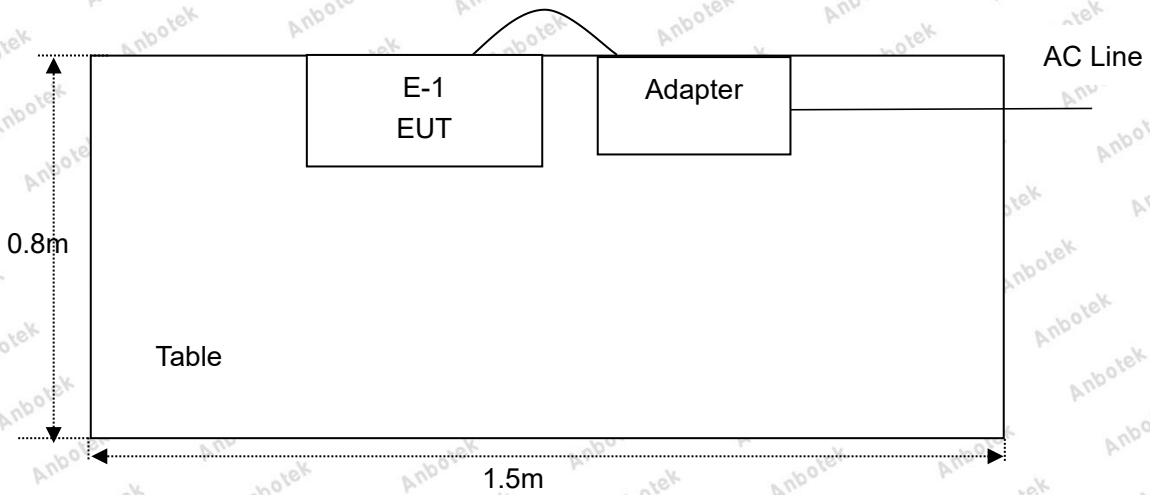



## 1.6. Test Equipment List

| Item | Equipment   | Manufacturer    | Model No.         | Serial No.   | Last Cal.     | Cal. Interval |
|------|---|-----------------|-------------------|--------------|---------------|---------------|
| 1.   | L.I.S.N.<br>Artificial Mains<br>Network           | Rohde & Schwarz | ENV216            | 100055       | Jan. 18, 2024 | 1 Year        |
| 2.   | Three Phase V-type<br>Artificial Power<br>Network | CYBERTEK        | EM5040DT          | E215040DT001 | Jan. 18, 2024 | 1 Year        |
| 3.   | EMI Test Receiver                                 | Rohde & Schwarz | ESCI              | 100627       | Oct. 12, 2023 | 1 Year        |
| 4.   | EMI Test Receiver                                 | Rohde & Schwarz | ESR26             | 101481       | Jan. 23, 2024 | 1 Year        |
| 5.   | MXA Spectrum<br>Analysis                          | Agilent         | N9020A            | MY51170037   | Oct. 12, 2023 | 1 Year        |
| 6.   | EMI Preamplifier                                  | SKET Electronic | LNPA-0118G<br>-45 | SKET-PA-002  | Jan. 17, 2024 | 1 Year        |
| 7.   | Double Ridged Horn<br>Antenna                     | SCHWARZBECK     | BBHA<br>9120D     | 02555        | Oct. 16, 2022 | 3 Year        |
| 8.   | Bilog Broadband<br>Antenna                        | Schwarzbeck     | VULB9163          | 345          | Oct. 23, 2022 | 3 Year        |
| 9.   | Loop Antenna                                      | Schwarzbeck     | FMZB1519B         | 00053        | Oct. 12, 2023 | 1 Year        |
| 10.  | Horn Antenna                                      | A-INFO          | LB-180400-<br>KF  | J211060628   | Oct. 12, 2023 | 1 Year        |
| 11.  | Pre-amplifier                                     | SONOMA          | 310N              | 186860       | Jan. 17, 2024 | 1 Year        |
| 12.  | EMI Test Software<br>EZ-EMC                       | SHURPLE         | N/A               | N/A          | N/A           | N/A           |
| 13.  | MXA Spectrum<br>Analysis                          | KEYSIGHT        | N9020A            | MY53280032   | Oct. 12, 2023 | 1 Year        |
| 14.  | MXG RF Vector<br>Signal Generator                 | Agilent         | N5182A            | MY48180656   | Oct. 12, 2023 | 1 Year        |
| 15.  | Signal Generator                                  | Agilent         | E4421B            | MY41000743   | Oct. 12, 2023 | 1 Year        |
| 16.  | DC Power Supply                                   | IVYTECH         | IV3605            | 1804D360510  | Oct. 20, 2023 | 1 Year        |
| 17.  | Constant<br>Temperature<br>Humidity Chamber       | ZHONGJIAN       | ZJ-KHWS80<br>B    | N/A          | Oct. 16, 2023 | 1 Year        |
| 18.  | Spectrum Analyzer                                 | Rohde & Schwarz | FSV40-N           | 102150       | May. 06, 2024 | 1 Year        |



**1.7. Measurement Uncertainty**

| Parameter   | Uncertainty   |
|---|---|
| Conducted emissions (AMN 150kHz~30MHz)  | 3.8dB   |
| Occupied Bandwidth  | 925Hz   |
| Conducted Output Power  | 0.76dB  |
| Conducted Spurious Emission   | 1.24dB  |
| Radiated spurious emissions (Below 30MHz)   | 3.53dB  |
| Radiated spurious emissions (30MHz~1GHz)  | Horizontal: 3.92dB; Vertical: 4.52dB                      |
| Radiated spurious emissions (above 1GHz)  | 1G-6GHz: 4.78dB;<br>6G-18GHz: 4.88dB<br>18G-40GHz: 5.68dB |
| The measurement uncertainty and decision risk evaluated according to AB/WI-RF-F-032.<br>This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2. |   |

**1.8. Description of Test Facility**

The test facility is recognized, certified, or accredited by the following organizations:

**FCC-Registration No.: 434132**

Shenzhen Anbotek Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No. 434132.

**ISED-Registration No.: 8058A**

Shenzhen Anbotek Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (ISED) Innovation, Science and Economic Development Canada. The acceptance letter from the ISED is maintained in our files. Registration 8058A.

**Test Location**

Shenzhen Anbotek Compliance Laboratory Limited.

Sogood Industrial Zone Laboratory & 1/F. of Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Subdistrict, Bao'an District, Shenzhen, Guangdong, China.



### 1.9.Disclaimer

1. The test report is invalid if not marked with the signatures of the persons responsible for preparing and approving the test report.
2. The test report is invalid if there is any evidence and/or falsification.
3. The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein.
4. This document may not be altered or revised in any way unless done so by Anbotek and all revisions are duly noted in the revisions section.
5. Content of the test report, in part or in full, cannot be used for publicity and/or promotional purposes without prior written approval from the laboratory.
6. The authenticity of the information provided by the customer is the responsibility of the customer and the laboratory is not responsible for its authenticity.

The laboratory is only responsible for the data released by the laboratory, except for the part provided by the applicant.



## 2. Summary of Test Results

| Standard Section  | Test Item                      | Result |
|---|--------------------------------|--------|
| 15.203/15.247(c)  | Antenna Requirement            | PASS   |
| 15.207  | Conducted Emission             | PASS   |
| 15.205/15.209   | Spurious Emission              | PASS   |
| 15.247(b)(2)  | Conducted Peak Output Power    | PASS   |
| 15.247(a)(1)(i)   | 20dB Occupied Bandwidth        | PASS   |
| 15.247(a)(1)  | Carrier Frequencies Separation | PASS   |
| 15.247(a)(1)(i)   | Hopping Channel Number         | PASS   |
| 15.247(a)(1)(i), 15.247(f)                                  | Dwell Time                     | PASS   |
| 15.247(d)   | Band Edge                      | PASS   |
| <b>Remark:</b> "N/A" is an abbreviation for Not Applicable. |                                |        |




### 3. Conducted Emission Test

#### 3.1. Test Standard and Limit

|  |                           |                                |               |
|--|---------------------------|--------------------------------|---------------|
| Test Standard  | FCC Part15 Section 15.207 |                                |               |
| Test Limit   | Frequency                 | Maximum RF Line Voltage (dBuV) |               |
|  |                           | Quasi-peak Level               | Average Level |
|  | 150kHz~500kHz             | 66 ~ 56 *                      | 56 ~ 46 *     |
|  | 500kHz~5MHz               | 56                             | 46            |
|  | 5MHz~30MHz                | 60                             | 50            |
| <b>Remark:</b> (1) *Decreasing linearly with logarithm of the frequency.<br>(2) The lower limit shall apply at the transition frequency. |                           |                                |               |

#### 3.2. Test Setup

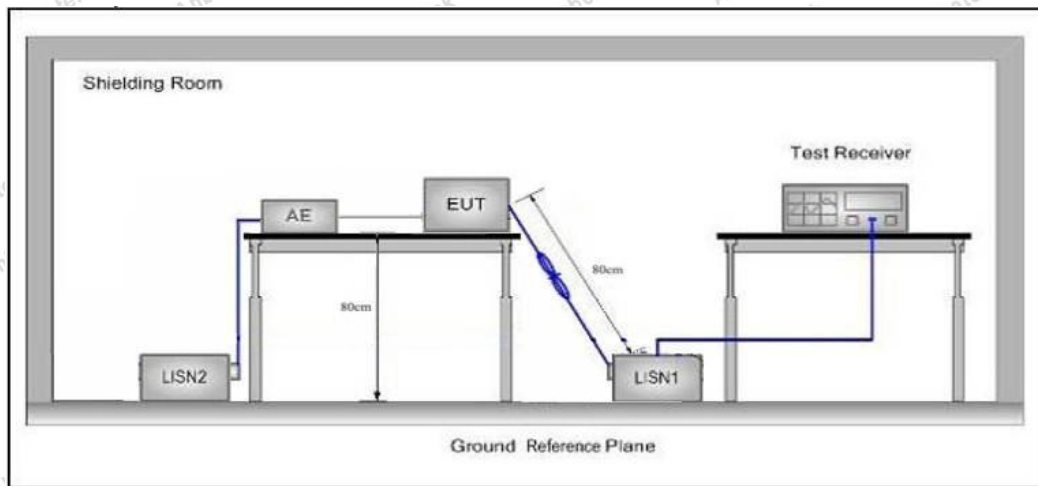

#### 3.3. Test Procedure

The EUT system is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to FCC ANSI C63.10: 2020 on Conducted Emission Measurement.

The bandwidth of test receiver (ESCI) set at 9kHz.

The frequency range from 150kHz to 30MHz is checked.

#### 3.4. Test Data


During the test, pre-scan all modes, only the worst case is recorded in the report.

Please to see the following pages.



### Conducted Emission Test Data

Test Site: 1# Shielded Room  
 Operating Condition: 902.75MHz  
 Test Specification: DC 12V from Adapter input AC 120V/60Hz  
 Comment: Live Line  
 Temp.(°C)/Hum.(%RH): 23.9°C/50%RH

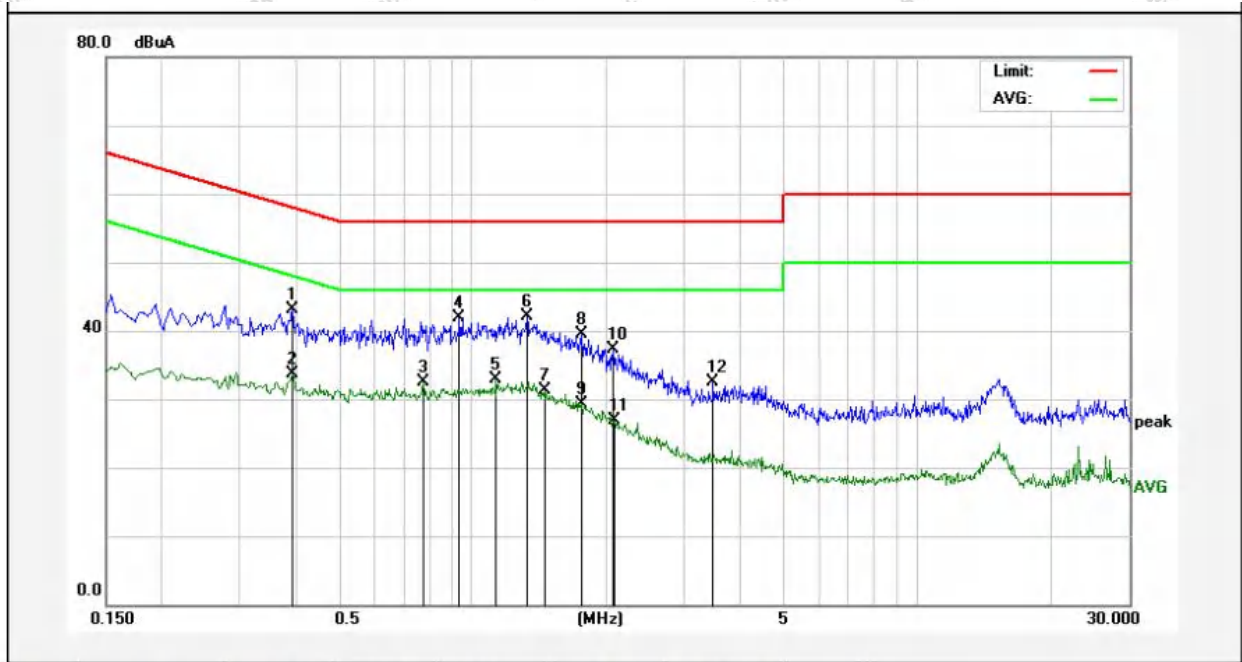


| No. | Freq. (MHz) | Reading (dBuA) | Factor (dB) | Result (dBuA) | Limit (dBuA) | Over Limit (dB) | Detector | Remark |
|-----|-------------|----------------|-------------|---------------|--------------|-----------------|----------|--------|
| 1   | 0.3940      | 25.34          | 17.81       | 43.15         | 57.98        | -14.83          | QP       |        |
| 2   | 0.3940      | 15.93          | 17.81       | 33.74         | 47.98        | -14.24          | AVG      |        |
| 3   | 0.7780      | 14.63          | 17.86       | 32.49         | 46.00        | -13.51          | AVG      |        |
| 4   | 0.9380      | 24.06          | 17.85       | 41.91         | 56.00        | -14.09          | QP       |        |
| 5   | 1.1300      | 15.01          | 17.85       | 32.86         | 46.00        | -13.14          | AVG      |        |
| 6   | 1.3300      | 24.20          | 17.84       | 42.04         | 56.00        | -13.96          | QP       |        |
| 7   | 1.4500      | 13.54          | 17.84       | 31.38         | 46.00        | -14.62          | AVG      |        |
| 8   | 1.7700      | 21.64          | 17.84       | 39.48         | 56.00        | -16.52          | QP       |        |
| 9   | 1.7700      | 11.46          | 17.84       | 29.30         | 46.00        | -16.70          | AVG      |        |
| 10  | 2.0740      | 19.44          | 17.83       | 37.27         | 56.00        | -18.73          | QP       |        |
| 11  | 2.0780      | 9.17           | 17.83       | 27.00         | 46.00        | -19.00          | AVG      |        |
| 12  | 3.4820      | 14.58          | 17.84       | 32.42         | 56.00        | -23.58          | QP       |        |



### Conducted Emission Test Data

Test Site: 1# Shielded Room  
 Operating Condition: 902.75MHz  
 Test Specification: DC 12V from Adapter input AC 120V/60Hz  
 Comment: Neutral Line  
 Temp.(°C)/Hum.(%RH): 23.9°C/50%RH

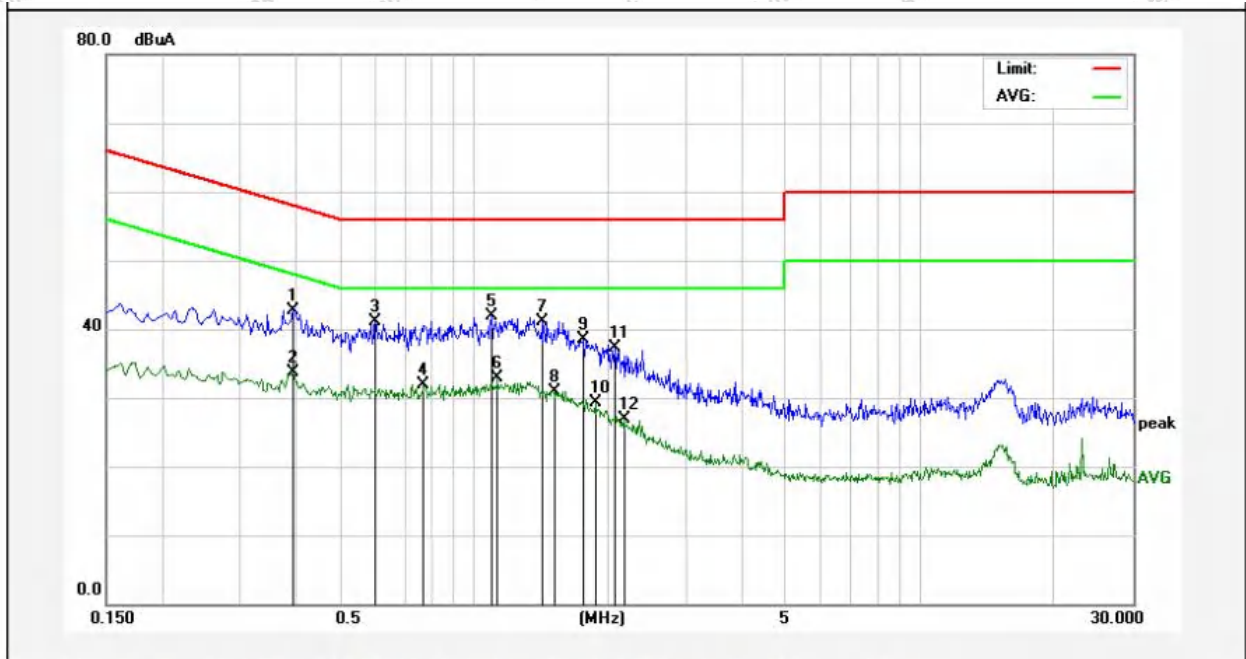

| No. | Freq. (MHz) | Reading (dBuA) | Factor (dB) | Result (dBuA) | Limit (dBuA) | Over Limit (dB) | Detector | Remark |
|-----|-------------|----------------|-------------|---------------|--------------|-----------------|----------|--------|
| 1   | 0.3940      | 24.86          | 17.81       | 42.67         | 57.98        | -15.31          | QP       |        |
| 2   | 0.3940      | 15.85          | 17.81       | 33.66         | 47.98        | -14.32          | AVG      |        |
| 3   | 0.6020      | 23.24          | 17.86       | 41.10         | 56.00        | -14.90          | QP       |        |
| 4   | 0.7740      | 14.11          | 17.87       | 31.98         | 46.00        | -14.02          | AVG      |        |
| 5   | 1.0980      | 24.00          | 17.85       | 41.85         | 56.00        | -14.15          | QP       |        |
| 6   | 1.1300      | 15.07          | 17.85       | 32.92         | 46.00        | -13.08          | AVG      |        |
| 7   | 1.4260      | 23.31          | 17.84       | 41.15         | 56.00        | -14.85          | QP       |        |
| 8   | 1.5140      | 13.13          | 17.84       | 30.97         | 46.00        | -15.03          | AVG      |        |
| 9   | 1.7660      | 20.67          | 17.84       | 38.51         | 56.00        | -17.49          | QP       |        |
| 10  | 1.8700      | 11.46          | 17.83       | 29.29         | 46.00        | -16.71          | AVG      |        |
| 11  | 2.0660      | 19.39          | 17.83       | 37.22         | 56.00        | -18.78          | QP       |        |
| 12  | 2.1780      | 9.16           | 17.83       | 26.99         | 46.00        | -19.01          | AVG      |        |



## 4. Radiation Spurious Emission and Band Edge

### 4.1. Test Standard and Limit

| Test Standard | FCC Part15 C Section 15.209 and 15.205 |                                  |                |            |                          |
|---------------|--|----------------------------------|----------------|------------|--------------------------|
| Test Limit    | Frequency (MHz)                        | Field strength (microvolt/meter) | Limit (dBuV/m) | Remark     | Measurement distance (m) |
|               | 0.009MHz~0.490MHz                      | 2400/F(kHz)                      | -              | -          | 300                      |
|               | 0.490MHz-1.705MHz                      | 24000/F(kHz)                     | -              | -          | 30                       |
|               | 1.705MHz-30MHz                         | 30                               | -              | -          | 30                       |
|               | 30MHz~88MHz                            | 100                              | 40.0           | Quasi-peak | 3                        |
|               | 88MHz~216MHz                           | 150                              | 43.5           | Quasi-peak | 3                        |
|               | 216MHz~960MHz                          | 200                              | 46.0           | Quasi-peak | 3                        |
|               | 960MHz~1000MHz                         | 500                              | 54.0           | Quasi-peak | 3                        |
|               | Above 1000MHz                          | 500                              | 54.0           | Average    | 3                        |
| -             |  | -                                | 74.0           | Peak       | 3                        |

**Remark:**

- (1) The lower limit shall apply at the transition frequency.
- (2) 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

### 4.2. Test Setup

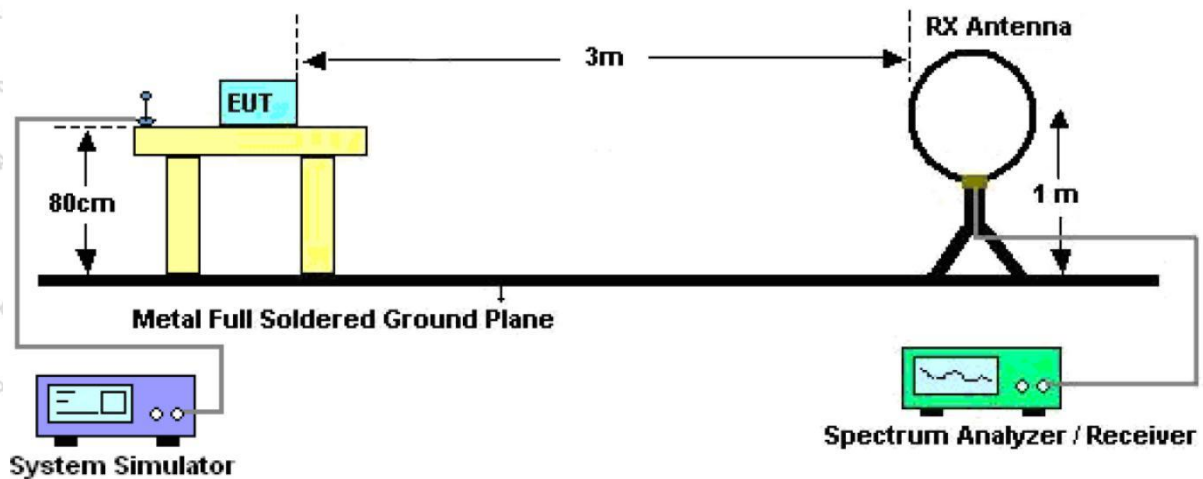


Figure 1. Below 30MHz





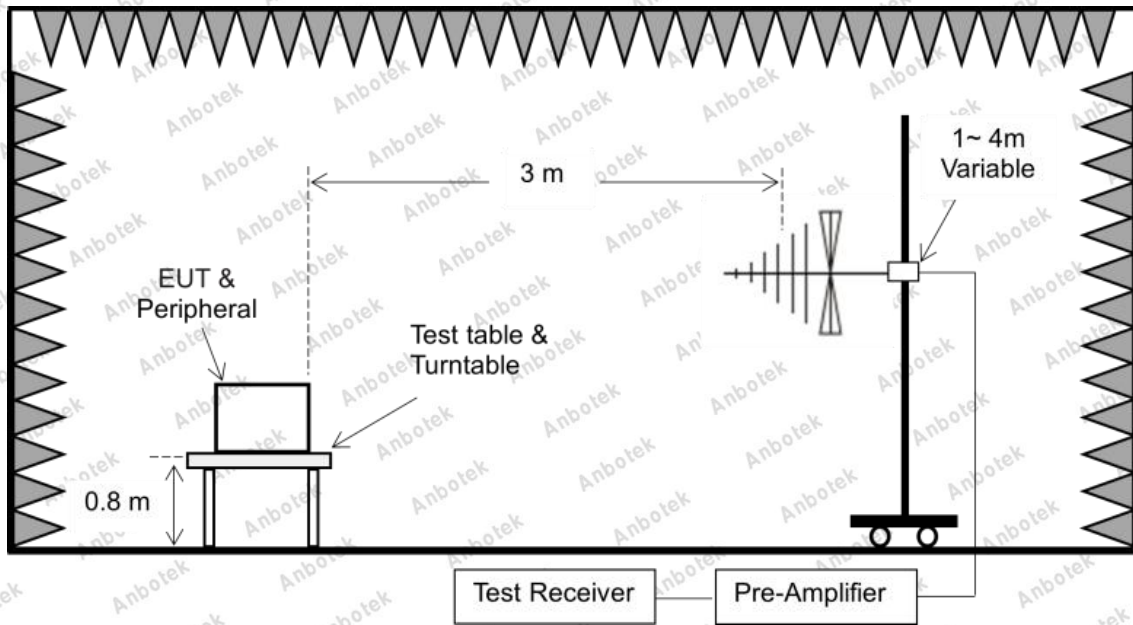


Figure 2. 30MHz to 1GHz

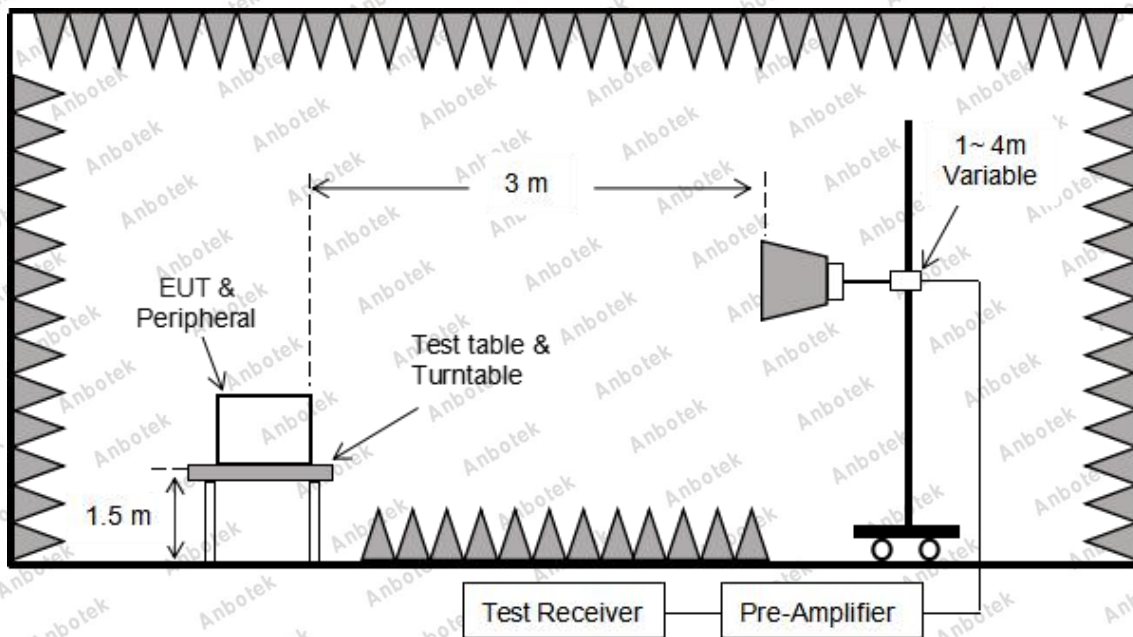


Figure 3. Above 1 GHz

**4.3. Test Procedure**

For below 1GHz: The EUT is placed on a turntable, which is 0.8m above the ground plane.

For above 1GHz: The EUT is placed on a turntable, which is 1.5m above the ground plane.

The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT is set 3 meters away from the receiving antenna which is mounted on a antenna tower. The antenna can be moved up and down from 1 to 4 meters to find out the maximum emission level.

Rotated the EUT through three orthogonal axes to determine the maximum emissions, both horizontal and vertical polarization of the antenna are set on test. The EUT is tested in 9\*6\*6 Chamber. The device is evaluated in xyz orientation.



For the radiated emission test above 1GHz:

Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.

For 9kHz to 150kHz, Set the spectrum analyzer as:

RBW = 200Hz, VBW = 1kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For 150kHz to 30MHz, Set the spectrum analyzer as:

RBW = 9KHz, VBW = 30kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For 30MHz to 1000MHz, Set the spectrum analyzer as:

RBW = 100kHz, VBW = 300kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For above 1GHz, Set the spectrum analyzer as:

RBW = 1MHz, VBW = 1MHz, Detector= Peak, Trace mode= Max hold, Sweep- auto couple.

RBW = 1MHz, VBW = 10Hz, Detector= Average, Trace mode= Max hold, Sweep- auto couple.

#### 4.4. Test Data

##### PASS

During the test, Pre-scan all kind of the place mode (X-axis, Y-axis, Z-axis), and found the X-axis is the worst case.


The test results of 9kHz-30MHz was attenuated more than 20dB below the permissible limits, so the results don't record in the report.

During the test, pre-scan all modes, only the worst case is recorded in the report.



### Test Results (30~1000MHz)

Test Mode: 902.75MHz  
 Power Source: DC 12V from Adapter input AC 120V/60Hz  
 Polarization: Horizontal  
 Temp.(°C)/Hum.(%RH): 22.6°C/56%RH  
 Fundamental

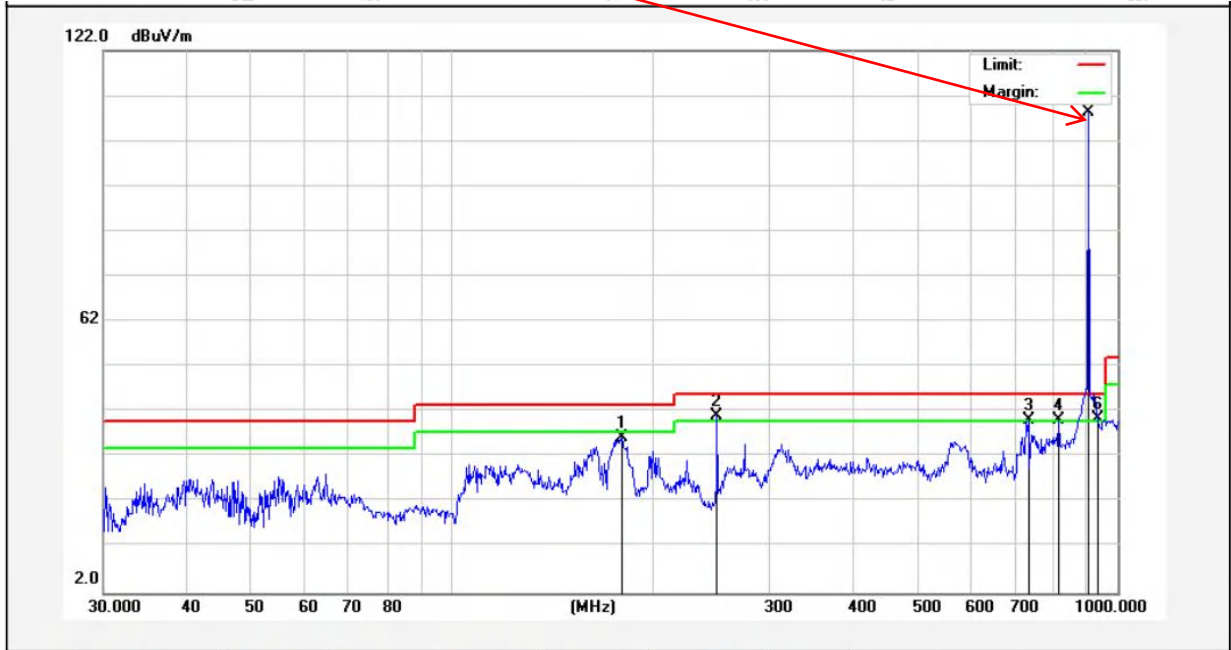


| No. | Freq. (MHz) | Reading (dBuV) | Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Over Limit (dB) | Detector |
|-----|-------------|----------------|---------------|-----------------|----------------|-----------------|----------|
| 1   | 180.0165    | 57.92          | -21.59        | 36.33           | 43.50          | -7.17           | QP       |
| 2   | 250.3010    | 60.54          | -19.41        | 41.13           | 46.00          | -4.87           | QP       |
| 3   | 734.4913    | 49.78          | -9.44         | 40.34           | 46.00          | -5.66           | QP       |
| 4   | 815.9678    | 48.30          | -8.01         | 40.29           | 46.00          | -5.71           | QP       |
| 5   | 903.3093    | 114.62         | -6.19         | 108.43          | 46.00          |                 |          |
| 6   | 935.5461    | 46.41          | -5.81         | 40.60           | 46.00          | -5.40           | QP       |



### Test Results (30~1000MHz)

Test Mode: 902.75MHz  
 Power Source: DC 12V from Adapter input AC 120V/60Hz  
 Polarization: Vertical  
 Temp.(°C)/Hum.(%RH): 22.6°C/56%RH  
 Fundamental

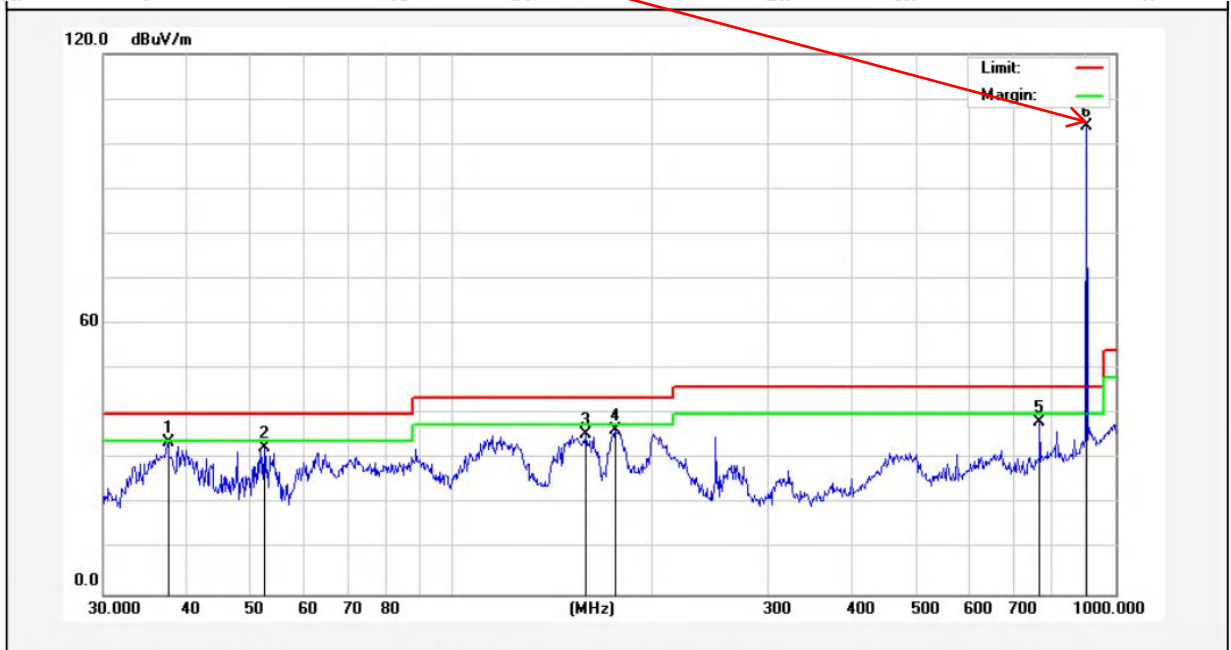

| No. | Freq. (MHz) | Reading (dBuV) | Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Over Limit (dB) | Detector |
|-----|-------------|----------------|---------------|-----------------|----------------|-----------------|----------|
| 1   | 37.5478     | 49.55          | -15.83        | 33.72           | 40.00          | -6.28           | QP       |
| 2   | 52.3912     | 49.09          | -16.66        | 32.43           | 40.00          | -7.57           | QP       |
| 3   | 159.7844    | 57.30          | -21.67        | 35.63           | 43.50          | -7.87           | QP       |
| 4   | 176.8875    | 57.24          | -20.76        | 36.48           | 43.50          | -7.02           | QP       |
| 5   | 768.7481    | 47.07          | -8.87         | 38.20           | 46.00          | -7.80           | QP       |
| 6   | 903.3093    | 110.24         | -6.19         | 104.05          | 46.00          |                 |          |



### Test Results (1GHz-25GHz)

| Test channel: Lowest |                |               |                 |                |                 |              |
|----------------------|----------------|---------------|-----------------|----------------|-----------------|--------------|
| Peak value:          |                |               |                 |                |                 |              |
| Frequency (MHz)      | Reading (dBuV) | Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Over Limit (dB) | polarization |
| 1805.50              | 31.82          | 17.67         | 49.49           | 74.00          | -24.51          | Vertical     |
| 2708.25              | 31.31          | 20.94         | 52.25           | 74.00          | -21.75          | Vertical     |
| 3611.00              | 33.31          | 22.51         | 55.82           | 74.00          | -18.18          | Vertical     |
| 4513.75              | *              |               |                 | 74.00          |                 | Vertical     |
| 5416.50              | *              |               |                 | 74.00          |                 | Vertical     |
| 1805.50              | 31.20          | 17.67         | 48.87           | 74.00          | -25.13          | Horizontal   |
| 2708.25              | 33.08          | 20.94         | 54.02           | 74.00          | -19.98          | Horizontal   |
| 3611.00              | 29.56          | 22.51         | 52.07           | 74.00          | -21.93          | Horizontal   |
| 4513.75              | *              |               |                 | 74.00          |                 | Horizontal   |
| 5416.50              | *              |               |                 | 74.00          |                 | Horizontal   |
| Average value:       |                |               |                 |                |                 |              |
| Frequency (MHz)      | Reading (dBuV) | Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Over Limit (dB) | polarization |
| 1805.50              | 20.09          | 17.67         | 37.76           | 54.00          | -16.24          | Vertical     |
| 2708.25              | 20.36          | 20.94         | 41.30           | 54.00          | -12.70          | Vertical     |
| 3611.00              | 22.78          | 22.51         | 45.29           | 54.00          | -8.71           | Vertical     |
| 4513.75              | *              |               |                 | 54.00          |                 | Vertical     |
| 5416.50              | *              |               |                 | 54.00          |                 | Vertical     |
| 1805.50              | 19.53          | 17.67         | 37.20           | 54.00          | -16.80          | Horizontal   |
| 2708.25              | 22.11          | 20.94         | 43.05           | 54.00          | -10.95          | Horizontal   |
| 3611.00              | 19.07          | 22.51         | 41.58           | 54.00          | -12.42          | Horizontal   |
| 4513.75              | *              |               |                 | 54.00          |                 | Horizontal   |
| 5416.50              | *              |               |                 | 54.00          |                 | Horizontal   |



### Test Results (1GHz-25GHz)

| Test channel: Middle |                |               |                 |                |                 |              |
|----------------------|----------------|---------------|-----------------|----------------|-----------------|--------------|
| Peak value:          |                |               |                 |                |                 |              |
| Frequency (MHz)      | Reading (dBuV) | Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Over Limit (dB) | polarization |
| 1829.50              | 31.37          | 17.70         | 49.07           | 74.00          | -24.93          | Vertical     |
| 2744.25              | 31.28          | 20.97         | 52.25           | 74.00          | -21.75          | Vertical     |
| 3659.00              | 32.81          | 22.51         | 55.32           | 74.00          | -18.68          | Vertical     |
| 4573.75              | *              |               |                 | 74.00          |                 | Vertical     |
| 5488.50              | *              |               |                 | 74.00          |                 | Vertical     |
| 1829.50              | 31.01          | 17.70         | 48.71           | 74.00          | -25.29          | Horizontal   |
| 2744.25              | 32.95          | 20.97         | 53.92           | 74.00          | -20.08          | Horizontal   |
| 3659.00              | 29.28          | 22.51         | 51.79           | 74.00          | -22.21          | Horizontal   |
| 4573.75              | *              |               |                 | 74.00          |                 | Horizontal   |
| 5488.50              | *              |               |                 | 74.00          |                 | Horizontal   |
| Average value:       |                |               |                 |                |                 |              |
| Frequency (MHz)      | Reading (dBuV) | Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Over Limit (dB) | polarization |
| 1829.50              | 20.18          | 17.70         | 37.88           | 54.00          | -16.12          | polarization |
| 2744.25              | 20.22          | 20.97         | 41.19           | 54.00          | -12.81          | Vertical     |
| 3659.00              | 22.63          | 22.51         | 45.14           | 54.00          | -8.86           | Vertical     |
| 4573.75              | *              |               |                 | 54.00          |                 | Vertical     |
| 5488.50              | *              |               |                 | 54.00          |                 | Vertical     |
| 1829.50              | 19.64          | 17.70         | 37.34           | 54.00          | -16.66          | Vertical     |
| 2744.25              | 22.46          | 20.97         | 43.43           | 54.00          | -10.57          | Horizontal   |
| 3659.00              | 19.37          | 22.51         | 41.88           | 54.00          | -12.12          | Horizontal   |
| 4573.75              | *              |               |                 | 54.00          |                 | Horizontal   |
| 5488.50              | *              |               |                 | 54.00          |                 | Horizontal   |



### Test Results (1GHz-25GHz)

| Test channel: Highest |                |               |                 |                |                 |              |
|-----------------------|----------------|---------------|-----------------|----------------|-----------------|--------------|
| Peak value:           |                |               |                 |                |                 |              |
| Frequency (MHz)       | Reading (dBuV) | Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Over Limit (dB) | polarization |
| 1854.50               | 31.50          | 17.74         | 49.24           | 74.00          | -24.76          | Vertical     |
| 2781.75               | 31.44          | 20.99         | 52.43           | 74.00          | -21.57          | Vertical     |
| 3709.00               | 33.51          | 22.51         | 56.02           | 74.00          | -17.98          | Vertical     |
| 4636.25               | *              |               |                 | 74.00          |                 | Vertical     |
| 5563.50               | *              |               |                 | 74.00          |                 | Vertical     |
| 1854.50               | 31.15          | 17.74         | 48.89           | 74.00          | -25.11          | Horizontal   |
| 2781.75               | 33.16          | 20.99         | 54.15           | 74.00          | -19.85          | Horizontal   |
| 3709.00               | 29.66          | 22.51         | 52.17           | 74.00          | -21.83          | Horizontal   |
| 4636.25               | *              |               |                 | 74.00          |                 | Horizontal   |
| 5563.50               | *              |               |                 | 74.00          |                 | Horizontal   |
| Average value:        |                |               |                 |                |                 |              |
| Frequency (MHz)       | Reading (dBuV) | Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Over Limit (dB) | polarization |
| 1854.50               | 21.30          | 17.74         | 39.04           | 54.00          | -14.96          | Vertical     |
| 2781.75               | 21.49          | 20.99         | 42.48           | 54.00          | -11.52          | Vertical     |
| 3709.00               | 23.28          | 22.51         | 45.79           | 54.00          | -8.21           | Vertical     |
| 4636.25               |                |               |                 | 54.00          |                 | Vertical     |
| 5563.50               |                |               |                 | 54.00          |                 | Vertical     |
| 1854.50               | 20.82          | 17.74         | 38.56           | 54.00          | -15.44          | Horizontal   |
| 2781.75               | 23.26          | 20.99         | 44.25           | 54.00          | -9.75           | Horizontal   |
| 3709.00               | 19.52          | 22.51         | 42.03           | 54.00          | -11.97          | Horizontal   |
| 4636.25               | *              |               |                 | 54.00          |                 | Horizontal   |
| 5563.50               | *              |               |                 | 54.00          |                 | Horizontal   |

**Remark:**

- 1.Result =Reading + Factor
2. Test frequency are from 1GHz to 25GHz, "\*"means the test results were attenuated more than 20dB below the permissible limits, so the results don't record in the report.




## 5. Maximum Peak Output Power Test

### 5.1. Test Standard and Limit

|               |  |
|---------------|--|
| Test Standard | FCC Part15 C Section 15.247 (b)(2)   |
| Test Limit    | For frequency hopping systems operating in the 902-928 MHz band: 1 watt for systems employing at least 50 hopping channels; and, 0.25 watts for systems employing less than 50 hopping channels, but at least 25 hopping channels, as permitted under paragraph (a)(1)(i) of this section. |

### 5.2. Test Setup



### 5.3. Test Procedure

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above,
- Spectrum Setting:
  - RBW > the 20 dB bandwidth of the emission being measured
  - Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel
  - VBW ≥ RBW
  - Sweep = auto
  - Detector function = peak
  - Trace = max hold


### 5.4. Test Data

|              |         |           |      |                       |         |
|--------------|---------|-----------|------|-----------------------|---------|
| Temperature: | 25.3 °C | Humidity: | 48 % | Atmospheric Pressure: | 101 kPa |
|--------------|---------|-----------|------|-----------------------|---------|

| Test Channel | Peak Power output (dBm) | Limit (dBm) | Results |
|--------------|-------------------------|-------------|---------|
| Low          | 26.776                  | 30.00       | PASS    |
| Middle       | 25.859                  | 30.00       | PASS    |
| High         | 24.974                  | 30.00       | PASS    |





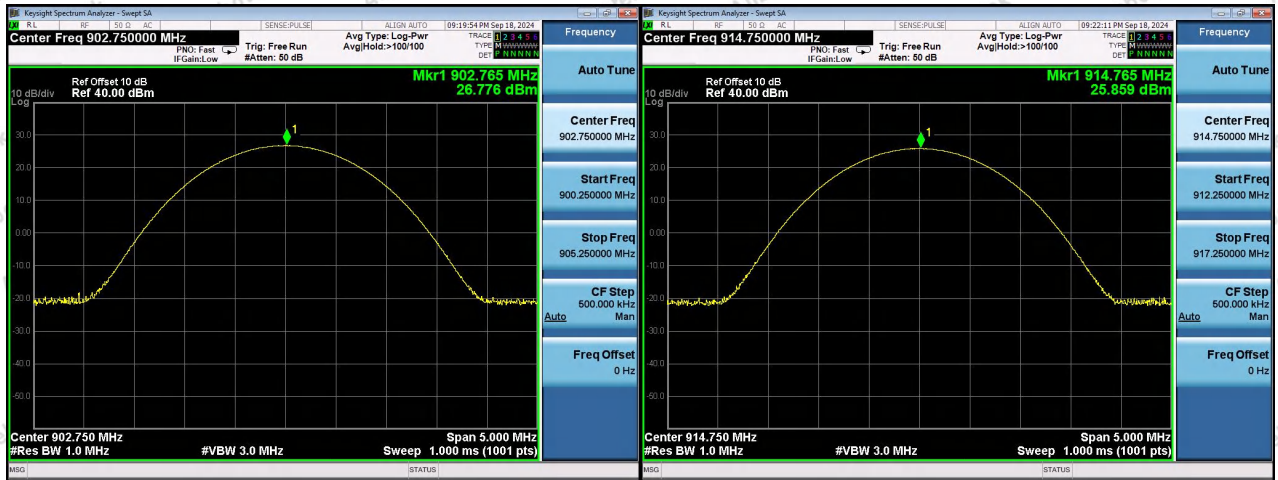

Low Channel

Mid Channel



High Channel




## 6. 20dB Occupy Bandwidth Test

### 6.1. Test Standard

|               |                                       |
|---------------|---------------------------------------|
| Test Standard | FCC Part15 C Section 15.247 (a)(1)(i) |
| Limit         | Less than 250KHz                      |

### 6.2. Test Setup



### 6.3. Test Procedure

Using the following spectrum analyzer settings:


1. Span= approximately 2 to 3 times the 20dB bandwidth, centered on a hopping channel.
2. Set the RBW  $\geq 1\%$  of the 20 dB bandwidth.
3. Set the VBW  $\geq$  RBW.
4. Sweep time = auto couple.
5. Detector function = peak.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.

### 6.4. Test Data

|              |         |           |      |                       |         |
|--------------|---------|-----------|------|-----------------------|---------|
| Temperature: | 25.3 °C | Humidity: | 48 % | Atmospheric Pressure: | 101 kPa |
|--------------|---------|-----------|------|-----------------------|---------|


| Test Channel | Bandwidth (kHz) | Limit (kHz) | Results |
|--------------|-----------------|-------------|---------|
| Low          | 85.72           | $\leq 250$  | PASS    |
| Middle       | 84.57           | $\leq 250$  | PASS    |
| High         | 86.11           | $\leq 250$  | PASS    |



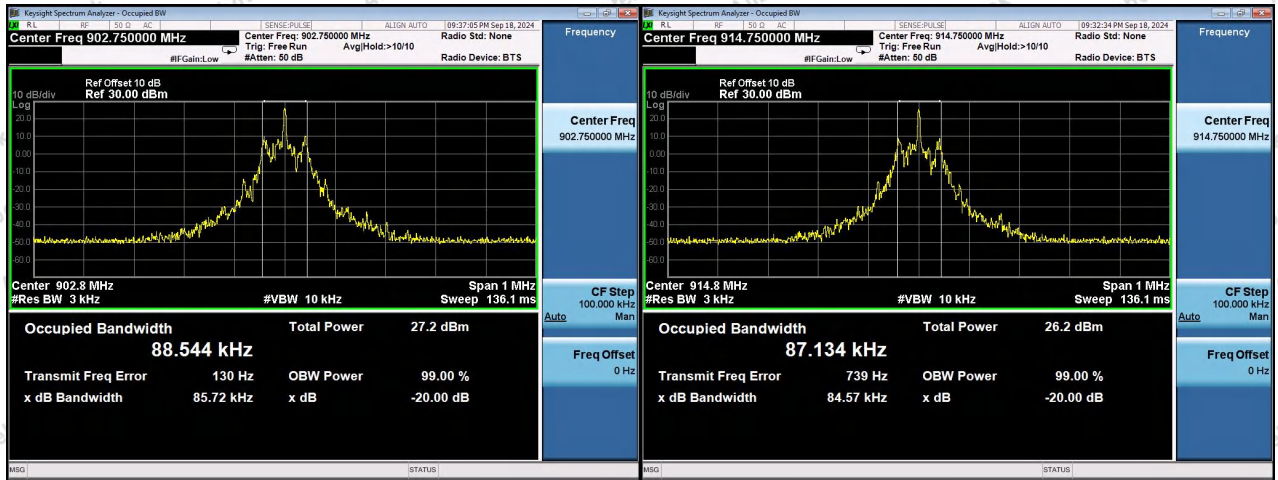

Low Channel

Mid Channel

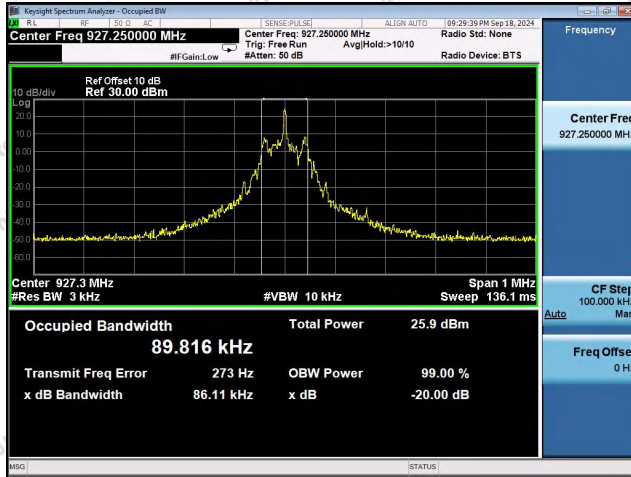

High Channel




## 7. Carrier Frequency Separation Test

### 7.1. Test Standard and Limit

|               |   |
|---------------|---|
| Test Standard | FCC Part15 C Section 15.247 (a)(1)                    |
| Test Limit    | > 25 kHz or the 20 dB bandwidth whichever is greater. |

### 7.2. Test Setup



### 7.3. Test Procedure

The EUT must have its hopping function enabled. Using the following spectrum analyzer settings:


1. Span= Wide enough to capture the peaks of two adjacent channels
2. Set the RBW =approximately 30% of the channel spacing.
3. Set the VBW  $\geq$  RBW.
4. Sweep time = auto couple.
5. Detector function = peak.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.

### 7.4. 7.4. Test Data

|              |         |           |      |                       |         |
|--------------|---------|-----------|------|-----------------------|---------|
| Temperature: | 25.3 °C | Humidity: | 48 % | Atmospheric Pressure: | 101 kPa |
|--------------|---------|-----------|------|-----------------------|---------|

| Mode    | Frequency (MHz) | Separation Read Value (kHz) | Limit (kHz) | Result |
|---------|-----------------|-----------------------------|-------------|--------|
| Hopping | 915             | 504                         | 86.11       | PASS   |



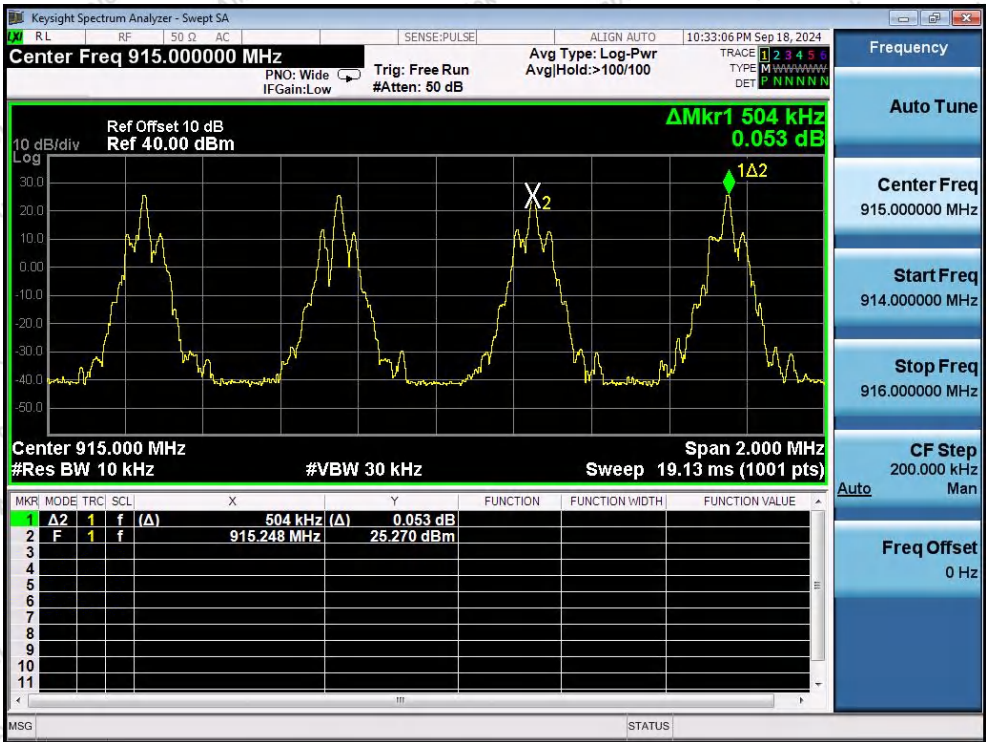

Hopping




## 8. Number of Hopping Channel Test

### 8.1. Test Standard and Limit

|               |   |
|---------------|---|
| Test Standard | FCC Part15 C Section 15.247(a)(1)(i)  |
| Test Limit    | ≥ 50 channels for 20 dB bandwidth less than 250KHZ<br>≥ 25 channels for 20 dB bandwidth greater than 250KHZ |

### 8.2. Test Setup



### 8.3. Test Procedure

The EUT must have its hopping function enabled. Using the following spectrum analyzer setting:


1. Span= the frequency band of operation
2. Set the RBW = less than 30% of the channel spacing or the 20 dB bandwidth, whichever is smaller.
3. Set the VBW ≥ RBW.
4. Sweep time = auto couple.
5. Detector function = peak.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.

### 8.4. Test Data

|              |         |           |      |                       |         |
|--------------|---------|-----------|------|-----------------------|---------|
| Temperature: | 25.3 °C | Humidity: | 48 % | Atmospheric Pressure: | 101 kPa |
|--------------|---------|-----------|------|-----------------------|---------|

| Hopping Channel Frequency Range | Quantity of Hopping Channel | Quantity of Hopping Channel |
|---------------------------------|-----------------------------|-----------------------------|
| 902-928MHZ                      | 50                          | ≥ 50                        |



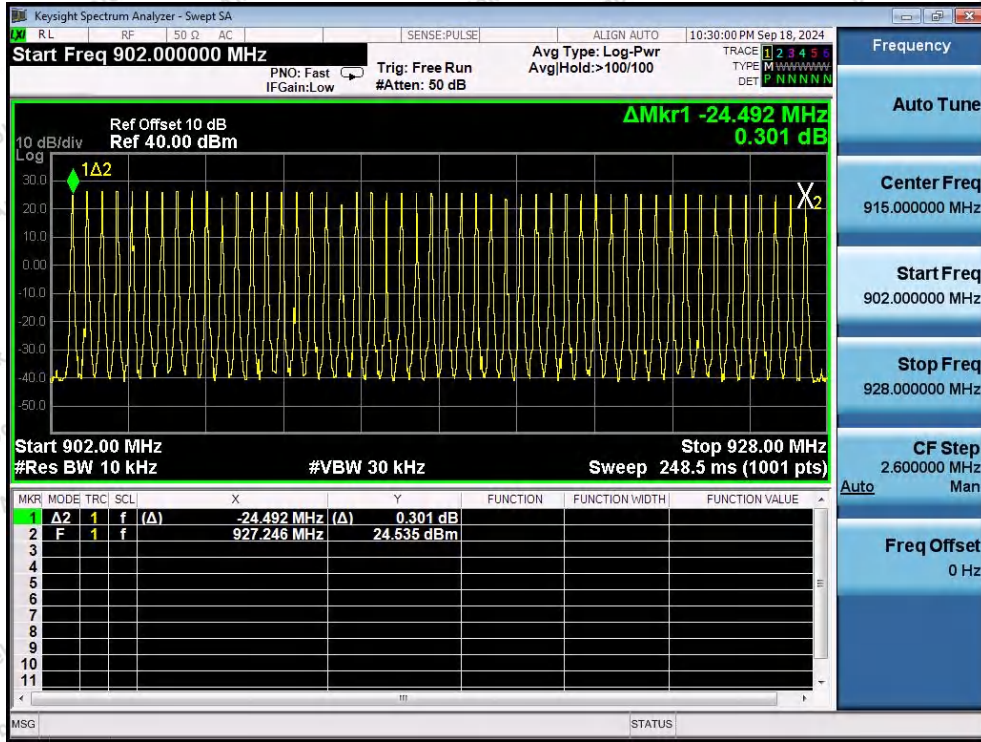

Hopping




## 9. Dwell Time Test

### 9.1. Test Standard and Limit

|               |  |
|---------------|--|
| Test Standard | FCC Part15 C Section 15.247(a)(1)(i), 15.247(f)  |
| Test Limit    | <p>15.247(a)(1)(i): if the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 20 second period; if the 20 dB bandwidth of the hopping channel is 250 kHz or greater, the system shall use at least 25 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 10 second period.</p> <p>15.247(f): For the purposes of this section, hybrid systems are those that employ a combination of both frequency hopping and digital modulation techniques. The frequency hopping operation of the hybrid system, with the direct sequence or digital modulation operation turned-off, shall have an average time of occupancy on any frequency not to exceed 0.4 seconds within a time period in seconds equal to the number of hopping frequencies employed multiplied by 0.4</p> |

### 9.2. Test Setup



### 9.3. Test Procedure

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

1. Span= zero span, centered on a hopping channel
2. Set the RBW = 100 KHz.
3. Set the VBW = 300 KHz.
4. Sweep time = as necessary to capture the entire dwell time per hopping channel.
5. Detector function = peak.
6. Trace mode = clear write.



### 9.4. Test Data

|              |         |           |      |                       |         |
|--------------|---------|-----------|------|-----------------------|---------|
| Temperature: | 25.3 °C | Humidity: | 48 % | Atmospheric Pressure: | 101 kPa |
|--------------|---------|-----------|------|-----------------------|---------|





| Requirement     | Pulse width (ms) | Observe Period(s) | TotalHops [Num] | Dwell time (ms) | Limit (s) | Result |
|-----------------|------------------|-------------------|-----------------|-----------------|-----------|--------|
| 15.247(a)(1)(i) | 16.00            | 20.00             | 3               | 48              | 0.40      | PASS   |

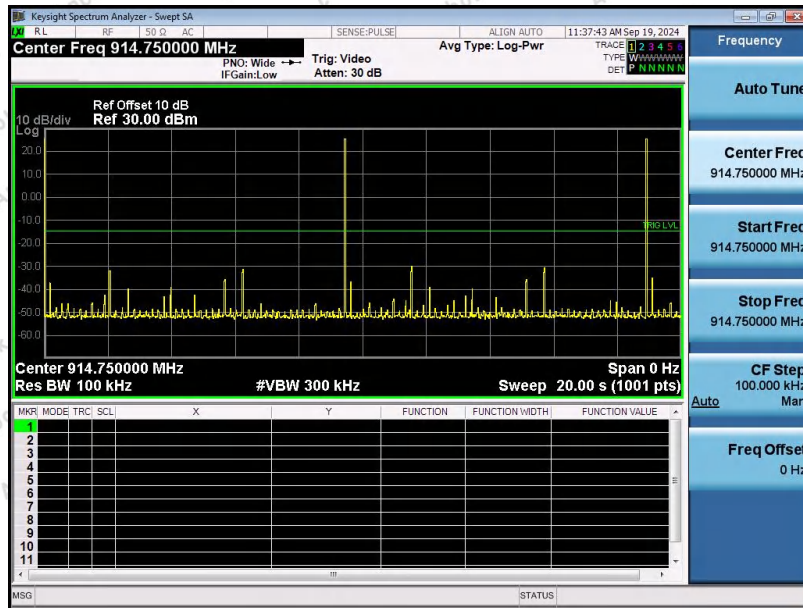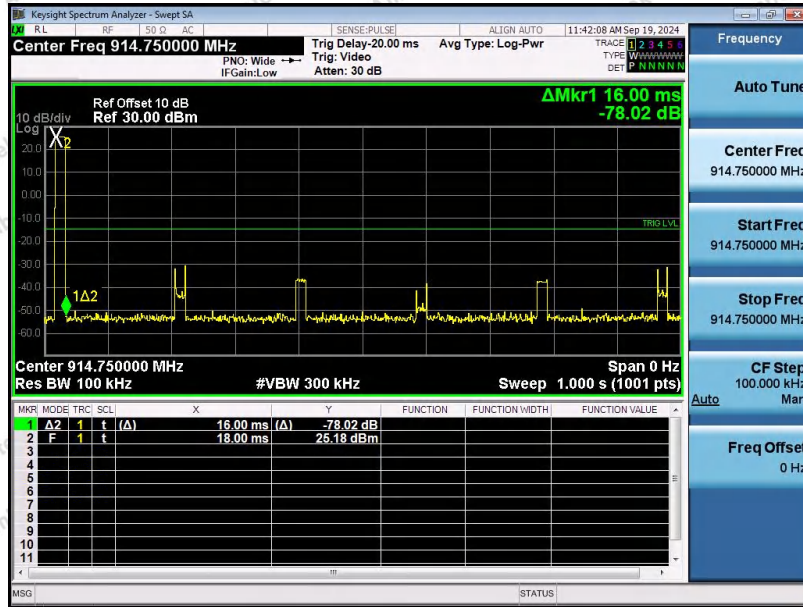

Hopping

Note: Dwell time=Pulse width\*TotalHops=16\*3=48ms




## 10. 100kHz Bandwidth of Frequency Band Edge Requirement

### 10.1. Test Standard and Limit

|               |  |
|---------------|--|
| Test Standard | FCC Part15 C Section 15.247 (d)  |
| Test Limit    | in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator in operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a). |

### 10.2. Test Setup



### 10.3. Test Procedure

The EUT must have its hopping/Non-hopping function enabled. Using the following spectrum analyzer setting:


1. Set the RBW = 100kHz.
2. Set the VBW = 300kHz.
3. Sweep time = auto couple.
4. Detector function = peak.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.

### 10.4. Test Data

|              |         |           |      |                       |         |
|--------------|---------|-----------|------|-----------------------|---------|
| Temperature: | 25.3 °C | Humidity: | 48 % | Atmospheric Pressure: | 101 kPa |
|--------------|---------|-----------|------|-----------------------|---------|




**Band edge measurements**

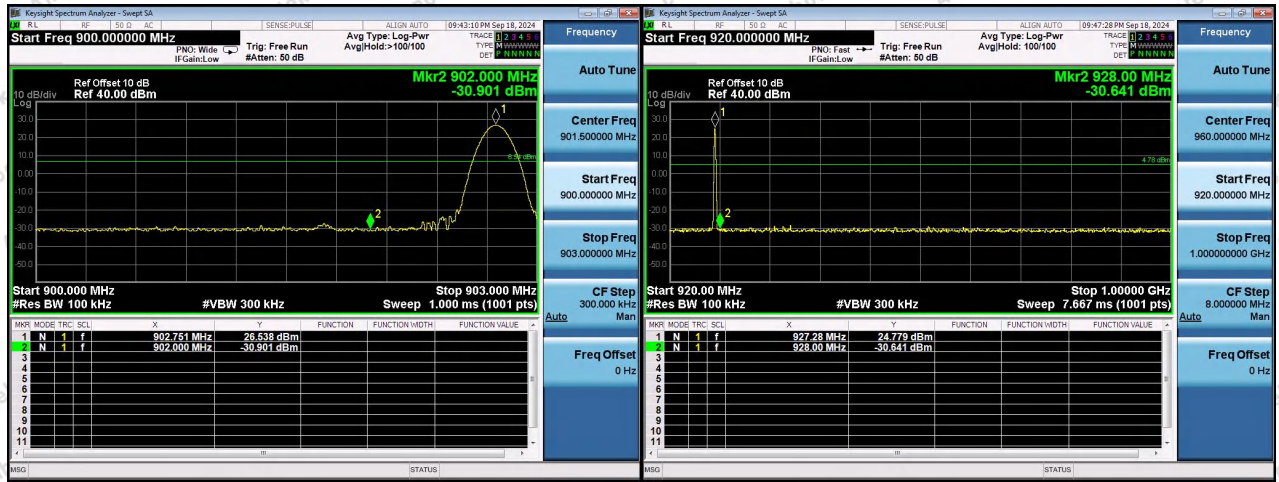

For Low channel Non-Hopping Mode

For High channel Non-Hopping Mode

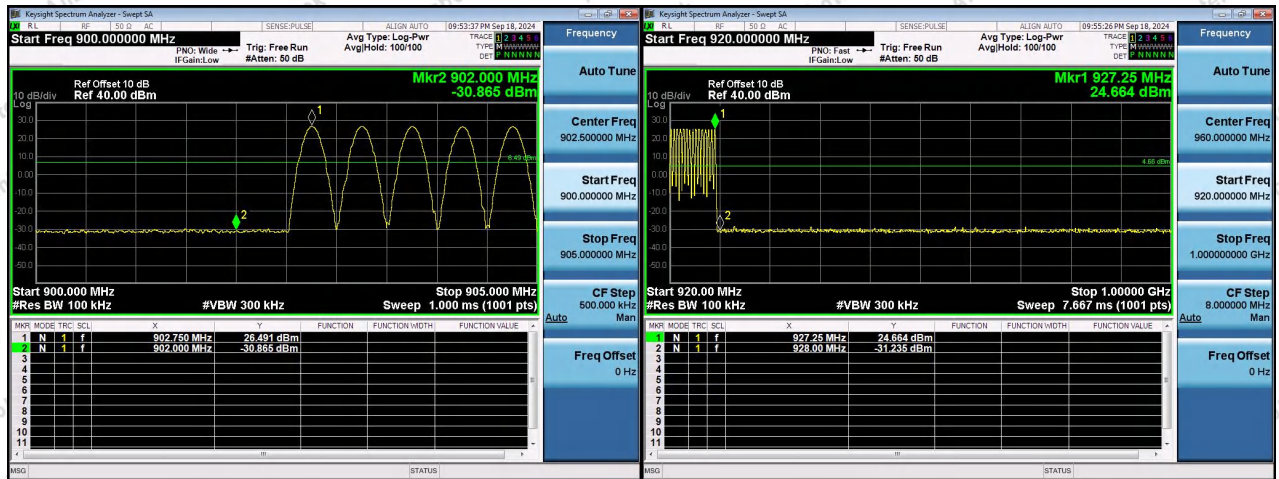


For Low channel Hopping Mode

For High channel Hopping Mode




**Conducted Emission Method**

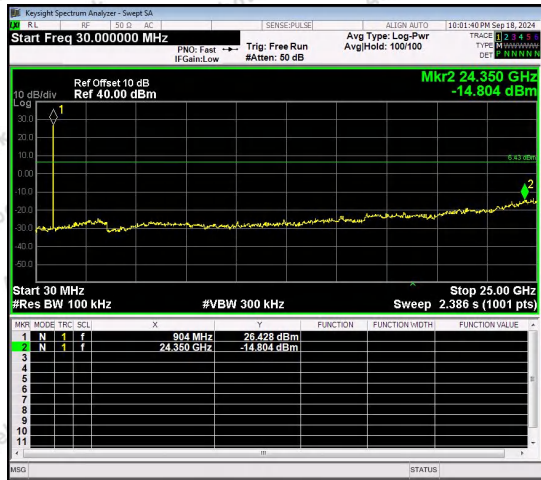

Low Channel



Mid Channel

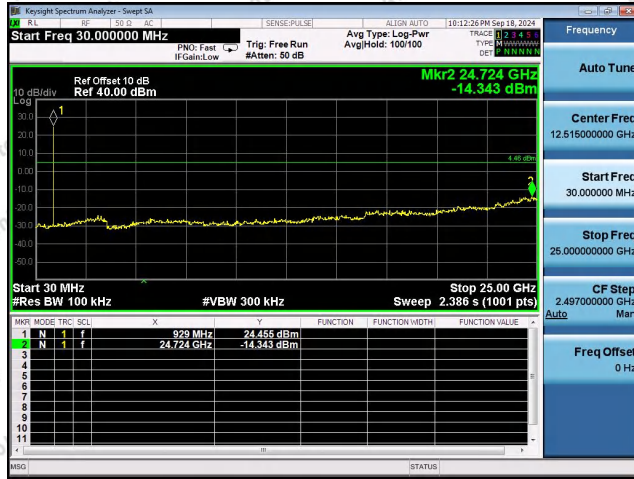

High Channel



## 11. Antenna Requirement

### 11.1. Test Standard and Requirement

|               |   |
|---------------|---|
| Test Standard | FCC Part15 Section 15.203 /247(c)   |
| Requirement   | <p>1) 15.203 requirement:<br/>                 An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.</p> <p>2) 15.247(c) (1)(i) requirement:<br/>                 Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.</p> |

### 11.2. Antenna Connected Construction

The antenna is External Antenna which permanently attached, and the best case gain of the antenna is 3dBi. It complies with the standard requirement.



## **APPENDIX I -- TEST SETUP PHOTOGRAPH**

Please refer to separated files Appendix I -- Test Setup Photograph\_RF

## **APPENDIX II -- EXTERNAL PHOTOGRAPH**

Please refer to separated files Appendix II -- External Photograph

## **APPENDIX III -- INTERNAL PHOTOGRAPH**

Please refer to separated files Appendix III -- Internal Photograph

----- End of Report -----

