

承认书

客户名称: Shenzhen Jiayu Chuang technology Co., LTD

客户料号: 25.25203-1

我司型号: RC-G25-3.8UH-3400GS-8MM

送样日期: 2024年 11月 22日

供应方: Dongguan Jierith Technology Co., LTD

绘制	审核	批准
王莉芝	邓祥桂	陆安圣

客户承认:

合格	不合格	承认
备注		

Dongguan Jier ith Technology Co., LTD



Tel:

Fax: 86+13632701380

地址: No.96 Longhu Road, Dalingshan Town, Dongguan City (3rd Floor, Building L, Jinxiongda Science Park)

客户名称	客户料号	我司型号	版本	日期
佳宇创	25.25203-1	RC-G25-3.8UH-3400GS-8MM	A0	2024.11.22

1. Plane structure diagram: Unit :MM

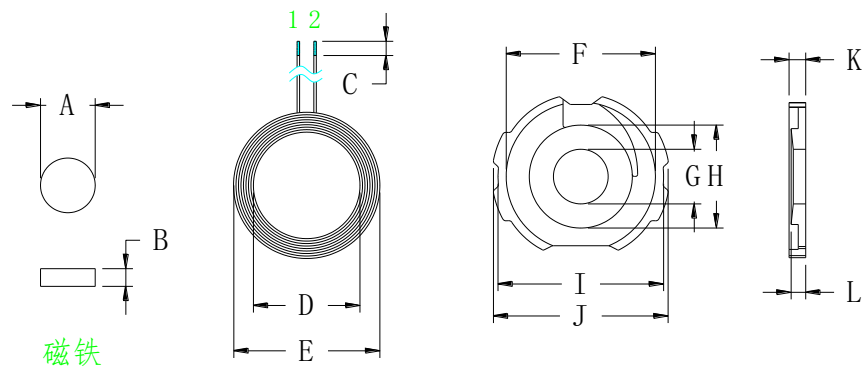

A	7.4 ± 0.1
B	2.5 ± 0.1
C	2 ± 1
D	15 ± 0.3
E	20.7 ± 0.3
F	21 ± 0.2
G	7.5 ± 0.1
H	14.5 ± 0.2
I	23.5 ± 0.3
J	25 ± 0.3
K	2.5 ± 0.2
L	2.4 ± 0.2 中柱高度
M	8 ± 1

2. Product parameters:

Foot position	Wire diameter	Number of turns	remark
1 - 2	0.08*24P	9	Hot air stranding wire

3. Technical requirements:

1. Fix the end of the wire to prevent loose and broken wires
2. According to customer requirements, the long thread is cut and tinned, and the tinning depth is 2 ± 1 MM
3. Point the appropriate white glue on the soft magnetic sheet, paste the coil, and ensure that the product surface is clean and tidy in the process
4. The soft magnetic sheet used is with round holes, without damage
5. Additional process (according to customer requirements) : Install 7.4x2.5mm magnet in the middle round hole of the finished product and paste 613-13*13mm square double-sided tape on the back of the finished product, and then pack



4.electrical parameters:

1.Inductance value, Q value:

$$\text{PIN } 1 - 2 = 3.8\mu\text{H} \pm 0.3\mu\text{H}$$

$$Q \text{ 值} \geq 20$$

The above inductance values are based on Quanhua 1062A instrument, 10KHZ/0.3Vrms as the standard or equivalent instrument.

Q value is based on Quanhua 1062A instrument, 100KHZ/0.3Vrms as standard or equivalent instrument

5.List of materials:

Serial number	name	material	supplier	remark
1	Hot air stranding wire	0.08X24P	维汉或等同	
2	Magnetic sheet	G25 Soft substrate	天通或等同	14.5
3	tin	High temperature environmental protection	千岛或等同	
4	White glue	BY882	宝月或等同	
5	Strong magnetic	7.4*2.5*3400GS±100GS	联胜或等同	附加工序,按客户要求
6	Double-sided tape	613-13*13mm	鸿辉或 d	方形