

Dates of Tests: September 19, 2024 ~ October 28, 2024  
Test Report S/N: LR500112411B  
Test Site : LTA CO., LTD.

## CERTIFICATION OF COMPLIANCE

FCC ID.

**2BLL7AIDEN**

APPLICANT

**NearthLab**

Equipment Class	:	Digital Transmission System (DTS)
Manufacturing Description	:	DRONE
Manufacturer	:	NearthLab
Model name	:	AiDEN
Contains Modules FCC ID	:	NS918PMDDL2450
Test Device Serial No.:	:	Identical prototype
Rule Part(s)	:	FCC Part 15.247 Subpart C ; ANSI C63.10 - 2013
Frequency Range	:	2402 ~ 2477 MHz 2407 ~ 2477 MHz
Max. Output Power	:	1.0 W
Data of issue	:	November 11, 2024

This test report is issued under the authority of:

The test was supervised by:



Ja-Beom Koo, Manager



Eun-Hwan Jung, Test Engineer

## **TABLE OF CONTENTS**

1. GENERAL INFORMATION	-----	3
2. INFORMATION ABOUT TEST ITEM	-----	4
3. TEST REPORT	-----	5
3.1 SUMMARY OF TESTS	-----	5
3.2 TECHNICAL CHARACTERISTICS TEST	-----	6
3.2.1 RADIATED SPURIOUS EMISSIONS	-----	6
 <b>APPENDIX</b>		
APPENDIX TEST EQUIPMENT USED FOR TESTS	-----	13

## 1. General information

### 1-1 Test Performed

Company name : LTA Co., Ltd.  
 Address : 243, Jubug-ri, Yangji-Myeon, Youngin-Si, Kyunggi-Do, Korea. 17159  
 Web site : <http://www.ltalab.com>  
 E-mail : [chahn@ltalab.com](mailto:chahn@ltalab.com)  
 Telephone : +82-31-323-6008  
 Facsimile : +82-31-323-6010

Quality control in the testing laboratory is implemented as per ISO/IEC 17025 which is the “General requirements for the competents of calibration and testing laboratory”.

### 1-2 Accredited agencies

LTA Co., Ltd. is approved to perform EMC testing by the following agencies:

Agency	Country	Accreditation No.	Validity	Reference
RRA	KOREA	KR0049	-	EMC accredited Lab.
FCC	U.S.A	649054	2025-03-29	FCC CAB
VCCI	JAPAN	C-4948,	2026-09-10	VCCI registration
VCCI	JAPAN	T-2416,	2026-09-10	VCCI registration
VCCI	JAPAN	R-4483(10 m),	2026-10-15	VCCI registration
VCCI	JAPAN	G-847	2024-12-13	VCCI registration
IC	CANADA	5799A-1	2025-08-15	IC filing

## 2. Information about test item

### 2-1 Client & Manufacturer

Client Company name : NearthLab  
Address : 3F, BLDG AJ, 9, Jeongui-ro 8-gil, Songpa-gu, Seoul, Republic of Korea  
Tel / Fax : TEL No : +82-2-6935-1574 / FAX No : -  
Manufacturer : NearthLab  
Address : 3F, BLDG AJ, 9, Jeongui-ro 8-gil, Songpa-gu, Seoul, Republic of Korea  
Tel / Fax : TEL No : +82-2-6935-1574 / FAX No : -

### 2-2 Equipment Under Test (EUT)

Model name : AiDEN  
Serial number : Identical prototype  
Date of receipt : September 19,2024  
EUT condition : Pre-production, not damaged  
Antenna type : PCB Antenna (Max Gain : 2.6 dBi)  
Frequency Range : 2402 ~ 2477 MHz  
2407 ~ 2477 MHz  
Type of Modulation : COFDM  
Power Source : DC 16.8 V

### 2-3 Ancillary Equipment

Equipment	Model No.	Serial No.	Manufacturer
-	-	-	-

### 3. Test Report

#### 3.1 Summary of tests

FCC Part Section(s)	Parameter	Test Condition	Status (note 1)
15.247(a)	6 dB Bandwidth	Conducted	N/A <sup>1)</sup>
15.247(b)	Transmitter Peak Output Power		N/A <sup>1)</sup>
15.247(e)	Transmitter Power Spectral Density		N/A <sup>1)</sup>
15.247(d)	Band Edge & Conducted Spurious emission		N/A <sup>1)</sup>
15.209	Transmitter emission	Radiated	C
15.207	AC Conducted Emissions	Conducted	N/A <sup>1)</sup>
15.203	Antenna requirement	-	C

N/A<sup>1)</sup> : The product replaces this test with a certificate using an authenticated module.

The above equipment was tested by LTA Co., Ltd. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10-2013 and the energy emitted by the sample EUT tested as described in this report is in compliance with the requirements of FCC Rules Part 2 and Part 15.247 The test results of this report relate only to the tested sample identified in this report.

The tests were performed according to the method of measurements prescribed in KDB No.558074.

#### → Antenna Requirement

dot incorporation. FCC ID: 2BLL7AIDEN unit complies with the requirement of §15.203.

The antenna type is PCB Antenna

## 3.2 Technical Characteristics Test

### 3.2.1 Radiated Spurious Emissions

#### Procedure:

Radiated emissions from 30 MHz to 25 GHz were measured according to the methods defines in ANSI C63.10-2013.

The EUT is a placed on as turn table. For emissions testing at or below 1 GHz, the table height shall be 0.8 m above the reference ground plane. For emission measurements above 1 GHz, the table height shall be 1.5 m. The turn table shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes and measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made “while keeping the antenna in the ‘cone of radiation’ from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response.” is still within the 3dB illumination BW of the measurement antenna.

The spectrum analyzer is set to:

Center frequency = the worst channel

Frequency Range = 9 kHz ~ 10<sup>th</sup> harmonic.

RBW = 120 kHz ( 30 MHz ~ 1 GHz)

VBW ≥ RBW

= 1 MHz (1 GHz ~ 10<sup>th</sup> harmonic )

Trace = max hold


Detector function = peak

Sweep = auto


**Duty cycle : 98.89 %**

**The EUT configureal to transmit continuously(D ≥ 98%)/ Duty Factor = 0**


**below 30 MHz**

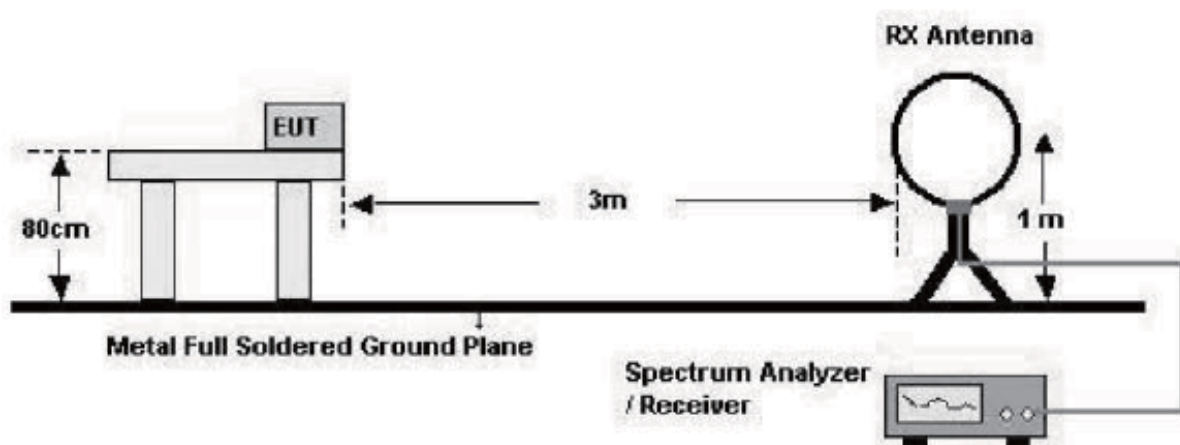

below 1 GHz (30 MHz to 1 GHz)

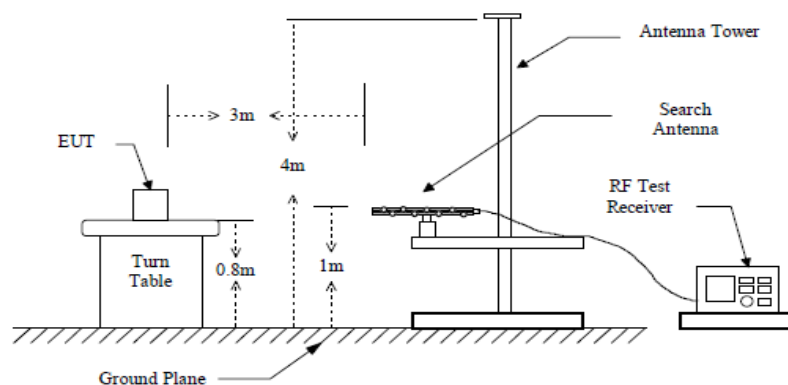

above 1 GHz

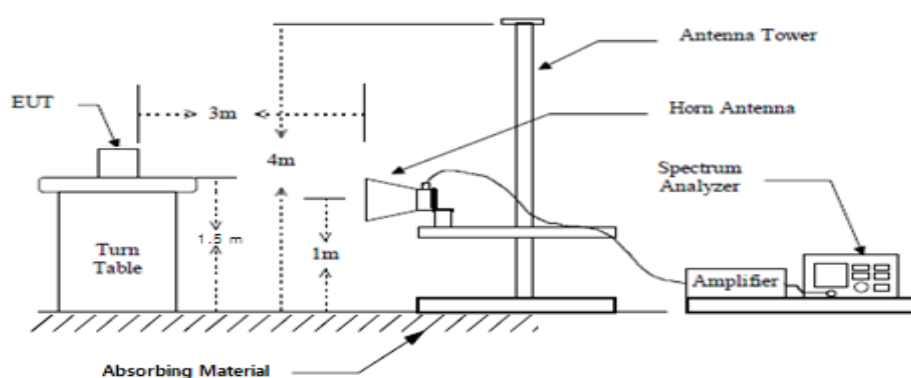

**Measurement Data: Complies**

- See next pages for actual measured data.
- No other emissions were detected at a level greater than 20 dB below limit include from 9 kHz to 30MHz.
- The test results for the worst of the various operating modes are presented in accordance with 6.3.4 of ANSI C63.10.
- Checked with a red circle is the fundamental frequency.
- At the request of the applicant, measurements of derived model products are also attached.


**Minimum Standard: FCC Part 15.209(a)**

Frequency (MHz)	Limit (uV/m) @ 3 m
0.009 ~ 0.490	2400/F(kHz) (@ 300 m)
0.490 ~ 1.705	24000/F(kHz) (@ 30 m)
1.705 ~ 30	30(@ 30 m)
30 ~ 88	100 **
88 ~ 216	150 **
216 ~ 960	200 **
Above 960	500

\*\* Except as provided in 15.209(g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g. 15.231 and 15.241.


**Radiated Emissions**

Date: 2024-09-26

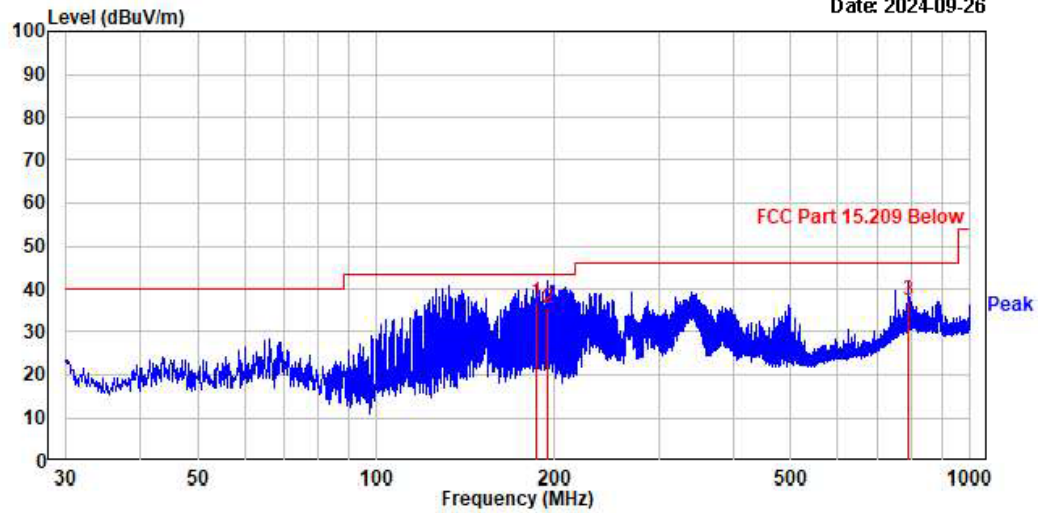

Trace:								
No.	Freq	Reading	C.F	Result	Limit	Margin	Height	Angle Polarity
	MHz	dBμV	dB	QP dBμV/m	dBμV/m	dB	cm	deg
1.	185.69	50.29	-13.38	36.91	43.52	6.61	-----	----- horizontal
2.	194.29	49.20	-13.90	35.30	43.52	8.22	-----	----- horizontal
3.	789.39	36.40	0.89	37.29	46.02	8.73	-----	----- horizontal


Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain

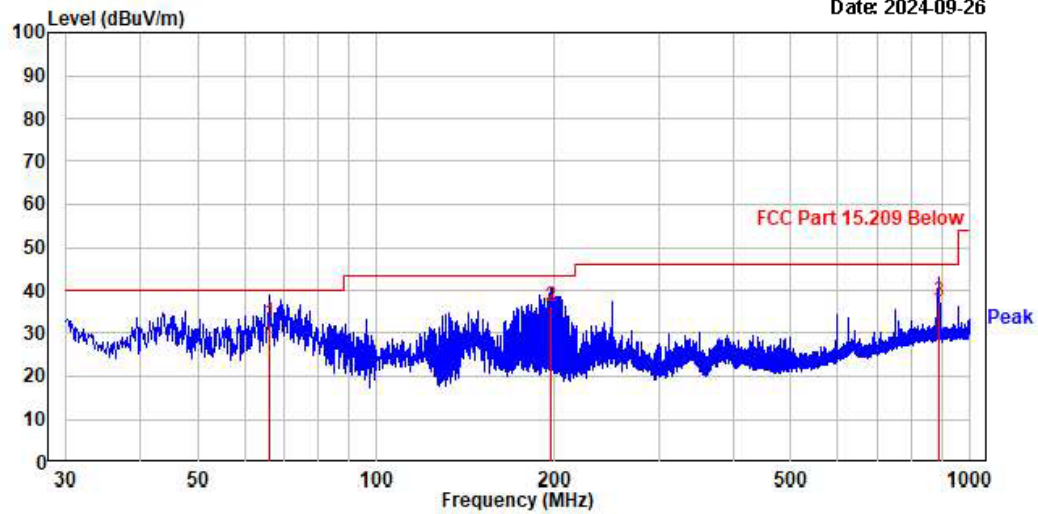

Trace:								
No.	Freq	Reading	C.F	Result	Limit	Margin	Height	Angle Polarity
	MHz	dBμV	dB	QP dBμV/m	dBμV/m	dB	cm	deg
1.	66.25	46.61	-14.10	32.51	40.00	7.49	-----	----- vertical
2.	196.60	50.09	-14.02	36.07	43.52	7.45	-----	----- vertical
3.	888.09	35.91	1.59	37.50	46.02	8.52	-----	----- vertical

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain


Date: 2024-09-26

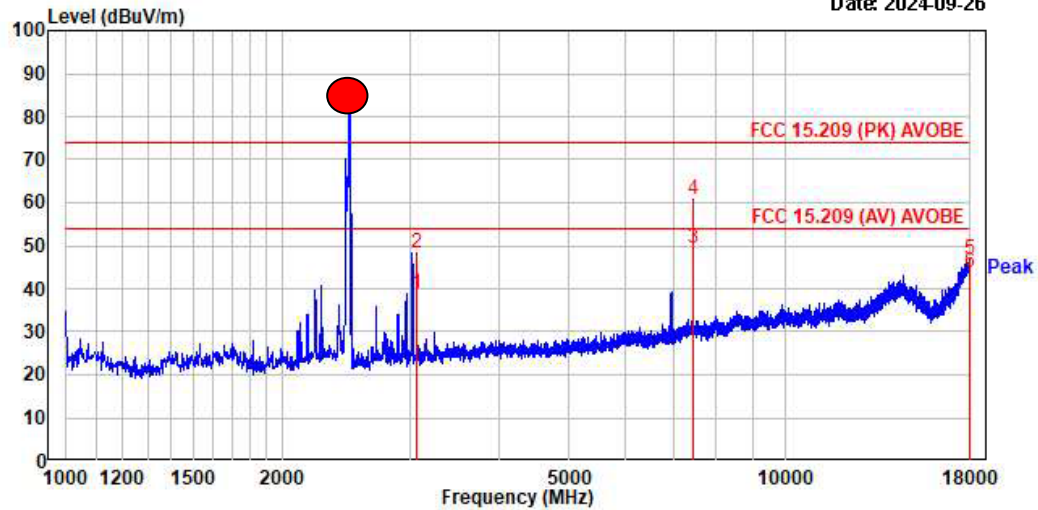

No.	Freq MHz	RD		C.F	Result		Limit		Margin		Height cm	Angle deg	Polarity
		PK dBμV	AV dBμV		PK dBμV	AV dBμV	PK dBμV	AV dBμV	PK dB	AV dB			
2.	3871.88	49.52	39.88	-1.11	48.41	38.69	74.00	54.00	25.59	15.31	100	360	horizontal
4.	7430.25	51.52	40.10	9.33	60.85	49.43	74.00	54.00	13.15	4.57	100	360	horizontal
5.	17989.38	21.20	-----	25.48	46.68	-----	74.00	-----	27.32	-----	100	172	horizontal
6.	17989.38	-----	18.39	25.48	-----	43.87	-----	54.00	-----	10.13	100	172	horizontal

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain


Date: 2024-09-26

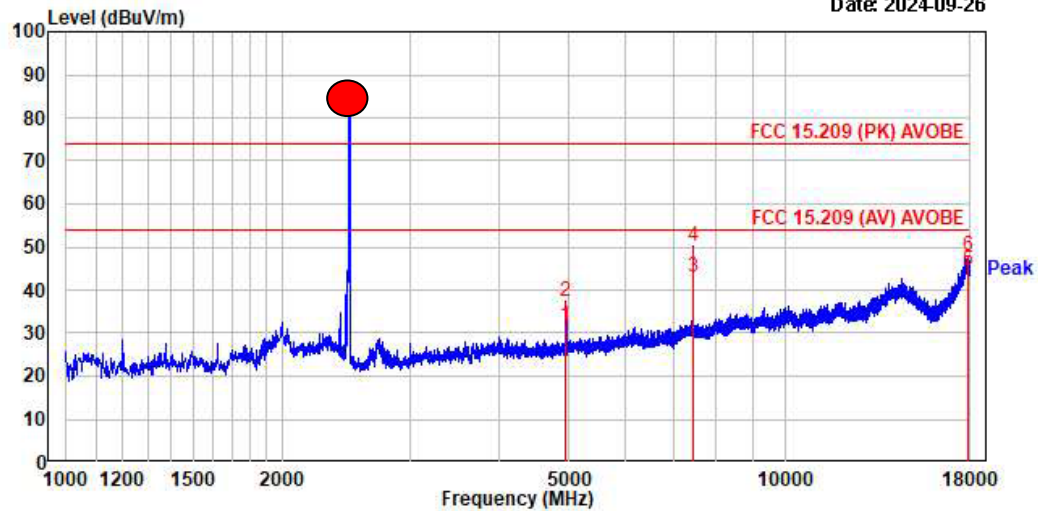

No.	Freq MHz	RD		C.F	Result		Limit		Margin		Height cm	Angle deg	Polarity
		PK dBμV	AV dBμV		PK dBμV	AV dBμV	PK dBμV	AV dBμV	PK dB	AV dB			
2.	4952.50	32.83	27.40	4.45	37.28	31.85	74.00	54.00	36.72	22.15	100	360	vertical
4.	7428.13	48.72	33.60	9.33	50.05	42.93	74.00	54.00	23.95	11.07	100	189	vertical
6.	17927.75	22.67	19.10	25.39	48.06	44.49	74.00	54.00	25.94	9.51	100	218	vertical

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain


Date: 2024-09-26

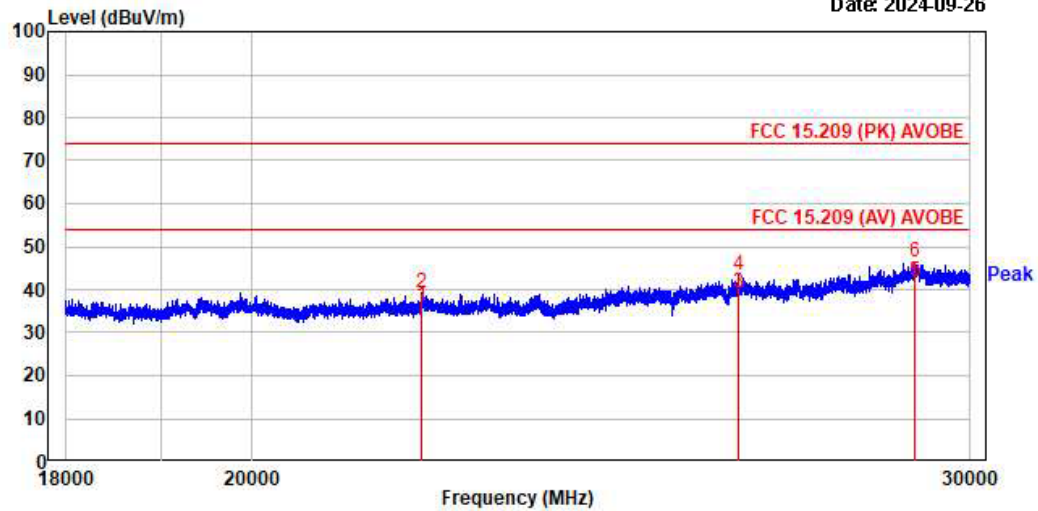

No.	Freq MHz	RD		C.F	Result		Limit		Margin		Height cm	Angle deg	Polarity
		PK dBμV	AV dBμV		PK dBμV	AV dBμV	PK dBμV	AV dBμV	PK dB	AV dB			
2.	22815.50	23.32	20.09	16.10	39.42	36.19	74.00	54.00	34.58	17.81	100	330	horizontal
4.	26322.00	23.53	19.41	19.76	43.29	39.17	74.00	54.00	30.71	14.83	100	360	horizontal
6.	29097.00	22.58	17.90	23.89	46.47	41.79	74.00	54.00	27.53	12.21	100	100	horizontal

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain

Date: 2024-09-26

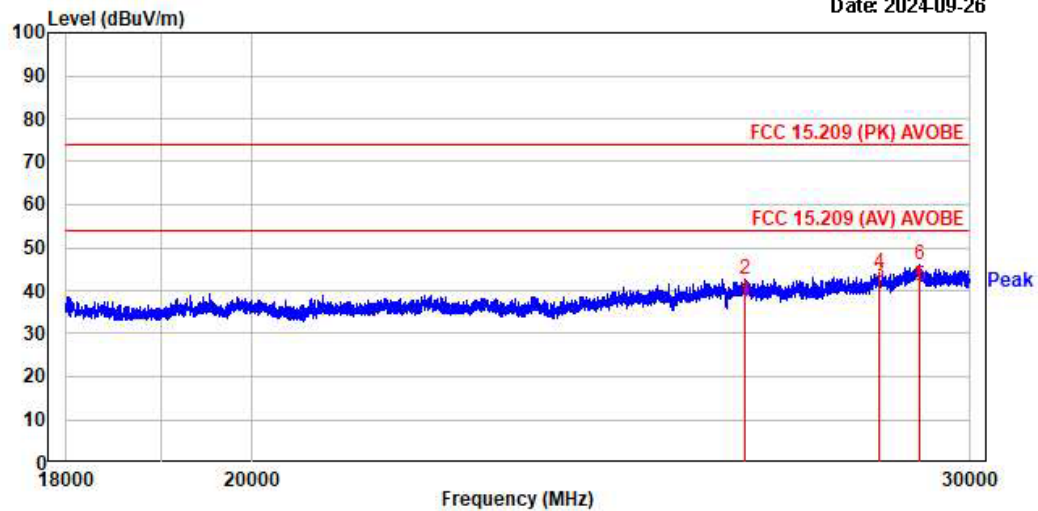

No.	Freq MHz	RD		C.F	Result		Limit		Margin		Height cm	Angle deg	Polarity
		PK dBμV	AV dBμV		PK dBμV	AV dBμV	PK dBμV	AV dBμV	PK dB	AV dB			
2.	26431.50	22.71	17.60	19.86	42.57	37.46	74.00	54.00	31.43	16.54	100	360	vertical
4.	28513.50	21.42	19.31	22.75	44.17	42.06	74.00	54.00	29.83	11.94	100	107	vertical
6.	29163.00	22.63	17.80	23.48	46.11	41.28	74.00	54.00	27.89	12.72	100	186	vertical

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain

### 3.2.7 AC Conducted Emissions

**Procedure:**

The conducted emissions are measured in the shielded room with a spectrum analyzer in peak hold. While the measurement, EUT had its hopping function disabled at the middle channels in line with Section 15.31(m). Emissions closest to the limit are measured in the quasi-peak mode (QP) with the tuned receiver using a bandwidth of 9 kHz. The emissions are maximized further by cable manipulation and Exerciser operation. The highest emissions relative to the limit are listed.

**Measurement Data:** N/A

**Minimum Standard:** FCC Part 15.207(a) / EN 55022

Class B

Frequency Range	quasi-peak	Average
0.15 ~ 0.5	66 to 56 *	56 to 46 *
0.5 ~ 5	56	46
5 ~ 30	60	50

\* Decreases with the logarithm of the frequency

## APPENDIX

### TEST EQUIPMENT USED FOR TESTS

	Use	Description	Model No.	Serial No.	Manufacturer	Interval	Next Cal. Date
1	■	Signal Analyzer (9 kHz ~ 30 GHz)	FSV30	100757	R&S	1 year	2025-08-19
2	■	Signal Generator (~3.2 GHz)	8648C	3623A02597	HP	1 year	2025-03-08
3		SYNTHESIZED CW GENERATOR	83711B	US34490456	HP	1 year	2025-03-08
4		Attenuator (3 dB)	8491A	37822	HP	1 year	2025-08-19
5		Attenuator (10 dB)	8491A	63196	HP	1 year	2025-08-19
6	■	EMI Test Receiver (~7 GHz)	ESCI7	100722	R&S	1 year	2025-08-19
7		RF Amplifier (~1.3 GHz)	8447D OPT 010	2944A07684	HP	1 year	2025-08-19
8		RF Amplifier (1~26.5 GHz)	8449B	3008A02126	HP	1 year	2025-03-08
9	■	Horn Antenna (1~18 GHz)	3115	00114105	ETS	2 year	2026-03-18
10		DRG Horn (Small)	3116B	81109	ETS-Lindgren	2 year	2026-03-18
11		DRG Horn (Small)	3116B	133350	ETS-Lindgren	2 year	2026-03-18
12	■	TRILOG Antenna	VULB 9160	9160-3237	SCHWARZBECK	2 year	2025-03-20
13		Temp.Humidity Data Logger	SK-L200TH II A	00801	SATO	1 year	2025-03-08
14		Splitter (SMA)	ZFSC-2-2500	SF617800326	Mini-Circuits	-	-
15	■	DC Power Supply	6674A	3637A01657	Agilent	-	-
17	■	Power Meter	EPM-441A	GB32481702	HP	1 year	2025-03-08
18	■	Power Sensor	8481A	3318A94972	HP	1 year	2025-08-19
19		Audio Analyzer	8903B	3729A18901	HP	1 year	2025-08-19
20		Modulation Analyzer	8901B	3749A05878	HP	1 year	2025-08-19
21		TEMP & HUMIDITY Chamber	YJ-500	LTAS06041	JinYoung Tech	1 year	2025-08-19
22		Stop Watch	HS-3	812Q08R	CASIO	2 year	2025-03-16
23		LISN	KNW-407	8-1430-1	Kyoritsu	1 year	2025-03-08
24		Two-Lime V-Network	ESH3-Z5	893045/017	R&S	1 year	2025-03-08
25		UNIVERSAL RADIO COMMUNICATION TESTER	CMU200	106243	R&S	1 year	2025-03-08
26		Highpass Filter	WHKX1.5/15G-10SS	74	Wainwright Instruments	1 year	2025-03-08
27		Highpass Filter	WHKX3.0/18G-10SS	118	Wainwright Instruments	1 year	2025-03-08
28		OSP120 BASE UNIT	OSP120	101230	R&S	1 year	2025-03-08
29		Signal Generator(100 kHz ~ 40 GHz)	SMB100A03	177621	R&S	1 year	2025-03-08
30		Signal Analyzer (10 Hz ~ 40 GHz)	FSV40	101367	R&S	1 year	2025-03-08
31	■	Active Loop Antenna	FMZB 1519	1519-031	SCHWARZBECK	2 year	2025-08-30