



FCC Test Report

Report No: FCS202409121W01

Issued for

| | |
|--|--|
| Applicant: | YONGKANG DIBILE INDUSTRY AND TRADE CO.,LTD |
| Address: | South of the third Floor, Building 1, 318 Kechuang Road, Yongkang Economic Development Zone, Zhejiang Province |
| Product Name: | Electric baby rocking chair |
| Brand Name: | BOBILONG |
| Model Name: | YY-001 |
| Series Model: | bbl001 ,bbl002,BBL-YYM-008,:BBL-YYF-002,BBL-YYH-002, BBL-YHH-002,BBL-YJB-002,BBL-YHB-002,BBL-YHH-002, BBL-XJB-002,BBL-XHH-002,YYM-001,YYM-002,YYM-005, YYM-006,YY-002,YY-003,YY-005,YY-006,YY-007,YY-008, YY-009 |
| FCC ID: | 2BLM7-YY-001 |
| Issued By: Flux Compliance Service Laboratory Add: Room 105 Floor Bao hao Technology Building 1 NO.15 Gong ye West Road Hi-Tech Industrial, Song shan lake Dongguan Tel: 769-27280901 Fax:769-27280901 http://www.FCS-lab.com | |

TEST RESULT CERTIFICATION

Applicant's Name.....: YONGKANG DIBILE INDUSTRY AND TRADE CO.,LTD
Address.....: South of the third Floor, Building 1, 318 Kechuang Road, Yongkang Economic Development Zone, Zhejiang Province
Manufacture's Name.....: YONGKANG DIBILE INDUSTRY AND TRADE CO.,LTD
Address.....: South of the third Floor, Building 1, 318 Kechuang Road, Yongkang Economic Development Zone, Zhejiang Province

Product Description

Product Name.....: Electric baby rocking chair
Brand Name.....: BOBILONG
Model Name.....: YY-001
bbI001 ,bbI002,BBL-YYM-008,:BBL-YYF-002,BBL-YYH-002, BBL-YHH-002,BBL-YJB-002,BBL-YHB-002,BBL-YHH-002, Series Model.....: BBL-XJB-002,BBL-XHH-002,YYM-001,YYM-002,YYM-005, YYM-006,YY-002,YY-003,YY-005,YY-006,YY-007,YY-008, YY-009
Test Standards.....: FCC Rules and Regulations Part 15 Subpart C, Section 247
Test Procedure.....: ANSI C63.10:2013

This device described above has been tested by Flux Compliance Service Laboratory, the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of Flux Compliance Service Laboratory, this document may be altered or revised by Flux Compliance Service Laboratory, personal only, and shall be noted in the revision of the document..

Date of Test.....:

Date (s) of performance of tests.: September 10, 2024 ~ September 29, 2024

Date of Issue.....: October 17, 2024

Test Result.....: Pass

Tested by : 

(Scott Shen)

Reviewed by : 

(Duke Qian)

Approved by : 

(Jack Wang)

| Table of Contents | Page |
|---|-----------|
| 1. SUMMARY OF TEST RESULTS | 6 |
| 1.1 TEST FACTORY | 7 |
| 1.2 MEASUREMENT UNCERTAINTY | 7 |
| 2. GENERAL INFORMATION | 8 |
| 2.1 GENERAL DESCRIPTION OF THE EUT | 8 |
| 2.2 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED | 10 |
| 2.3 DESCRIPTION OF NECESSARY ACCESSORIES AND SUPPORT UNITS | 11 |
| 2.4 EQUIPMENTS LIST | 12 |
| 3 CONDUCTED EMISSION MEASUREMENT | 13 |
| 4. 20 DB BANDWIDTH | 17 |
| 4.1 Limit | 17 |
| 4.2 Test Procedure | 17 |
| 4.3 Test setup | 17 |
| 4.4 Test results | 17 |
| 4.5 Original Test Data | 18 |
| 5. CONDUCTED OUTPUT POWER | 19 |
| 5.1 LIMIT | 19 |
| 5.3 TEST SETUP | 19 |
| 5.5 TEST RESULTS | 19 |
| 6 NUMBER OF HOPPING CHANNEL | 20 |
| 6.1 LIMIT | 20 |
| 6.2 TEST PROCEDURE | 20 |
| 6.3 TEST SETUP | 20 |
| 6.4 EUT OPERATION CONDITIONS | 20 |
| 6.5 TEST RESULTS | 21 |
| 7. BAND EDGE AND SPURIOUS(CONDUCTED) | 22 |
| 7.1 LIMIT | 22 |
| 7.2 TEST PROCEDURE | 22 |
| 7.3 TEST SETUP | 22 |
| 7.4 TEST RESULTS | 23 |

| Table of Contents | Page |
|--|-----------|
| 7.5 Original test data | 23 |
| 7.6 For Hopping Band edge | 25 |
| 8. RADIATED EMISSION MEASUREMENT | 26 |
| 8.1 RADIATED EMISSION LIMITS | 26 |
| 8.2 TEST PROCEDURE | 27 |
| 8.3 TESTSETUP | 28 |
| 8.4. TEST RESULTS | 29 |
| 8.5 (30MHZ-1000MHZ) | 30 |
| ■ 8.6 ABOVE 1GHZ | 32 |
| 8.7 RADIATED BAND EDGE DATA | 35 |
| 9. AVERAGE TIME OF OCCUPANCY | 36 |
| 9.1 LIMIT | 36 |
| 9.2 TEST PROCEDURE | 36 |
| 9.3 TEST SETUP | 36 |
| 9.4 TEST RESULTS | 37 |
| 9.5 ORIGINAL TEST DATA | 37 |
| 10. HOPPING CHANNEL SEPARATION MEASUREMEN | 39 |
| 10.1 LIMIT | 39 |
| 10.2 TEST PROCEDURE | 39 |
| 10.3 TEST SETUP | 39 |
| 10.4 EUT OPERATION CONDITIONS | 39 |
| 10.5 TEST RESULTS | 40 |
| 11. ANTENNA REQUIREMENT | 41 |
| 11.1 STANDARD REQUIREMENT | 41 |
| 11.2 RESULT | 41 |

Revision History

| Rev. | Issue Date | Effect Page | Contents |
|------|------------------|-------------|----------|
| 00 | October 17, 2024 | N/A | N/A |
| | | | |

1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:
KDB 558074 D01 15.247 Meas Guidance v05r02

| FCC Part 15.247,Subpart C | | | |
|----------------------------------|---|----------|--------|
| Standard Section | Test Item | Judgment | Remark |
| 15.207 | Conducted Emission | PASS | -- |
| 15.247(a)(1) | Hopping Channel Separation | PASS | -- |
| 15.247 (b)(1) | Output Power | PASS | -- |
| 15.209 | Radiated Spurious Emission | PASS | -- |
| 15.247(d) | Conducted Spurious & Band Edge Emission | PASS | -- |
| 15.247(a)(1)(i) | Number of Hopping Frequency | PASS | -- |
| 15.247(a)(1)(i) | Dwell Time | PASS | -- |
| 15.247(a)(1) | 20dB Bandwidth 99% Bandwidth | PASS | -- |
| 15.205 | Restricted bands of operation | PASS | -- |
| Part 15.247(d)/part 15.209(a) | Band Edge Emission | PASS | -- |
| 15.203 | Antenna Requirement | PASS | -- |

NOTE:

(1)" N/A" denotes test is not applicable in this Test Report

(2) All tests are according to ANSI C63.10-2013

1.1 TEST FACTORY

| | |
|---|--|
| Company Name: | Flux Compliance Service Laboratory |
| Address: | Room 105 Floor Bao hao Technology Building 1 NO.15 Gong ye West Road Hi-Tech Industrial, Song shan lake Dongguan |
| Telephone: | +86-769-27280901 |
| Fax: | +86-769-27280901 |
| Laboray Accreditations | |
| FCC Test Firm Registration Number: 514908 | |
| CNAS Number: L15566 | |
| Designation number: CN0127 | |
| A2LA accreditation number: 5545.01 | |
| ISED Number: 25801 | |

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately **95 %**.

| No. | Item | Uncertainty |
|-----|--|------------------------|
| 1 | RF output power, conducted | $\pm 0.71\text{dB}$ |
| 2 | Unwanted Emissions, conducted | $\pm 2.988 \text{ dB}$ |
| 3 | Conducted Emission (9KHz-150KHz) | $\pm 4.13 \text{ dB}$ |
| 4 | All emissions radiated (9KHz -30MHz) | $\pm 3.1 \text{ dB}$ |
| 5 | Conducted Emission (150KHz-30MHz) | $\pm 4.74 \text{ dB}$ |
| 6 | All emissions, radiated(<1G) 30MHz-1000MHz | $\pm 5.2 \text{ dB}$ |
| 7 | All emissions, radiated 1GHz -18GHz | $\pm 4.66 \text{ dB}$ |
| 8 | All emissions, radiated 18GHz -40GHz | $\pm 4.31 \text{ dB}$ |
| 9 | Occupied bandwidth | $\pm 0.3 \text{ dB}$ |
| 10 | Dwell Time | $\pm 3\%$ |

2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF THE EUT

| | |
|-------------------------|--|
| Product Name | Electric baby rocking chair |
| Trade Name | BOBILONG |
| Model Name | YY-001 |
| Series Model | bbl001 ,bbl002,BBL-YYM-008,:BBL-YYF-002,BBL-YYH-002, BBL-YHH-002,BBL-YJB-002,BBL-YHB-002,BBL-YHH-002, BBL-XJB-002,BBL-XHH-002,YYM-001,YYM-002,YYM-005, YYM-006,YY-002,YY-003,YY-005,YY-006,YY-007,YY-008, YY-009 |
| Model Difference | We (YONGKANG DIBILE INDUSTRY AND TRADE CO.,LTD) hereby state that all the models are electrical identical including the same software parameter and hardware design (i.e., circuit design, PCB Layout, RF module/circuit, antenna type(s) and antenna location, components on PCB, etc.,), same mechanical structure and design (including product enclosure, materials, etc.,), the only difference is the model name and appearance color. |
| Channel List | Please refer to the Note 2. |
| Operation frequency | 2402MHz-2480MHz |
| Modulation: | GFSK |
| Channel number | 79 CH |
| Transmitter rate: | 1Mbps |
| Power Supply | Input:AC 120V/60Hz |
| Battery | N/A |
| Report number | FCS202409121W01 |
| Hardware version number | V1.0 |
| Software version number | V1.0 |
| Connecting I/O Port(s) | Please refer to the User's Manual |

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

2.

| Channel | Frequency | Channel | Frequency | Channel | Frequency | Channel | Frequency |
|---------|-----------|---------|-----------|---------|-----------|---------|-----------|
| 1 | 2402MHz | 21 | 2422MHz | 41 | 2442MHz | 61 | 2462MHz |
| 2 | 2403MHz | 22 | 2423MHz | 42 | 2443MHz | 62 | 2463MHz |
| ... | ... | ... | ... | ... | ... | ... | ... |
| 19 | 2420MHz | 39 | 2440MHz | 59 | 2460MHz | 79 | 2480MHz |
| 20 | 2421MHz | 40 | 2441MHz | 60 | 2461MHz | | |

3. Table for Filed Antenna


| Ant. | Brand | Model Name | Antenna Type | Connector | Gain (dBi) | NOTE |
|------|-------|------------|--------------|-----------|------------|---------|
| 1 | NA | 2.4G ANT | PCB antenna | N/A | -0.58 | Antenna |

2.2 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

Block diagram of EUT configuration for test

Mode 1

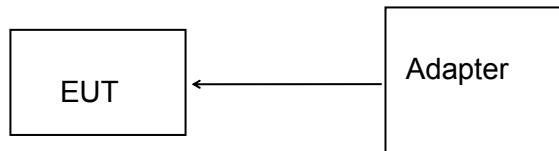

Test software: the FCC_assist1.0.4.exe

The test software was used to control EUT work in continuous TX mode, and select test channel, Wireless mode as below table

| No. | Test model description |
|-----|------------------------|
| 1 | Low channel GFSK |
| 2 | Middle channel GFSK |
| 3 | High channel GFSK |
| 4 | Hopping GFSK |

Note:

1. All test modes are powered by adapters, and only the worst results are recorded in the report. The GFSK model is the worst.
2. For radiated emission, 3 axis were chosen for testing for each applicable mode.
3. During the test, EUT uses powered by adapter.

Remark: The EDR function is disabled by software control

2.3 DESCRIPTION OF NECESSARY ACCESSORIES AND SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Necessary accessories

| Item | Equipment | Mfr/Brand | Model/Type No. | Serial No. | Note |
|------|-----------|-----------|----------------|------------|------|
| | | | | | |
| | | | | | |

Support units

| Item | Equipment | Mfr/Brand | Model/Type No. | Serial No. | Note |
|------|-----------|-----------|----------------|------------|----------|
| 1 | Adapter | Xiaomi | AD652G | N/A | Test use |
| 2 | USB cable | N/A | 0.25m | N/A | Test use |

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.
- (3) "YES" is means "shielded" "with core"; "NO" is means "unshielded" "without core".

2.4 EQUIPMENTS LIST

Radiation Test equipment

| Kind of Equipment | Manufacturer | Type No. | Company No. | Last calibration | Calibrated until |
|----------------------------------|----------------------------|--------------|-------------|------------------|------------------|
| EMI Test Receiver | R&S | ESRP 3 | FCS-E001 | 2024.09.09 | 2025.09.08 |
| Signal Analyzer | R&S | FSV40-N | FCS-E012 | 2024.09.09 | 2025.09.08 |
| Active loop Antenna | ZHINAN | ZN30900C | FCS-E013 | 2024.09.09 | 2025.09.08 |
| Bilog Antenna | SCHWARZBECK | VULB 9168 | FCS-E002 | 2024.09.09 | 2025.09.08 |
| Horn Antenna | SCHWARZBECK | BBHA 9120D | FCS-E003 | 2024.09.09 | 2025.09.08 |
| SHF-EHF Horn Antenna (18G-40GHz) | A-INFO | LB-180400-KF | FCS-E018 | 2024.09.09 | 2025.09.08 |
| Pre-Amplifier(0.1M-3G Hz) | EMCI | EM330N | FCS-E004 | 2024.09.09 | 2025.09.08 |
| Pre-Amplifier (1G-18GHz) | N/A | TSAMP-0518SE | FCS-E014 | 2024.09.09 | 2025.09.08 |
| Pre-Amplifier (18G-40GHz) | TERA-MW | TRLA-0400 | FCS-E019 | 2024.09.09 | 2025.09.08 |
| Temperature & Humidity | HTC-1 | victor | FCS-E005 | 2024.09.09 | 2025.09.08 |
| Testing Software | EZ-EMC(Ver.STSLAB 03A1 RE) | | | | |

Conduction Test equipment

| Kind of Equipment | Manufacturer | Type No. | Company No. | Last calibration | Calibrated until |
|------------------------|---------------------------|----------|-------------|------------------|------------------|
| EMI Test Receiver | R&S | ESPI | FCS-E020 | 2024.09.09 | 2025.09.08 |
| LISN | R&S | ENV216 | FCS-E007 | 2024.09.09 | 2025.09.08 |
| LISN | ETS | 3810/2NM | FCS-E009 | 2024.09.09 | 2025.09.08 |
| Temperature & Humidity | HTC-1 | victor | FCS-E008 | 2024.09.09 | 2025.09.08 |
| Testing Software | EZ-EMC(Ver.EMC-CON 3A1.1) | | | | |

RF Connected Test

| Kind of Equipment | Manufacturer | Type No. | Company No. | Last calibration | Calibrated until |
|---------------------|----------------------------|----------|-------------|------------------|------------------|
| MXA SIGNAL Analyzer | Keysight | N9020A | FCS-E015 | 2024.09.09 | 2025.09.08 |
| Spectrum Analyzer | Agilent | E4447A | MY50180039 | 2024.09.09 | 2025.09.08 |
| Spectrum Analyzer | R&S | FSV-40 | 101499 | 2024.09.09 | 2025.09.08 |
| Power Sensor | Agilent | UX2021XA | FCS-E021 | 2024.09.09 | 2025.09.08 |
| Testing Software | EZ-EMC(Ver.STSLAB 03A1 RE) | | | | |

3 CONDUCTED EMISSION MEASUREMENT

3.1 LIMIT

Operating frequency band. In case the emission fall within the restricted band specified on Part 207(a) limit in the table below has to be followed.

| FREQUENCY (MHz) | Conducted Emissionlimit (dBuV) | |
|-----------------|--------------------------------|-----------|
| | Quasi-peak | Average |
| 0.15 -0.5 | 66 - 56 * | 56 - 46 * |
| 0.50 -5.0 | 56.00 | 46.00 |
| 5.0 -30.0 | 60.00 | 50.00 |

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.


3.2 TEST PROCEDURE

The following table is the setting of the receiver

| Receiver Parameters | Setting |
|---------------------|----------|
| Attenuation | 10 dB |
| Start Frequency | 0.15 MHz |
| Stop Frequency | 30 MHz |
| IF Bandwidth | 9 kHz |


- a. The EUT was 0.1 meters from the horizontal ground plane and 0.4 meters from the vertical ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 10 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

3.3 TEST SETUP

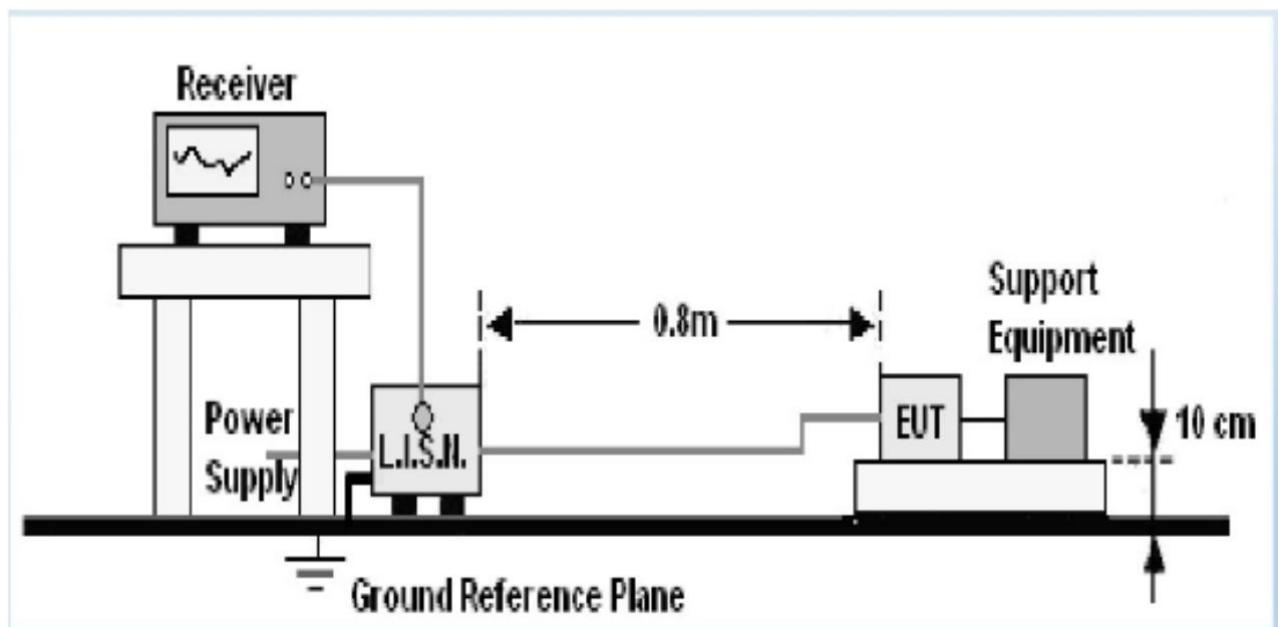


3.4 TEST RESULTS

| | | | |
|---------------|------------------|--------------------|-----|
| Temperature: | 22.1 °C | Relative Humidity: | 56% |
| Test Voltage: | AC 120V/60Hz | Phase: | L |
| Test Mode: | GFSK(worst mode) | | |

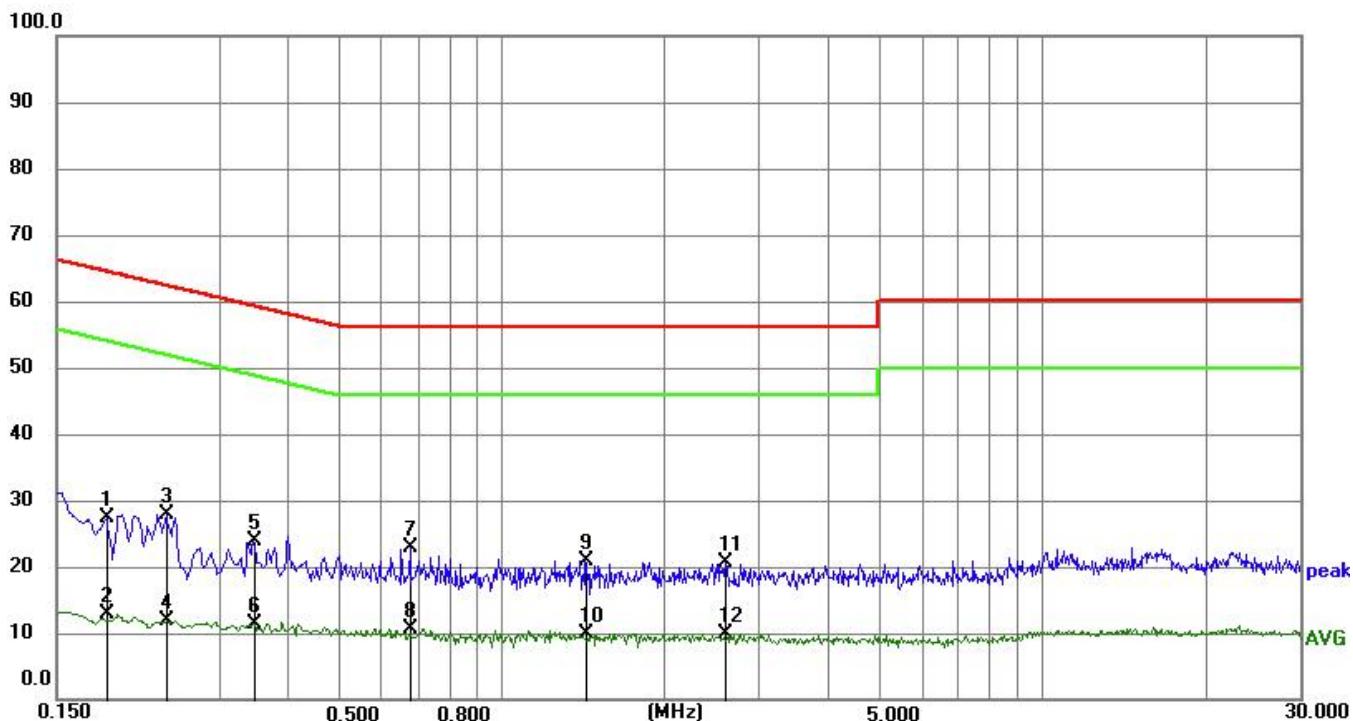

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor(dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|--------------------|-------------------|-------------------------|--------------------|-------------------|----------------|--------|
| 1 | 0.1860 | 17.33 | 10.10 | 27.43 | 64.21 | 36.78 | QP |
| 2 | 0.1860 | 2.66 | 10.10 | 12.76 | 54.21 | 41.45 | AVG |
| 3 | 0.2400 | 17.76 | 10.06 | 27.82 | 62.10 | 34.28 | QP |
| 4 | 0.2400 | 1.75 | 10.06 | 11.81 | 52.10 | 40.29 | AVG |
| 5 | 0.3480 | 13.83 | 10.02 | 23.85 | 59.01 | 35.16 | QP |
| 6 | 0.3480 | 1.40 | 10.02 | 11.42 | 49.01 | 37.59 | AVG |
| 7 | 0.6764 | 12.86 | 9.98 | 22.84 | 56.00 | 33.16 | QP |
| 8 | 0.6764 | 0.54 | 9.98 | 10.52 | 46.00 | 35.48 | AVG |
| 9 | 1.4279 | 11.01 | 9.99 | 21.00 | 56.00 | 35.00 | QP |
| 10 | 1.4279 | -0.22 | 9.99 | 9.77 | 46.00 | 36.23 | AVG |
| 11 | 2.6070 | 10.77 | 9.95 | 20.72 | 56.00 | 35.28 | QP |
| 12 | 2.6070 | -0.03 | 9.95 | 9.92 | 46.00 | 36.08 | AVG |

| | | | |
|---------------|------------------|--------------------|-----|
| Temperature: | 22.1 °C | Relative Humidity: | 56% |
| Test Voltage: | AC 120V/60Hz | Phase: | N |
| Test Mode: | GFSK(worst mode) | | |

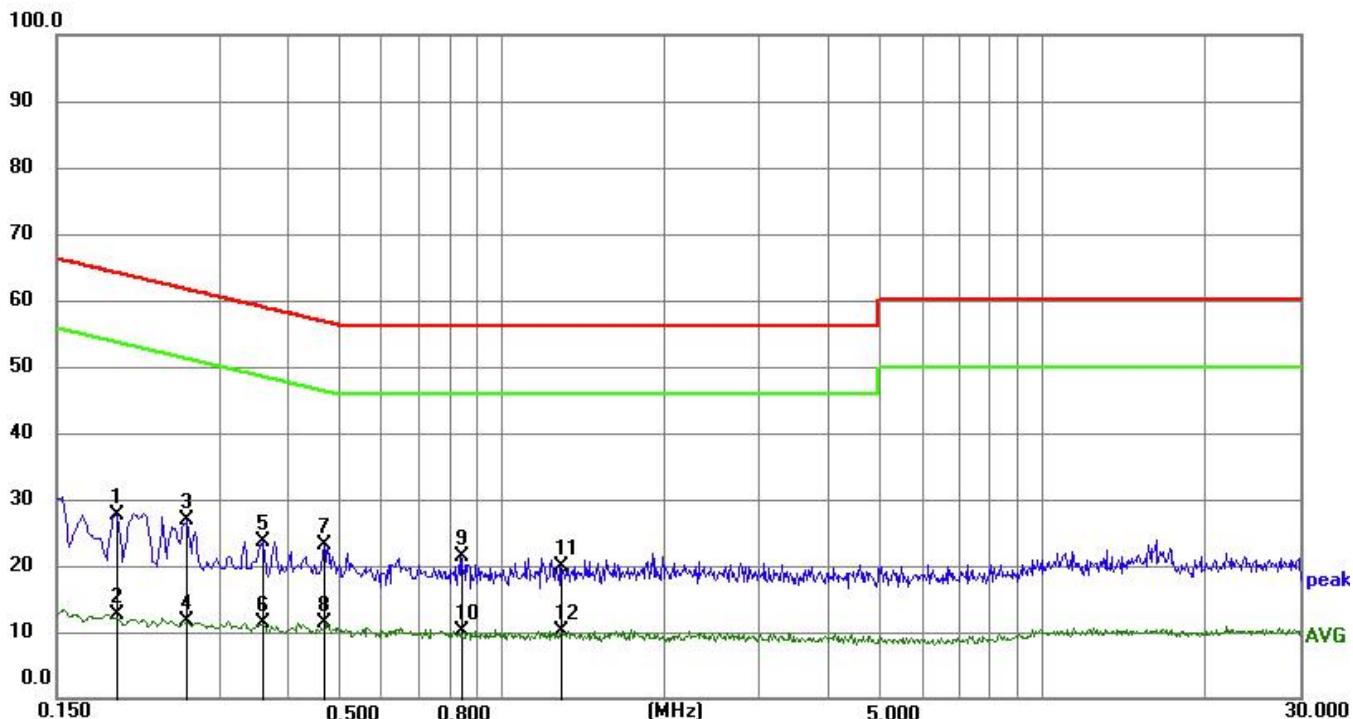

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor(dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|--------------------|-------------------|-------------------------|--------------------|-------------------|----------------|--------|
| 1 | 0.1949 | 17.51 | 10.05 | 27.56 | 63.83 | 36.27 | QP |
| 2 | 0.1949 | 2.70 | 10.05 | 12.75 | 53.83 | 41.08 | AVG |
| 3 | 0.2625 | 16.80 | 10.04 | 26.84 | 61.35 | 34.51 | QP |
| 4 | 0.2625 | 1.66 | 10.04 | 11.70 | 51.35 | 39.65 | AVG |
| 5 | 0.3615 | 13.58 | 10.02 | 23.60 | 58.69 | 35.09 | QP |
| 6 | 0.3615 | 1.37 | 10.02 | 11.39 | 48.69 | 37.30 | AVG |
| 7 | 0.4695 | 13.09 | 10.01 | 23.10 | 56.52 | 33.42 | QP |
| 8 | 0.4695 | 1.44 | 10.01 | 11.45 | 46.52 | 35.07 | AVG |
| 9 | 0.8430 | 11.32 | 9.98 | 21.30 | 56.00 | 34.70 | QP |
| 10 | 0.8430 | 0.27 | 9.98 | 10.25 | 46.00 | 35.75 | AVG |
| 11 | 1.2885 | 9.97 | 9.98 | 19.95 | 56.00 | 36.05 | QP |
| 12 | 1.2885 | 0.13 | 9.98 | 10.11 | 46.00 | 35.89 | AVG |

4. 20 DB BANDWIDTH

4.1 Limit

| FCC Part15 (15.247) , Subpart C | | | |
|---------------------------------|----------------|-------|-----------------------|
| Section | Test Item | Limit | Frequency Range (MHz) |
| 15.247a(1) | 20dB bandwidth | N/A | 2400-2483.5 |

4.2 Test Procedure

- (1) Connect EUT's antenna output to spectrum analyzer by RF cable.
- (2) Set the spectrum analyzer as follows

| | |
|------------------|--|
| Center Frequency | The centre frequency of the channel under test |
| Detector | Peak |
| RBW | For 20 dB Bandwidth :30KHz For 99% Bandwidth :1% to 5% of the occupied bandwidth |
| VBW | For 20dB Bandwidth : $\geq 3 \times$ RBW For 99% Bandwidth : approximately $3 \times$ RBW |
| Trace | Max hold |
| Sweep | Auto |

- (3) Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator
- (4) Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
- (5) Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.


4.3 Test setup



4.4 Test results

| TestMode | Channel (MHz) | 99%OBW(MHz) | 20dB Bandwidth (MHz) | Verdict |
|----------|---------------|-------------|----------------------|---------|
| Lowest | 2402MHz | 0.890 | 1.004 | Pass |
| Middle | 2441MHz | 0.908 | 1.030 | Pass |
| Highest | 2480MHz | 0.936 | 1.036 | Pass |

4.5 Original Test Data

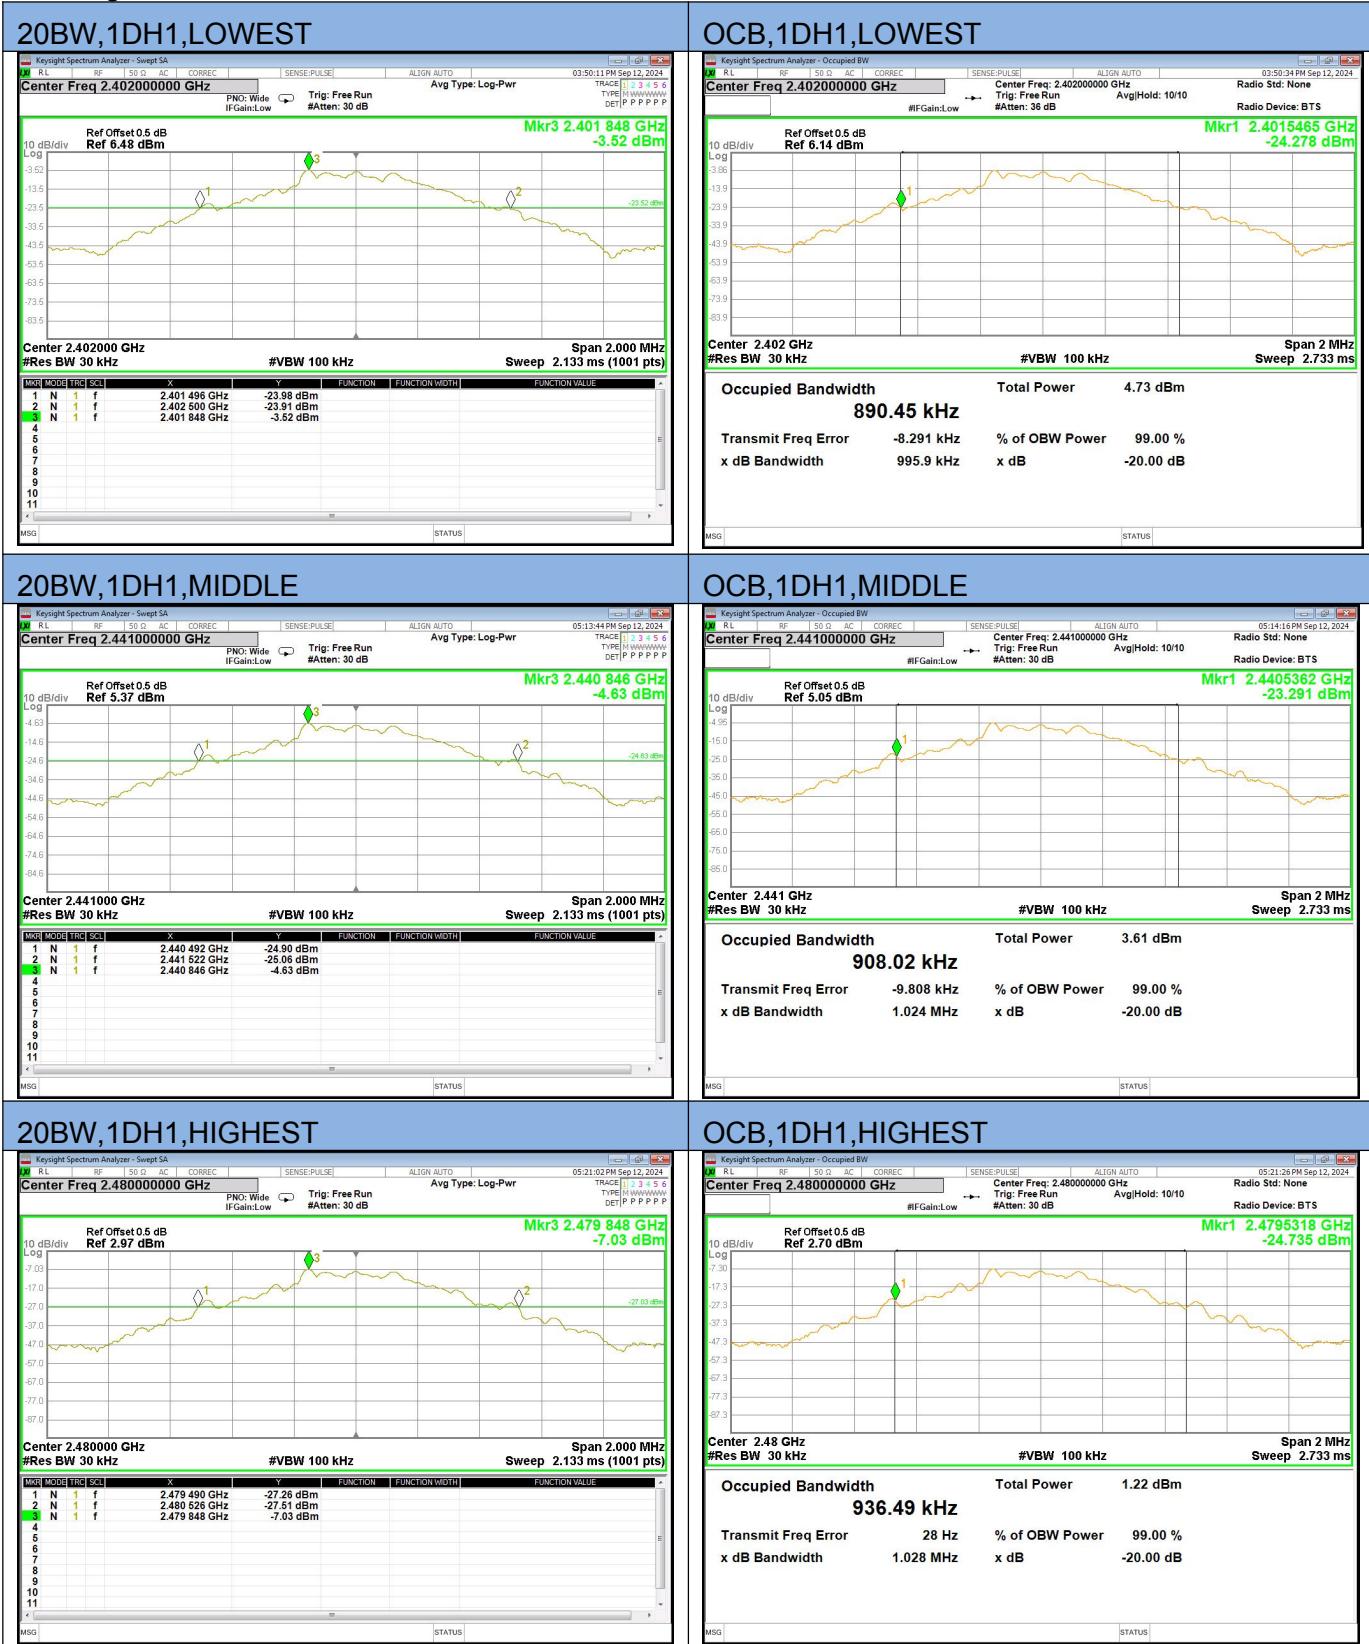

5. CONDUCTED OUTPUT POWER

5.1 LIMIT

| FCC Part 15 Subpart C | | | |
|-----------------------|-------------------|----------------|-----------------|
| Section | Test Item | Limit | Frequency Range |
| 15.247(b)(1) | Peak output power | Power <(21dBm) | 2400-2483.5 |

1. Connect each EUT's antenna output to power sensor by RF cable and attenuator
2. Measure the PK output power of each antenna port by power sensor.

5.3 TEST SETUP



5.5 TEST RESULTS

| TestMode | Channel (MHz) | Result (dBm) | Limit (dBm) | Verdict |
|----------|---------------|--------------|-------------|---------|
| Lowest | 2402MHz | -1.73 | 21 | Pass |
| Middle | 2441MHz | -2.74 | 21 | Pass |
| Highest | 2480MHz | -5.23 | 21 | Pass |

6 NUMBER OF HOPPING CHANNEL


6.1 LIMIT

| FCC Part 15.247,Subpart C | | | | |
|---------------------------|---------------------------|-------|----------------------|--------|
| Section | Test Item | Limit | FrequencyRange (MHz) | Result |
| 15.247 (a)(1)(iii) | Number of Hopping Channel | >15 | 2400-2483.5 | PASS |

6.2 TEST PROCEDURE

a The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
b Spectrum Setting: RBW= 100KHz, VBW=300KHz, Sweep time = Auto

5.3 TEST SETUP

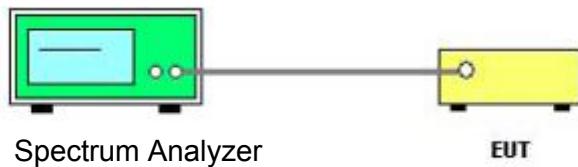

6.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

6.5 TEST RESULTS

| | | | |
|----------------------|--------------|--------------------|--------------|
| Temperature: | 25 °C | Relative Humidity: | 60% |
| Test Mode: | Hopping Mode | Test Voltage: | AC 120V/60Hz |
| Hopping Number | 79 | Limit | >15 |
| Frequency Range(MHz) | 2400-2483.5 | Results | Pass |



7. BAND EDGE AND SPURIOUS(CONDUCTED)

7.1 LIMIT

In any 100kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 30dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power.

7.2 TEST PROCEDURE

(1) Connect EUT's antenna output to spectrum analyzer by RF cable.

(2) Establish a reference level by using the following procedure:

| | |
|------------------|----------------------------|
| Center frequency | Channel center frequency |
| RBW: | 100kHz |
| VBW: | 300kHz |
| Span | 1.5times the DTS bandwidth |
| Detector Mode: | Peak |
| Sweep time: | auto |
| Trace mode | Max hold |


(3) Establish Allow the trace to stabilize, use the peak marker function to determine the maximum peak power level to establish the reference level.

(4) Set the spectrum analyzer as follows:

| | |
|------------------------------|--|
| RBW: | 100kHz |
| VBW: | 300kHz |
| Span | Encompass frequency range to be measured |
| Number of measurement points | \geq span/RBW |
| Detector Mode: | Peak |
| Sweep time: | auto |
| Trace mode | Max hold |

(5) Allow the trace to stabilize, use the peak marker function to determine the maximum amplitude of all unwanted emissions outside of the authorized frequency band


7.3 TEST SETUP

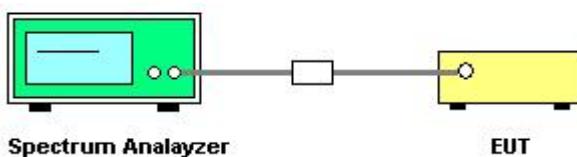

7.4 TEST RESULTS


| Eut set mode | CH or Frequency | Result |
|--------------|-----------------|--------|
| GFSK | CH1 | Pass |
| | CH79 | Pass |

7.5 Original test data

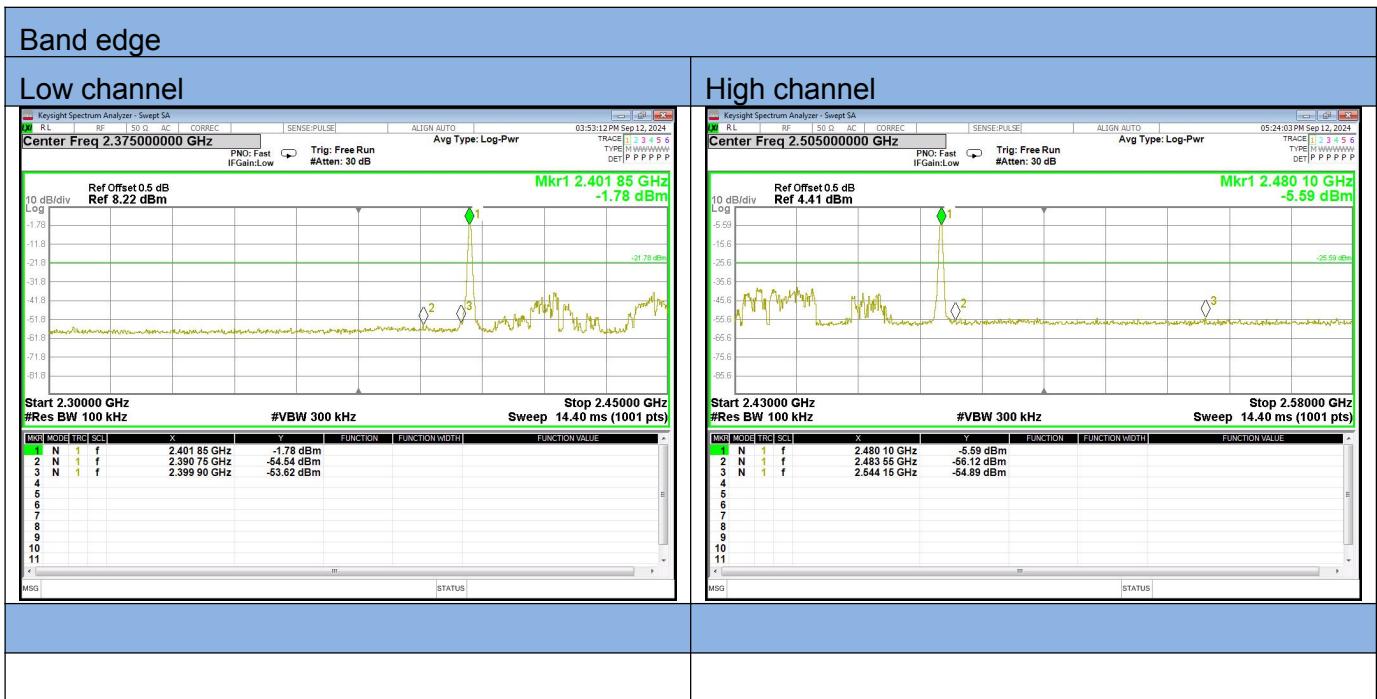

Spurious emissions


Low 2402MHz 0.3GHz-25GHz

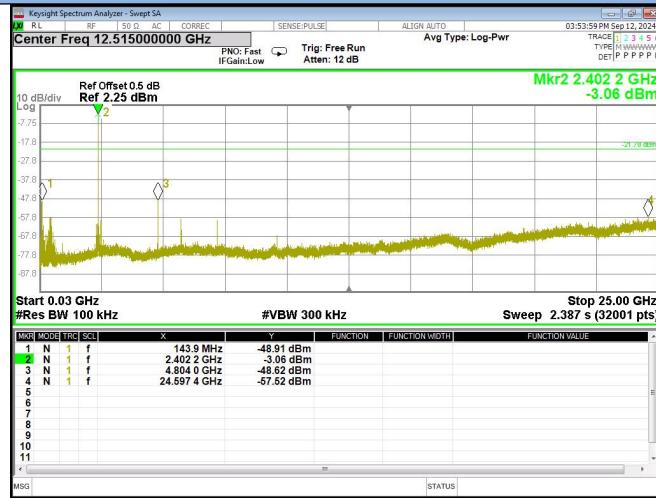


Middle 2441MHz 0.3GHz-25GHz



High 2480MHz 0.3GHz-25GHz

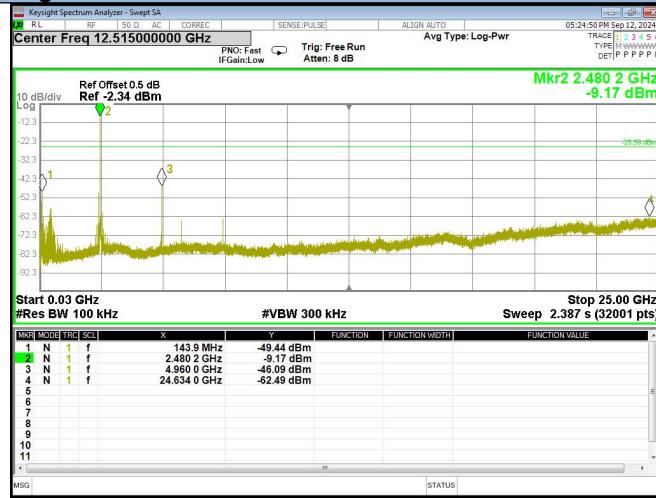

7.6 For Hopping Band edge

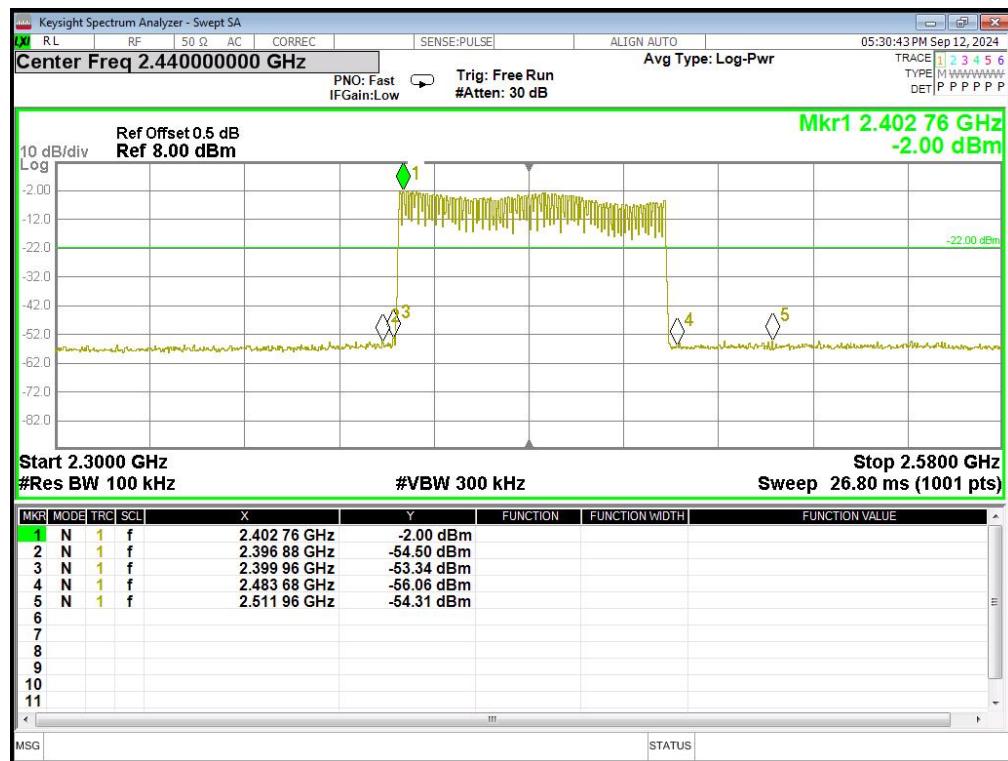

8. RADIATED EMISSION MEASUREMENT

8.1 RADIATED EMISSION LIMITS

In any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the Restricted band specified on Part15.205(a)&209(a) limit in the table and according to ANSI C63.10-2013 below has to be followed

LIMITS OF RADIATED EMISSION MEASUREMENT (0.009MHz - 1000MHz)

| Frequencies (MHz) | Field Strength (micorvolts/meter) | Measurement Distance (meters) |
|-------------------|-----------------------------------|-------------------------------|
| 0.009~0.490 | 2400/F(KHz) | 300 |
| 0.490~1.705 | 24000/F(KHz) | 30 |
| 1.705~30.0 | 30 | 30 |
| 30~88 | 100 | 3 |
| 88~216 | 150 | 3 |
| 216~960 | 200 | 3 |
| Above 960 | 500 | 3 |

LIMITS OF RADIATED EMISSION MEASUREMENT (1GHz-25 GHz)

| FREQUENCY (MHz) | (dBuV/m) (at 3M) | |
|-----------------|------------------|---------|
| | PEAK | AVERAGE |
| Above 1000 | 74 | 54 |

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

For Radiated Emission

| Spectrum Parameter | Setting |
|---------------------------------------|---------------------------------|
| Attenuation | Auto |
| Detector | Peak/AV |
| Start Frequency | 1000 MHz(Peak/AV) |
| Stop Frequency | 10th carrier hamonic(Peak/AV) |
| RB / VB (emission in restricted band) | PK=1MHz / 1MHz, AV=1 MHz /10 Hz |

For Band edge

| Spectrum Parameter | Setting |
|---------------------------------------|--|
| Detector | Peak/AV |
| Start/Stop Frequency | Lower Band Edge: 2300 to 2403 MHz Upper Band Edge: 2479 to 2500 MHz |
| RB / VB (emission in restricted band) | PK=1MHz / 1MHz, AV=1 MHz / 10 Hz |

| Receiver Parameter | Setting |
|------------------------|--------------------------------------|
| Attenuation | Auto |
| Start ~ Stop Frequency | 9kHz~90kHz / RB 200Hz for PK & AV |
| Start ~ Stop Frequency | 90kHz~110kHz / RB 200Hz for QP |
| Start ~ Stop Frequency | 110kHz~490kHz / RB 200Hz for PK & AV |
| Start ~ Stop Frequency | 490kHz~30MHz / RB 9kHz for QP |
| Start ~ Stop Frequency | 30MHz~1000MHz / RB 120kHz for QP |

8.2 TEST PROCEDURE


- a. The measuring distance of at 3 m shall be used for measurements at frequency 0.009MHz up to 1GHz, and above 1GHz.
- b. The EUT was placed on the top of a rotating table 1.5 meters (above 1GHz is 1.5 m) above the ground at a 3 meter anechoic chamber test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The height of the equipment shall be 0.1 m (above 1GHz is 1.5 m); the height of the test antenna shall vary between 1 m to 4 m. horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then QuasiPeak detector mode re-measured.
- e. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- f. For the actual test configuration, please refer to the related Item –EUT Test Photos.

Note:


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

8.3 TESTSETUP


(A) Radiated Emission Test-Up Frequency Below 30MHz

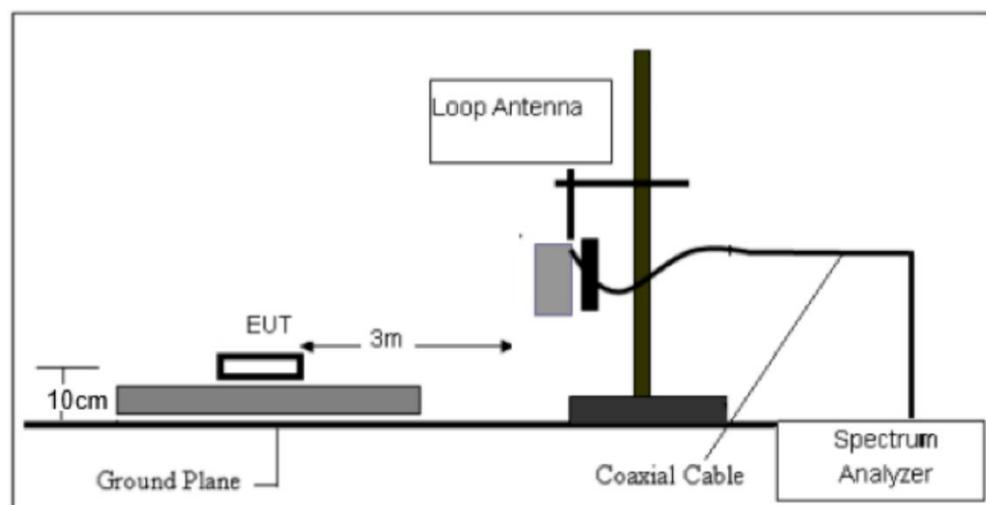

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

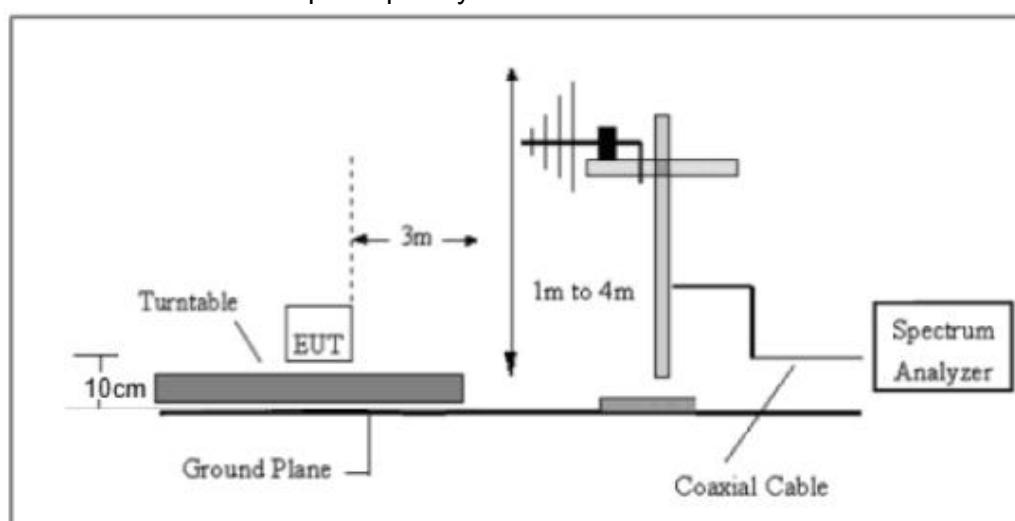

(C) Radiated Emission Test-Up Frequency Above 1GHz

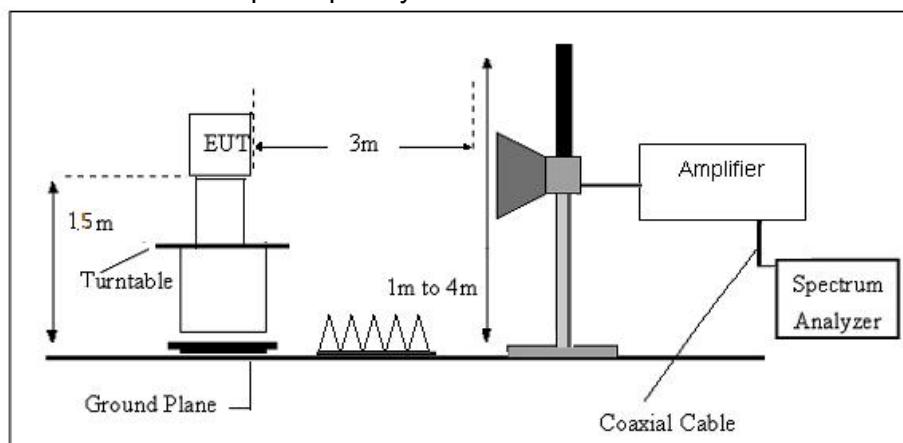

8.4. TEST RESULTS

(9KHz-30MHz)

| | | | |
|---------------|--------------|--------------------|------------------|
| Temperature: | 22.7°C | Relative Humidity: | 61% |
| Test Voltage: | AC 120V/60Hz | Test Mode: | GFSK(worst mode) |

| Freq. (MHz) | Reading (dBuV/m) | Limit (dBuV/m) | Margin (dB) | State P/F | Test Result |
|----------------|---------------------|-------------------|----------------|--------------|-------------|
| -- | -- | -- | -- | -- | PASS |
| -- | -- | -- | -- | -- | PASS |


Note:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor = $40 \log \left(\frac{\text{specific distance}}{\text{test distance}} \right)$ (dB);
Limit line = specific limits (dBuv) + distance extrapolation factor.

8.5 (30MHZ-1000MHZ)

| | | | |
|---------------|------------------|--------------------|------------|
| Temperature: | 24.7°C | Relative Humidity: | 61% |
| Test Voltage: | AC 120V/60Hz | Phase: | Horizontal |
| Test Mode: | GFSK(worst mode) | | |

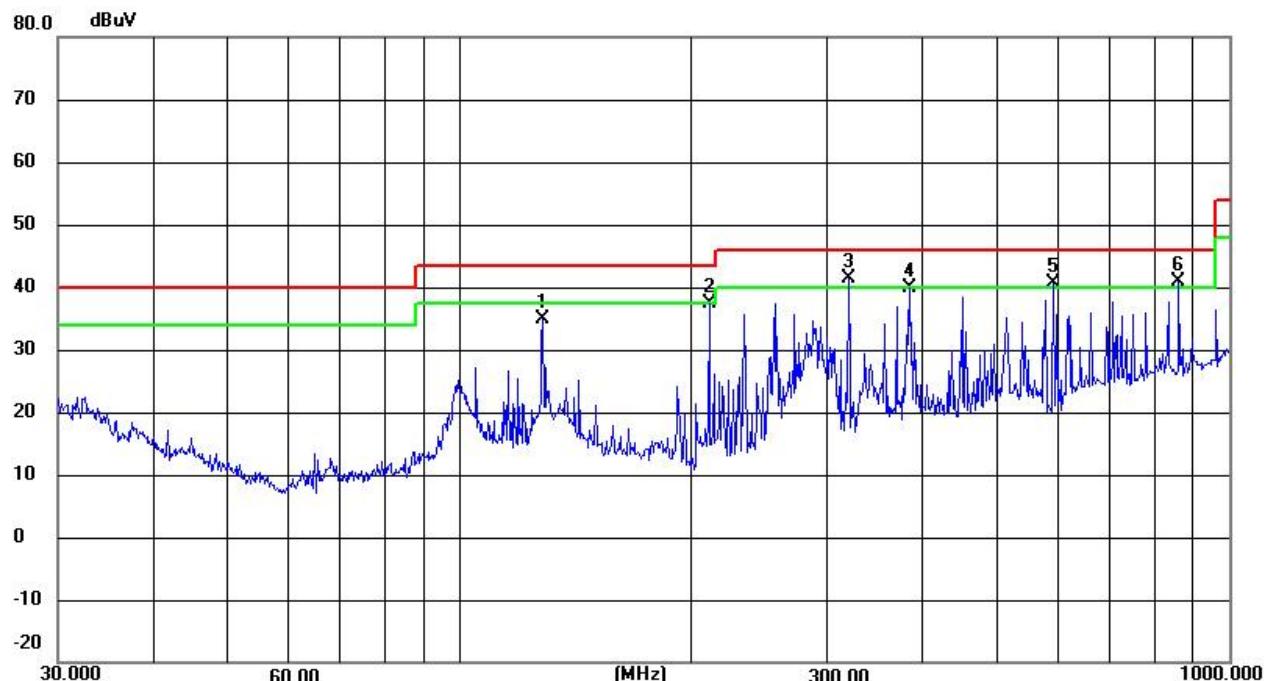


| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor(dB/ m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|--------------------|-------------------|-----------------------------|--------------------|-------------------|----------------|--------|
| 1 | 128.1130 | 67.16 | -32.16 | 35.00 | 43.50 | -8.50 | QP |
| 2 | 210.7860 | 69.41 | -32.03 | 37.38 | 43.50 | -6.12 | QP |
| 3 | 319.9370 | 73.21 | -31.84 | 41.37 | 46.00 | -4.63 | QP |
| 4 | 383.9318 | 71.49 | -31.65 | 39.84 | 46.00 | -6.16 | QP |
| 5 | 590.9737 | 71.67 | -31.15 | 40.52 | 46.00 | -5.48 | QP |
| 6 | 860.0351 | 71.53 | -30.74 | 40.79 | 46.00 | -5.21 | QP |

Note: 1. Margin = Result (Result =Reading + Factor)-Limit

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

| | | | |
|---------------|------------------|--------------------|----------|
| Temperature: | 22.7°C | Relative Humidity: | 61% |
| Test Voltage: | AC 120V/60Hz | Phase: | Vertical |
| Test Mode: | GFSK(worst mode) | | |

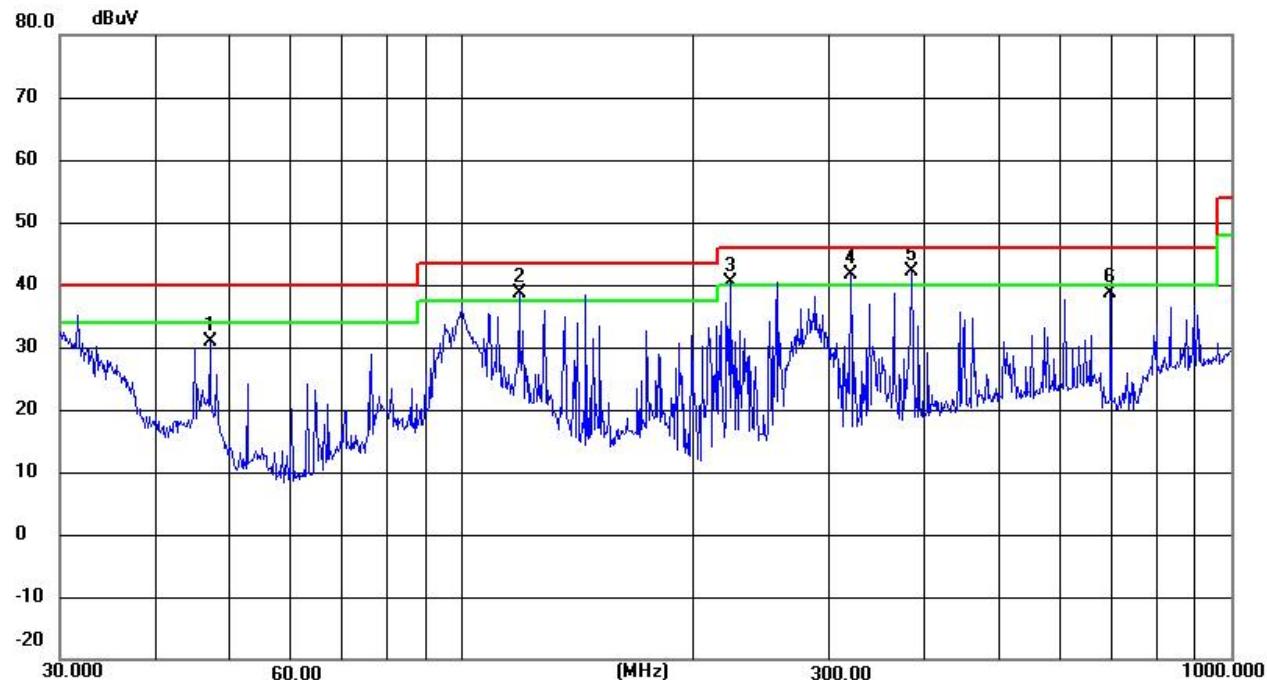

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor(dB/ m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|--------------------|-------------------|-----------------------------|--------------------|-------------------|----------------|--------|
| 1 | 46.9947 | 47.24 | -16.37 | 30.87 | 40.00 | -9.13 | QP |
| 2 | 118.6013 | 70.86 | -32.17 | 38.69 | 43.50 | -4.81 | QP |
| 3 | 222.9502 | 72.36 | -32.02 | 40.34 | 46.00 | -5.66 | QP |
| 4 | 319.9370 | 73.57 | -31.84 | 41.73 | 46.00 | -4.27 | QP |
| 5 | 383.9318 | 73.68 | -31.65 | 42.03 | 46.00 | -3.97 | QP |
| 6 | 696.8567 | 69.64 | -30.97 | 38.67 | 46.00 | -7.33 | QP |

Note: 1. Margin = Result (Result =Reading + Factor)–Limit

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

■ 8.6 ABOVE 1GHZ

Low CH (GFSK)

Peak value:

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | polarization |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------|---------------------|-----------------|--------------|
| 4804.00 | 41.87 | 31.78 | 8.60 | 32.09 | 50.16 | 74.00 | -23.84 | Vertical |
| 7206.00 | 34.15 | 36.15 | 11.65 | 32.00 | 49.95 | 74.00 | -24.05 | Vertical |
| 9608.00 | 31.73 | 37.95 | 14.14 | 31.62 | 52.20 | 74.00 | -21.80 | Vertical |
| 12010.00 | * | | | | | 74.00 | | Vertical |
| 14412.00 | * | | | | | 74.00 | | Vertical |
| 4804.00 | 45.63 | 31.78 | 8.60 | 32.09 | 53.92 | 74.00 | -20.08 | Horizontal |
| 7206.00 | 37.75 | 36.15 | 11.65 | 32.00 | 53.55 | 74.00 | -20.45 | Horizontal |
| 9608.00 | 34.29 | 37.95 | 14.14 | 31.62 | 54.76 | 74.00 | -19.24 | Horizontal |
| 12010.00 | * | | | | | 74.00 | | Horizontal |
| 14412.00 | * | | | | | 74.00 | | Horizontal |

Average value:

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | polarization |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------|---------------------|-----------------|--------------|
| 4804.00 | 28.17 | 31.78 | 8.60 | 32.09 | 36.46 | 54.00 | -17.54 | Vertical |
| 7206.00 | 22.69 | 36.15 | 11.65 | 32.00 | 38.49 | 54.00 | -15.51 | Vertical |
| 9608.00 | 23.43 | 37.95 | 14.14 | 31.62 | 43.90 | 54.00 | -10.10 | Vertical |
| 12010.00 | * | | | | | 54.00 | | Vertical |
| 14412.00 | * | | | | | 54.00 | | Vertical |
| 4804.00 | 32.05 | 31.78 | 8.60 | 32.09 | 40.34 | 54.00 | -13.66 | Horizontal |
| 7206.00 | 23.29 | 36.15 | 11.65 | 32.00 | 39.09 | 54.00 | -14.91 | Horizontal |
| 9608.00 | 22.87 | 37.95 | 14.14 | 31.62 | 43.34 | 54.00 | -10.66 | Horizontal |
| 12010.00 | * | | | | | 54.00 | | Horizontal |
| 14412.00 | * | | | | | 54.00 | | Horizontal |

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.
3. “*”, means this data is the too weak instrument of signal is unable to test.

Middle CH (GFSK)

Peak value:

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | polarization |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------|---------------------|-----------------|--------------|
| 4882.00 | 37.49 | 31.85 | 8.67 | 32.12 | 45.89 | 74.00 | -28.11 | Vertical |
| 7323.00 | 32.22 | 36.37 | 11.72 | 31.89 | 48.42 | 74.00 | -25.58 | Vertical |
| 9764.00 | 29.57 | 38.35 | 14.25 | 31.62 | 50.55 | 74.00 | -23.45 | Vertical |
| 12205.00 | * | | | | | 74.00 | | Vertical |
| 14646.00 | * | | | | | 74.00 | | Vertical |
| 4882.00 | 38.73 | 31.85 | 8.67 | 32.12 | 47.13 | 74.00 | -26.87 | Horizontal |
| 7323.00 | 31.30 | 36.37 | 11.72 | 31.89 | 47.50 | 74.00 | -26.50 | Horizontal |
| 9764.00 | 27.89 | 38.35 | 14.25 | 31.62 | 48.87 | 74.00 | -25.13 | Horizontal |
| 12205.00 | * | | | | | 74.00 | | Horizontal |
| 14646.00 | * | | | | | 74.00 | | Horizontal |

Average value:

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | polarization |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------|---------------------|-----------------|--------------|
| 4882.00 | 26.02 | 31.85 | 8.67 | 32.12 | 34.42 | 54.00 | -19.58 | Vertical |
| 7323.00 | 21.88 | 36.37 | 11.72 | 31.89 | 38.08 | 54.00 | -15.92 | Vertical |
| 9764.00 | 20.57 | 38.35 | 14.25 | 31.62 | 41.55 | 54.00 | -12.45 | Vertical |
| 12205.00 | * | | | | | 54.00 | | Vertical |
| 14646.00 | * | | | | | 54.00 | | Vertical |
| 4882.00 | 32.23 | 31.85 | 8.67 | 32.12 | 40.63 | 54.00 | -13.37 | Horizontal |
| 7323.00 | 24.10 | 36.37 | 11.72 | 31.89 | 40.30 | 54.00 | -13.70 | Horizontal |
| 9764.00 | 20.52 | 38.35 | 14.25 | 31.62 | 41.50 | 54.00 | -12.50 | Horizontal |
| 12205.00 | * | | | | | 54.00 | | Horizontal |
| 14646.00 | * | | | | | 54.00 | | Horizontal |

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.
3. “*”, means this data is the too weak instrument of signal is unable to test.

High CH(GFSK)

Peak value:

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | polarization |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------|---------------------|-----------------|--------------|
| 4960.00 | 37.92 | 31.93 | 8.73 | 32.16 | 46.42 | 74.00 | -27.58 | Vertical |
| 7440.00 | 33.46 | 36.59 | 11.79 | 31.78 | 50.06 | 74.00 | -23.94 | Vertical |
| 9920.00 | 30.80 | 38.81 | 14.38 | 31.88 | 52.11 | 74.00 | -21.89 | Vertical |
| 12400.00 | * | | | | | 74.00 | | Vertical |
| 14880.00 | * | | | | | 74.00 | | Vertical |
| 4960.00 | 39.55 | 31.93 | 8.73 | 32.16 | 48.05 | 74.00 | -25.95 | Horizontal |
| 7440.00 | 32.22 | 36.59 | 11.79 | 31.78 | 48.82 | 74.00 | -25.18 | Horizontal |
| 9920.00 | 31.72 | 38.81 | 14.38 | 31.88 | 53.03 | 74.00 | -20.97 | Horizontal |
| 12400.00 | * | | | | | 74.00 | | Horizontal |
| 14880.00 | * | | | | | 74.00 | | Horizontal |

Average value:

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | polarization |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------|---------------------|-----------------|--------------|
| 4960.00 | 30.38 | 31.93 | 8.73 | 32.16 | 38.88 | 54.00 | -15.12 | Vertical |
| 7440.00 | 24.76 | 36.59 | 11.79 | 31.78 | 41.36 | 54.00 | -12.64 | Vertical |
| 9920.00 | 22.95 | 38.81 | 14.38 | 31.88 | 44.26 | 54.00 | -9.74 | Vertical |
| 12400.00 | * | | | | | 54.00 | | Vertical |
| 14880.00 | * | | | | | 54.00 | | Vertical |
| 4960.00 | 33.04 | 31.93 | 8.73 | 32.16 | 41.54 | 54.00 | -12.46 | Horizontal |
| 7440.00 | 24.81 | 36.59 | 11.79 | 31.78 | 41.41 | 54.00 | -12.59 | Horizontal |
| 9920.00 | 24.42 | 38.81 | 14.38 | 31.88 | 45.73 | 54.00 | -8.27 | Horizontal |
| 12400.00 | * | | | | | 54.00 | | Horizontal |
| 14880.00 | * | | | | | 54.00 | | Horizontal |

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.
3. “*”, means this data is the too weak instrument of signal is unable to test.

4. The amplitude of spurious emissions which are attenuated more than 20 dB below the limits are not reported.

8.7 RADIATED BAND EDGE DATA

Remark: All restriction band have been tested, and only the worst case is shown in report

Low CH (GFSK)

Peak value:

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Polarization |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------|---------------------|-----------------|--------------|
| 2390.00 | 40.20 | 27.59 | 5.38 | 30.18 | 42.99 | 74.00 | -31.01 | Horizontal |
| 2400.00 | 53.86 | 27.58 | 5.39 | 30.18 | 56.65 | 74.00 | -17.35 | Horizontal |
| 2390.00 | 39.93 | 27.59 | 5.38 | 30.18 | 42.72 | 74.00 | -31.28 | Vertical |
| 2400.00 | 53.04 | 27.58 | 5.39 | 30.18 | 55.83 | 74.00 | -18.17 | Vertical |

Average value:

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Polarization |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------|---------------------|-----------------|--------------|
| 2390.00 | 32.68 | 27.59 | 5.38 | 30.18 | 35.47 | 54.00 | -18.53 | Horizontal |
| 2400.00 | 39.85 | 27.58 | 5.39 | 30.18 | 42.64 | 54.00 | -11.36 | Horizontal |
| 2390.00 | 32.51 | 27.59 | 5.38 | 30.18 | 35.30 | 54.00 | -18.70 | Vertical |
| 2400.00 | 41.79 | 27.58 | 5.39 | 30.18 | 44.58 | 54.00 | -9.42 | Vertical |

High CH(GFSK)

Peak value:

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Polarization |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------|---------------------|-----------------|--------------|
| 2483.50 | 43.48 | 27.53 | 5.47 | 29.93 | 46.55 | 74.00 | -27.45 | Horizontal |
| 2500.00 | 44.66 | 27.55 | 5.49 | 29.93 | 47.77 | 74.00 | -26.23 | Horizontal |
| 2483.50 | 43.25 | 27.53 | 5.47 | 29.93 | 46.32 | 74.00 | -27.68 | Vertical |
| 2500.00 | 41.89 | 27.55 | 5.49 | 29.93 | 45.00 | 74.00 | -29.00 | Vertical |

Average value:

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Polarization |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------|---------------------|-----------------|--------------|
| 2483.50 | 33.31 | 27.53 | 5.47 | 29.93 | 36.38 | 54.00 | -17.62 | Horizontal |
| 2500.00 | 32.53 | 27.55 | 5.49 | 29.93 | 35.64 | 54.00 | -18.36 | Horizontal |
| 2483.50 | 33.75 | 27.53 | 5.47 | 29.93 | 36.82 | 54.00 | -17.18 | Vertical |
| 2500.00 | 34.69 | 27.55 | 5.49 | 29.93 | 37.80 | 54.00 | -16.20 | Vertical |

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor

2. The amplitude of spurious emissions which are attenuated more than 20 dB below the limits are not reported.

9. AVERAGE TIME OF OCCUPANCY

9.1 LIMIT

| FCC PART 15 (15.247), Subpart C | | | |
|---------------------------------|---------------------------|---------|-----------------------|
| Section | Test Item | Limit | Frequency Range (MHz) |
| 15.247(a)(1) | Average Time of Occupancy | 0.4 sec | 2400-2483.5 |

9.2 TEST PROCEDURE

- a. The transmitter output (antenna port) was connected to the spectrum analyzer.
- b. Set RBW =1MHz/VBW =1MHz.
- c. Use a video trigger with the trigger level set to enable triggering only on full pulses.
- d. Sweep Time is more than once pulse time.
- e. Set the center frequency on any frequency would be measure and set the frequency span to zero span.
- f. Measure the maximum time duration of one single pulse.
- g. Set the EUT for DH5, DH3 and DH1 packet transmitting.
- h. Measure the maximum time duration of one single pulse.
- i. To the number of pulses in the observation period of 31.6 seconds is 319(DH1).
- j. To the number of pulses in the observation period of 31.6 seconds is 157(DH3).
- k. The number of pulses in the observation period of 31.6 seconds is 109(DH5).


9.3 TEST SETUP




9.4 TEST RESULTS

| AVERAGE_TIME_OF_OCCUPANCY | | | | | | | |
|---------------------------|------|-----------------|-----------------|--------------------------------|------------|--------------|---------|
| CONDITION | MODE | FREQUENCY (MHZ) | PULSE TIME (MS) | AVERAGE TIME OF OCCUPANCY (MS) | LIMIT (MS) | BURST NUMBER | RESULTS |
| NVNT | 1DH1 | 2402 | 0.380 | 121.092 | 400 | 319 | PASS |
| NVNT | 1DH3 | 2402 | 1.639 | 257.276 | 400 | 157 | PASS |
| NVNT | 1DH5 | 2480 | 2.888 | 314.792 | 400 | 109 | PASS |

9.5 ORIGINAL TEST DATA

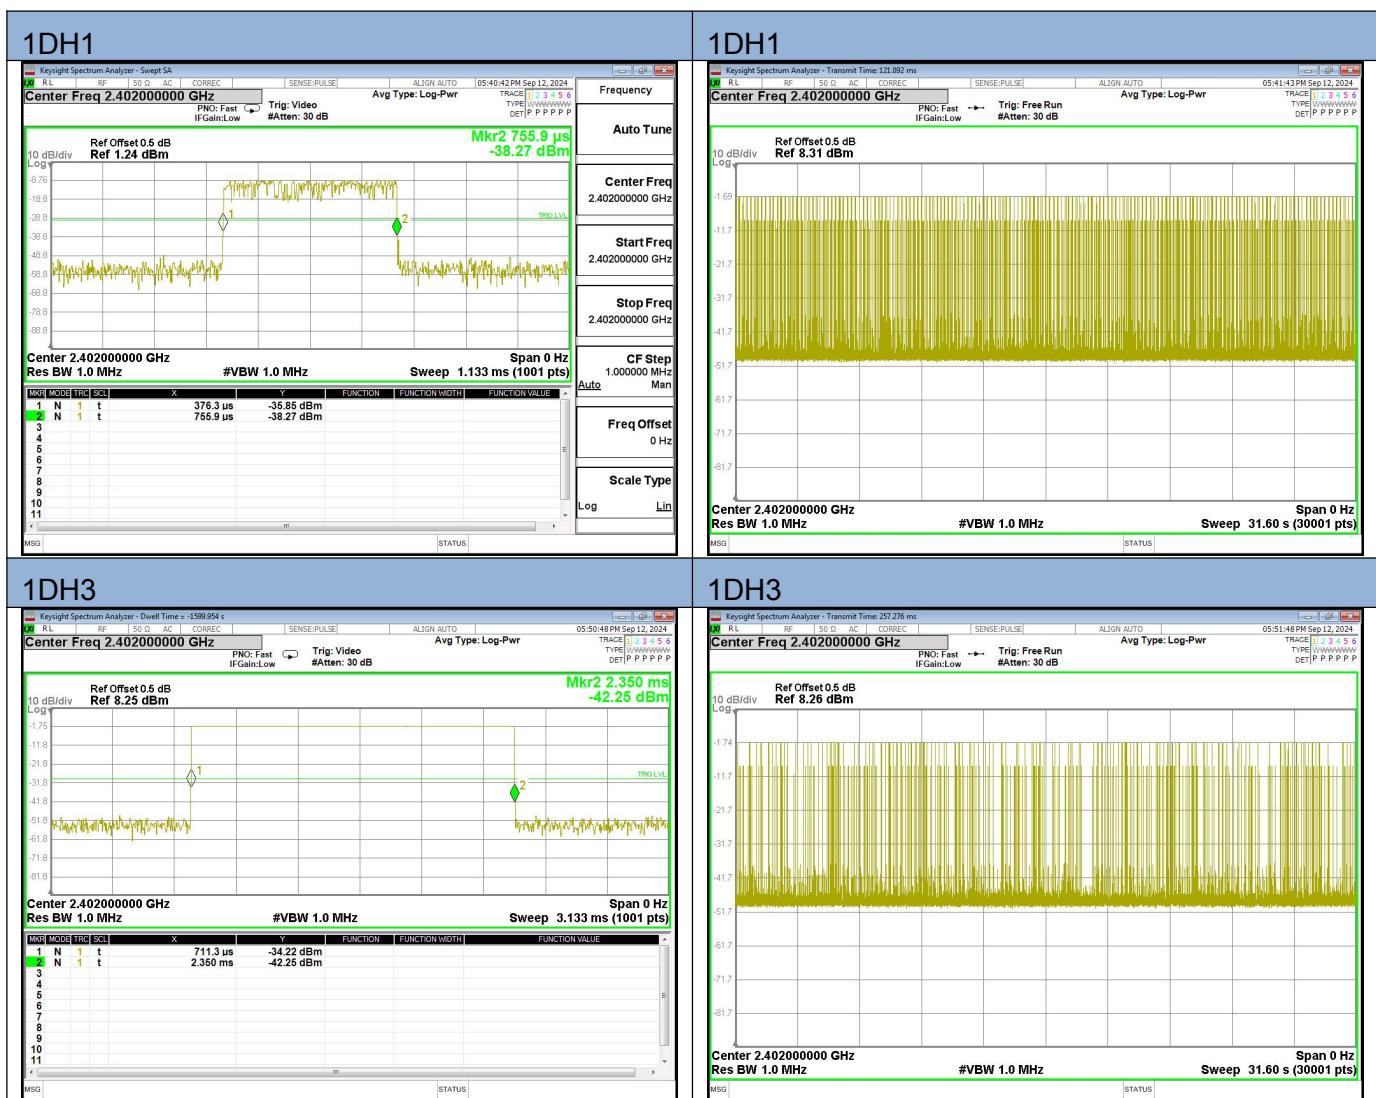

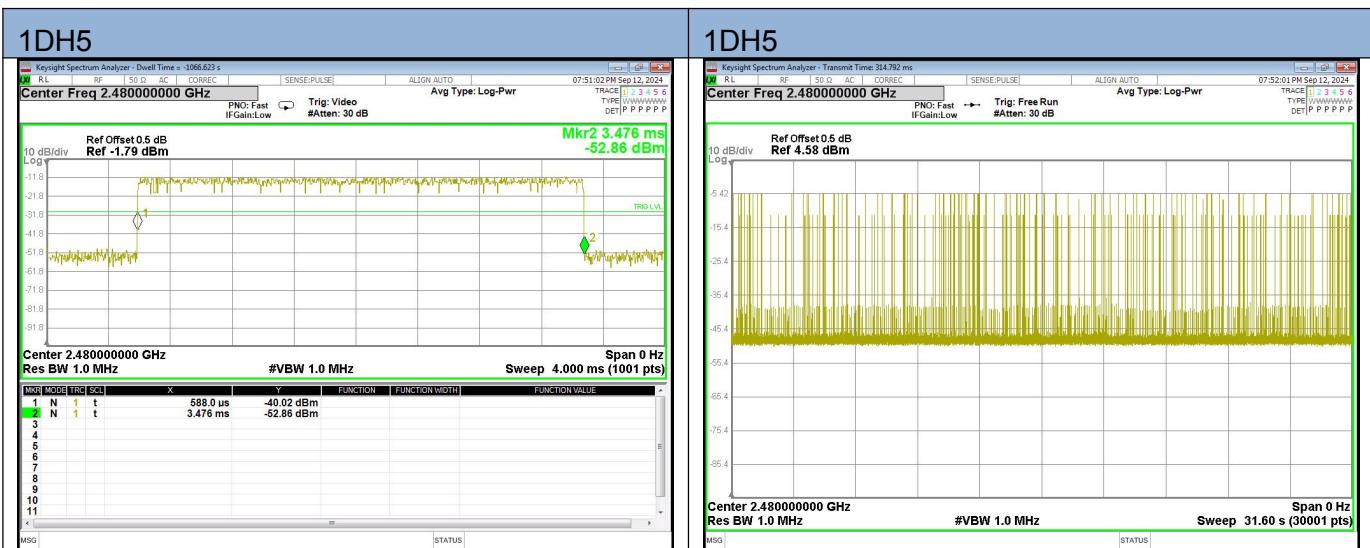

10. HOPPING CHANNEL SEPARATION MEASUREMEN

10.1 LIMIT


Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

| Spectrum Parameter | Setting |
|--------------------|--|
| Attenuation | Auto |
| Span Frequency | > 20 dB Bandwidth or Channel Separation |
| RB | 30 kHz (20dB Bandwidth) / 30 kHz (Channel Separation) |
| VB | 100 kHz (20dB Bandwidth) /100 kHz (Channel Separation) |
| Detector | Peak |
| Trace | Max Hold |
| Sweep Time | Auto |

10.2 TEST PROCEDURE

- The transmitter output (antenna port) was connected to the spectrum analyser in peak hold mode.
- The resolution bandwidth of 30 kHz and the video bandwidth of 100 kHz were utilised for 20 dB bandwidth measurement.
- The resolution bandwidth of 30 kHz and the video bandwidth of 100 kHz were utilised for channel separation measurement

10.3 TEST SETUP

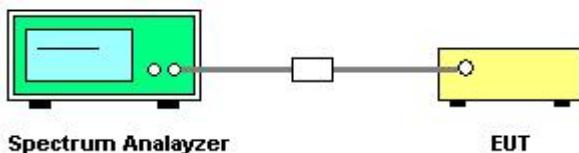

10.4 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

10.5 TEST RESULTS

| | | | |
|--------------|--------------|--------------------|--------------|
| Temperature: | 25 °C | Relative Humidity: | 60% |
| Test Mode: | Hopping Mode | Test Voltage: | AC 120V/60Hz |

| Modulation | Test Mode | Frequency (MHz) | Channel Separation (MHz) | Limit (MHz) | Result |
|------------|-----------|-----------------|--------------------------|-------------|--------|
| GFSK | 1DH1 | 2402 | 0.998 | > 0.67 | Pass |
| | 1DH1 | 2441 | 1.006 | > 0.69 | Pass |
| | 1DH1 | 2480 | 0.998 | > 0.69 | Pass |



11. ANTENNA REQUIREMENT

11.1 STANDARD REQUIREMENT

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

11.2 RESULT

The antennas used for this product are PCB antenna and no antenna other than that furnished by the responsible party shall be used with the device, the maximum peak gain of the transmit antenna is -0.58dBi.

*****END OF THE REPORT*****