



Coverage.
Performance.
Smart.

Ultra Series M01YCABA

Airgain Embedded Antenna Engineering Data Sheet

3611 Valley Centre Drive, Suite 150
San Diego, CA 92130 USA
Tel: +1 760 579 0200
Fax: +1 760 579 0892
Information: info@airgain.com
Sales: sales@airgain.com
Support: support@airgain.com

Revision History (Required)

Revision	Date	Note
4015C-02-00-001-1 Rev1.0	September 6, 2022	Preliminary Datasheet 1.0
4015C-02-00-001-1 Rev1.1	September 20, 2022	Released
4015C-02-00-001-1 Rev1.2	October 28, 2022	Updated peak gain and Radiation Pattern

Disclaimers

The information in this document is provided in connection with Airgain Antenna products and is proprietary and confidential. Airgain may make changes at any time, without notice.

Please verify with Airgain before finalizing a product design.

Contents

1. Airgain M01YCABA Embedded Antenna.....	4
2. Features.....	4
3. Specifications and Interface.....	5
4. Radiation Patterns.....	5
5. Dimensions	7
6. ROHS.....	7
7. Feature and Options Information.....	7
7.1 Part Number Conventions	8
7.2 Part Number Example	8
8. Cable Data Sheet	9

Figures

Figure 1: Model M01YCABA Embedded Antenna.....	4
Figure 2: Model M01YCABA Measurement axes	5
Figure 3: Model M01YCABA Radiation Patterns at 2.4 GHz & 2.44 GHz & 2.48 GHz.....	6
Figure 4: Model M01YCABA-T2 Pre-applied Tape Dimensions.....	7
Figure 5: Airgain M01YCABA with connector or stripped cable.....	8

1. Airgain M01YCABA Embedded Antenna

The Model M01YCABA Embedded Antenna provides a high efficiency, single frequency embedded antenna solution for Wi-Fi and ISM band applications, such as WLAN products. As embedded antenna solutions become the focus of next generation wireless product design, the Model M01YCABA provides the flexibility of an embedded antenna with top performance.

2. Features

The Airgain M01YCABA embedded antenna includes the following features:

- IEEE 802.11 b/g/n/ax standards
- Case mount
- 4.0 dBi peak gain @2.44 GHz
- High efficiency
- Quick integration

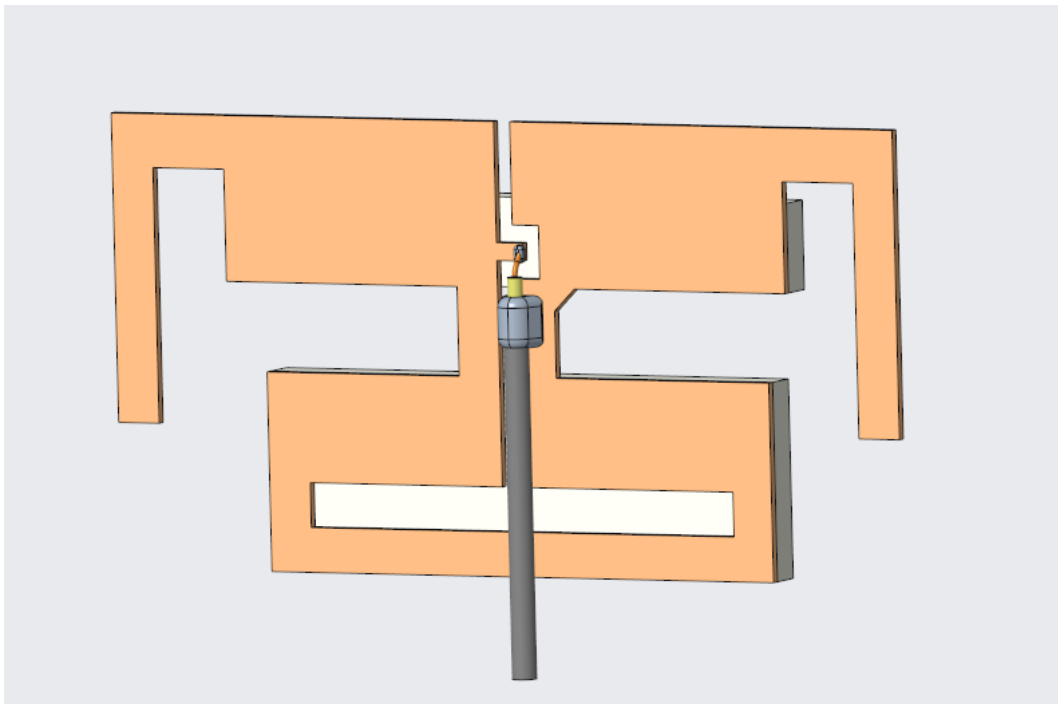


Figure 1: Model M01YCABA Embedded Antenna

3. Specifications and Interface

Standard	IEEE 802.11 b/g/n/ax
Frequency range	2.4 to 2.49 GHz
Peak gain	4.0 dBi @2.44 GHz,
VSWR	< 2:1
Feed impedance	50 ohms
Power handling	30 dBm
Interface	50 ohms, 1.37 mm diameter, micro coax cable (available with optional U.FL-compatible cable connector and/or cable-mounted EMI ferrites)
Antenna dimensions	38.6 x 20.3 x 0.4 mm
Weight	2.7 g
Temperature range	Operating: -40° C to +75° C (-40° F to +167° F) Storage: -40° C to +85° C (-40° F to +185° F)
Humidity range	0% to 95% non-condensing

4. Radiation Patterns

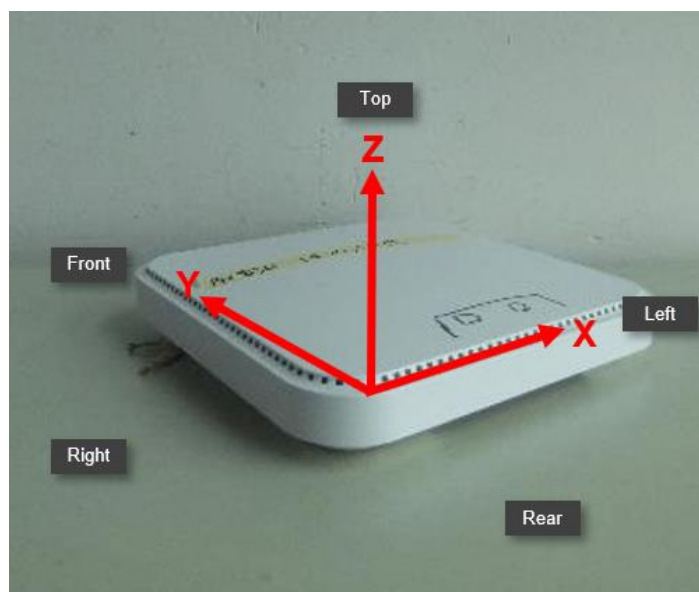


Figure 2: Model M01YCABA Measurement axes

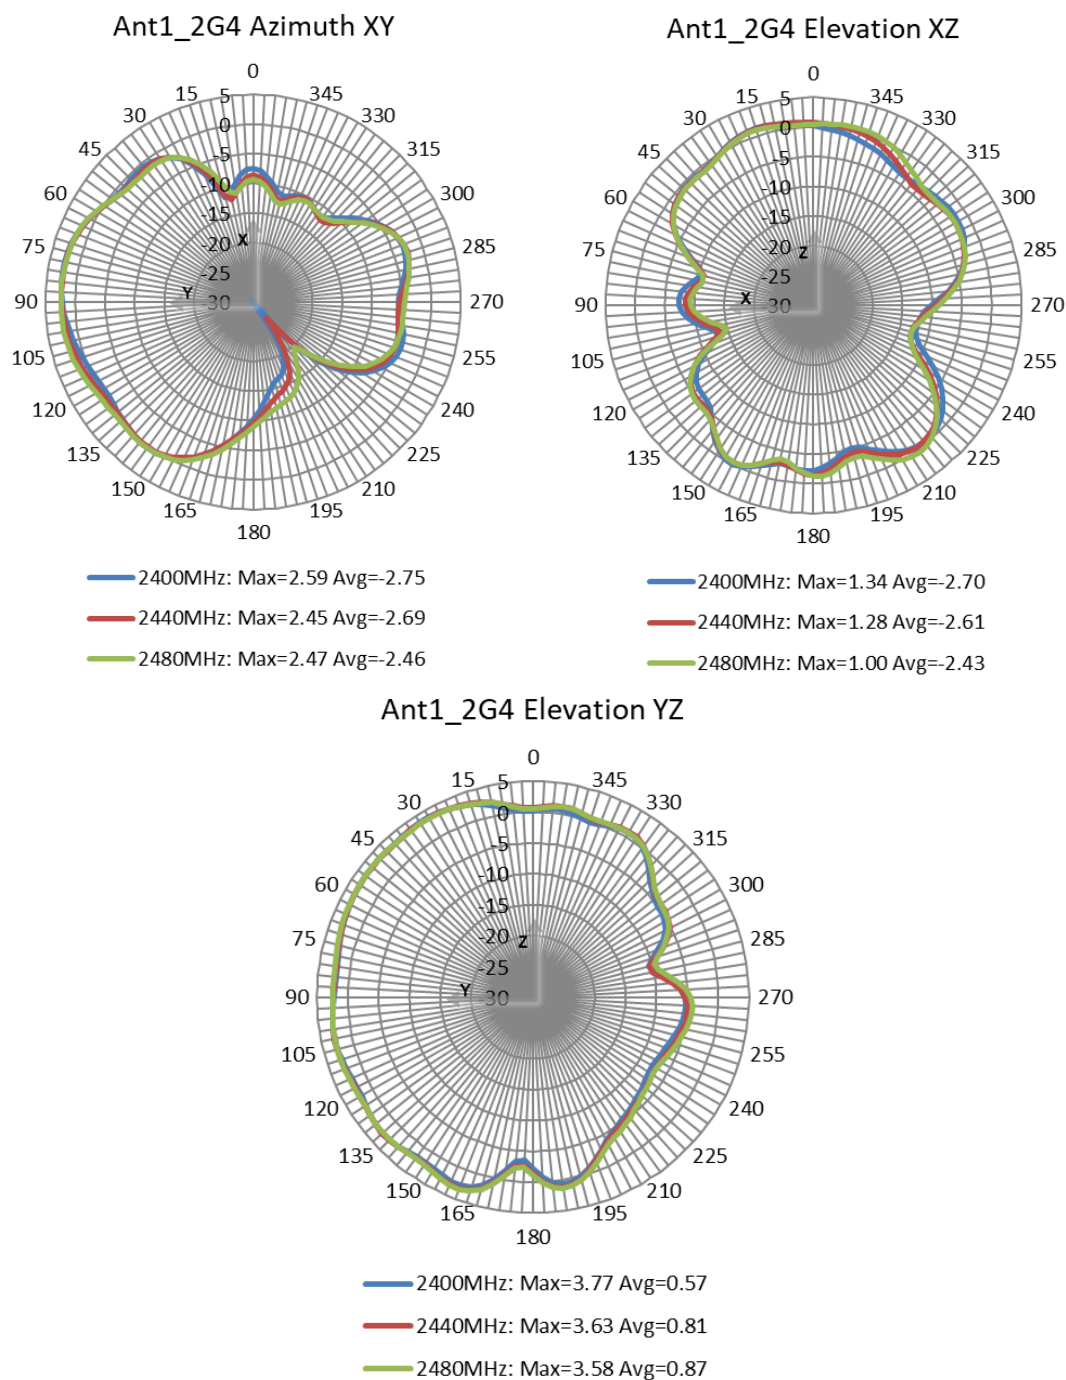


Figure 3: Model M01YCABA Radiation Patterns at 2.4 GHz & 2.44 GHz & 2.48 GHz

5. Dimensions

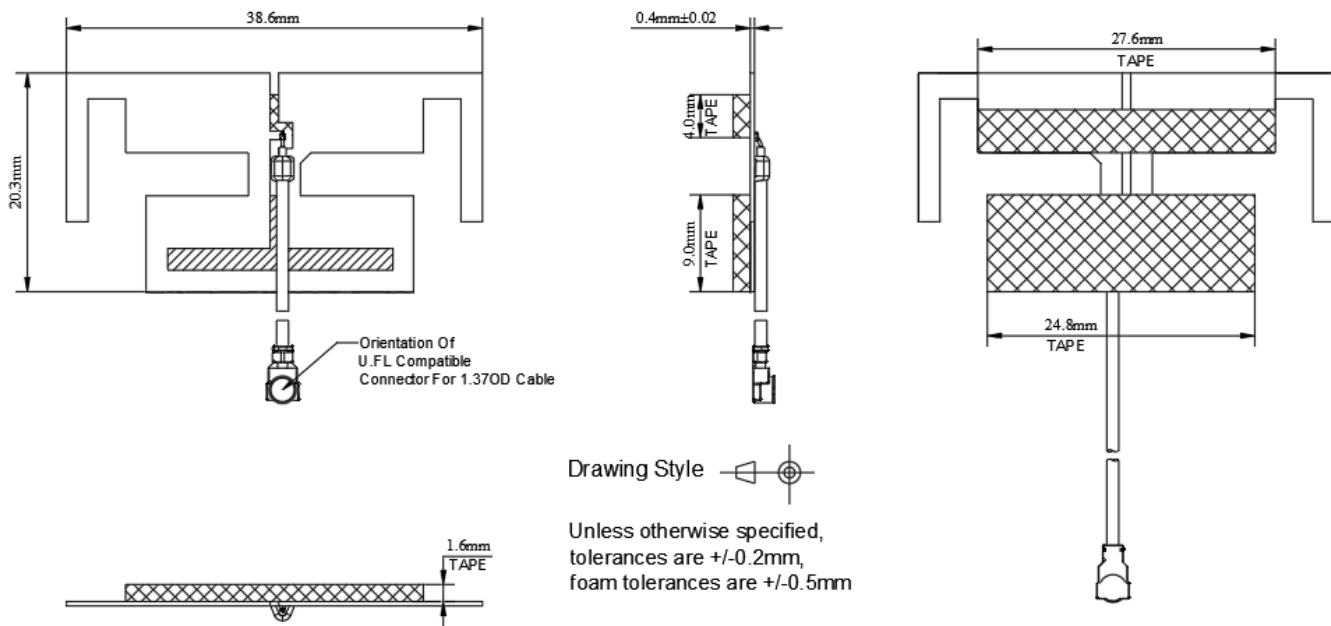


Figure 4: Model M01YCABA-T2 Pre-applied Tape Dimensions

6. ROHS

Airgain M01YCABA embedded antennas are RoHS compliant.

7. Feature and Options Information

Airgain M01YCABA antennas are equipped with an RF cable I/O interface. Optional cable termination such as U.FL-compatible micro coax connectors and cable mounted EMI ferrite cores are available. To aid mounting the M01YCABA, pre-applied, double-sided adhesive tape is available on the M01YCABA -T Series.

7.1 Part Number Conventions

Airgain uses a five-staged standard number system for our part numbers, which serially define the antenna type, tape type, cable type/length, and connector type/interface, as described below:

Antenna #	Tape type -XX (if required)	Packaging type -xx	Cable Assembly Type -xxxxxx		
			Cable color -X	Cable length XXX	Connector type XX (if required)
M01YCABA	Blank = No tape T = Tape on bottom of element F1 = Special size Foam	PK1= singulated (individual) antennas (PK1 is mandatory)	G = Grey (Standard) B = Black (Non Standard) W = White (Non Standard) A = Blue (Non Standard) E = Green (Non Standard)	Cable length in millimeters (mm) Commonly used Lengths*: 65, 100, 130, 150, 190, 230, 250, 300,400, etc.	Blank = Stripped Cable U = U.FL connector C = U.FL connector plus Ferrite Core, core size: 3.5mm * 9.0mm * 1.5mm CS = stripped cable plus Ferrite Core, core size: 3.5mm * 9.0mm * 1.5mm UR1 = U.FL compatible connector, rotated cw 90° UR2 = U.FL compatible connector, rotated cw 180° UR3 = U.FL compatible connector, rotated cw 270°

* Standard cable lengths listed in RF Cable Datasheet

7.2 Part Number Example

M01YCABA-T-G100U – M01YCABA antenna with 1.6-mm double-sided adhesive tape, 100-mm cable, and U.FL-compatible connector.


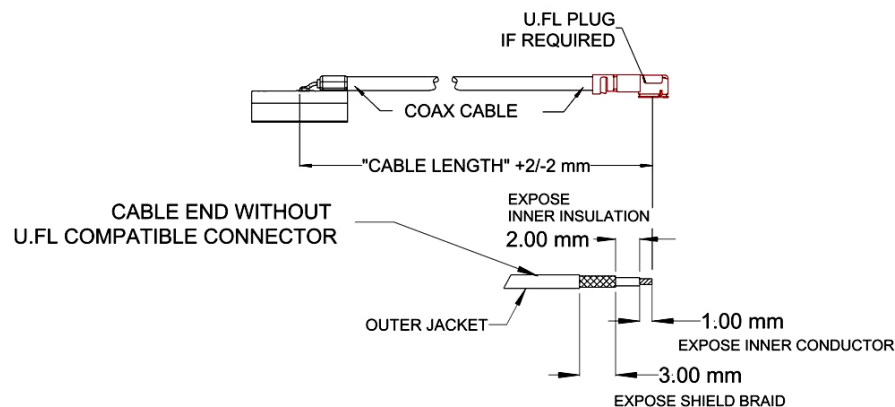


Figure 5: Airgain M01YCABA with connector or stripped cable

8. Cable Data Sheet

Item	Specification	
Cable type	OD1.37	
Impedance	50 $\pm$ 2 ohms	
Inner conductor	Material	Tinned copper wire
	Conductor numbers	7
	Conductor size	0.102 mm
	Outer diameter	0.306 $\pm$ 0.02 mm
Insulation	Material	FEP
	Color	Clarity
	NOM.O.D	0.9 $\pm$ 0.03 mm
Outer conductor	Material	Tinned copper wire
	Makeup: total / O.D. of every wire(mm)	5/0.05 mm
	NOM.O.D	1.13 $\pm$ 0.05mm
	Coverage ratio	90% $\pm$ 5%
Jacket	Material	FEP
	Color	Gray
	NOM.O.D	1.37 $\pm$ 0.05 mm
VSWR testing	< 1.3@0~6GHz	
Attenuation (dB/1meter)	1GHz	$\leq$ 1.82
	2GHz	$\leq$ 2.67
	3GHz	$\leq$ 3.21
	4GHz	$\leq$ 3.74
	5GHz	$\leq$ 4.27
	6GHz	$\leq$ 4.8
Operating temperature	-55°C~+150°C	

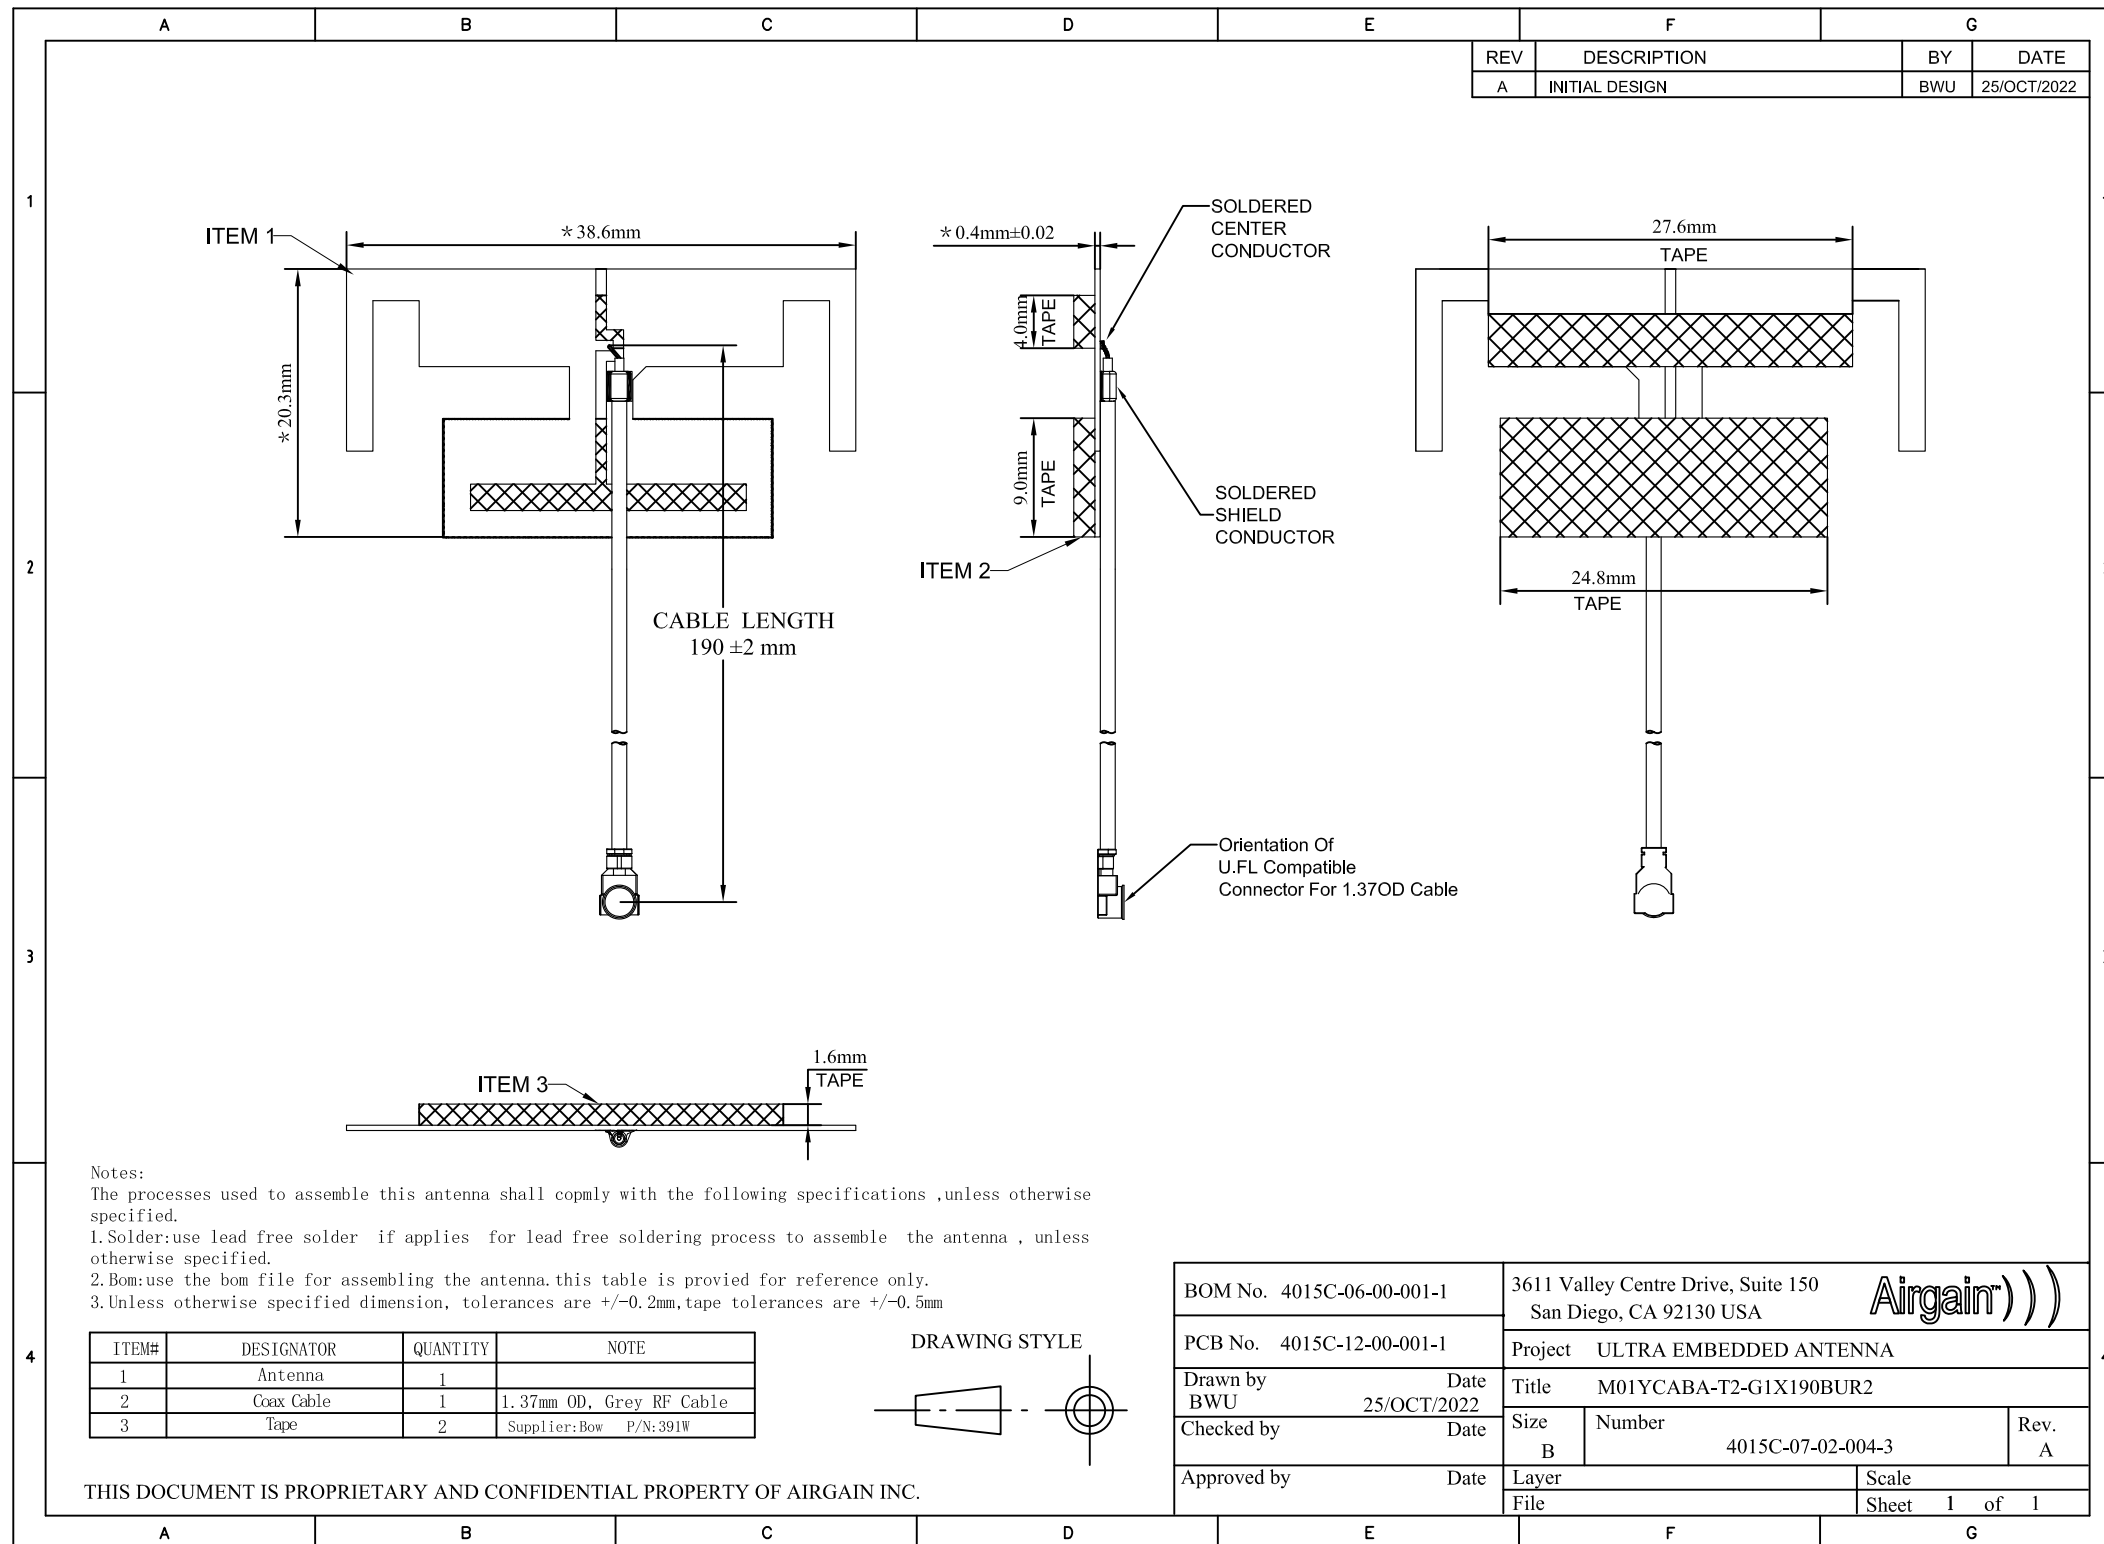

BOM No. 4015C-06-00-001-1		3611 Valley Centre Drive, Suite 150 San Diego, CA 92130 USA		Airgain)))	
PCB No. 4015C-12-00-001-1		Project ULTRA EMBEDDED ANTENNA			
Drawn by BWU		Date 25/OCT/2022		Title M01YCABA-T2-G1X190BUR2	
Checked by		Date		Size B Number 4015C-07-02-004-3 Rev. A	
Approved by		Date		Layer File Scale Sheet 1 of 1	