

# TEST REPORT

<b>Product Name</b>	:	Bluetooth voice remote control
<b>Brand Mark</b>	:	N/A
<b>Model No.</b>	:	YDX-159 7601-Z2ES00-02440001, 7601-Z2ES02-03440001, 7601-Z5S032-01440001, 7601-Z7S022-03440001,
<b>Extension model</b>	:	7601-Z7S022-01440001, 7601-Z6S032-01440001, 7601-Z1S012-00440001, 7601-Z2ES00-03440001, YDX-169
<b>Report Number</b>	:	BLA-EMC-202203-A6002
<b>FCC ID</b>	:	2A6A2-YDX-159
<b>Date of Sample Receipt</b>	:	2022/3/10
<b>Date of Test</b>	:	2022/3/10 to 2022/5/22
<b>Date of Issue</b>	:	2022/5/22
<b>Test Standard</b>	:	47 CFR Part 15, Subpart C 15.247
<b>Test Result</b>	:	Pass

Prepared for:

**Yi dong xing (Shenzhen) Technology Co., LTD**  
**1.2 Floor, NO 4 Building, No.2 fuqiao industry area, qiaotou Community,**  
**fuyong Street, baoan District, Shenzhen, P.R.China**

Prepared by:

**BlueAsia of Technical Services(Shenzhen) Co.,Ltd.**  
**Building C, No. 107, Shihuan Road, Shiyan Sub-District, Baoan District,**  
**Shenzhen, Guangdong Province, China**  
**TEL: +86-755-23059481**

Compiled by:

*Jozu*

Approved by:

*Blue Zheng*

Review by:

*Sueelle*

Date: 2022/5/22



**REPORT REVISE RECORD**

Version No.	Date	Description
00	2022/4/2	Original
01	2023/5/22	Add extension model

Remark:

About FCC ID: 2A6A2-YDX-159 (Product Name: Bluetooth voice remote control, Model No.: YDX-169). This report is based on the original report BLA-EMC-202203-A6002(FCC ID: 2A6A2-YDX-159, Model No.: Bluetooth voice remote control) and Add extension model. For the test data, see the original report: BLA-EMC-202203-A6002.

## TABLE OF CONTENTS

1	TEST SUMMARY .....	4
2	GENERAL INFORMATION .....	5
3	GENERAL DESCRIPTION OF E.U.T. ....	5
4	TEST ENVIRONMENT .....	6
5	TEST MODE .....	6
6	MEASUREMENT UNCERTAINTY .....	6
7	DESCRIPTION OF SUPPORT UNIT .....	7
8	LABORATORY LOCATION .....	7
9	TEST INSTRUMENTS LIST .....	8
10	RADIATED SPURIOUS EMISSIONS .....	11
10.1	LIMITS .....	11
10.2	BLOCK DIAGRAM OF TEST SETUP .....	12
10.3	PROCEDURE .....	12
10.4	TEST DATA .....	14
	APPENDIX A: PHOTOGRAPHS OF TEST SETUP .....	16
	APPENDIX B: PHOTOGRAPHS OF EUT .....	17

## 1 TEST SUMMARY

Test item	Test Requirement	Test Method	Class/Severity	Result
Radiated Spurious Emissions	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 6.4,6.5,6.6	47 CFR Part 15, Subpart C 15.209 & 15.247(d)	Pass

Note:

Only test 30MHz to 1GHz.

## 2 GENERAL INFORMATION

<b>Applicant</b>	Yi dong xing (Shenzhen) Technology Co., LTD
<b>Address</b>	1、2 Floor, NO 4 Building, No.2 fujiao industry area, qiaotou Community, fuyong Street, baoan District, Shenzhen, P.R.China
<b>Manufacturer</b>	Yi dong xing (Shenzhen) Technology Co., LTD
<b>Address</b>	1、2 Floor, NO 4 Building, No.2 fujiao industry area, qiaotou Community, fuyong Street, baoan District, Shenzhen, P.R.China
<b>Factory</b>	Yi dong xing (Shenzhen) Technology Co., LTD
<b>Address</b>	1、2 Floor, NO 4 Building, No.2 fujiao industry area, qiaotou Community, fuyong Street, baoan District, Shenzhen, P.R.China
<b>Product Name</b>	Bluetooth voice remote control
<b>Test Model No.</b>	YDX-169
<b>Extension model</b>	7601-Z2ES00-02440001, 7601-Z2ES02-03440001, 7601-Z5S032-01440001, 7601-Z7S022-03440001, 7601-Z7S022-01440001, 7601-Z6S032-01440001, 7601-Z1S012-00440001, 7601-Z2ES00-03440001, YDX-169
<b>Note</b>	All above models are identical in the same PCB layout, interior structure and electrical circuits. The differences are model name for commercial purpose.

## 3 GENERAL DESCRIPTION OF E.U.T.

<b>Hardware Version</b>	YDX-159-LYD-V1.1
<b>Software Version</b>	N/A
<b>Operation Frequency:</b>	2402MHz-2480MHz
<b>Modulation Type:</b>	GFSK
<b>Channel Spacing:</b>	2MHz
<b>Number of Channels:</b>	40
<b>Antenna Type:</b>	PCB Antenna
<b>Antenna Gain:</b>	0dBi(Provided by the applicant)

#### 4 TEST ENVIRONMENT

Environment	Temperature	Voltage
Normal	25°C	DC3V

#### 5 TEST MODE

TEST MODE	TEST MODE DESCRIPTION
Transmitting mode	Keep the EUT in continuously transmitting mode with modulation.
Remark: new battery is used during all test.	

#### 6 MEASUREMENT UNCERTAINTY

Parameter	Expanded Uncertainty (Confidence of 95%)
Radiated Emission(9kHz-30MHz)	±4.34dB
Radiated Emission(30MHz-1000MHz)	±4.24dB
Radiated Emission(1GHz-18GHz)	±4.68dB
AC Power Line Conducted Emission(150kHz-30MHz)	±3.45dB

## 7 DESCRIPTION OF SUPPORT UNIT

Device Type	Manufacturer	Model Name	Serial No.	Remark
N/A	N/A	N/A	N/A	N/A

## 8 LABORATORY LOCATION

All tests were performed at:

BlueAsia of Technical Services(Shenzhen) Co., Ltd.

Building C, No. 107, Shihuan Road, Shiyan Sub-District, Baoan District, Shenzhen, Guangdong Province, China

Telephone: TEL: +86-755-28682673 FAX: +86-755-28682673

No tests were sub-contracted.

BlueAsia

## 9 TEST INSTRUMENTS LIST

Test Equipment Of Conducted Band Edges Measurement					
Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Spectrum	R&S	FSP40	100817	24/9/2021	23/9/2022
Spectrum	Agilent	N9020A	MY49100060	24/9/2021	23/9/2022
Signal Generator	Agilent	N5182A	MY49060650	24/9/2021	23/9/2022
Signal Generator	Agilent	E8257D	MY44320250	24/9/2021	23/9/2022

Test Equipment Of Conducted Peak Output Power					
Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Spectrum	R&S	FSP40	100817	24/9/2021	23/9/2022
Spectrum	Agilent	N9020A	MY49100060	24/9/2021	23/9/2022
Signal Generator	Agilent	N5182A	MY49060650	24/9/2021	23/9/2022
Signal Generator	Agilent	E8257D	MY44320250	24/9/2021	23/9/2022

Test Equipment Of Power Spectrum Density					
Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Spectrum	R&S	FSP40	100817	24/9/2021	23/9/2022
Spectrum	Agilent	N9020A	MY49100060	24/9/2021	23/9/2022
Signal Generator	Agilent	N5182A	MY49060650	24/9/2021	23/9/2022
Signal Generator	Agilent	E8257D	MY44320250	24/9/2021	23/9/2022

Test Equipment Of Minimum 6dB Bandwidth					
Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due

Spectrum	R&S	FSP40	100817	24/9/2021	23/9/2022
Spectrum	Agilent	N9020A	MY49100060	24/9/2021	23/9/2022
Signal Generator	Agilent	N5182A	MY49060650	24/9/2021	23/9/2022
Signal Generator	Agilent	E8257D	MY44320250	24/9/2021	23/9/2022

**Test Equipment Of Radiated Spurious Emissions**

Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Chamber	SKET	966	N/A	10/11/2020	9/11/2023
Spectrum	R&S	FSP40	100817	24/9/2021	23/9/2022
Receiver	R&S	ESR7	101199	24/9/2021	23/9/2022
broadband Antenna	Schwarzbeck	VULB9168	00836 P:00227	26/9/2020	25/9/2022
Horn Antenna	Schwarzbeck	9120D	01892 P:00331	26/9/2020	25/9/2022
Amplifier	SKET	LNPA-0118-45	N/A	24/9/2021	23/9/2022
EMI software	EZ	EZ-EMC	N/A	N/A	N/A
Loop antenna	SCHNARZBECK	FMZB1519B	00102	26/9/2020	25/9/2022

**Test Equipment Of Radiated Emissions which fall in the restricted bands**

Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Chamber	SKET	966	N/A	10/11/2020	9/11/2023
Spectrum	R&S	FSP40	100817	24/9/2021	23/9/2022
Receiver	R&S	ESR7	101199	24/9/2021	23/9/2022
broadband Antenna	Schwarzbeck	VULB9168	00836 P:00227	26/9/2020	25/9/2022

Horn Antenna	Schwarzbeck	9120D	01892 P:00331	26/9/2020	25/9/2022
Amplifier	SKET	LNPA-0118-45	N/A	24/9/2021	23/9/2022
EMI software	EZ	EZ-EMC	N/A	N/A	N/A
Loop antenna	SCHNARZBECK	FMZB1519B	00102	26/9/2020	25/9/2022

**Test Equipment Of Conducted Spurious Emissions**

Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Spectrum	R&S	FSP40	100817	24/9/2021	23/9/2022
Spectrum	Agilent	N9020A	MY49100060	24/9/2021	23/9/2022
Signal Generator	Agilent	N5182A	MY49060650	24/9/2021	23/9/2022
Signal Generator	Agilent	E8257D	MY44320250	24/9/2021	23/9/2022

## 10 RADIATED SPURIOUS EMISSIONS


<b>Test Standard</b>	47 CFR Part 15, Subpart C 15.247
<b>Test Method</b>	ANSI C63.10 (2013) Section 6.4,6.5,6.6
<b>Test Mode (Pre-Scan)</b>	TX mode (SE) below 1G;TX mode (SE) Above 1G
<b>Test Mode (Final Test)</b>	TX mode (SE) below 1G;TX mode (SE) Above 1G
<b>Tester</b>	Jozu
<b>Temperature</b>	25°C
<b>Humidity</b>	60%

### 10.1 LIMITS

<b>Frequency(MHz)</b>	<b>Field strength(microvolts/meter)</b>	<b>Measurement distance(meters)</b>
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

## 10.2 BLOCK DIAGRAM OF TEST SETUP

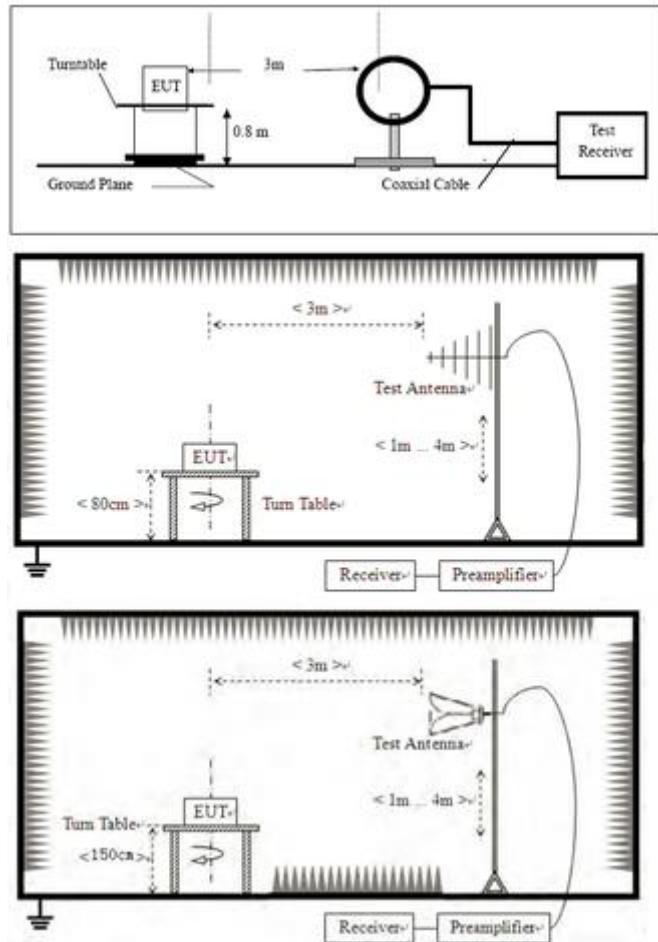

## 10.3 PROCEDURE

- For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.


- h. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j. Repeat above procedures until all frequencies measured was complete.

Remark:

- 1) For emission below 1GHz, through pre-scan found the worst case is the lowest channel. Only the worst case is recorded in the report.
- 2) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:  
Final Test Level = Receiver Reading + Antenna Factor + Cable Factor - Preamplifier Factor
- 3) Scan from 9kHz to 25GHz, the disturbance above 12.75GHz and below 30MHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported. fundamental frequency is blocked by filter, and only spurious emission is shown.
- 4) For frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.

## 10.4 TEST DATA


[TestMode: TX mode (SE) below 1G]; [Polarity: Vertical]

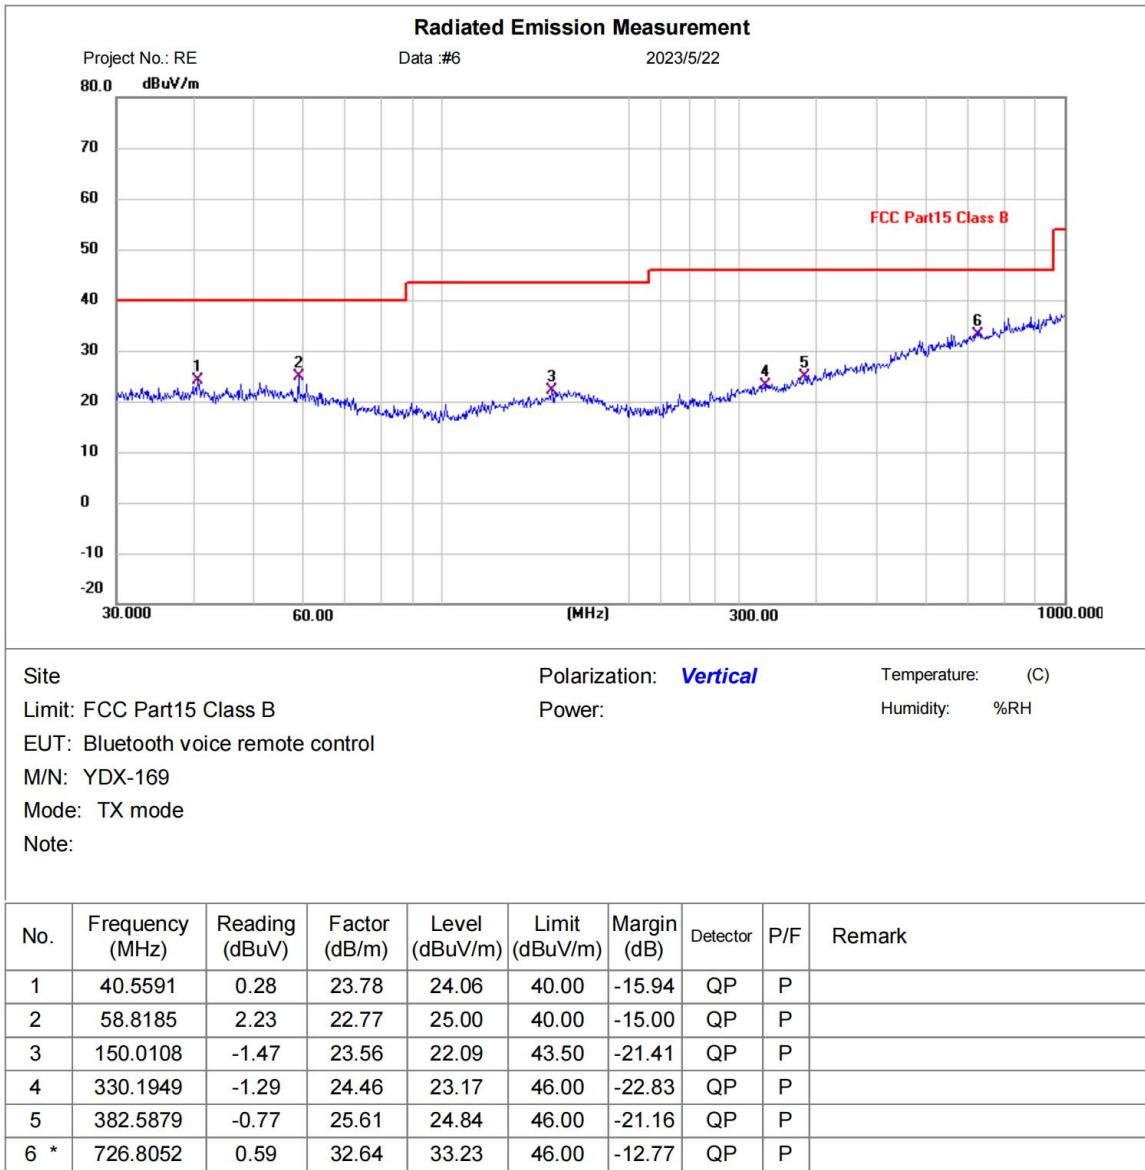

\*:Maximum data x:Over limit !:over margin

**Test Result: Pass**


[TestMode: TX mode (SE) below 1G]; [Polarity: Horizontal]

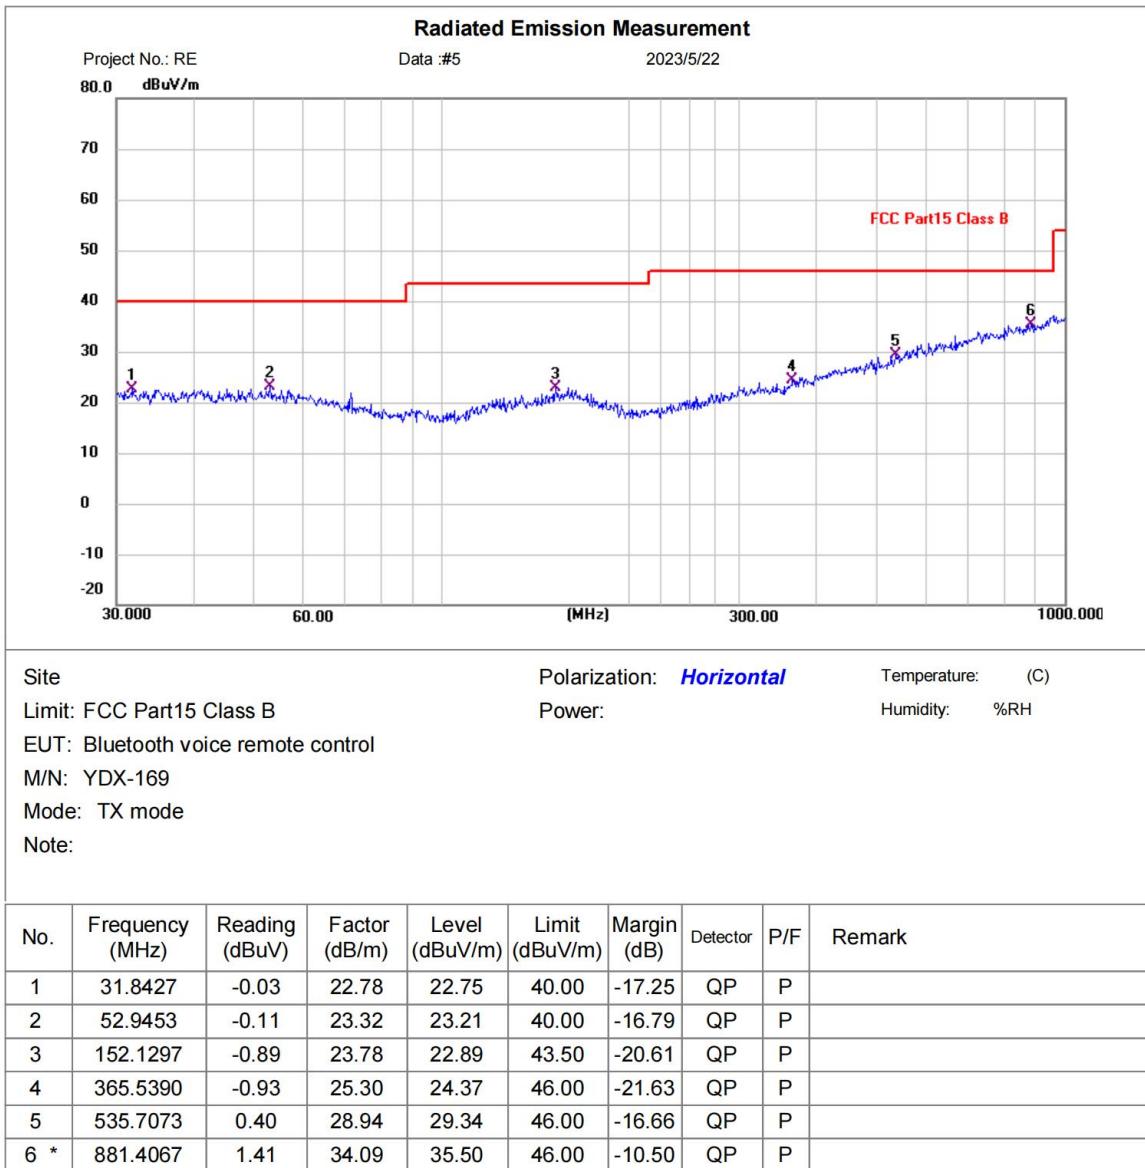

\*:Maximum data    x:Over limit    !:over margin

**Test Result: Pass**

## APPENDIX A: PHOTOGRAPHS OF TEST SETUP

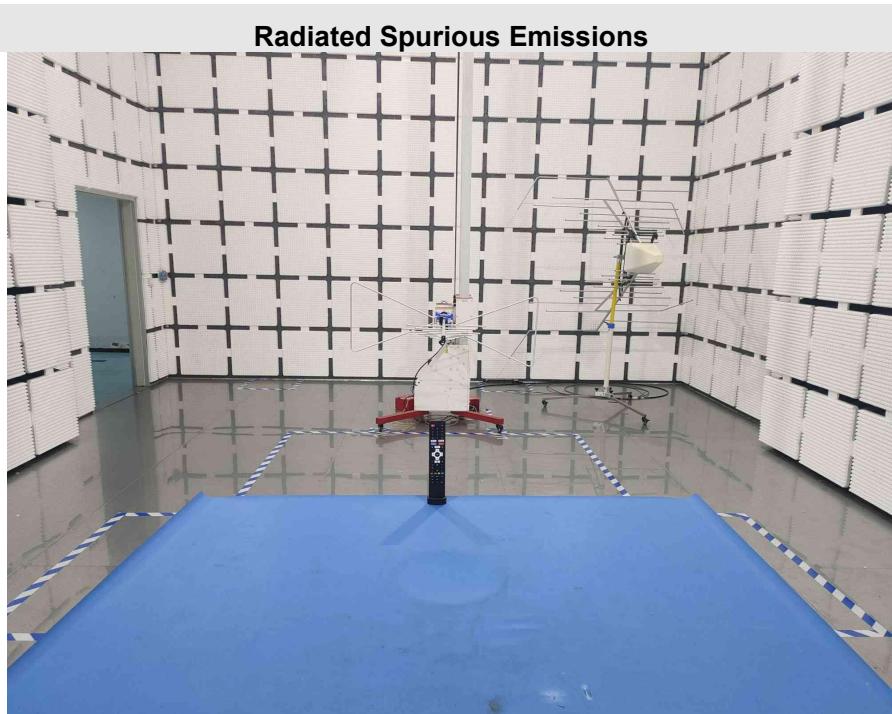

## APPENDIX B: PHOTOGRAPHS OF EUT

Reference to the test report No. BLA-EMC-202203-A6001

----END OF REPORT----

The test report is effective only with both signature and specialized stamp, The result(s) shown in this report refer only to the sample(s) tested. Without written approval of BlueAsia, this report can't be reproduced except in full.

BlueAsia