



**FCC 47 CFR PART 15 SUBPART C
INDUSTRY CANADA RSS-210 ISSUE 8**

CERTIFICATION TEST REPORT

FOR

Fibaro Single Switch 2

MODEL NUMBER: FGS-213

FCC ID: 2AA9MFGS213

IC: 20430-FGS213

REPORT NUMBER: 11291477A

ISSUE DATE: July 15, 2016

Prepared for
Fibar Group S.A.
Ul. Lotnicza 1
Poznań, Poland 60-421

Prepared by
UL LLC
333 Pfingsten Rd.
Northbrook, IL 60062
TEL: (847) 272-8800



NVLAP Lab code: 100414-0

Revision History

Rev.	Issue Date	Revisions	Revised By
--	July 12, 2016	Initial Issue	V Sabalvaro
REV1	July 15, 2016	Editorial Changes	V Sabalvaro

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS	4
2. TEST METHODOLOGY	5
3. FACILITIES AND ACCREDITATION	5
4. CALIBRATION AND UNCERTAINTY	5
4.1. <i>MEASURING INSTRUMENT CALIBRATION</i>	5
4.2. <i>SAMPLE CALCULATION</i>	5
4.3. <i>MEASUREMENT UNCERTAINTY</i>	6
5.5. <i>DESCRIPTION OF TEST SETUP</i>	8
6. TEST AND MEASUREMENT EQUIPMENT	10
7. TEST RESULTS	11
7.1. <i>20 dB AND 99% BANDWIDTH</i>	11
7.2. <i>RADIATED EMISSIONS</i>	18
7.2.1. <i>FUNDAMENTAL FREQUENCY RADIATED EMISSION</i>	19
7.2.2. <i>HARMONICS AND SPURIOUS EMISSIONS ABOVE 1GHz</i>	20
7.2.3. <i>WORST-CASE BELOW 1 GHz</i>	26
7.2.4. <i>Transmitter RX/Digital Radiated Emissions</i>	37
8. AC POWER LINE CONDUCTED EMISSIONS	41
8.1. <i>TRANSMITTER – CONDUCTED EMISSIONS</i>	42
8.2. <i>TRANSMITTER – CONDUCTED EMISSIONS</i>	45
9. SETUP PHOTOS	48

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: Fibar Group S.A.
Ul. Lotnicza 1
Poznań, Poland 60-421

EUT DESCRIPTION: Fibaro Single Switch 2

MODEL: FGS-213

SERIAL NUMBER: Non-serialized

DATE TESTED: June 27 – July 7, 2016

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart C	Pass
INDUSTRY CANADA RSS-210 Issue 8 Annex A2.9	Pass
INDUSTRY CANADA RSS-GEN Issue 4	Pass

UL LLC tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL LLC based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL LLC and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL LLC will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government.

Approved & Released For
UL LLC By:

Tested By:



Bart Mucha
Staff Engineer

Vincent Sabalvaro
EMC WISE Engineer
Consumer Technology
UL LLC

UL LLC

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.10-2013, FCC CFR 47 Part 15, RSS-GEN Issue 4, and RSS-210 Issue 8.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 333 Pfingsten Road, Northbrook, IL 60062 USA.

UL NBK is accredited by NVLAP, Laboratory Code 100414-0. The full scope of accreditation can be viewed at <http://ts.nist.gov>

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. SAMPLE CALCULATION

Sample Calculations

Radiated Field Strength and Conducted Emissions data contained within this report is calculated on the following basis:

Field Strength (dBuV/m) = Meter Reading (dBuV) + AF (dB/m) - Gain (dB) + Cable Loss (dB)

Conducted Voltage (dBuV) = Meter Reading (dBuV) + Cable Loss (dB) + LISN IL (dB)

Conducted Current (dBuA) = Meter Reading (dBuV) + Cable Loss (dB) - Transducer Factor (dBohms)

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Test	Range	Equipment	Uncertainty k=2
Conducted Emissions	150k-30MHz	LISN	3.65dB
Radiated Emissions	9k-30MHz	H-Field Loop	3.15dB
Radiated Emissions	30-200MHz	Bicon 3m Horz	3.64dB
Radiated Emissions	30-200MHz	Bicon 3m Vert	5.10dB
Radiated Emissions	200-1000MHz	LogP 3m Horz	4.00dB
Radiated Emissions	200-1000MHz	LogP 3m Vert	5.36dB
Radiated Emissions	30-200MHz	Bicon 10m Horz	4.48dB
Radiated Emissions	30-200MHz	Bicon 10m Vert	4.49dB
Radiated Emissions	200-1000MHz	LogP 10m Horz	3.79dB
Radiated Emissions	200-1000MHz	LogP 10m Vert	3.84dB
Radiated Emissions	1-18GHz	Horn	4.32dB
Conducted Ant Port	30MHz-26GHz	Spectrum Analyzer	2.94dB

Uncertainty figures are valid to a confidence level of 95%.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The EUT is a 908.4MHz, 908.42MHz, and 916MHz transceiver. It is AC powered. The transmitter utilizes Z-wave technologies to communicate with other devices for home automation.

The device is manufactured by Fibar Group S.A

5.2. MAXIMUM OUTPUT E-FIELD STRENGTH

The transmitter has a maximum output peak E-field as follows:

Frequency Range (MHz)	Mode	Output QK E-field Strength (dBuV/m)
908.4 - 916	TX	92.05

5.3. DESCRIPTION OF AVAILABLE ANTENNAS

The radio utilizes an isolated copper wire type whip antenna.

5.4. WORST-CASE CONFIGURATION AND MODE

The EUT was set in worst axis as found in preliminary testing. The Z-axis was determined to be the worst axis.

For radiated emissions, the worst-case configuration is determined to be the transmitting channel with the highest measured output power.

5.5. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Support Equipment List				
Description	Manufacturer	Model	Serial Number	FCC ID
None	-	-	-	-


I/O CABLES

Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
0	Enclosure	-	Non-Electrical	-	-	None
1	AC	2	Wire	AC	>3m	None
2	IO Lines	4	Wire	AC	>3m	Wires connected to all IO ports

TEST SETUP

The EUT is programmed for continuous TX mode

SETUP DIAGRAM FOR TESTS

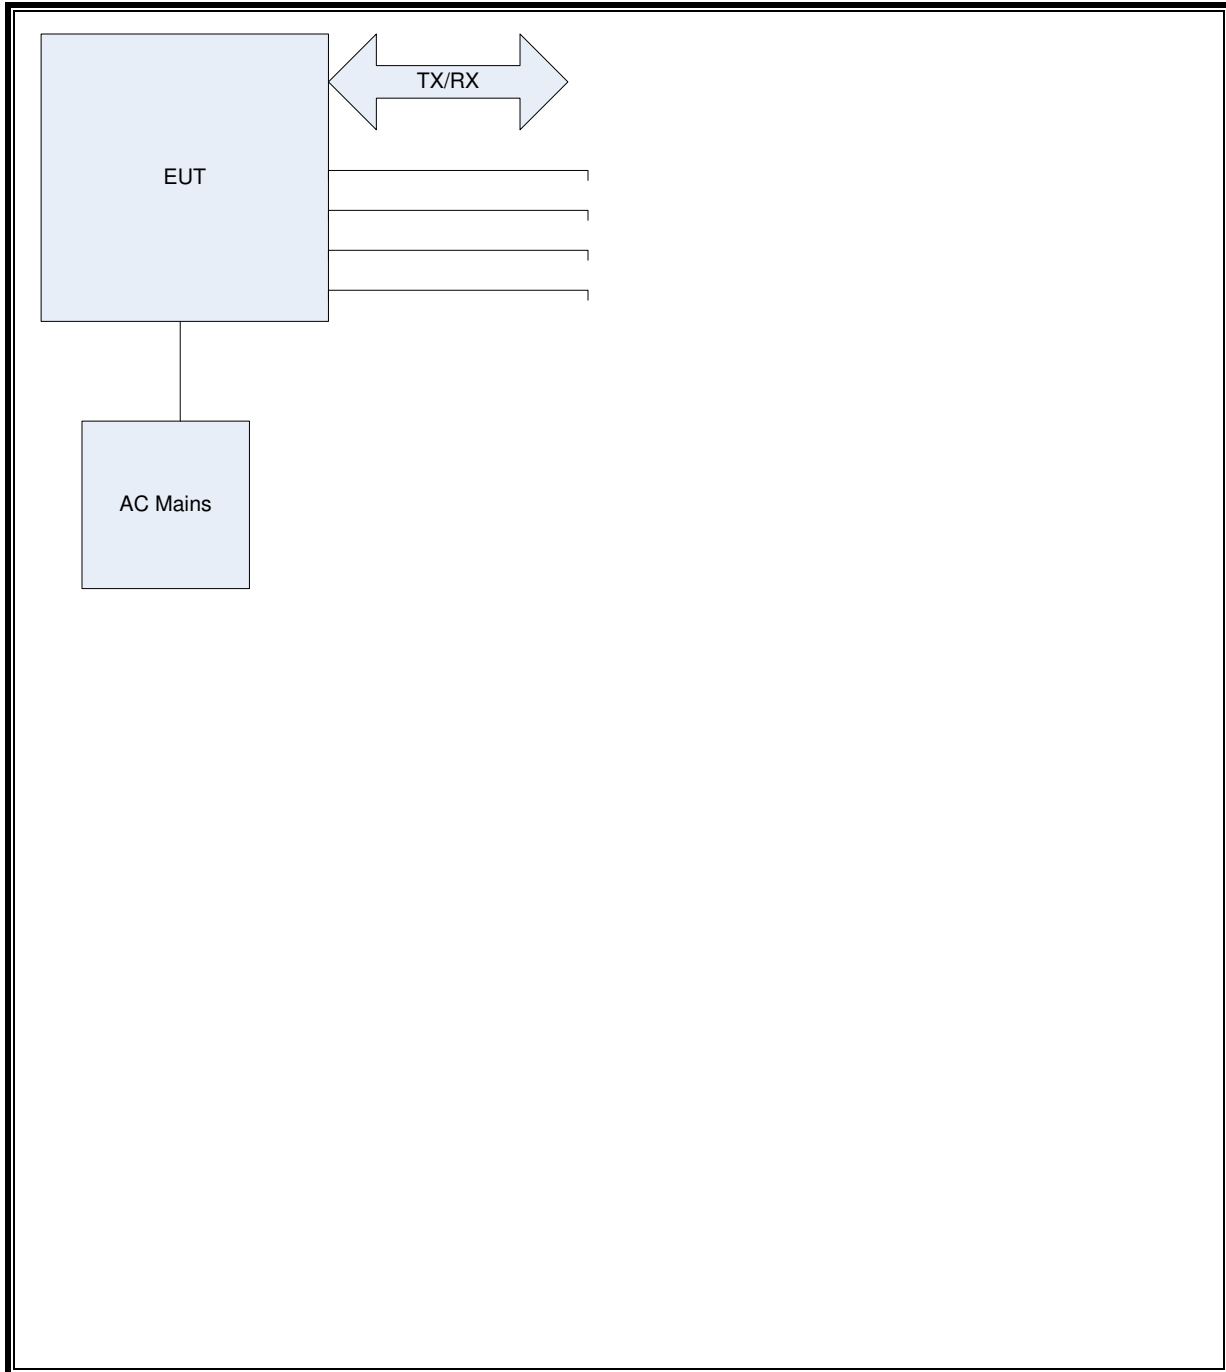

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

Test Equipment List					
Description	Manufacturer	Model	T No.	Cal Date	Cal Due
Radiated Software	UL	UL EMC	Ver 9.5, Nov, 2015		
Conducted Software	UL	UL EMC	Ver 9.5, Nov 2015		
EMI Test Receiver	Rohde & Schwarz	ESR	EMC4377	4/26/2016	4/30/2017
Transient Limiter	Electro-Metrics	EM7600-2	EMC4224	N/A	N/A
HighPass Filter	Solar Electronics	2803-150	EMC4327	N/A	N/A
Attenuator	HP	8494B	2831A0083	N/A	N/A
LISN - L1	Solar	8602-50-TS-50-N	EMC4052	2/16/2016	2/28/2017
LISN - L2	Solar	8602-50-TS-50-N	EMC4064	2/16/2016	2/28/2017
Signal Analyzer	Agilent	PXA	EMC4360	1/8/2016	1/31/2017
Test Receiver	Rhode & Schwarz	ESCI	EMC4328	11/18/2015	11/30/2016
Log-P Antenna	Chase	UPA6109	EMC4313	1/22/2016	1/31/2017
Bicon Antenna	Chase	UPA6106A	EMC4078	12/28/2015	12/31/2016
Antenna Array	UL	BOMS	EMC4276	12/1/2015	12/31/2016
Test Receiver	Rhode & Schwarz	ESU	EMC4323	1/2/2016	1/31/2017

7. TEST RESULTS

7.1. 20 dB AND 99% BANDWIDTH

LIMITS

None; for reporting purposes only.


TEST PROCEDURE


The transmitter output is connected to the spectrum analyzer. The RBW is set to 1% to % of the Occupied bandwidth. The VBW is set to 3 times the RBW. The sweep time is coupled. The spectrum analyzer internal 99% bandwidth function is utilized.


RESULTS

Channel	Frequency (MHz)	20 dB Bandwidth (kHz)	99% Bandwidth (kHz)
Low	908.4	58.52	55.787
Middle	908.42	62.14	58.222
High	916	75.23	74.099


99% BANDWIDTH

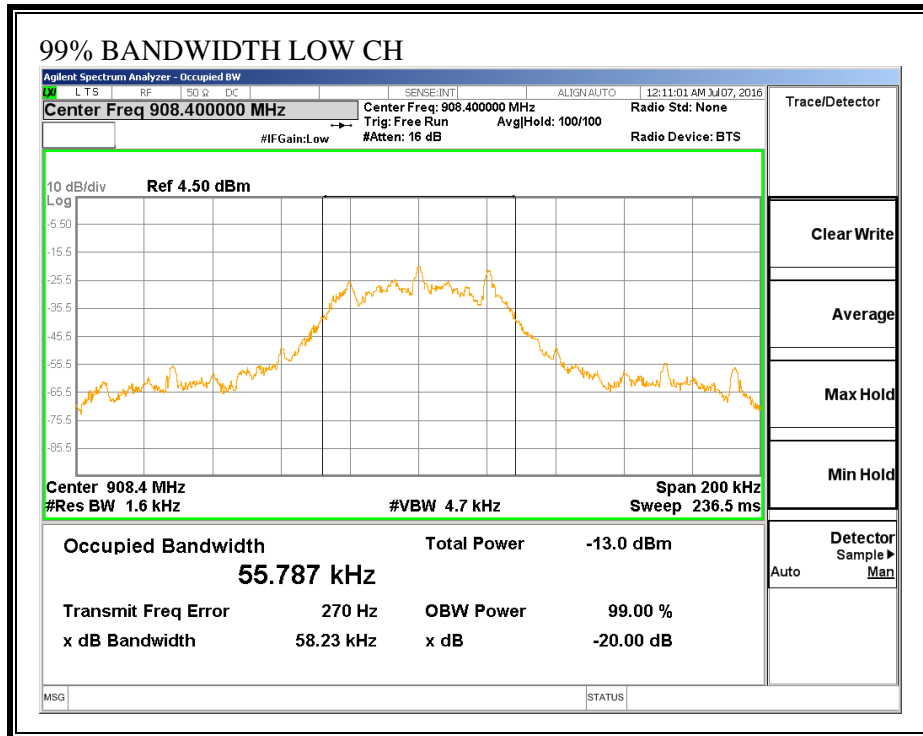


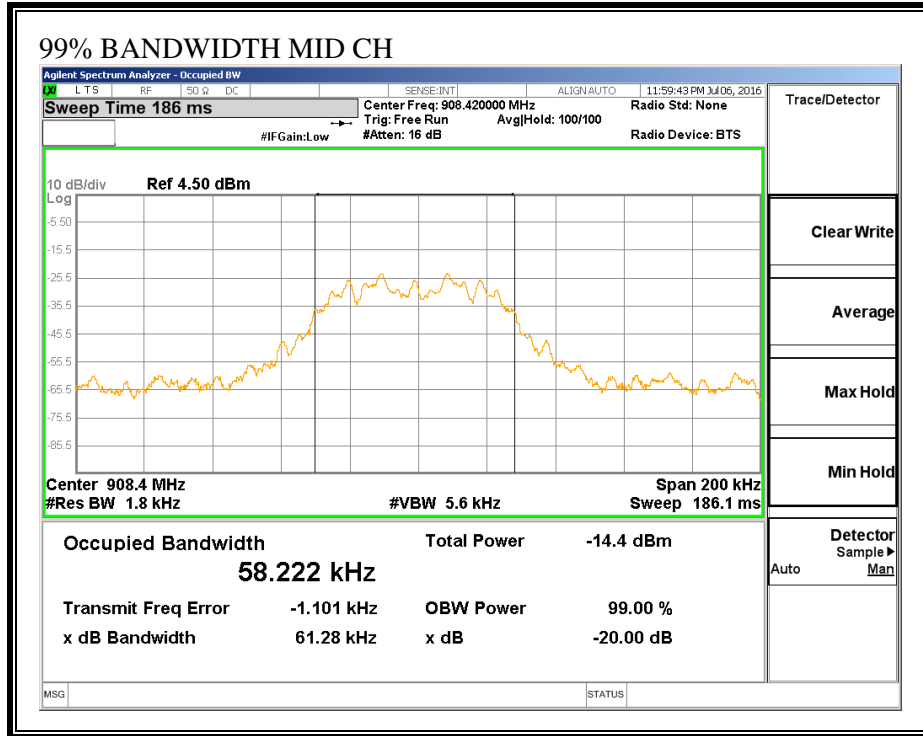


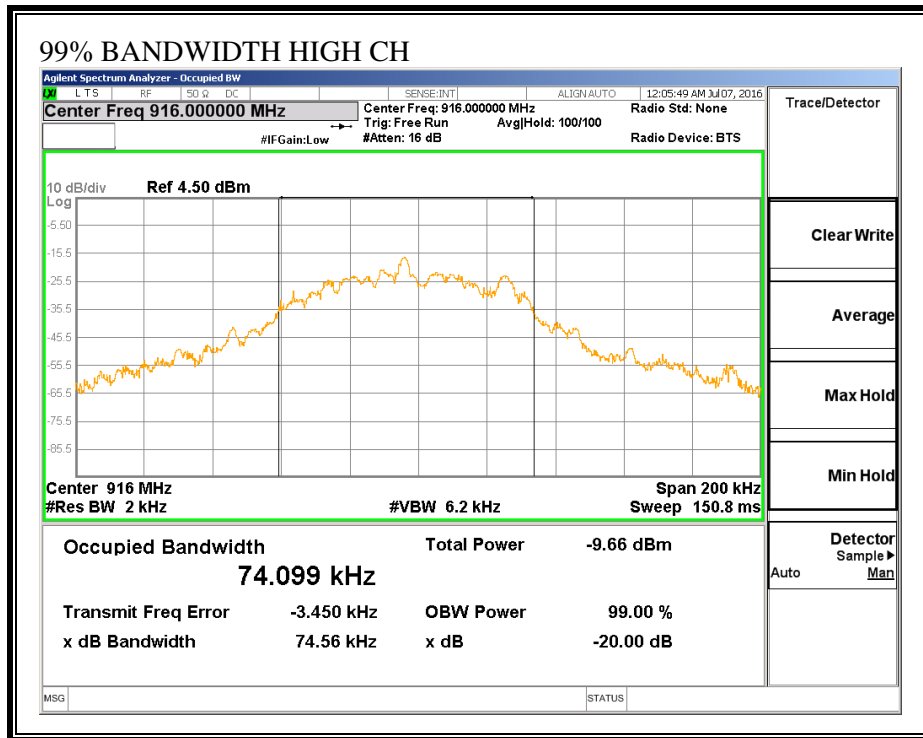

20dB BANDWIDTH

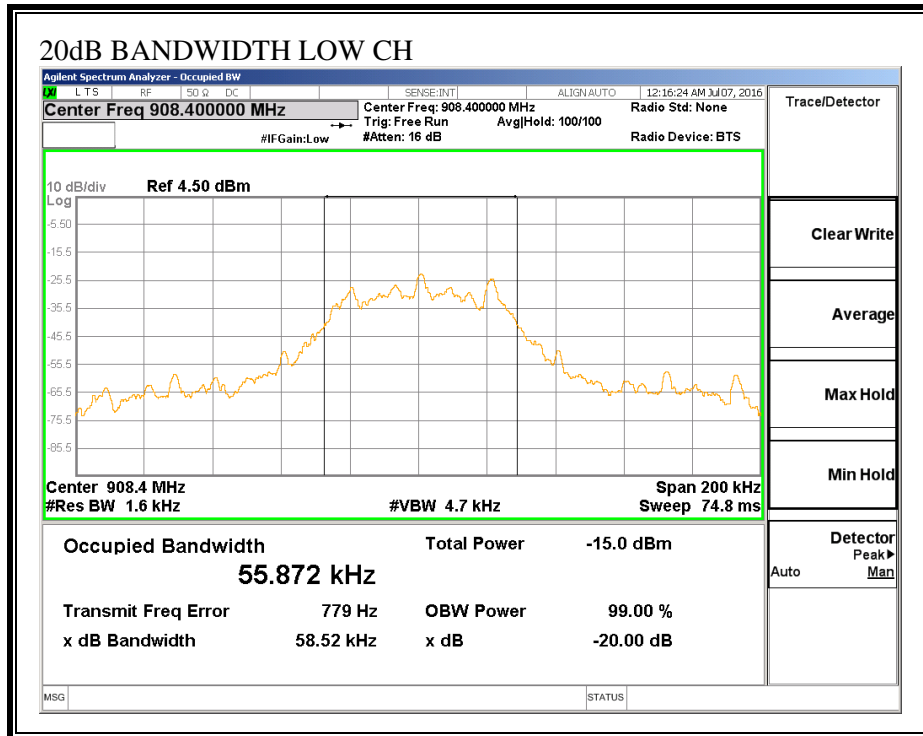

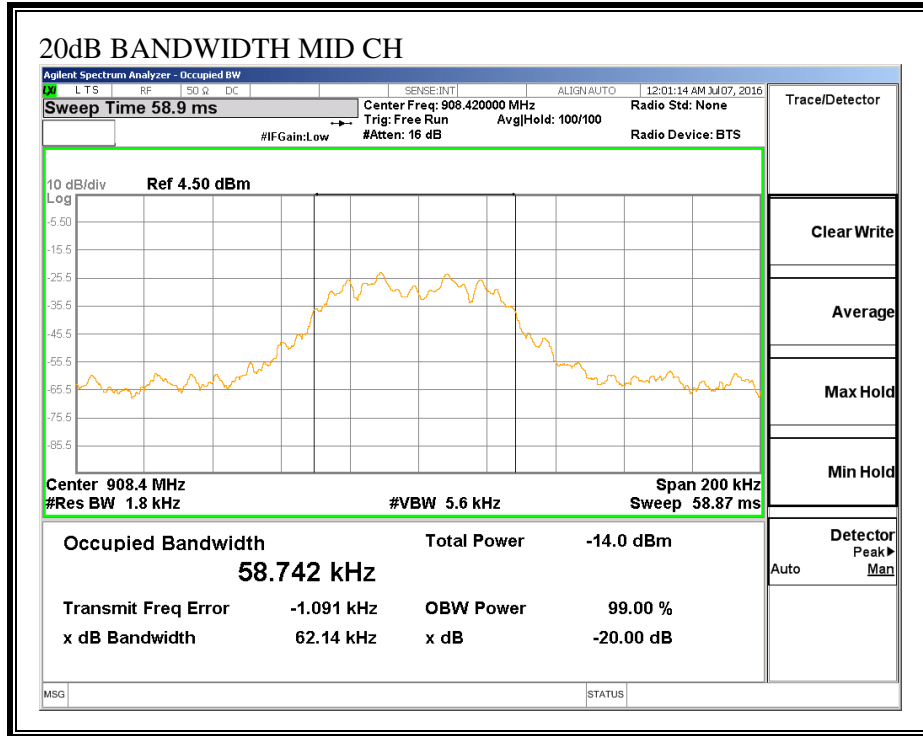

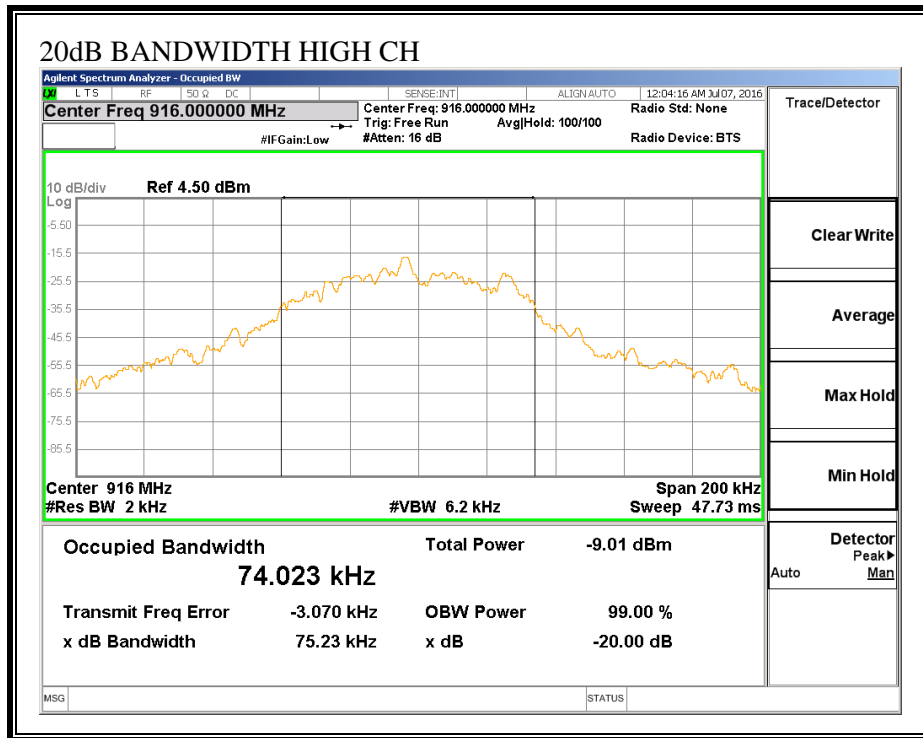

7.2. RADIATED EMISSIONS

LIMIT

IC RSS-210, A2.9
 FCC 15.249

Operation within the bands 902–928 MHz, 2400–2483.5 MHz, 5725–5875 MHz, and 24.0–24.25 GHz.

(a) Except as provided in paragraph (b) of this section, the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:

Fundamental frequency	Field strength of fundamental (millivolts/meter)	Field strength of harmonics (microvolts/meter)
902–928 MHz	50	500
2400–2483.5 MHz	50	500
5725–5875 MHz	50	500
24.0–24.25 GHz	250	2500

(d) Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in § 15.209, whichever is the lesser attenuation.

Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009–0.490	2400/F(kHz)	300
0.490–1.705	24000/F(kHz)	30
1.705–30.0	30	30
30–88	100 **	3
88–216	150 **	3
216–960	200 **	3
Above 960	500	3

** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54–72 MHz, 76–88 MHz, 174–216 MHz or 470–806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§15.231 and 15.241.

RESULTS


7.2.1. FUNDAMENTAL FREQUENCY RADIATED EMISSION

Fibar
 Single Switch 2, FGS-213
 Worst Axis Fundamental Measurement
 120V 60Hz
 Radiated Emission Data

Test Frequency (MHz)	Meter		Antenna		Corrected Reading		Peak		QP		Azimuth [Degs]	Height [cm]	Polarity
	Reading (dBuV)	Detector	Factor dB/m	Path dB	dB(uVolts/ meter)	Limit 3m	Margin (dB)	Limit 3m	Margin (dB)				
908.4051	54.62	Pk	23.1	9.5	87.22	114	-26.78	-	-	-	69	296	H
908.4	54.5	Qp	23.1	9.5	87.1	-	-	94	-6.9	-	69	296	H
908.4161	52.19	Pk	23.1	9.5	84.79	114	-29.21	-	-	-	345	119	V
908.4051	52.07	Qp	23.1	9.5	84.67	-	-	94	-9.33	-	345	119	V
908.3983	55.93	Pk	23.1	9.5	88.53	114	-25.47	-	-	-	307	102	H
908.42	55.74	Qp	23.1	9.5	88.34	-	-	94	-5.66	-	307	102	H
908.4381	54.17	Pk	23.1	9.5	86.77	114	-27.23	-	-	-	323	121	V
908.42	53.94	Qp	23.1	9.5	86.54	-	-	94	-7.46	-	323	121	V
915.978	58.75	Pk	23.3	9.6	91.65	114	-22.35	-	-	-	282	102	H
916	58.54	Qp	23.3	9.6	91.44	-	-	94	-2.56	-	282	102	H
915.976	59.37	Pk	23.3	9.6	92.27	114	-21.73	-	-	-	201	138	V
916	59.15	Qp	23.3	9.6	92.05	-	-	94	-1.95	-	201	138	V

Pk - Peak detector
 Qp - Quasi-Peak detector

7.2.2. HARMONICS AND SPURIOUS EMISSIONS ABOVE 1GHz

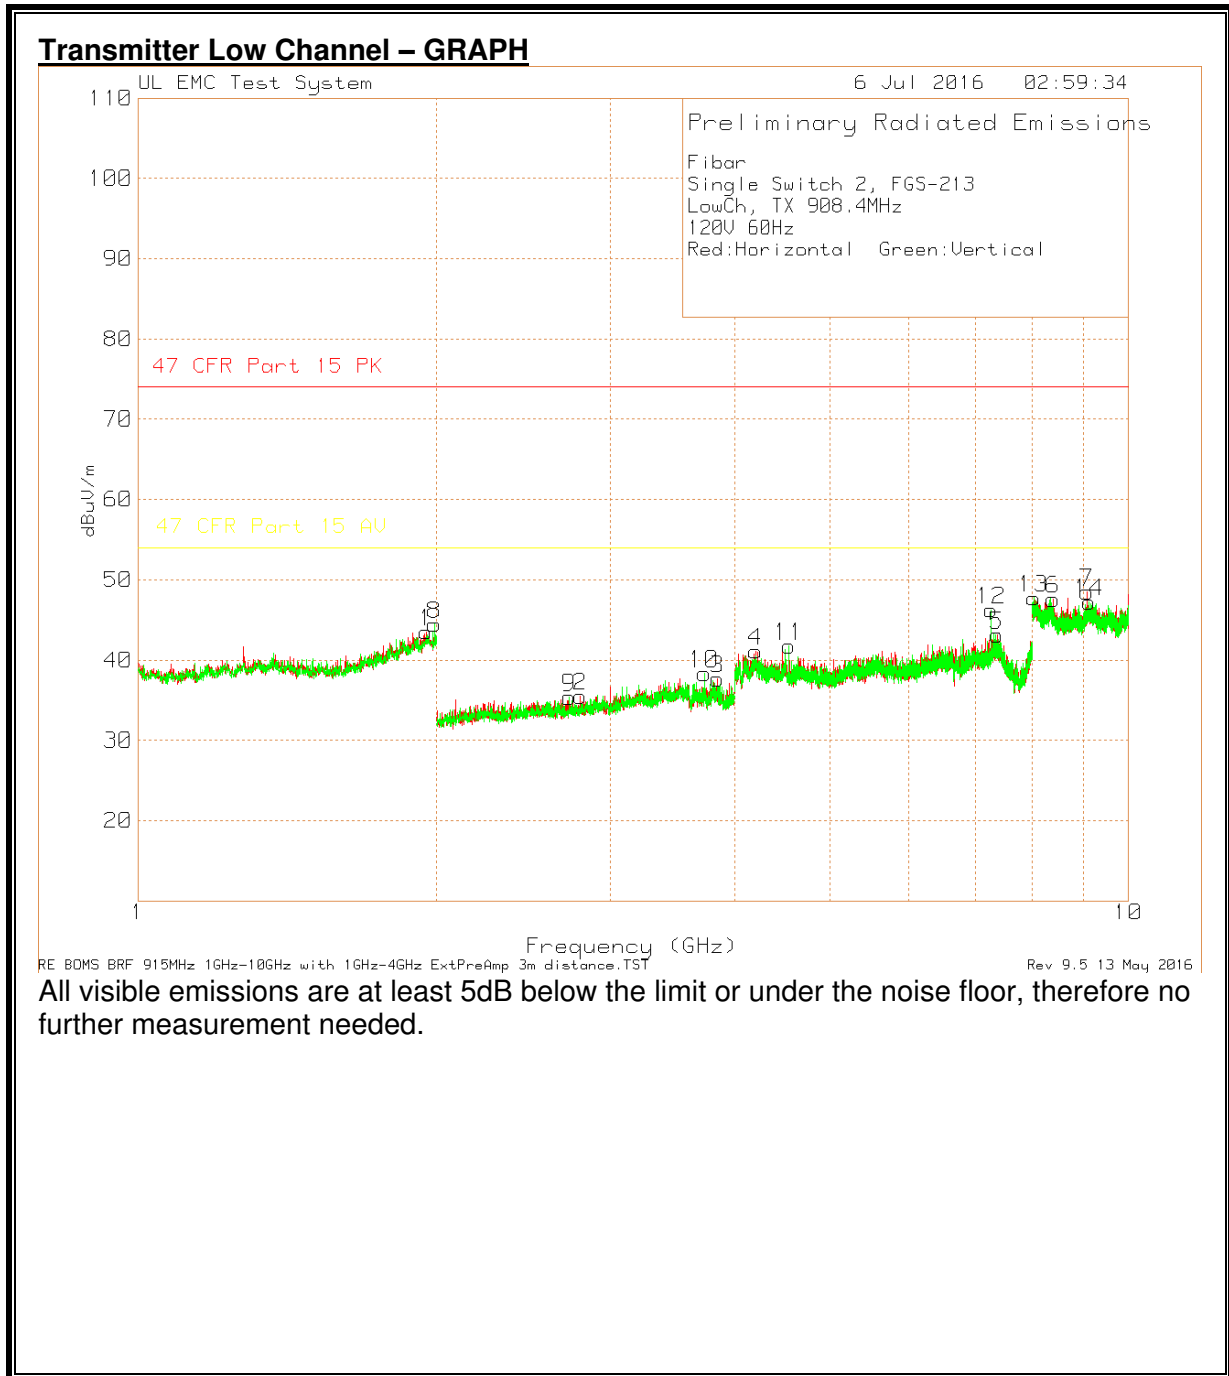

Transmitter Low Channel – DATA


Fibar
 Single Switch 2, FGS-213
 LowCh, TX 908.4MHz
 120V 60Hz
 Radiated Emission Data

Marker No.	Test Frequency (MHz)	Meter		Antenna		Corrected Reading		Peak		AV		Azimuth [Degs]	Height [cm]	Polarity
		Reading (dBuV)	Detector	Factor dB/m	Path dB	dB(uVolts/ meter)	Limit 3m	Margin (dB)	Limit 3m	Margin (dB)				
1	1.953	65.77	Pk		32	-54	43.51	74	-30.49	54	-10.49	0-360	98	H
2	2.797	63.94	Pk		22.2	-51	35.52	74	-38.48	54	-18.48	0-360	100	H
3	3.847	63.46	Pk		24	-50	37.66	74	-36.34	54	-16.34	0-360	100	H
4	4.205	64.3	Pk		28.3	-51	41.12	74	-32.88	54	-12.88	0-360	100	H
5	7.367	58.48	Pk		31	-46	43.11	74	-30.89	54	-10.89	0-360	150	H
6	8.391	59.15	Pk		36.6	-48	47.59	74	-26.41	54	-6.41	0-360	100	H
7	9.084	61	Pk		36.2	-49	48.48	74	-25.52	54	-5.52	0-360	100	H
8	1.992	66.19	Pk		32.3	-54	44.46	74	-29.54	54	-9.54	0-360	100	V
9	2.725	64.21	Pk		22.1	-51	35.35	74	-38.65	54	-18.65	0-360	100	V
10	3.731	64.97	Pk		23.7	-50	38.34	74	-35.66	54	-15.66	0-360	100	V
11	4.542	65.77	Pk		27.8	-52	41.76	74	-32.24	54	-12.24	0-360	100	V
12	7.268	62.1	Pk		30.2	-46	46.28	74	-27.72	54	-7.72	0-360	100	V
13	8.026	58.68	Pk		36.1	-47	47.73	74	-26.27	54	-6.27	0-360	150	V
14	9.13	59.19	Pk		36.3	-48	47.24	74	-26.76	54	-6.76	0-360	150	V

Pk - Peak detector

All visible emissions are at least 5dB below the limit or under the noise floor, therefore no further measurement needed.

Transmitter Mid Channel – GRAPH

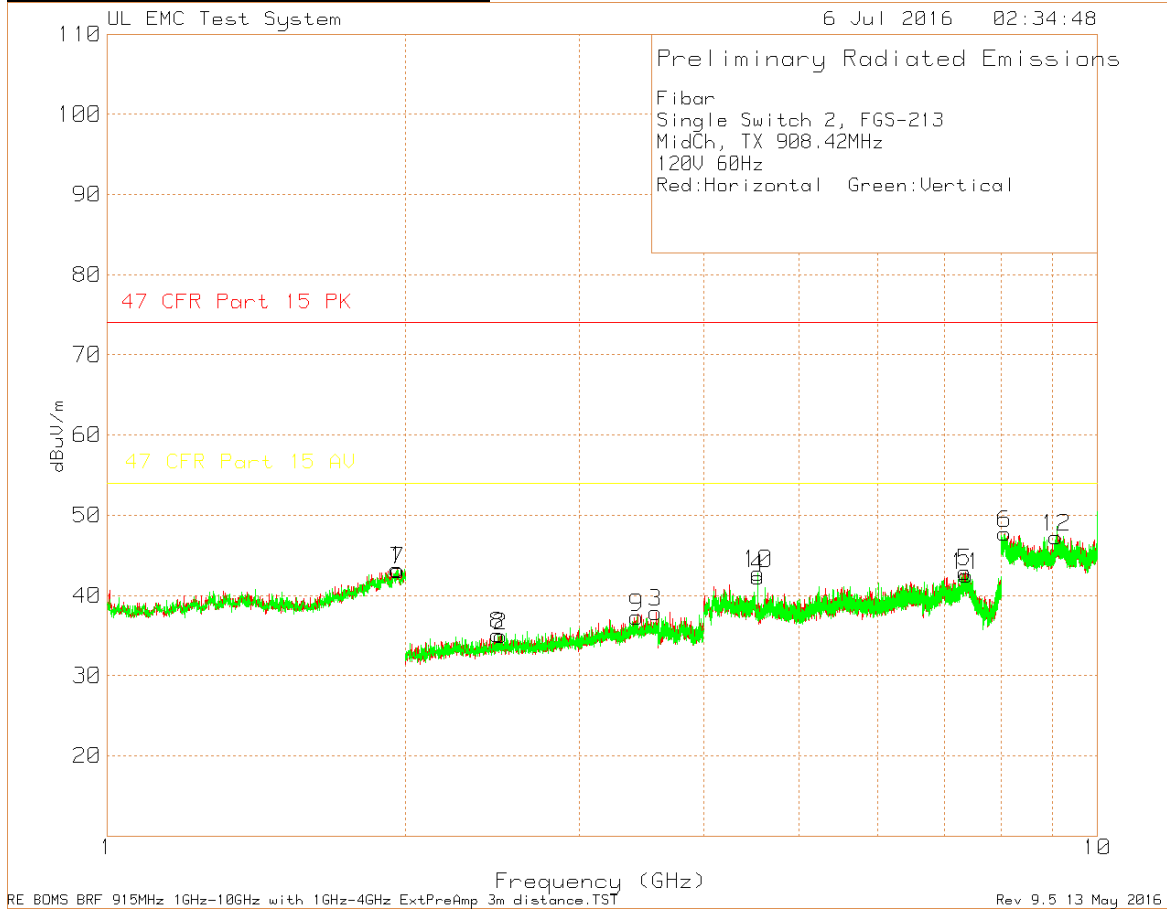

All visible emissions are at least 5dB below the limit or under the noise floor, therefore no further measurement needed.

Transmitter Mid Channel – DATA


Fibar
 Single Switch 2, FGS-213
 MidCh, TX 908.42MHz
 120V 60Hz
 Radiated Emission Data

Marker No.	Test Frequency (MHz)	Meter		Antenna		Corrected Reading		Peak		AV		Azimuth [Degs]	Height [cm]	Polarity
		Reading (dBuV)	Detector	Factor dB/m	Path dB	dB(uVolts/ meter)	Limit 3m	Margin (dB)	Limit 3m	Margin (dB)				
1	1.962	65.37	Pk	32.1	-54	43.27	74	-30.73	54	-10.73	0-360	98	H	
2	2.498	64.05	Pk	22.1	-51	34.97	74	-39.03	54	-19.03	0-360	150	H	
3	3.581	65.11	Pk	23.3	-51	37.89	74	-36.11	54	-16.11	0-360	100	H	
4	4.542	66.27	Pk	27.8	-52	42.26	74	-31.74	54	-11.74	0-360	100	H	
5	7.352	58.41	Pk	30.8	-46	42.93	74	-31.07	54	-11.07	0-360	100	H	
6	8.062	58.1	Pk	36.2	-47	47.74	74	-26.26	54	-6.26	0-360	100	H	
7	1.966	65.21	Pk	32.1	-54	43.16	74	-30.84	54	-10.84	0-360	150	V	
8	2.48	64.47	Pk	22	-51	35.1	74	-38.9	54	-18.9	0-360	150	V	
9	3.428	64.33	Pk	23.5	-51	37.29	74	-36.71	54	-16.71	0-360	100	V	
10	4.542	66.79	Pk	27.8	-52	42.78	74	-31.22	54	-11.22	0-360	100	V	
11	7.371	57.95	Pk	31	-46	42.49	74	-31.51	54	-11.51	0-360	150	V	
12	9.084	59.82	Pk	36.2	-49	47.3	74	-26.7	54	-6.7	0-360	150	V	

Pk - Peak detector

All visible emissions are at least 5dB below the limit or under the noise floor, therefore no further measurement needed.

Transmitter High Channel – GRAPH

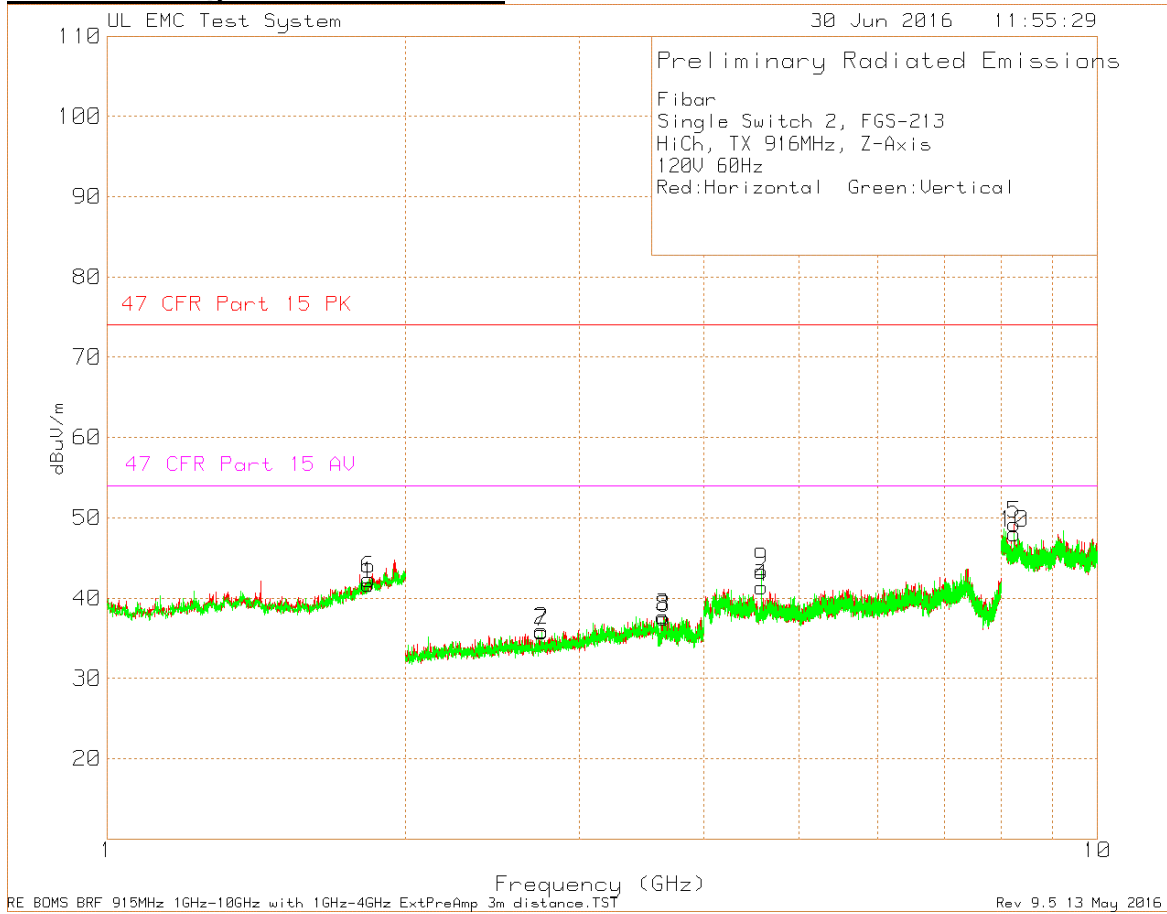

All visible emissions are at least 5dB below the limit or under the noise floor, therefore no further measurement needed.

Transmitter High Channel – DATA

Fibar
 Single Switch 2, FGS-213
 HiCh, TX 916MHz, Z-Axis
 120V 60Hz
 Radiated Emission Data


Marker No.	Test Frequency (MHz)	Meter		Antenna		Corrected Reading		Peak		AV		Azimuth [Degs]	Height [cm]	Polarity
		Reading (dBuV)	Detector	Factor dB/m	Path dB	dB(uVolts/ meter)	Limit 3m	Margin (dB)	Limit 3m	Margin (dB)				
1	1.836	65.24	Pk	31.1	-55	41.7	74	-32.3	54	-12.3	0-360	100	H	
2	2.748	64.72	Pk	22.1	-51	35.96	74	-38.04	54	-18.04	0-360	150	H	
3	3.643	64.07	Pk	23.3	-50	37.71	74	-36.29	54	-16.29	0-360	100	H	
4	4.58	65.54	Pk	27.7	-52	41.39	74	-32.61	54	-12.61	0-360	100	H	
5	8.244	61.01	Pk	36.4	-48	48.93	74	-25.07	54	-5.07	0-360	100	H	
6	1.837	65.87	Pk	31.1	-55	42.34	74	-31.66	54	-11.66	0-360	100	V	
7	2.748	64.55	Pk	22.1	-51	35.79	74	-38.21	54	-18.21	0-360	100	V	
8	3.65	63.6	Pk	23.4	-49	37.51	74	-36.49	54	-16.49	0-360	100	V	
9	4.58	67.49	Pk	27.7	-52	43.34	74	-30.66	54	-10.66	0-360	100	V	
10	8.244	60.13	Pk	36.4	-48	48.05	74	-25.95	54	-5.95	0-360	100	V	


Pk - Peak detector

All visible emissions are at least 5dB below the limit or under the noise floor, therefore no further measurement needed.

7.2.3. WORST-CASE BELOW 1 GHz

SPURIOUS EMISSIONS 30 TO 1000 MHz

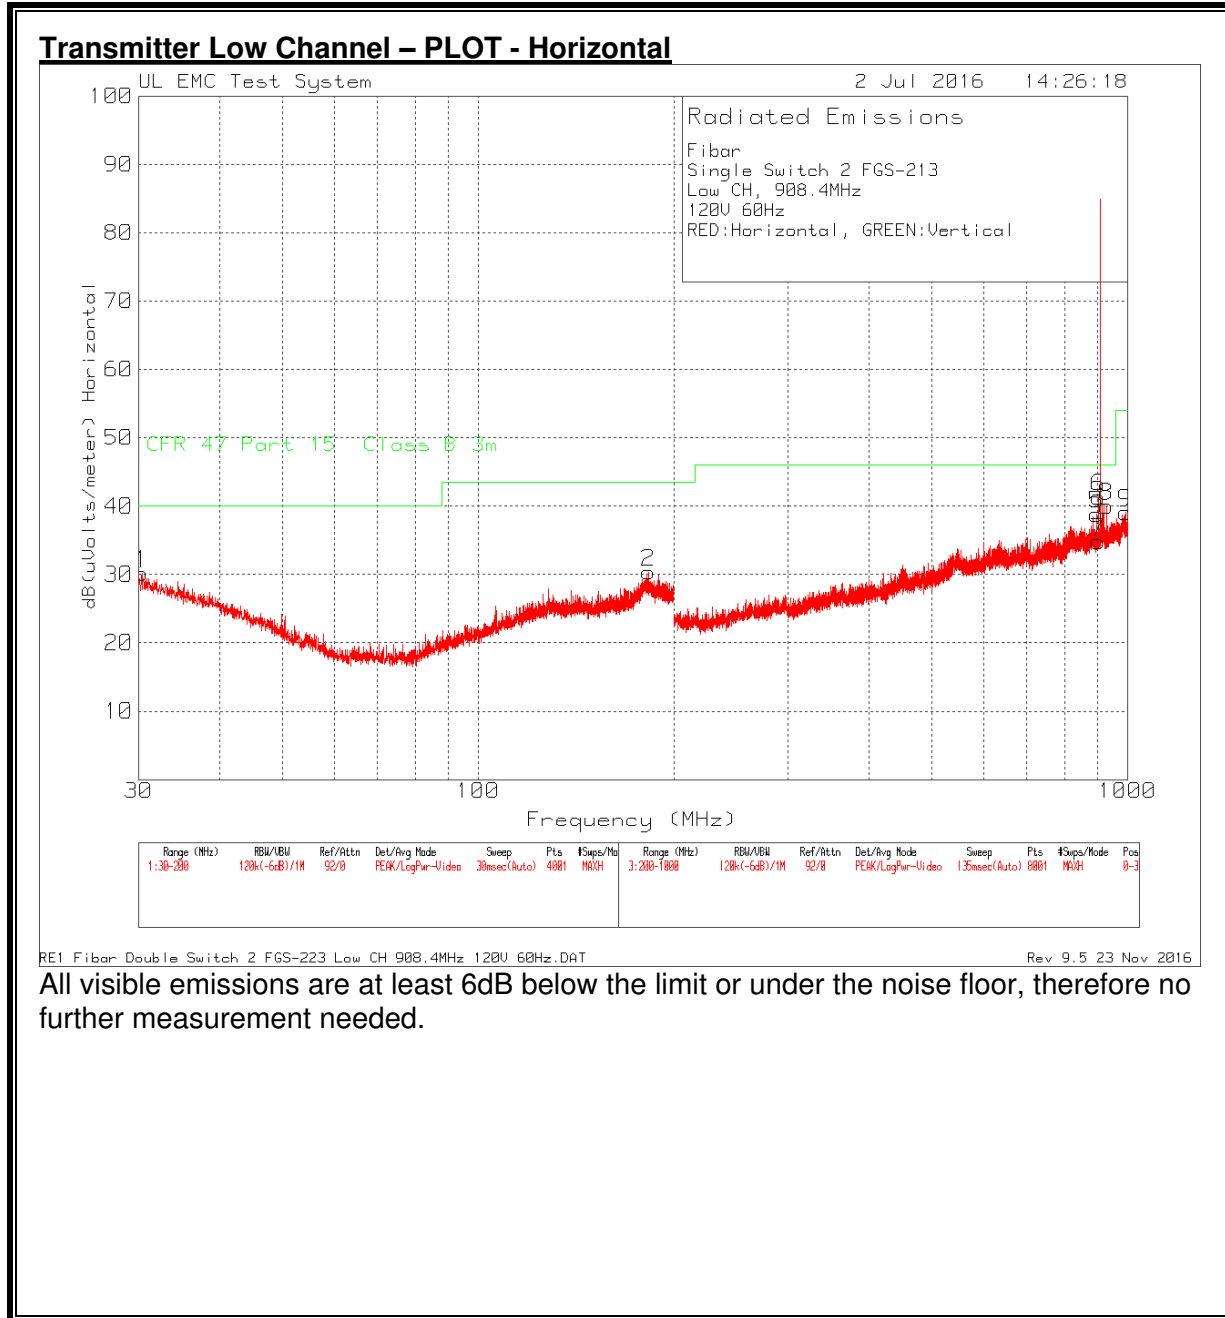

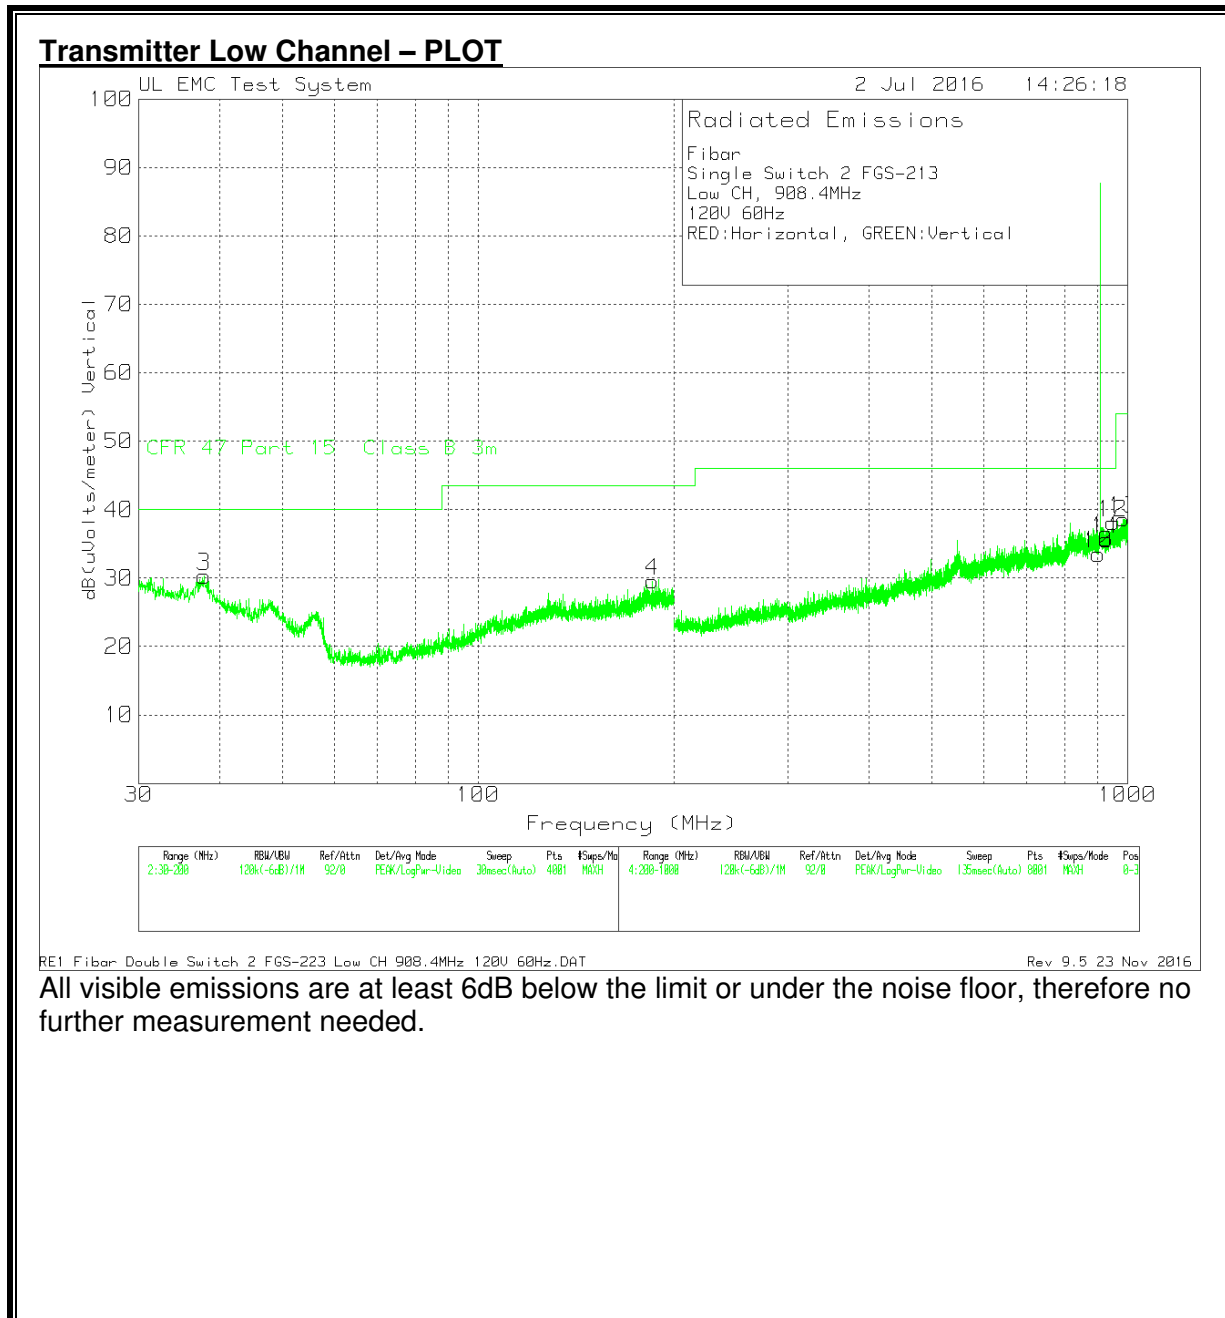

Transmitter Low Channel – DATA

Fibar
 Single Switch 2, FGS-213
 Low CH, 908.4MHz
 120V 60Hz
 Radiated Emission Data

Marker No.	Test Frequency (MHz)	Meter Reading (dBuV)	Antenna Factor dB/m	Path dB	10M to 3M Factor dB	Corrected Reading dB(uVolts/m eter)	QP Limit 3m	Margin (dB)	Azimuth [Degs]	Height [cm]	Polarity
1	30.34	31.54 Pk	18.1	-30	10.5	30.14	40	-9.86	0-360	398	H
2	183.0425	33.48 Pk	15.6	-29	10.5	30.38	43.52	-13.14	0-360	248	H
3	37.82	34.58 Pk	15.2	-30	10.5	30.28	40	-9.72	0-360	101	V
4	185.5075	32.38 Pk	15.8	-29	10.5	29.58	43.52	-13.94	0-360	252	V
5	896	33.45 Pk	22.5	-28	10.5	38.85	46.02	-7.17	0-360	299	H
6	901.2	36.15 Pk	22.6	-28	10.5	41.35	46.02	-4.67	0-360	299	H
7*	902	29.59 Pk	22.7	-28	10.5	34.79	46.02	-11.23	0-360	299	H
8*	928	34.39 Pk	22.7	-28	10.5	39.99	46.02	-6.03	0-360	299	H
9	992.8	31.36 Pk	23.9	-27	10.5	39.06	53.97	-14.91	0-360	199	H
10*	902	28.32 Pk	22.7	-28	10.5	33.52	46.02	-12.5	0-360	299	V
11*	928	30.09 Pk	22.7	-28	10.5	35.69	46.02	-10.33	0-360	399	V
12	949	31.61 Pk	23.5	-28	10.5	38.11	46.02	-7.91	0-360	399	V
13	985.5	30.31 Pk	24.4	-27	10.5	38.61	53.97	-15.36	0-360	399	V


Pk - Peak detector
 * - Bandedge markers

Radiated Emission Data


Test Frequency (MHz)	Meter Reading (dBuV)	Antenna Factor dB/m	Path dB	10M to 3M Factor dB	Corrected Reading dB(uVolts/m eter)	QP Limit 3m	Margin (dB)	Azimuth [Degs]	Height [cm]	Polarity
901.2	28.05 Qp	22.6	-28	10.5	33.25	46.02	-12.77	159	107	H

Qp - Quasi-Peak detector

All visible emissions are at least 6dB below the limit or under the noise floor, therefore no further measurement needed.

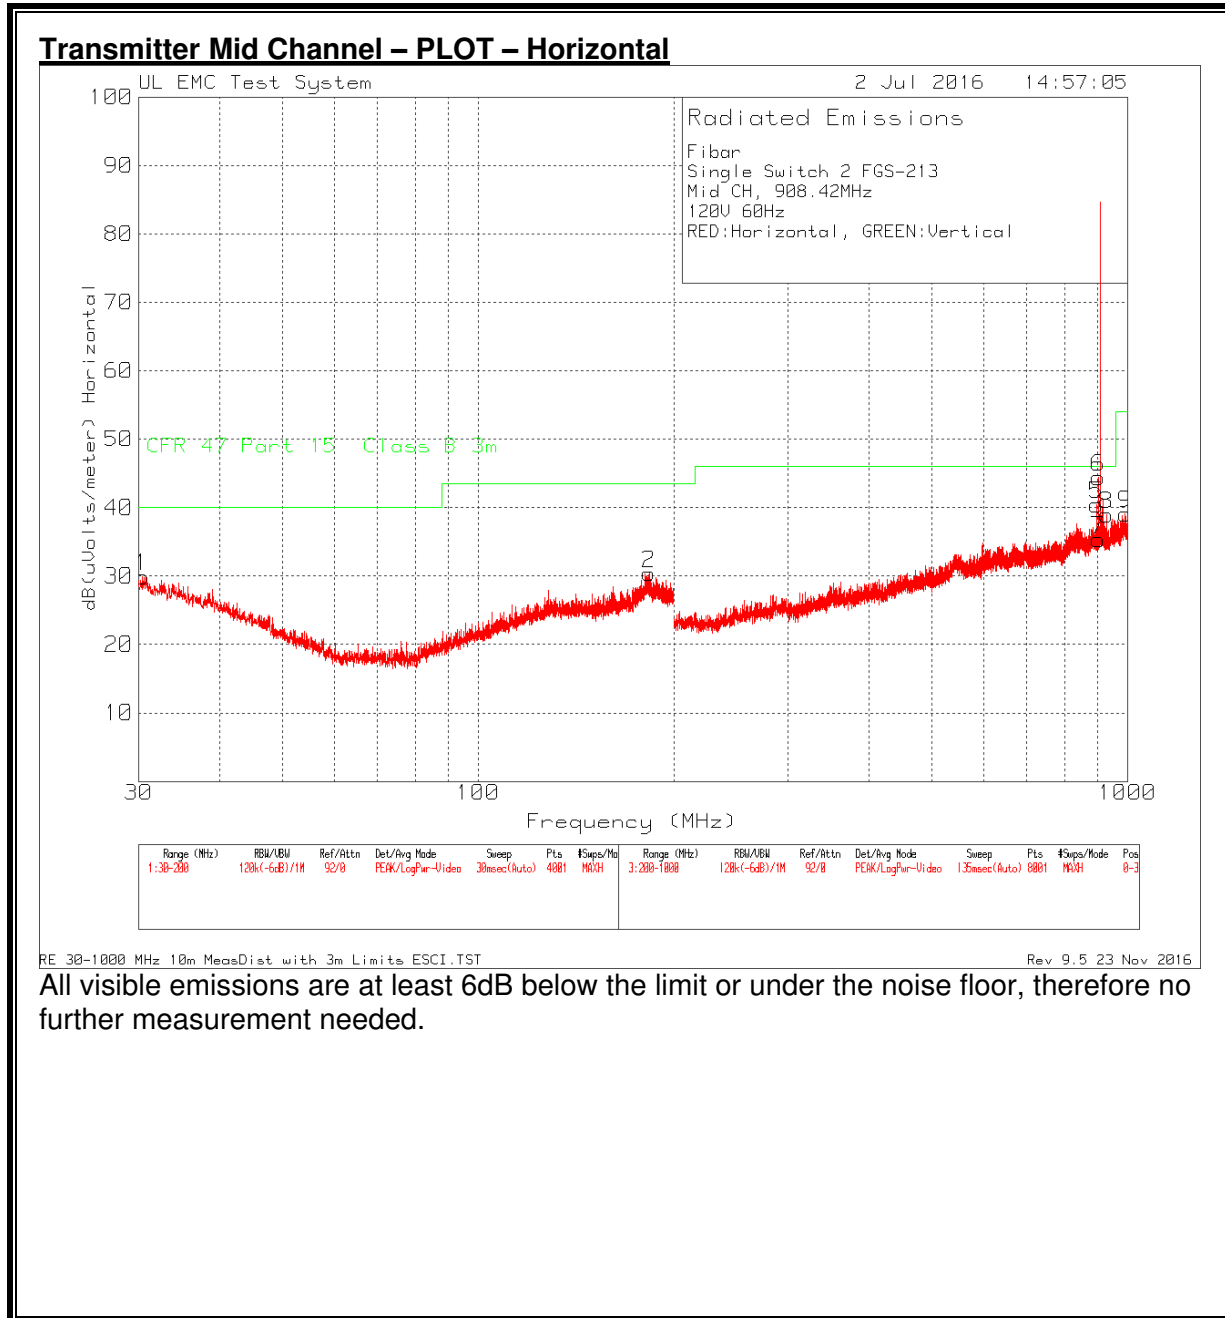

Transmitter Mid Channel – PLOT – Vertical

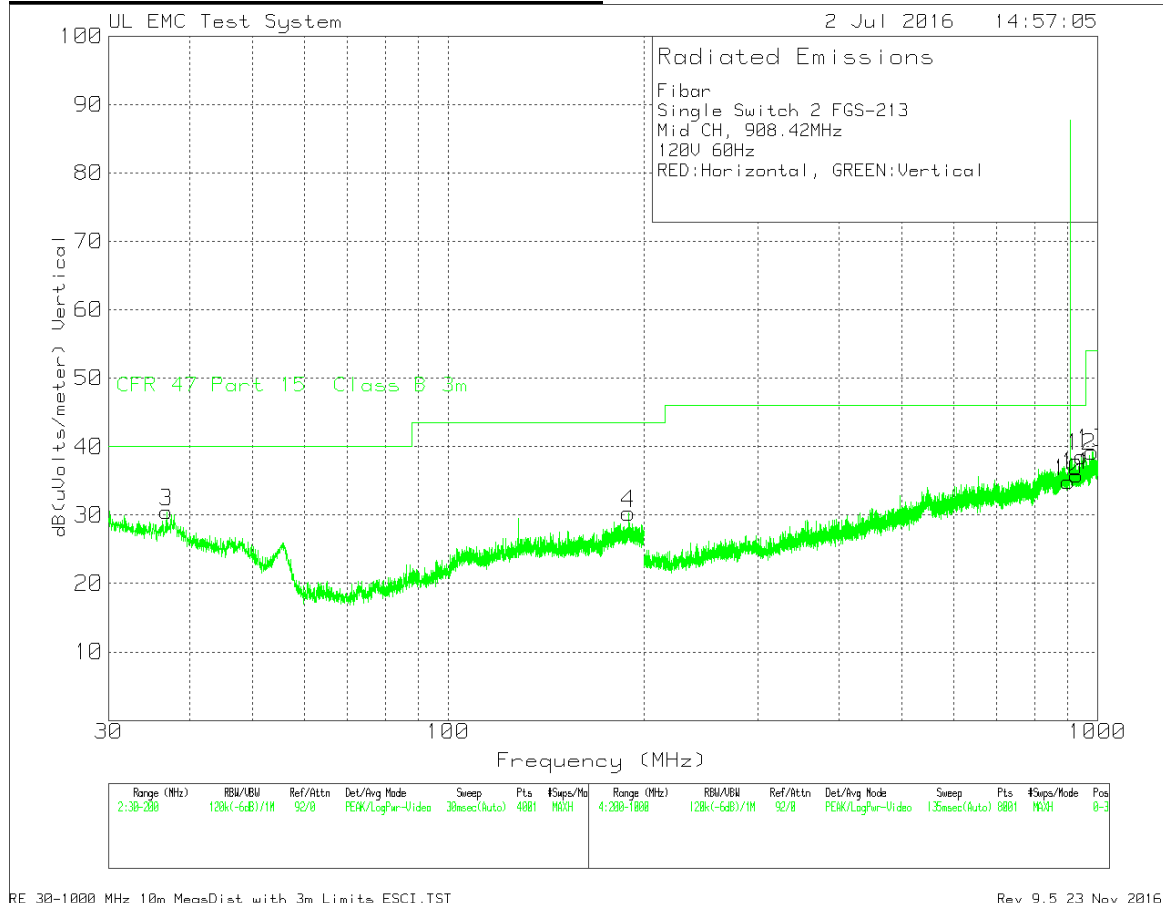

All visible emissions are at least 6dB below the limit or under the noise floor, therefore no further measurement needed.

Transmitter Mid Channel – DATA

Fibar
 Single Switch 2, FGS-213
 Mid CH, 908.42MHz
 120V 60Hz
 Radiated Emission Data

Marker No.	Test Frequency (MHz)	Meter Reading (dBuV)	Antenna Factor dB/m	Path dB	10M to 3M Factor dB	Corrected Reading		Limit 3m	Margin (dB)	Azimuth [Degs]	Height [cm]	Polarity
						dB(uVolts/m eter)	QP					
1	30.3825	31.42 Pk	18	-30	10.5	29.92	40	-10.08	0-360	398	H	
2	183.34	33.39 Pk	15.6	-29	10.5	30.39	43.52	-13.13	0-360	248	H	
3	36.8425	34.28 Pk	15.6	-30	10.5	30.48	40	-9.52	0-360	101	V	
4	189.63	32.77 Pk	16	-29	10.5	30.27	43.52	-13.25	0-360	398	V	
5	896.1	35.05 Pk	22.5	-28	10.5	40.45	46.02	-5.57	0-360	99	H	
6	901.4	39.25 Pk	22.6	-28	10.5	44.45	46.02	-1.57	0-360	99	H	
7*	902	30.15 Pk	22.7	-28	10.5	35.35	46.02	-10.67	0-360	399	H	
8*	928	33.35 Pk	22.7	-28	10.5	38.95	46.02	-7.07	0-360	99	H	
9	992.1	31.4 Pk	23.9	-27	10.5	39.1	53.97	-14.87	0-360	299	H	
10*	902	29.69 Pk	22.7	-28	10.5	34.89	46.02	-11.13	0-360	98	V	
11*	928	30.22 Pk	22.7	-28	10.5	35.82	46.02	-10.2	0-360	199	V	
12	944.7	32.25 Pk	23.4	-28	10.5	38.55	46.02	-7.47	0-360	302	V	
13	980	31.51 Pk	24.1	-27	10.5	39.21	53.97	-14.76	0-360	199	V	


Pk - Peak detector
 * - Bandedge Markers


Radiated Emission Data

Test Frequency (MHz)	Meter Reading (dBuV)	Antenna Factor dB/m	Path dB	10M to 3M Factor dB	Corrected Reading		Limit 3m	Margin (dB)	Azimuth [Degs]	Height [cm]	Polarity
					dB(uVolts/m eter)	QP					
901.2943	27.85 Qp	22.6	-28	10.5	33.05	46.02	-12.97	293	102	H	
896.0045	27.13 Qp	22.5	-28	10.5	32.53	46.02	-13.49	147	113	H	

Qp - Quasi-Peak detector

All visible emissions are at least 6dB below the limit or under the noise floor, therefore no further measurement needed.

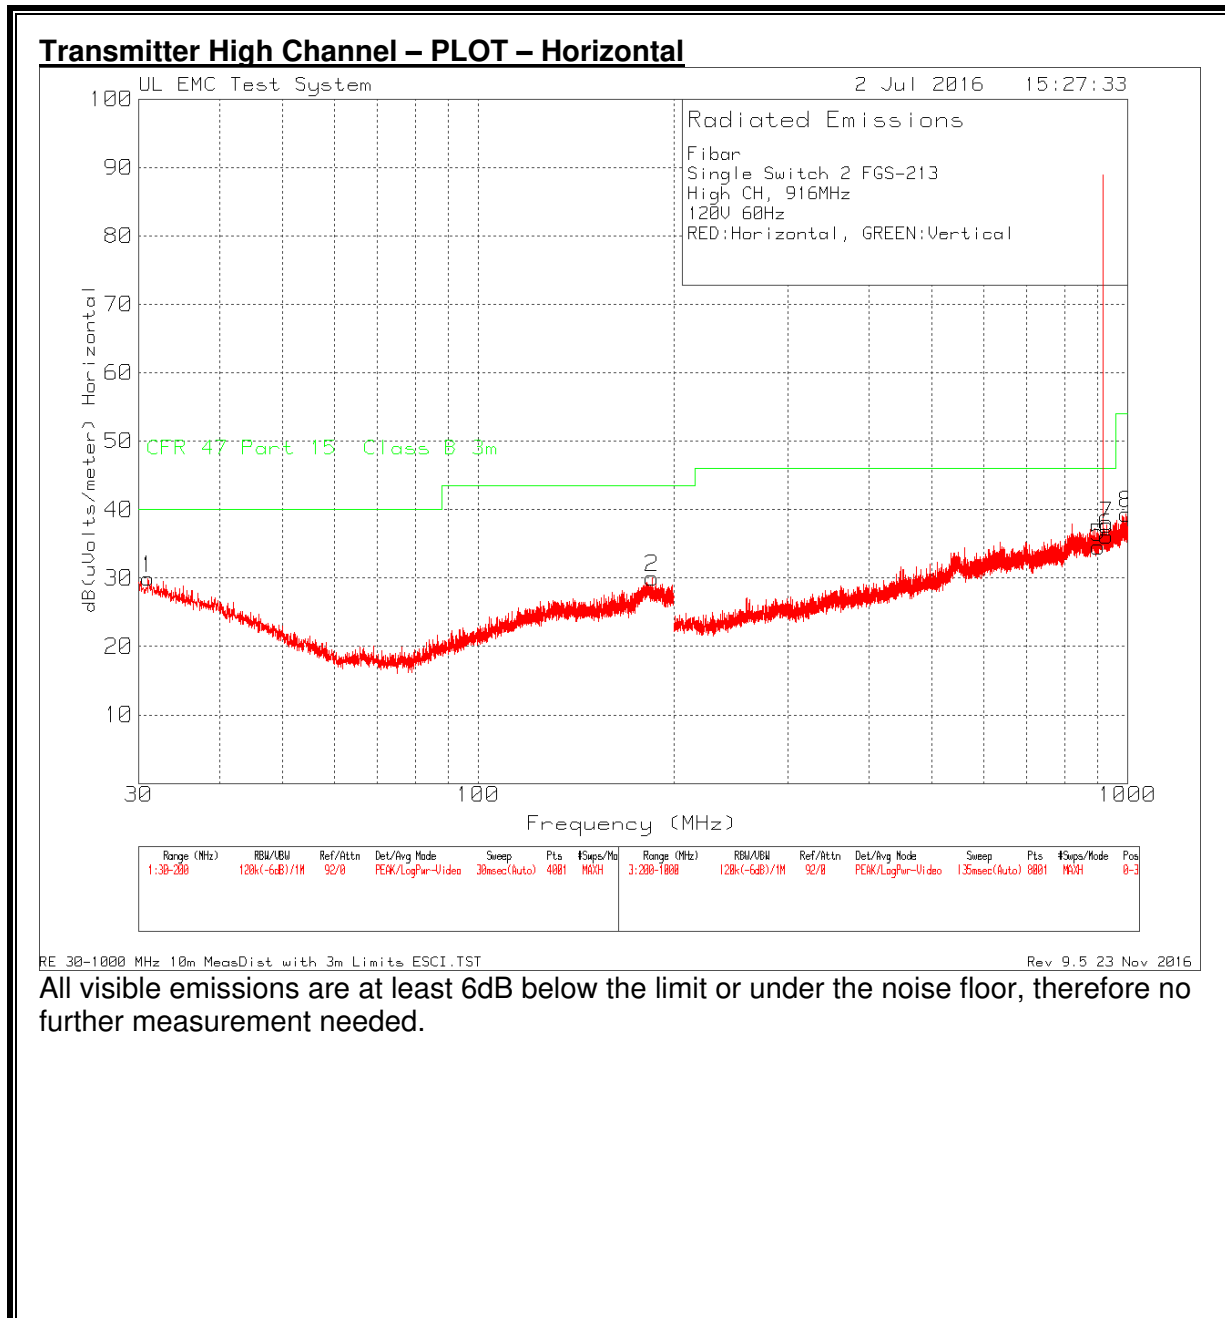

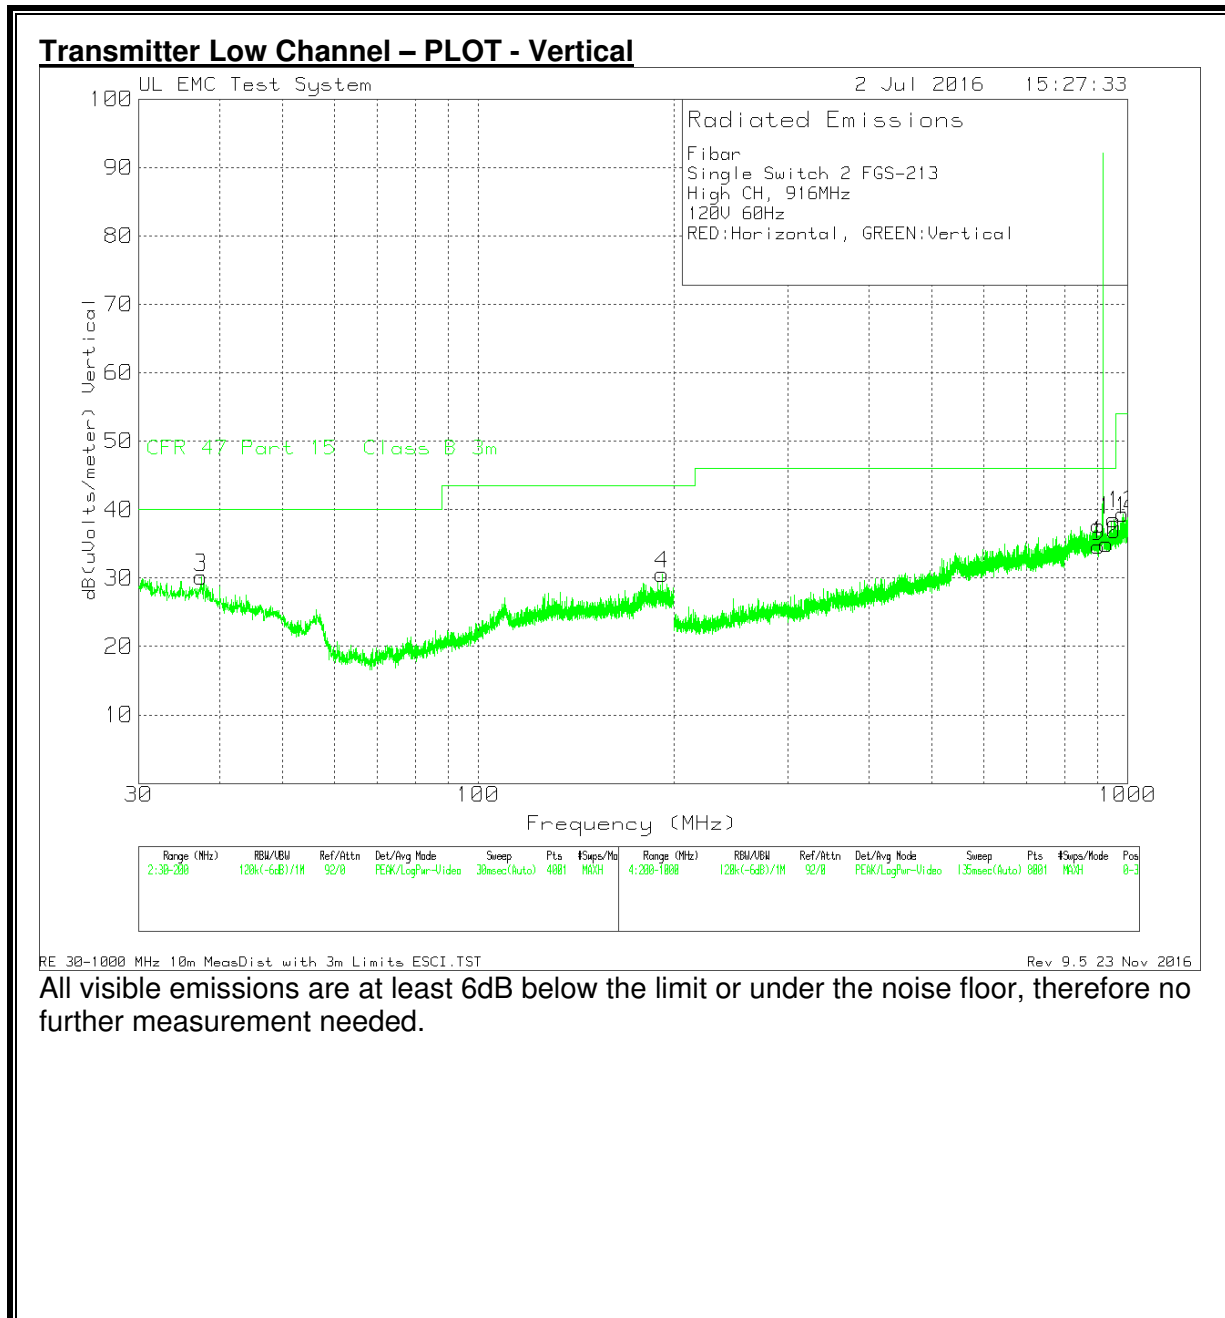

Transmitter High Channel – DATA


Fibar
 Single Switch 2, FGS-213
 High CH, 916MHz
 120V 60Hz
 Radiated Emission Data

Marker No.	Test Frequency (MHz)	Meter Reading (dBuV) Detector	Antenna Factor dB/m	Path dB	10M to 3M Factor dB	Corrected Reading dB(uVolts/m eter)	QP Limit 3m	Margin (dB)	Azimuth [Degs]	Height [cm]	Polarity
1	31.02	31.67 Pk	17.8	-30	10.5	29.97	40	-10.03	0-360	398	H
2	185.4225	32.86 Pk	15.8	-29	10.5	30.06	43.52	-13.46	0-360	248	H
3	37.4375	34.23 Pk	15.3	-30	10.5	30.13	40	-9.87	0-360	102	V
4	192.1375	33 Pk	16	-29	10.5	30.6	43.52	-12.92	0-360	102	V
5*	902	29.35 Pk	22.7	-28	10.5	34.55	46.02	-11.47	0-360	100	H
6*	928	30.51 Pk	22.7	-28	10.5	36.11	46.02	-9.91	0-360	299	H
7	929.3	32.26 Pk	22.7	-28	10.5	37.76	46.02	-8.26	0-360	100	H
8	994.7	31.69 Pk	23.8	-27	10.5	39.39	53.97	-14.58	0-360	100	H
9*	902	29.44 Pk	22.7	-28	10.5	34.64	46.02	-11.38	0-360	399	V
10*	928	29.33 Pk	22.7	-28	10.5	34.93	46.02	-11.09	0-360	399	V
11	952.8	31.73 Pk	23.5	-27	10.5	38.53	46.02	-7.49	0-360	99	V
12	983	31.39 Pk	24.3	-27	10.5	39.39	53.97	-14.58	0-360	202	V

Pk - Peak detector
 * - Bandedge Markers

All visible emissions are at least 6dB below the limit or under the noise floor, therefore no further measurement needed.

SPURIOUS EMISSIONS 9 kHz TO 30 MHz

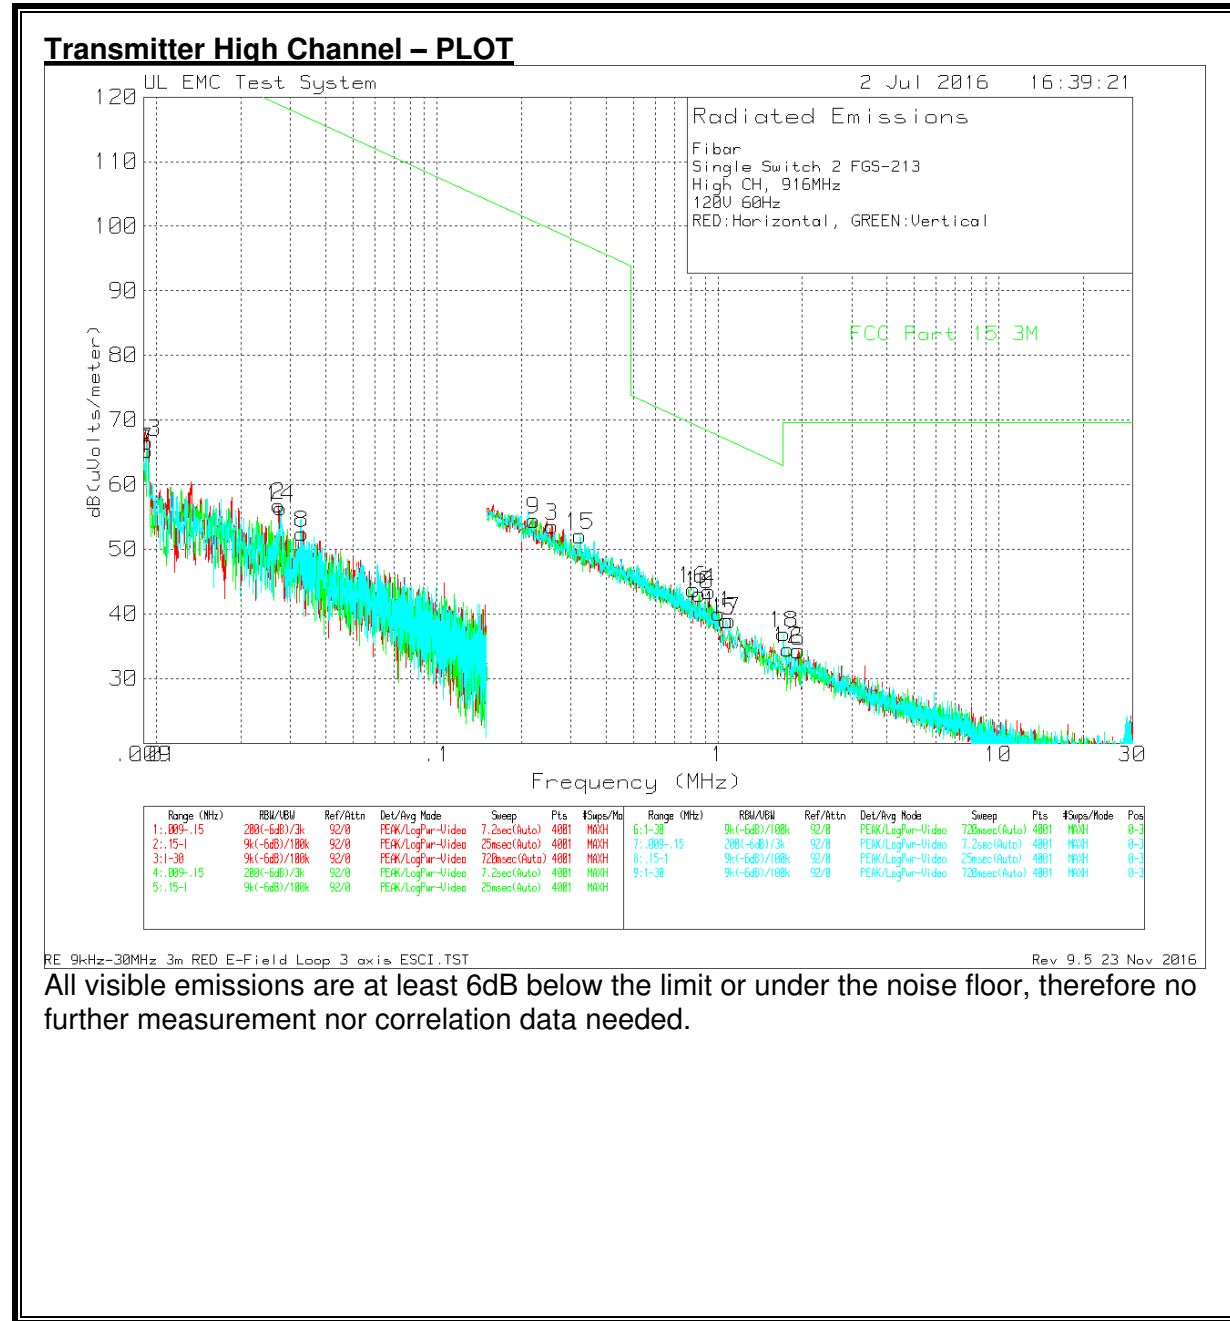

Transmitter High Channel – DATA


Fibar
 Single Switch 2, FGS-213
 RX
 120V 60Hz
 Radiated Emission Data

Marker No.	Test Frequency (MHz)	Meter Reading		Antenna		Corrected Reading		Margin (dB)	Azimuth [Degs]
		Reading(dBuV)	Detector	Factor dB/m	Path dB	dB(uVolts/ meter)	Avg Limit		
1	0.009105	48.76	Pk	19.5	0	68.26	128.4	-60.14	0-360
2	0.02727	42.89	Pk	13.9	0	56.79	118.88	-62.09	0-360
3	0.25629	41.98	Pk	11.6	0	53.58	99.43	-45.85	0-360
4	0.93086	31.76	Pk	11.6	0.1	43.46	68.23	-24.77	0-360
5	1.1015	27.22	Pk	11.6	0.1	38.92	66.76	-27.84	0-360
6	1.93525	22.48	Pk	11.7	0.1	34.28	69.54	-35.26	0-360
7	0.009245	45.88	Pk	19.4	0	65.28	128.27	-62.99	0-360
8	0.03294	38.94	Pk	13.5	0	52.44	117.24	-64.8	0-360
9	0.22072	42.88	Pk	11.6	0	54.48	100.72	-46.24	0-360
10	0.85972	31.32	Pk	11.6	0.1	43.02	68.92	-25.9	0-360
11	1.00725	28.31	Pk	11.6	0.1	40.01	67.54	-27.53	0-360
12	1.77575	22.69	Pk	11.7	0.1	34.49	69.54	-35.05	0-360
13	0.009245	47.17	Pk	19.4	0	66.57	128.27	-61.7	0-360
14	0.02769	42.48	Pk	13.9	0	56.38	118.74	-62.36	0-360
15	0.32274	40.52	Pk	11.6	0	52.12	97.42	-45.3	0-360
16	0.81903	32.06	Pk	11.6	0.1	43.76	69.34	-25.58	0-360
17	1.0725	27.25	Pk	11.6	0.1	38.95	67	-28.05	0-360
18	1.71775	25.13	Pk	11.7	0.1	36.93	69.54	-32.61	0-360

Pk - Peak detector

All visible emissions are at least 6dB below the limit or under the noise floor, therefore no further measurement needed.

7.2.4. Transmitter RX/Digital Radiated Emissions

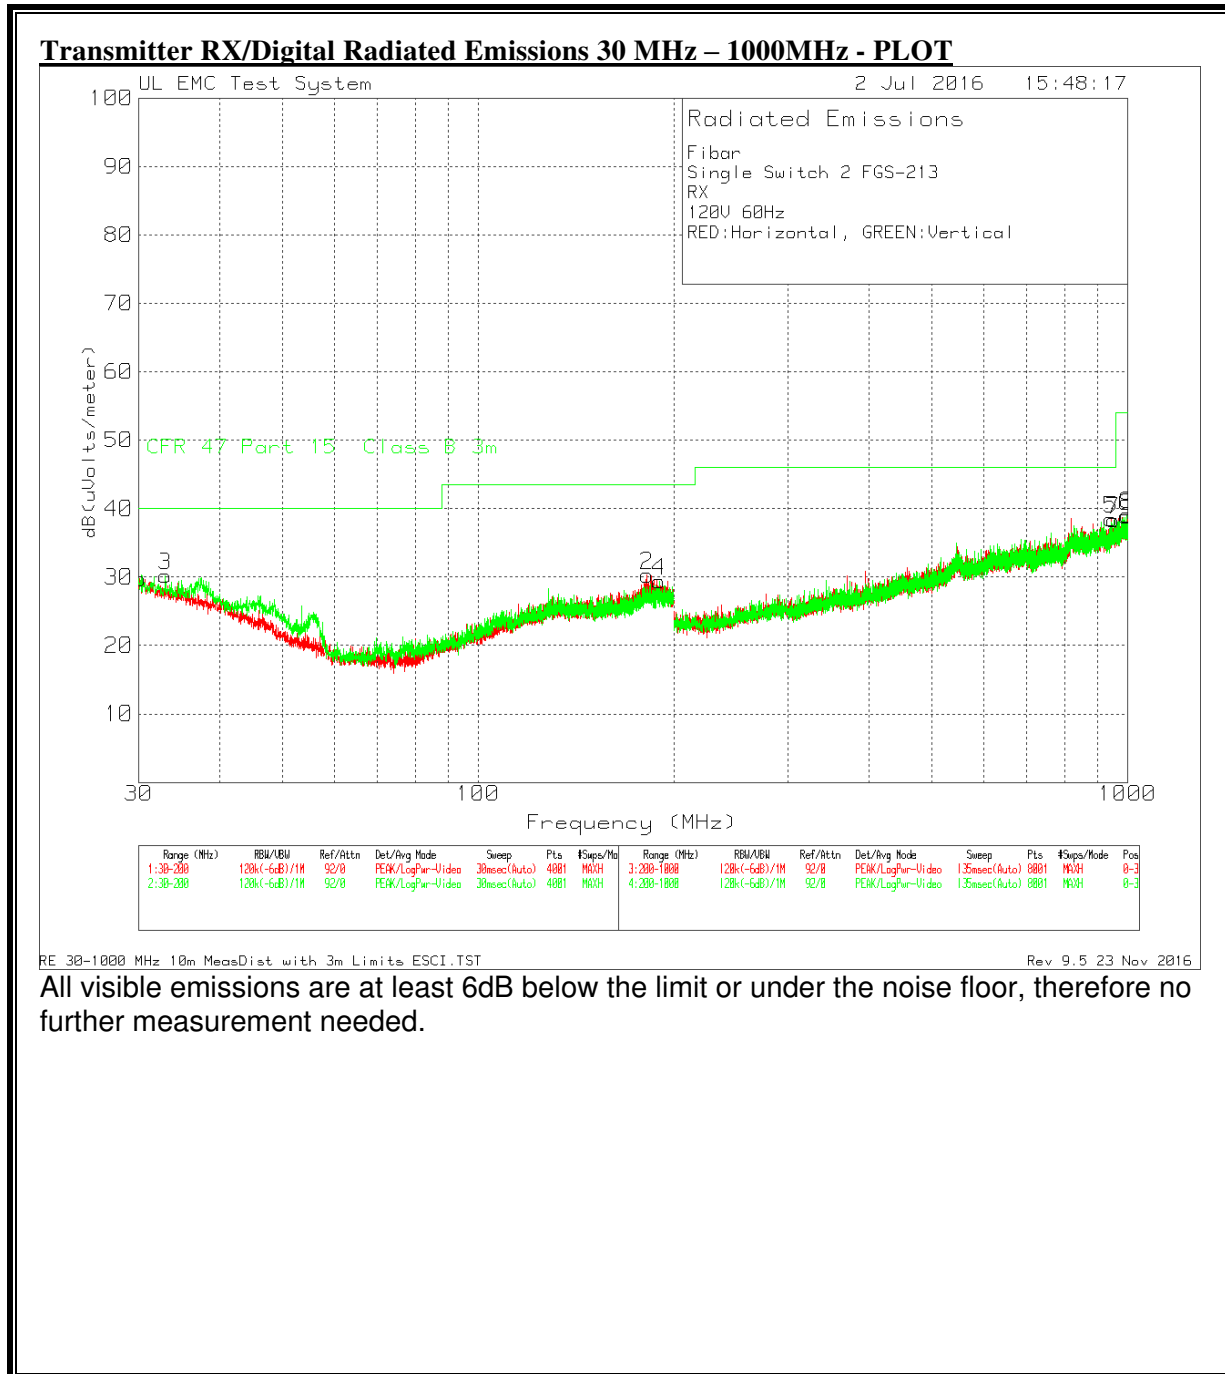

Transmitter RX/Digital Radiated Emissions 30 MHz – 1000MHz - DATA


Fibar
 Single Switch 2, FGS-213
 RX
 120V 60Hz
 Radiated Emission Data

Marker No.	Test Frequency (MHz)	Meter Reading (dBuV)	Antenna Factor dB/m	Path Loss dB	10M to 3M Factor dB	Corrected		Limit 3m	Margin (dB)	Azimuth [Degs]	Height [cm]	Polarity
						Reading	QP					
1	30.085	31.06 Pk	18.2	-30	10.5	29.76	40	-10.24	0-360	398	H	
2	182.065	33.47 Pk	15.5	-29	10.5	30.27	43.52	-13.25	0-360	398	H	
3	32.975	32.71 Pk	17	-30	10.5	30.21	40	-9.79	0-360	102	V	
4	189.97	31.91 Pk	16	-29	10.5	29.41	43.52	-14.11	0-360	398	V	
5	942.9	32.3 Pk	23.2	-28	10.5	38.5	46.02	-7.52	0-360	199	H	
6	995.6	31.11 Pk	23.8	-27	10.5	38.91	53.97	-15.06	0-360	199	H	
7	951.6	31.66 Pk	23.5	-27	10.5	38.36	46.02	-7.66	0-360	199	V	
8	997.9	31.22 Pk	23.8	-26	10.5	39.12	53.97	-14.85	0-360	199	V	

Pk - Peak detector

All visible emissions are at least 6dB below the limit or under the noise floor, therefore no further measurement needed.

Transmitter RX/Digital Radiated Emissions 1 GHz – 10GHz - PLOT

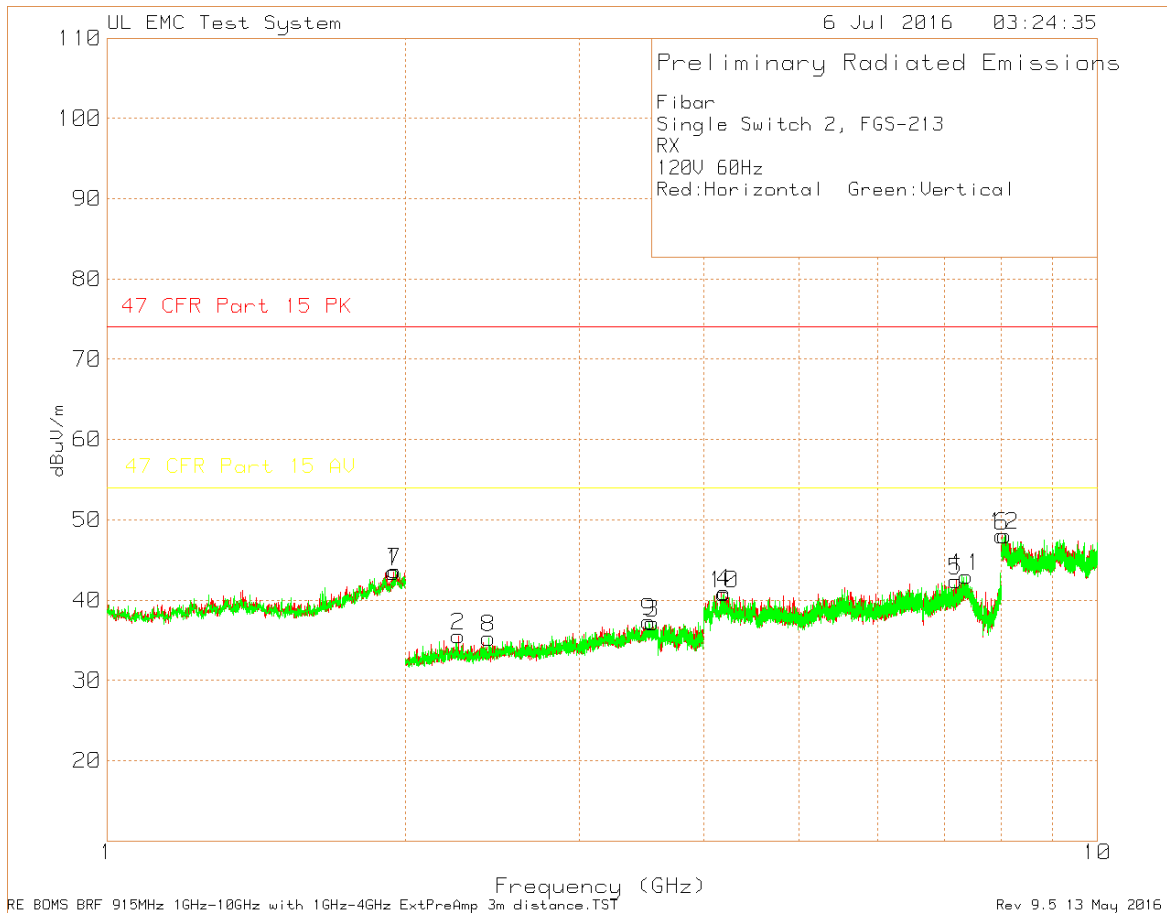

All visible emissions are at least 6dB below the limit or under the noise floor, therefore no further measurement needed.

Transmitter RX/Digital Radiated Emissions 1 GHz – 10GHz - DATA

Fibar
 Single Switch 2, FGS-213
 RX
 120V 60Hz
 Radiated Emission Data

Marker No.	Test Frequency (MHz)	Meter Reading (dBuV) Detector	Antenna Factor dB/m	Path Loss dB	Corrected Reading		Peak		QP		Azimuth [Degs]	Height [cm]	Polarity
					dB(uVolts/ meter)	Limit 3m	Margin (dB)	Limit 3m	Margin (dB)				
1	1.946	65.79 Pk	32	-54	43.48	74	-30.52	54	-10.52	0-360	98	H	
2	2.264	65.07 Pk	21.7	-51	35.55	74	-38.45	54	-18.45	0-360	150	H	
3	3.554	64.3 Pk	23.3	-50	37.17	74	-36.83	54	-16.83	0-360	100	H	
4	4.2	64.13 Pk	28.3	-51	40.96	74	-33.04	54	-13.04	0-360	150	H	
5	7.196	59.06 Pk	29.7	-46	42.41	74	-31.59	54	-11.59	0-360	100	H	
6	8.01	58.93 Pk	36.1	-47	48.03	74	-25.97	54	-5.97	0-360	150	H	
7	1.953	65.89 Pk	32	-54	43.63	74	-30.37	54	-10.37	0-360	100	V	
8	2.429	64.69 Pk	21.9	-51	35.28	74	-38.72	54	-18.72	0-360	100	V	
9	3.524	63.84 Pk	23.4	-50	37.34	74	-36.66	54	-16.66	0-360	150	V	
10	4.196	63.96 Pk	28.3	-51	40.79	74	-33.21	54	-13.21	0-360	150	V	
11	7.372	58.44 Pk	31	-46	42.96	74	-31.04	54	-11.04	0-360	150	V	
12	8.06	58.34 Pk	36.2	-47	48.04	74	-25.96	54	-5.96	0-360	150	V	

Pk - Peak detector

All visible emissions are at least 6dB below the limit or under the noise floor, therefore no further measurement needed.

8. AC POWER LINE CONDUCTED EMISSIONS

LIMITS

FCC §15.207 (a)

RSS-Gen 8.8

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

TEST PROCEDURE

The EUT is placed on a non-conducting table 40 cm from the vertical ground plane and 80 cm above the horizontal ground plane. The EUT is configured in accordance with ANSI C63.10.


The receiver is set to a resolution bandwidth of 9 kHz. Peak detection is used unless otherwise noted as quasi-peak or average.

Line conducted data is recorded for both NEUTRAL and HOT lines.


RESULTS

8.1. TRANSMITTER – CONDUCTED EMISSIONS

LINE 1 PLOT – TX Mode

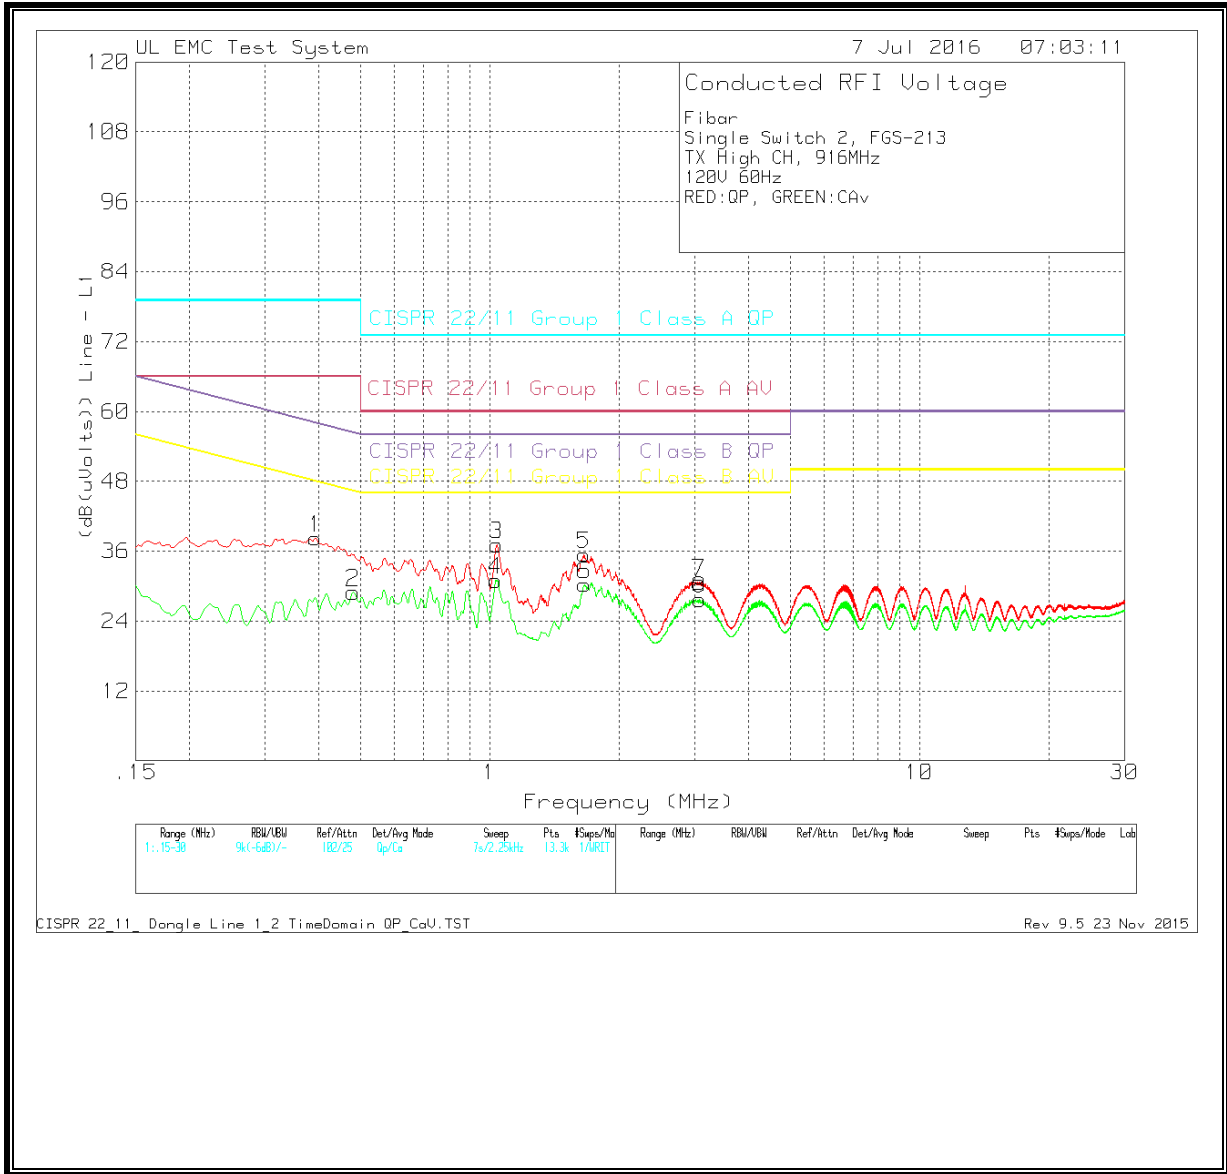

LINE 2 PLOT – TX Mode

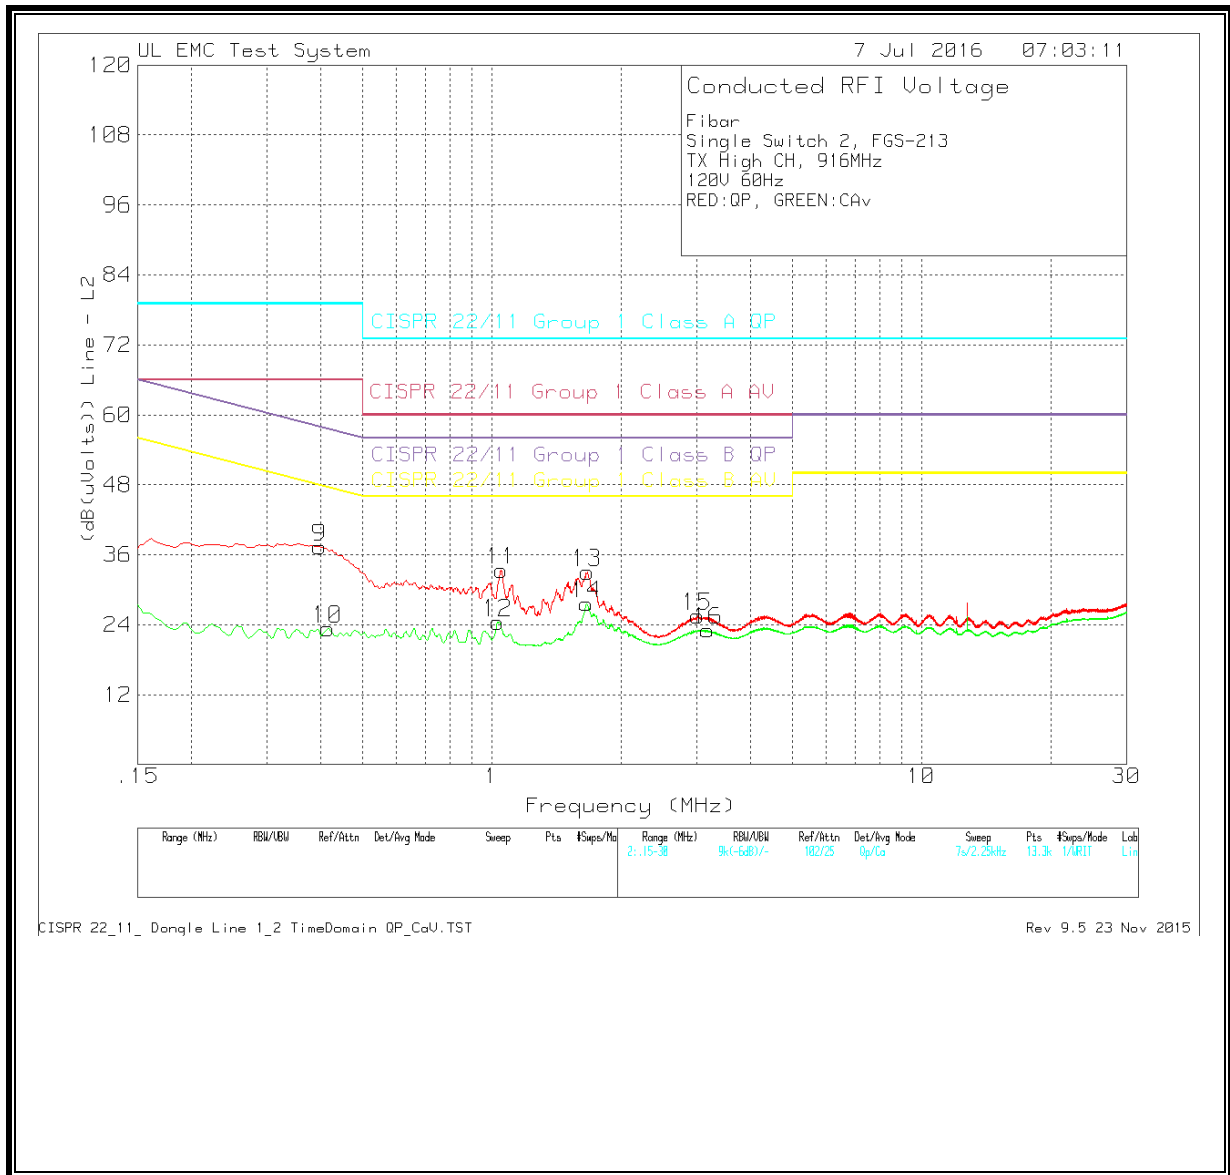

LINE 1 & 2 DATA – TX Mode


Fibar
 Single Switch 2, FGS-213
 TX High CH, 916MHz
 120V 60Hz
 Trace Markers

Marker No.	Test Frequency (MHz)	Meter Reading (dBUV)	Detector	Transducer Factor dB	Path dB	Corrected Reading (dB(uVolts))	QP Limit	QP Margin (dB)	AV Limit	AV Margin (dB)
Line - L1										
1	0.393	27.45	Qp		0	10.8	38.25	58	-19.75	-
2	0.48075	18.24	Ca		0	10.7	28.94	-	-	46.33 -17.39
3	1.03875	26.54	Qp		0	10.6	37.14	56	-18.86	-
4	1.032	20.41	Ca		0	10.6	31.01	-	-	46 -14.99
5	1.6575	24.87	Qp		0	10.6	35.47	56	-20.53	-
6	1.662	19.71	Ca		0	10.6	30.31	-	-	46 -15.69
7	3.075	20.08	Qp		0	10.6	30.68	56	-25.32	-
8	3.0795	17.13	Ca		0	10.6	27.73	-	-	46 -18.27
Line - N										
9	0.3975	26.06	Qp		0	11.3	37.36	57.91	-20.55	-
10	0.4155	12.02	Ca		0	11.3	23.32	-	-	47.54 -24.22
11	1.05225	22.26	Qp		0	11.1	33.36	56	-22.64	-
12	1.032	13.33	Ca		0	11.1	24.43	-	-	46 -21.57
13	1.66875	21.91	Qp		0	11.1	33.01	56	-22.99	-
14	1.662	16.52	Ca		0	11.1	27.62	-	-	46 -18.38
15	3.012	14.39	Qp		0	11.1	25.49	56	-30.51	-
16	3.183	11.89	Ca		0	11.2	23.09	-	-	46 -22.91


Qp - Quasi-Peak detector
 Ca - CISPR Average detection

8.2. RECEIVER / DIGITAL – CONDUCTED EMISSIONS

LINE 1 RESULTS – RX Mode

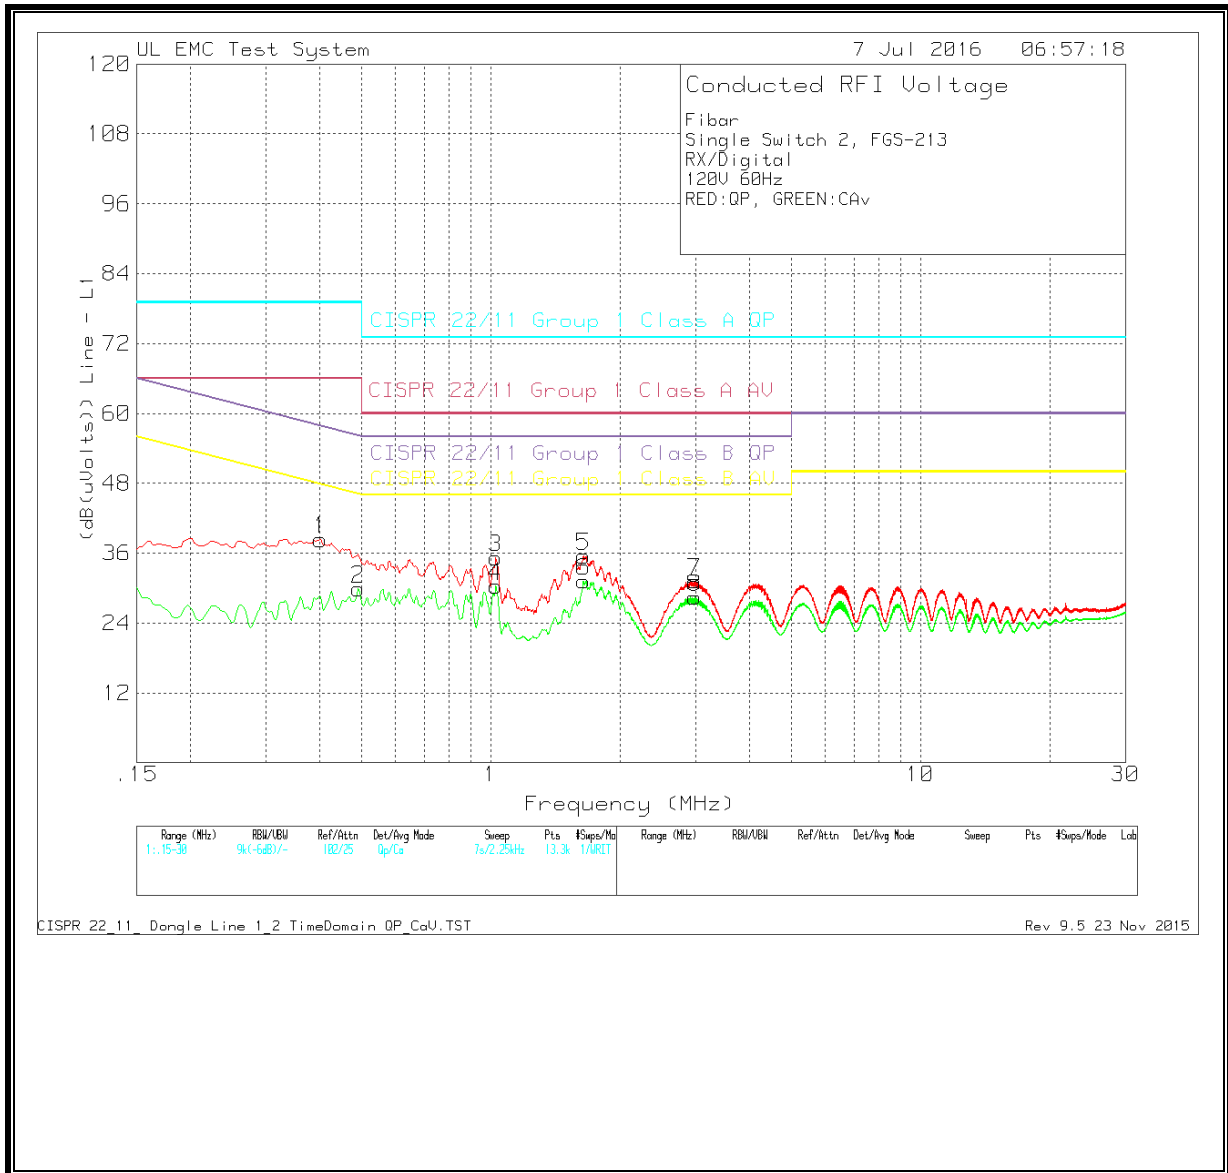

LINE 2 RESULTS – RX Mode

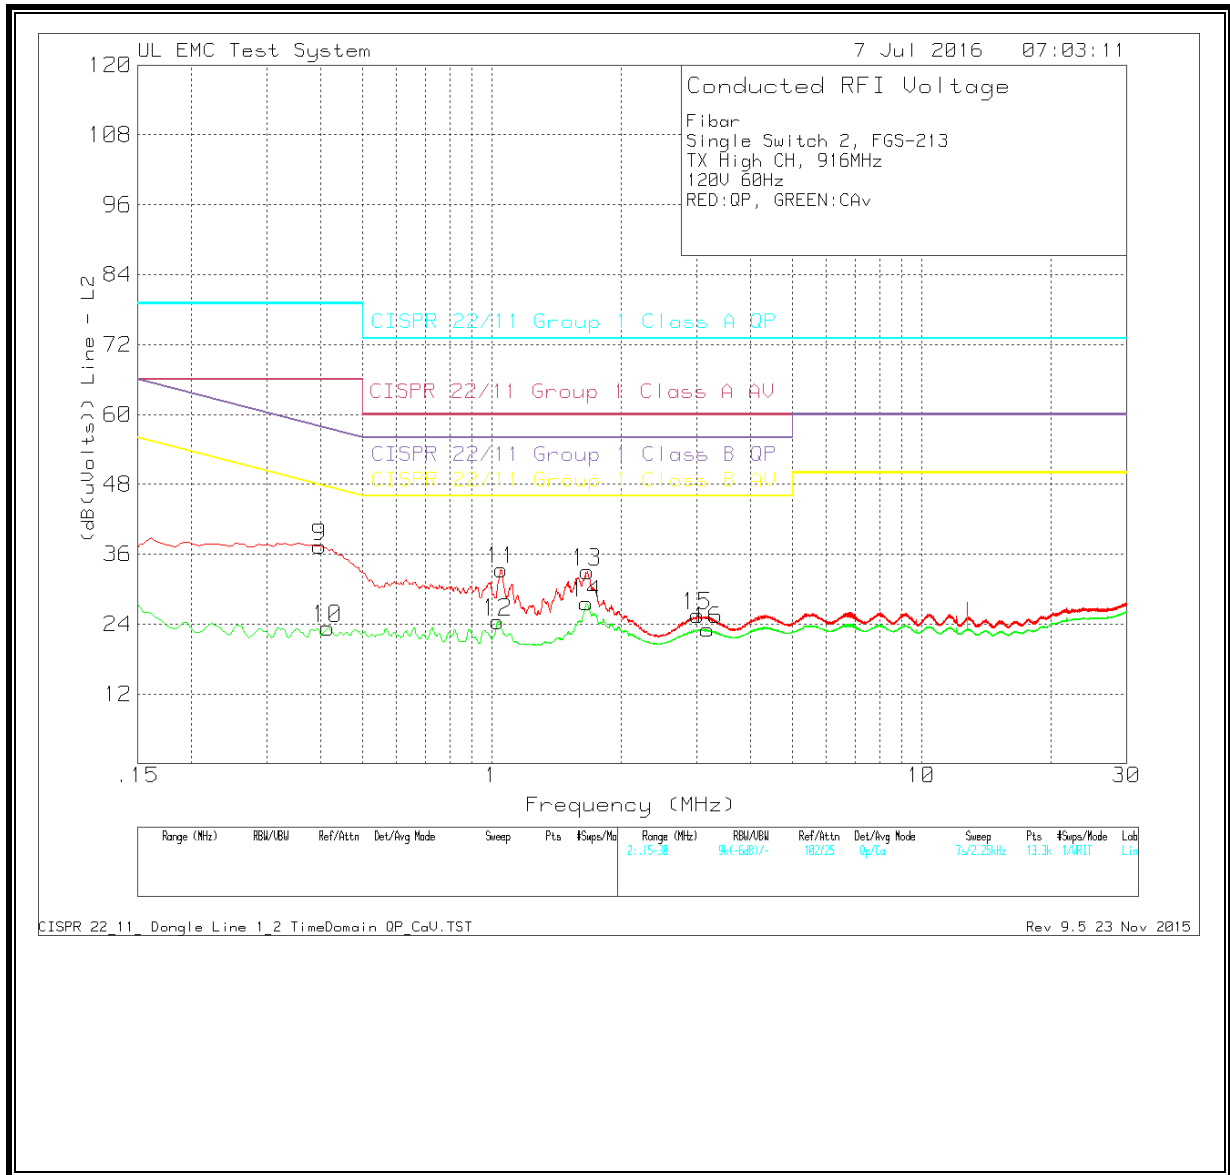

LINE 2 DATA – RX Mode

Fibar
 Single Switch 2, FGS-213
 TX High CH, 916MHz
 120V 60Hz
 Trace Markers

Marker No.	Test Frequency (MHz)	Meter Reading (dBuV)	Detector	Transducer Factor dB	Path dB	Corrected Reading (dB(uVolts))	QP Limit	QP Margin (dB)	AV Limit	AV Margin (dB)
Line - L1										
1	0.393	27.45	Qp		0	10.8	38.25	58	-19.75	-
2	0.48075	18.24	Ca		0	10.7	28.94	-	-	46.33 -17.39
3	1.03875	26.54	Qp		0	10.6	37.14	56	-18.86	-
4	1.032	20.41	Ca		0	10.6	31.01	-	-	46 -14.99
5	1.6575	24.87	Qp		0	10.6	35.47	56	-20.53	-
6	1.662	19.71	Ca		0	10.6	30.31	-	-	46 -15.69
7	3.075	20.08	Qp		0	10.6	30.68	56	-25.32	-
8	3.0795	17.13	Ca		0	10.6	27.73	-	-	46 -18.27
Line - N										
9	0.3975	26.06	Qp		0	11.3	37.36	57.91	-20.55	-
10	0.4155	12.02	Ca		0	11.3	23.32	-	-	47.54 -24.22
11	1.05225	22.26	Qp		0	11.1	33.36	56	-22.64	-
12	1.032	13.33	Ca		0	11.1	24.43	-	-	46 -21.57
13	1.66875	21.91	Qp		0	11.1	33.01	56	-22.99	-
14	1.662	16.52	Ca		0	11.1	27.62	-	-	46 -18.38
15	3.012	14.39	Qp		0	11.1	25.49	56	-30.51	-
16	3.183	11.89	Ca		0	11.2	23.09	-	-	46 -22.91

Qp - Quasi-Peak detector
 Ca - CISPR Average detection