



# FCC RF Test Report

**APPLICANT** : OnePlus Technology (Shenzhen) Co., Ltd.  
**EQUIPMENT** : Mobile Phone  
**BRAND NAME** : 1+, ONEPLUS  
**MODEL NAME** : CPH2451  
**FCC ID** : 2ABZ2-AA516  
**STANDARD** : FCC Part 15 Subpart C §15.247  
**CLASSIFICATION** : (DTS) Digital Transmission System  
**TEST DATE(S)** : Oct. 25, 2022 ~ Dec. 05, 2022

We, Sporton International Inc. (Shenzhen), would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Shenzhen), the test report shall not be reproduced except in full.

Jason Jia



Approved by: Jason Jia

**Sporton International Inc. (ShenZhen)**

**1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055**

**People's Republic of China**



# TABLE OF CONTENTS

**REVISION HISTORY..... 3**

**SUMMARY OF TEST RESULT ..... 4**

**1 GENERAL DESCRIPTION ..... 5**

    1.1 Applicant ..... 5

    1.2 Manufacturer ..... 5

    1.3 Product Feature of Equipment Under Test..... 5

    1.4 Product Specification of Equipment Under Test..... 6

    1.5 Modification of EUT ..... 7

    1.6 Testing Location ..... 7

    1.7 Test Software..... 8

    1.8 Applicable Standards..... 8

**2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST ..... 9**

    2.1 Carrier Frequency and Channel ..... 9

    2.2 Test Mode ..... 10

    2.3 Connection Diagram of Test System ..... 11

    2.4 Support Unit used in test configuration and system ..... 12

    2.5 EUT Operation Test Setup ..... 12

    2.6 Measurement Results Explanation Example..... 12

**3 TEST RESULT ..... 13**

    3.1 6dB and 99% Bandwidth Measurement ..... 13

    3.2 Output Power Measurement..... 14

    3.3 Power Spectral Density Measurement ..... 15

    3.4 Conducted Band Edges and Spurious Emission Measurement ..... 17

    3.5 Radiated Band Edges and Spurious Emission Measurement ..... 18

    3.6 AC Conducted Emission Measurement..... 22

    3.7 Antenna Requirements ..... 24

**4 LIST OF MEASURING EQUIPMENT ..... 25**

**5 UNCERTAINTY OF EVALUATION ..... 26**

**APPENDIX A. CONDUCTED TEST RESULTS**

**APPENDIX B. AC CONDUCTED EMISSION TEST RESULT**

**APPENDIX C. RADIATED SPURIOUS EMISSION**

**APPENDIX D. DUTY CYCLE PLOTS**

**APPENDIX E. SETUP PHOTOGRAPHS**





## SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(2)	6dB Bandwidth	$\geq 0.5\text{MHz}$	Pass	-
3.1	-	99% Bandwidth	-	Report Only	-
3.2	15.247(b)	Power Output Measurement	$\leq 30\text{dBm}$	Pass	-
3.3	15.247(e)	Power Spectral Density	$\leq 8\text{dBm}/3\text{kHz}$	Pass	-
3.4	15.247(d)	Conducted Band Edges	$\leq 20\text{dBc}$	Pass	-
		Conducted Spurious Emission		Pass	-
3.5	15.247(d)	Radiated Band Edges and Radiated Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 5.17 dB at 2390.000 MHz
3.6	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 10.16 dB at 0.150 MHz
3.7	15.203 & 15.247(b)	Antenna Requirement	15.203 & 15.247(b)	Pass	-

<b>Declaration of Conformity:</b>
The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits.
<b>Comments and Explanations:</b>
The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.



# 1 General Description

## 1.1 Applicant

**OnePlus Technology (Shenzhen) Co., Ltd.**

18C02, 18C03, 18C04, and 18C05, Shum Yip Terra Building, Binhe Avenue North, Futian District, Shenzhen, Guangdong, P.R. China.

## 1.2 Manufacturer

**OnePlus Technology (Shenzhen) Co., Ltd.**

18C02, 18C03, 18C04, and 18C05, Shum Yip Terra Building, Binhe Avenue North, Futian District, Shenzhen, Guangdong, P.R. China.

## 1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Mobile Phone
Brand Name	1+, ONEPLUS
Model Name	CPH2451
FCC ID	2ABZ2-AA516
IMEI Code	Conducted: 864921060035658 864921060035641 Conduction: 864921060029230/864921060029222 Radiation: 864921060029156/864921060029149
HW Version	11
SW Version	OxygenOS 13.0
EUT Stage	Production Unit

**Remark:** The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.



### 1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
<b>Tx/Rx Channel Frequency Range</b>	2412 MHz ~ 2462 MHz
<b>Maximum (Peak) Output Power to antenna</b>	<b>&lt;MIMO Ant. 12+7&gt;</b> 802.11b : 25.44 dBm (0.3499 W) 802.11g : 25.54 dBm (0.3581 W) 802.11n HT20 : 25.95 dBm (0.3936 W) 802.11n HT40 : 26.23 dBm (0.4198 W) 802.11ac VHT20 : 25.81 dBm (0.3811 W) 802.11ac VHT40 : 26.22 dBm (0.4188 W) 802.11ax HE20 : 26.51 dBm (0.4477 W) 802.11ax HE40 : 26.39 dBm (0.4355 W) 802.11be EHT20 : 26.62 dBm (0.4592 W) 802.11be EHT40 : 26.54 dBm (0.4508 W)
<b>99% Occupied Bandwidth</b>	<b>&lt;MIMO Ant. 12+7&gt;</b> 802.11b : 14.346MHz 802.11g : 18.462MHz 802.11be EHT20 : 19.700MHz 802.11be EHT40: 38.601MHz
<b>Antenna Type / Gain</b>	<Ant.7>: IFA Antenna / -3.4 dBi <Ant.12>: IFA Antenna / -1.6 dBi
<b>Type of Modulation</b>	802.11b : DSSS (DBPSK / DQPSK / CCK) 802.11g/n: OFDM (BPSK / QPSK / 16QAM / 64QAM) 802.11ac: OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM) 802.11ax: OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM / 1024QAM) 802.11be: OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM / 1024QAM / 4096QAM)

**Note:**

1. For WLAN SISO & MIMO mode, the whole testing has assessed only MIMO mode by referring to the higher normal conducted power.
2. For 802.11n HT20/ac VHT20/ ax HE20/be EHT20 mode and 802.11n HT40/ac VHT40/ax HE40/be EHT40 mode, the whole testing have assessed only 802.11be EHT20/EHT40 by referring to the higher output power.
3. 802.11ax/be support OFDMA full RU tone and partial RU tone, both full RU and partial RU-left (for low CH) and partial RU-right (for high CH) test output power, the full RU power > partial RU, therefore the full RU perform full test to cover partial RU except for PSD/ Band edge/ RSE.
4. 802.11be support OFDMA for small size RU, 52Tone + 26 Tone or 106Tone + 26Tone, test combination as below, which is less than full RU conducted power, therefore have assessed only Power Density/ Band edge / RSE.
  - a. For Low channel, 52Tone, Index38 + 26Tone, Index1 and 106Tone, Index53 + 26Tone, Index4
  - b. For High channel, 52Tone, Index39 + 26Tone, Index7 and 106Tone, Index54 + 26Tone, Index4

Only the worse cases are shown in this report.
5. The worse cases of RSE for partial RU and small size RU are shown in this report.



### 1.5 Modification of EUT

No modifications are made to the EUT during all test items.

### 1.6 Testing Location

Sporton International Inc. (ShenZhen) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.01.

<b>Test Firm</b>	Sporton International Inc. (ShenZhen)		
<b>Test Site Location</b>	1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055 People's Republic of China TEL: +86-755-86379589 FAX: +86-755-86379595		
<b>Test Site No.</b>	<b>Sporton Site No.</b>	<b>FCC Designation No.</b>	<b>FCC Test Firm Registration No.</b>
	CO01-SZ TH01-SZ	CN1256	421272

<b>Test Firm</b>	Sporton International Inc. (ShenZhen)		
<b>Test Site Location</b>	101, 1st Floor, Block B, Building 1, No. 2, Tengfeng 4th Road, Fenghuang Community, Fuyong Street, Baoan District, Shenzhen City Guangdong Province China 518103 TEL: +86-755-33202398		
<b>Test Site No.</b>	<b>Sporton Site No.</b>	<b>FCC Designation No.</b>	<b>FCC Test Firm Registration No.</b>
	03CH04-SZ	CN1256	421272



### 1.7 Test Software

Item	Site	Manufacturer	Name	Version
1.	03CH04-SZ	AUDIX	E3	6.2009-8-24
2.	CO01-SZ	AUDIX	E3	6.120613b

### 1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 15 Subpart C §15.247
- ♦ FCC KDB 558074 D01 15.247 Meas Guidance v05r02
- ♦ FCC KDB 662911 D01 Multiple Transmitter Output v02r01.
- ♦ ANSI C63.10-2013

**Remark:**

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.





## 2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (X plane) were recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

### 2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	1	2412	7	2442
	2	2417	8	2447
	3	2422	9	2452
	4	2427	10	2457
	5	2432	11	2462
	6	2437		



## 2.2 Test Mode

Final test modes are considering the modulation and worse data rates as below table.

### MIMO Antenna


Modulation	Data Rate
802.11b	1 Mbps
802.11g	6 Mbps
802.11be EHT20	MCS0
802.11be EHT40	MCS0

Test Cases	
AC Conducted Emission	Mode 1 :GSM 850 Idle+BT Link+ WLAN Link(2.4G)+USB Cable (Charging From Adaptor)
<b>Remark:</b> For Radiated Test Cases, The tests were performed with Adapter and USB Cable	


Simultaneous transmission
802.11be EHT20_TX_CH01 + LTE_Band 48 Tx

## 2.3 Connection Diagram of Test System

For Conducted Emission:

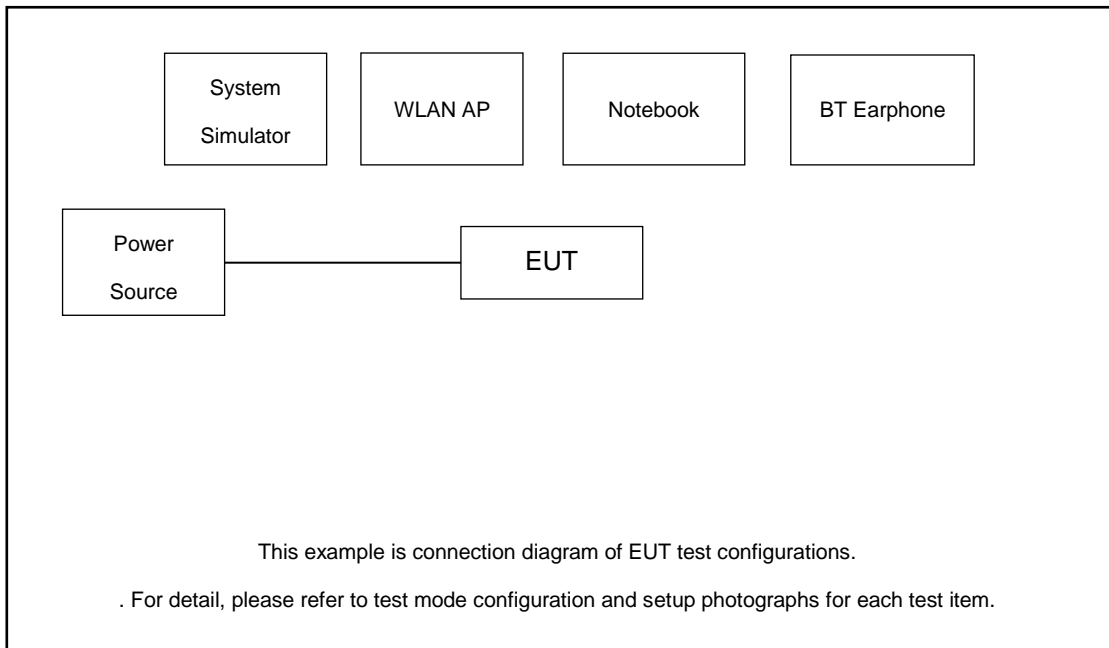

For Radiated Emission:

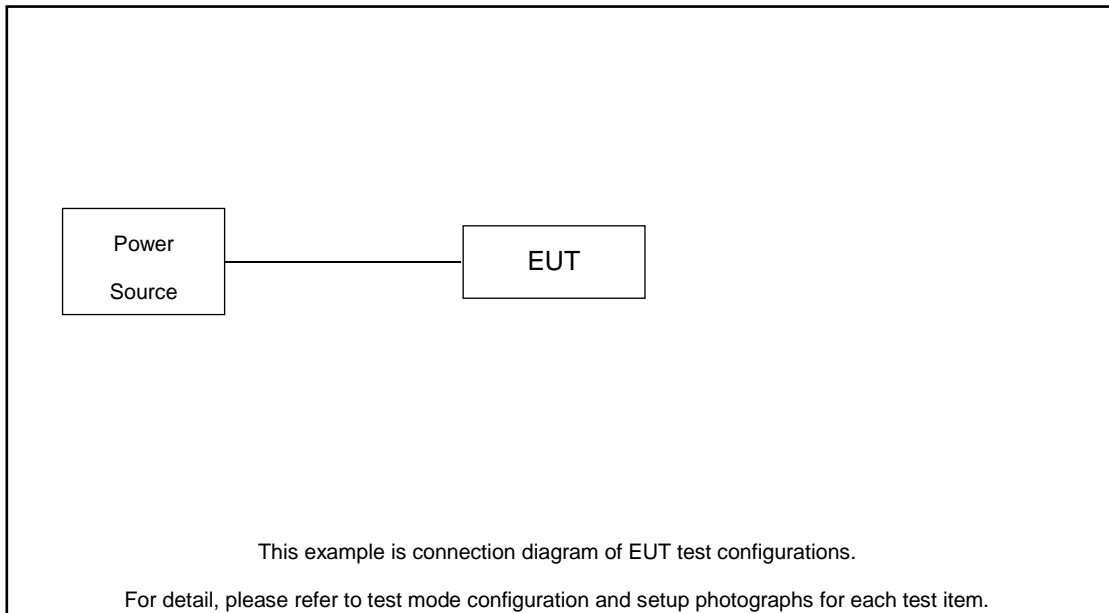

## 2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Bluetooth Earphone	Samsung	EO-MG900	N/A	N/A	N/A
2.	WLAN AP	D-Link	DIR-820L	KA2IR820LA1	N/A	Unshielded, 1.8m
3.	Notebook	Lenovo	E540	FCC DoC	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
4.	Base Station	Anritsu	MT8821C	N/A	N/A	Unshielded, 1.8m

## 2.5 EUT Operation Test Setup

For WLAN RF test items, an engineering test program was provided and enabled to make EUT continuous transmit.

For AC power line conducted emissions, the EUT was set to connect with the WLAN AP under large package sizes transmission.

## 2.6 Measurement Results Explanation Example

**For all conducted test items:**

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example:

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

*Offset = RF cable loss + attenuator factor.*

Following shows an offset computation example with cable loss 2.20 dB and 20dB attenuator.

$$\begin{aligned}
 \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\
 &= 2.20 + 20 = 22.20 \text{ (dB)}
 \end{aligned}$$

### 3 Test Result

#### 3.1 6dB and 99% Bandwidth Measurement

##### 3.1.1 Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.


##### 3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

##### 3.1.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 11.8
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) = 1%~5% of OBW and set the Video bandwidth (VBW) = 3MHz.
6. Measure and record the results in the test report.

##### 3.1.4 Test Setup

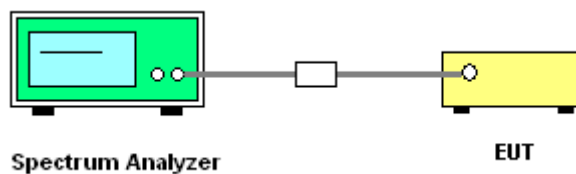

##### 3.1.5 Test Result of 6dB and 99% Occupied Bandwidth

Please refer to Appendix A.

## 3.2 Output Power Measurement

### 3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. If transmitting antenna with directional gain greater than 6dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.


### 3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

### 3.2.3 Test Procedures

1. The testing follows the Measurement Procedure of ANSI C63.10-2013 clause 11.9.1.3 PKPM1 Peak power meter or ANSI C63.10-2013 clause 11.9.2.3.1 Method AVGPM method.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.
5. For MIMO mode, calculation method follows FCC KDB 662911 D01 Multiple Transmitter Output v02r01.

### 3.2.4 Test Setup

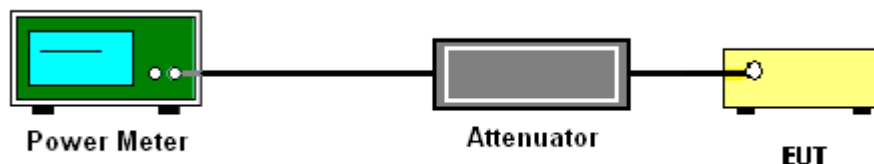

### 3.2.5 Test Result of Peak Output Power

Please refer to Appendix A.

### 3.2.6 Test Result of Average Output Power (Reporting Only)

Please refer to Appendix A.



### 3.3 Power Spectral Density Measurement

#### 3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.

#### 3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

#### 3.3.3 Test Procedures

1. The testing follows Measurement Procedure of ANSI C63.10-2013 clause 11.10.2 Method PKPSD.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.
7. For MIMO mode, calculation method follows FCC KDB 662911 D01 Multiple Transmitter Output v02r01.

Method (a): Measure and sum the spectra across the outputs.

The total final Power Spectral Density is the bin-by-bin summation to obtain the combined spectrum. For the device with 2 transmitter outputs. The spectrum measurements of the individual outputs are all performed with the same span and number of points, the spectrum value in the first spectral bin of output 1 is summed with that in the first spectral bin of output 2 to obtain the value for the first frequency bin of the summed spectrum.


Method (b): Measure and sum spectral maxima across the outputs.

The measurement on each individual output were performed with the same span and number on each individual output. The maximum value (peak) of each spectrum is determined. These maximum values are then summed mathematically in linear power units across the outputs.

Method (c): Measure and add  $10 \log(N_{\text{ANT}})$  dB, where  $N_{\text{ANT}}$  is the number of outputs.

The measurement on each individual output were performed with the same span and number on each individual output. The quantity  $10 \log(N_{\text{ANT}})$  dB is added to each spectrum value before comparing to the emission limit.

### 3.3.4 Test Setup

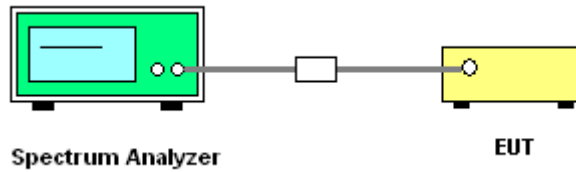

### 3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.



## 3.4 Conducted Band Edges and Spurious Emission Measurement

### 3.4.1 Limit of Conducted Band Edges and Spurious Emission Measurement

In any 100 kHz bandwidth outside of the authorized frequency band, the emissions which fall in the non-restricted bands shall be attenuated at least 20 dB / 30dB relative to the maximum PSD level in 100 kHz by RF conducted measurement.


### 3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

### 3.4.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 11.13
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB per 15.247(d).
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

### 3.4.4 Test Setup

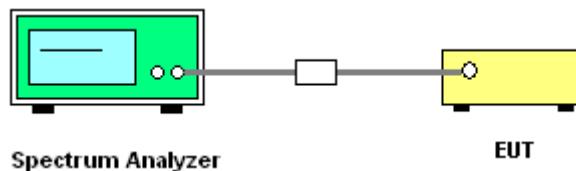

### 3.4.5 Test Result of Conducted Band Edges and Spurious Emission

Please refer to Appendix A.



### 3.5 Radiated Band Edges and Spurious Emission Measurement

#### 3.5.1 Limit of Radiated band edge and Spurious Emission Measurement

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

#### 3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.




### 3.5.3 Test Procedures


1. The testing follows ANSI C63.10-2013 clause 11.11 & 11.12
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than peak limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
8. Use the following spectrum analyzer settings:
  - (1) Span shall wide enough to fully capture the emission being measured;
  - (2) Set RBW=100 kHz for  $f < 1$  GHz; VBW  $\geq$  RBW; Sweep = auto; Detector function = peak; Trace = max hold;
  - (3) Set RBW = 1 MHz, VBW= 3MHz for  $f \geq 1$  GHz for peak measurement.  
For average measurement:
    - VBW = 10 Hz, when duty cycle is no less than 98 percent.
    - VBW  $\geq 1/T$ , when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

### 3.5.4 Test Setup


For radiated emissions below 30MHz

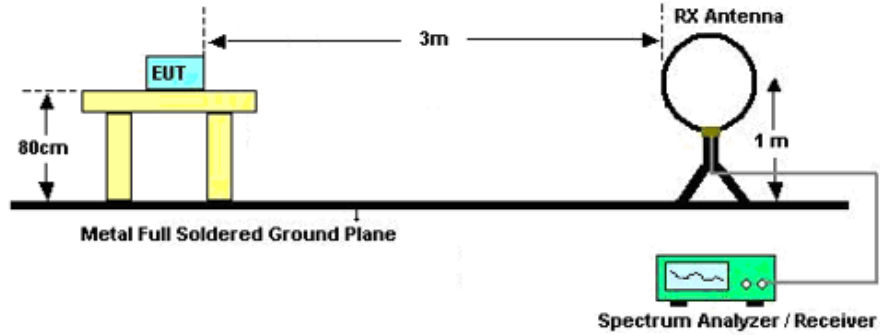

For radiated emissions from 30MHz to 1GHz

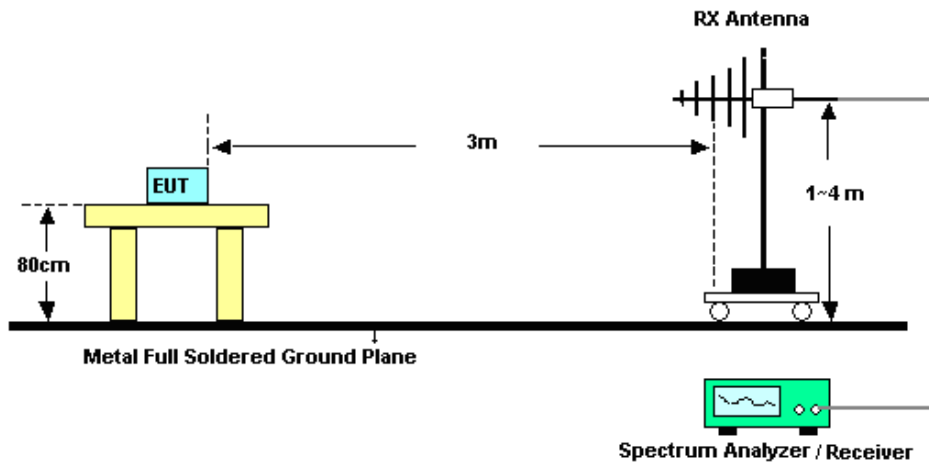

For radiated emissions above 1GHz

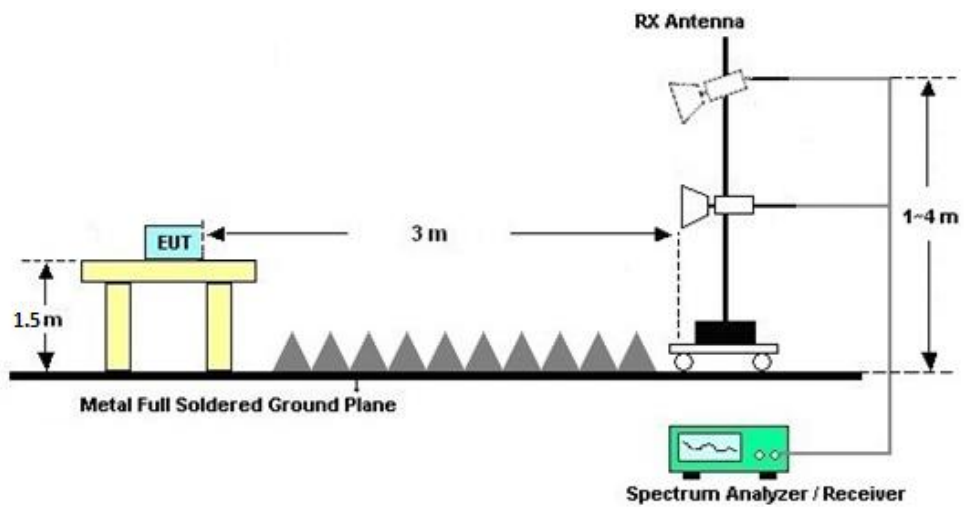



### **3.5.5 Test Results of Radiated Spurious Emissions (9kHz ~ 30MHz)**

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

### **3.5.6 Test Result of Radiated Spurious at Band Edges**

Please refer to Appendix C.

### **3.5.7 Duty Cycle**

Please refer to Appendix D.

### **3.5.8 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic or 40GHz, whichever is lower)**

Please refer to Appendix C.

## 3.6 AC Conducted Emission Measurement

### 3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of Emission (MHz)	Conducted Limit (dB $\mu$ V)	
	Quasi-Peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.


### 3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

### 3.6.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room, and it was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF bandwidth = 9kHz) with Maximum Hold Mode.

### 3.6.4 Test Setup

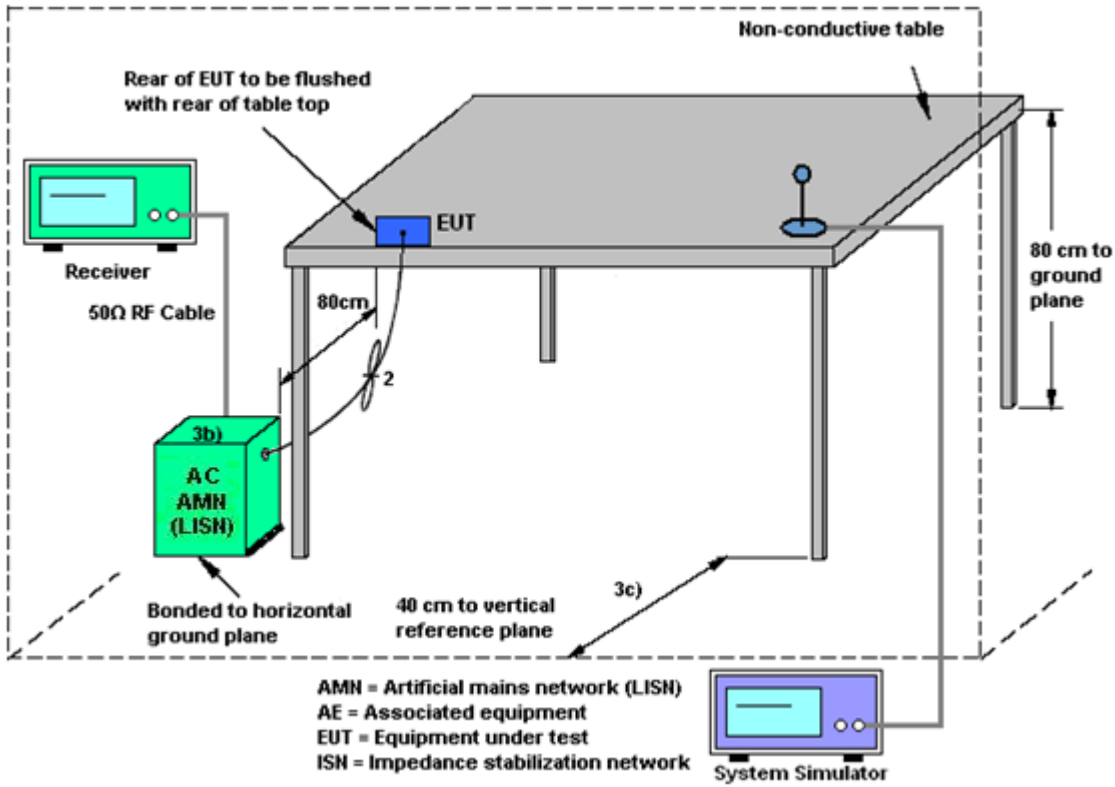

### 3.6.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



### 3.7 Antenna Requirements

#### 3.7.1 Standard Applicable

If directional gain of transmitting Antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached Antenna or of an Antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

#### 3.7.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

#### 3.7.3 Antenna Gain

<CDD Modes >

FCC KDB 662911 D01 Multiple Transmitter Output v02r01

For CDD transmissions, directional gain is calculated as

Directional gain =  $G_{ANT}$  + Array Gain, where Array Gain is as follows.

For power spectral density (PSD) measurements on all devices,

Array Gain =  $10 \log(N_{ANT}/N_{SS}=1)$  dB.

For power measurements on IEEE 802.11 devices,

Array Gain = 0 dB (i.e., no array gain) for  $N_{ANT} \leq 4$ .

Directional gain may be calculated by using the formulas applicable to equal gain antennas with  $G_{ANT}$  set equal to the gain of the antenna having the highest gain;

The EUT supports CDD mode.

For power, the directional gain  $G_{ANT}$  is set equal to the antenna having the highest gain, i.e., F)2)f)i).

For PSD, the directional gain calculation is following F)2)f)ii) of KDB 662911 D01 v02r01.

The power and PSD limit should be modified if the directional gain of EUT is over 6 dBi,

The directional gain "DG" is calculated as following table.

<CDD Modes>						
	Ant. 7 (dBi)	Ant. 12 (dBi)	DG for Power (dBi)	DG for PSD (dBi)	Power Limit Reduction (dB)	PSD Limit Reduction (dB)
2.4 GHz	-3.40	-1.60	-1.60	0.56	0.00	0.00





## 4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101078	10Hz~40GHz	Apr. 07, 2022	Oct.25,2022~Dec.05,2022	Apr. 06, 2023	Conducted (TH01-SZ)
Pulse Power Sensor	Anritsu	MA2411B	1339473	30MHz~40GHz	Dec. 28,2021	Oct.25,2022~Dec.05,2022	Dec. 27,2022	Conducted (TH01-SZ)
Power Meter	Anritsu	ML2495A	1542004	50MHz Bandwidth	Dec. 28,2021	Oct.25,2022~Dec.05,2022	Dec. 27,2022	Conducted (TH01-SZ)
EMI Test Receiver	R&S	ESR7	101404	9kHz~7GHz	Oct. 19, 2022	Dec. 05, 2022	Oct. 18, 2023	Radiation (03CH04-SZ)
EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY55150213	10Hz~44GHz	Jul. 07, 2022	Dec. 05, 2022	Jul. 06, 2023	Radiation (03CH04-SZ)
Loop Antenna	R&S	HFH2-Z2	100354	9kHz~30MHz	Jun. 28, 2022	Dec. 05, 2022	Jun. 27, 2023	Radiation (03CH04-SZ)
Bilog Antenna	TeseQ	CBL6111D	41909	30MHz~1GHz	Apr. 27, 2022	Dec. 05, 2022	Apr. 26, 2023	Radiation (03CH04-SZ)
Double Ridge Horn Antenna	SCHWARZBECK	BBHA9120D	9120D-1474	1GHz~18GHz	Jul. 07, 2022	Dec. 05, 2022	Jul. 06, 2023	Radiation (03CH04-SZ)
Horn Antenna	SCHWARZBECK	BBHA9170	9170#679	15GHz~40GHz	Jul. 07, 2022	Dec. 05, 2022	Jul. 06, 2023	Radiation (03CH04-SZ)
Amplifier	Burgeon	BPA-530	102211	0.01Hz~3000MHz	Oct. 19, 2022	Dec. 05, 2022	Oct. 18, 2023	Radiation (03CH04-SZ)
HF Amplifier	MITEQ	AMF-7D-00101800-30-10P-R	1943528	1GHz~18GHz	Oct. 19, 2022	Dec. 05, 2022	Oct. 18, 2023	Radiation (03CH04-SZ)
HF Amplifier	MITEQ	TTA1840-35-HG	1871923	18GHz~40GHz	Jul. 06, 2022	Dec. 05, 2022	Jul. 05, 2023	Radiation (03CH04-SZ)
Amplifier	Agilent Technologies	83017A	MY57280136	500MHz~26.5GHz	Sep. 30, 2022	Dec. 05, 2022	Sep. 29, 2023	Radiation (03CH04-SZ)
AC Power Source	APC	AFV-S-600B	F119050019	N/A	Nov. 10, 2022	Dec. 05, 2022	Nov. 09, 2023	Radiation (03CH04-SZ)
Turn Table	EM	EM1000	N/A	0~360 degree	NCR	Dec. 05, 2022	NCR	Radiation (03CH04-SZ)
Antenna Mast	EM	EM1000	N/A	1 m~4 m	NCR	Dec. 05, 2022	NCR	Radiation (03CH04-SZ)
EMI Receiver	R&S	ESR7	101630	9kHz~7GHz;	Jul. 07, 2022	Nov. 10, 2022	Jul. 06, 2023	Conduction (CO01-SZ)
AC LISN	R&S	ENV216	100063	9kHz~30MHz	Sep. 15, 2022	Nov. 10, 2022	Sep. 14, 2023	Conduction (CO01-SZ)
AC LISN (for auxiliary equipment)	EMCO	3816/2SH	00103892	9kHz~30MHz	Oct. 17, 2022	Nov. 10, 2022	Oct. 16, 2023	Conduction (CO01-SZ)
AC Power Source	Chroma	61602	616020000891	100Vac~250Vac	Jul. 07, 2022	Nov. 10, 2022	Jul. 06, 2023	Conduction (CO01-SZ)

NCR: No Calibration Required



## 5 Uncertainty of Evaluation

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10-2013. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

### Uncertainty of Conducted Measurement

Test Item	Uncertainty
Conducted Power	±1.34 dB
Conducted Emissions	±1.34 dB
Occupied Channel Bandwidth	0.012MHz
Conducted Power Spectral Density	±1.32 dB

### Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.94 dB
---	---------

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.1 dB
---	--------

### Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	4.8 dB
---	--------

### Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.1 dB
---	--------

----- THE END -----



## **Appendix A. Conducted Test Results**




### DTS Bandwidth


#### Test Result


TestMode	Antenna	Freq(MHz)	DTS BW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11B-CDD	Ant12	2412	8.00	2408.00	2416.00	0.5	PASS
	Ant7	2412	8.04	2407.96	2416.00	0.5	PASS
	Ant12	2437	8.08	2432.96	2441.04	0.5	PASS
	Ant7	2437	7.12	2433.44	2440.56	0.5	PASS
	Ant12	2462	8.04	2457.96	2466.00	0.5	PASS
	Ant7	2462	8.08	2457.96	2466.04	0.5	PASS
11G-CDD	Ant12	2412	16.32	2403.84	2420.16	0.5	PASS
	Ant7	2412	16.36	2403.80	2420.16	0.5	PASS
	Ant12	2437	16.32	2428.84	2445.16	0.5	PASS
	Ant7	2437	16.32	2428.84	2445.16	0.5	PASS
	Ant12	2462	16.36	2453.80	2470.16	0.5	PASS
	Ant7	2462	16.32	2453.84	2470.16	0.5	PASS
11BE20MIMO	Ant12	2412	18.96	2402.52	2421.48	0.5	PASS
	Ant7	2412	19.00	2402.48	2421.48	0.5	PASS
	Ant12	2437	19.04	2427.48	2446.52	0.5	PASS
	Ant7	2437	19.00	2427.48	2446.48	0.5	PASS
	Ant12	2462	19.00	2452.48	2471.48	0.5	PASS
	Ant7	2462	19.04	2452.48	2471.52	0.5	PASS
11BE40MIMO	Ant12	2422	38.24	2402.88	2441.12	0.5	PASS
	Ant7	2422	38.16	2402.88	2441.04	0.5	PASS
	Ant12	2437	38.24	2417.88	2456.12	0.5	PASS
	Ant7	2437	38.32	2417.88	2456.20	0.5	PASS
	Ant12	2452	38.24	2432.80	2471.04	0.5	PASS
	Ant7	2452	38.24	2432.80	2471.04	0.5	PASS




### Test Graphs

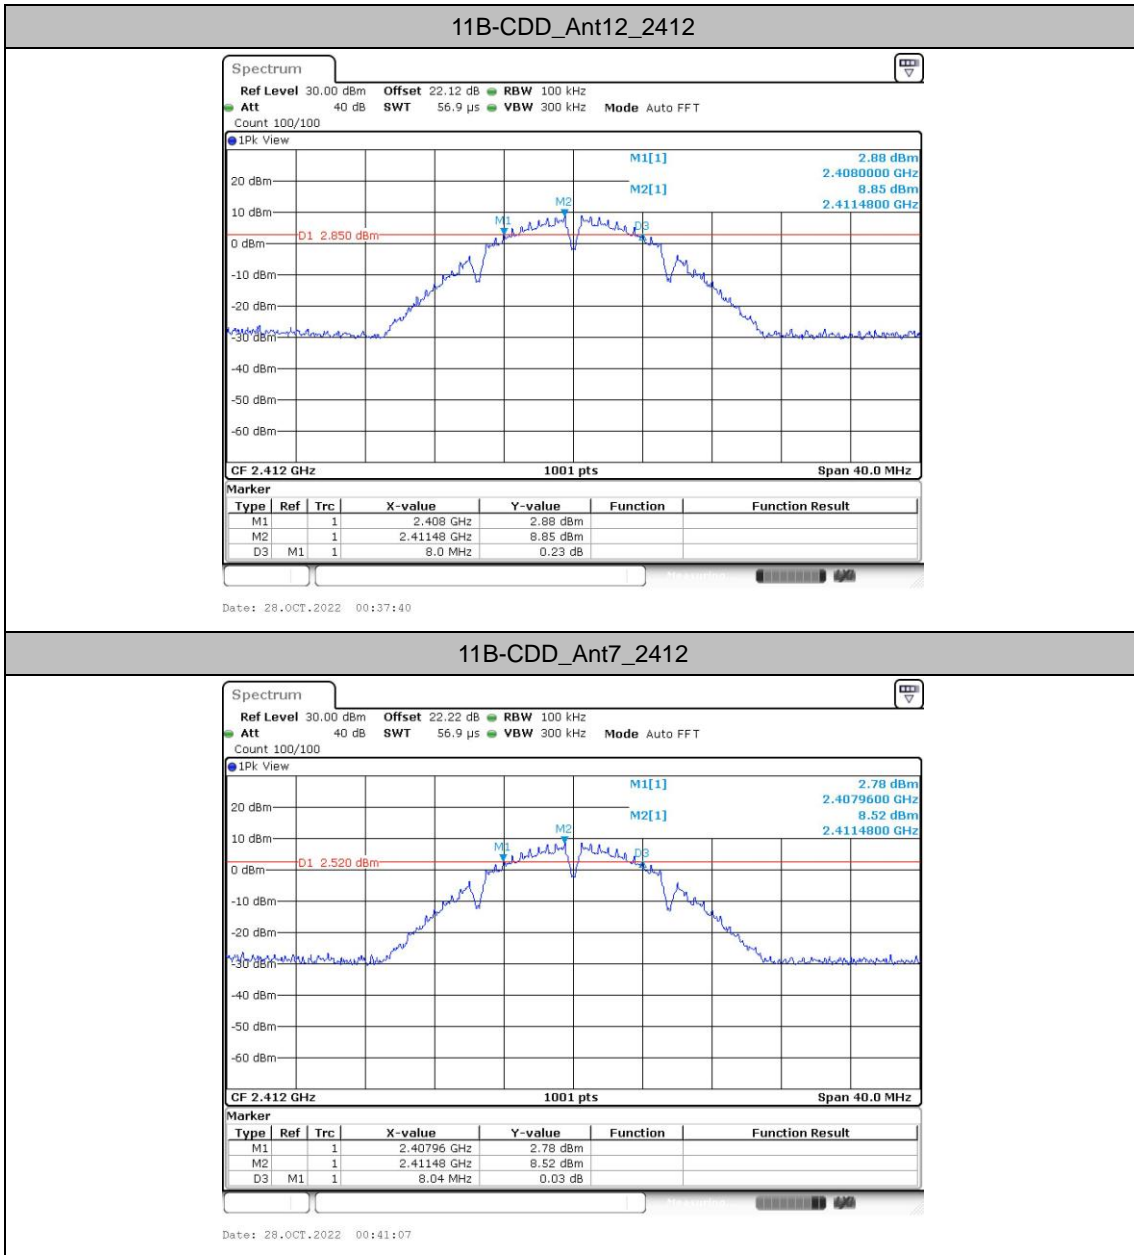


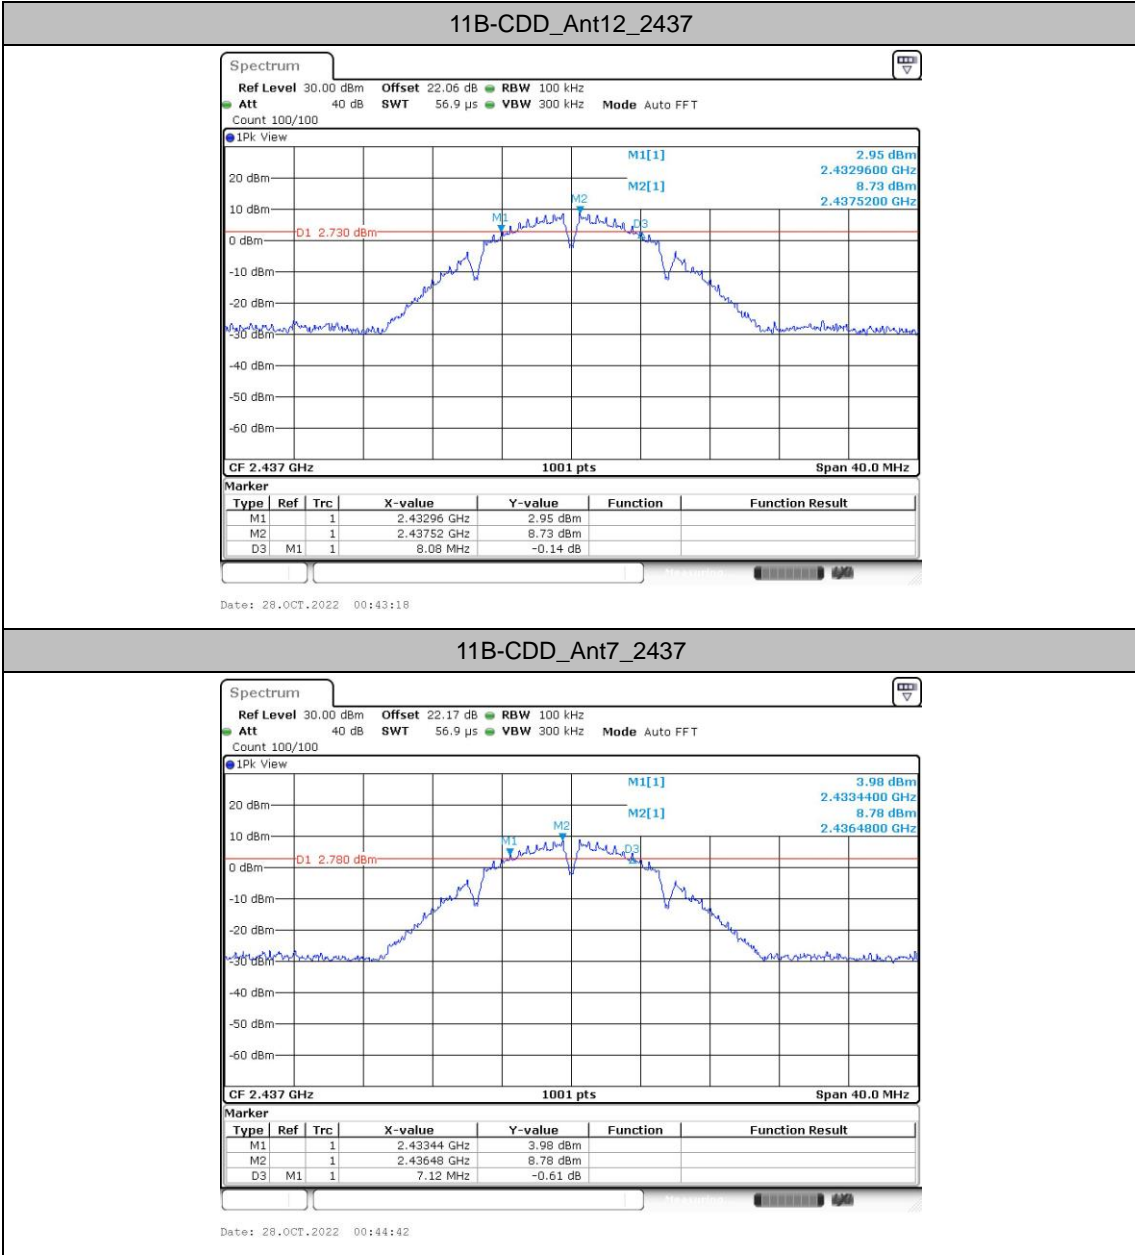


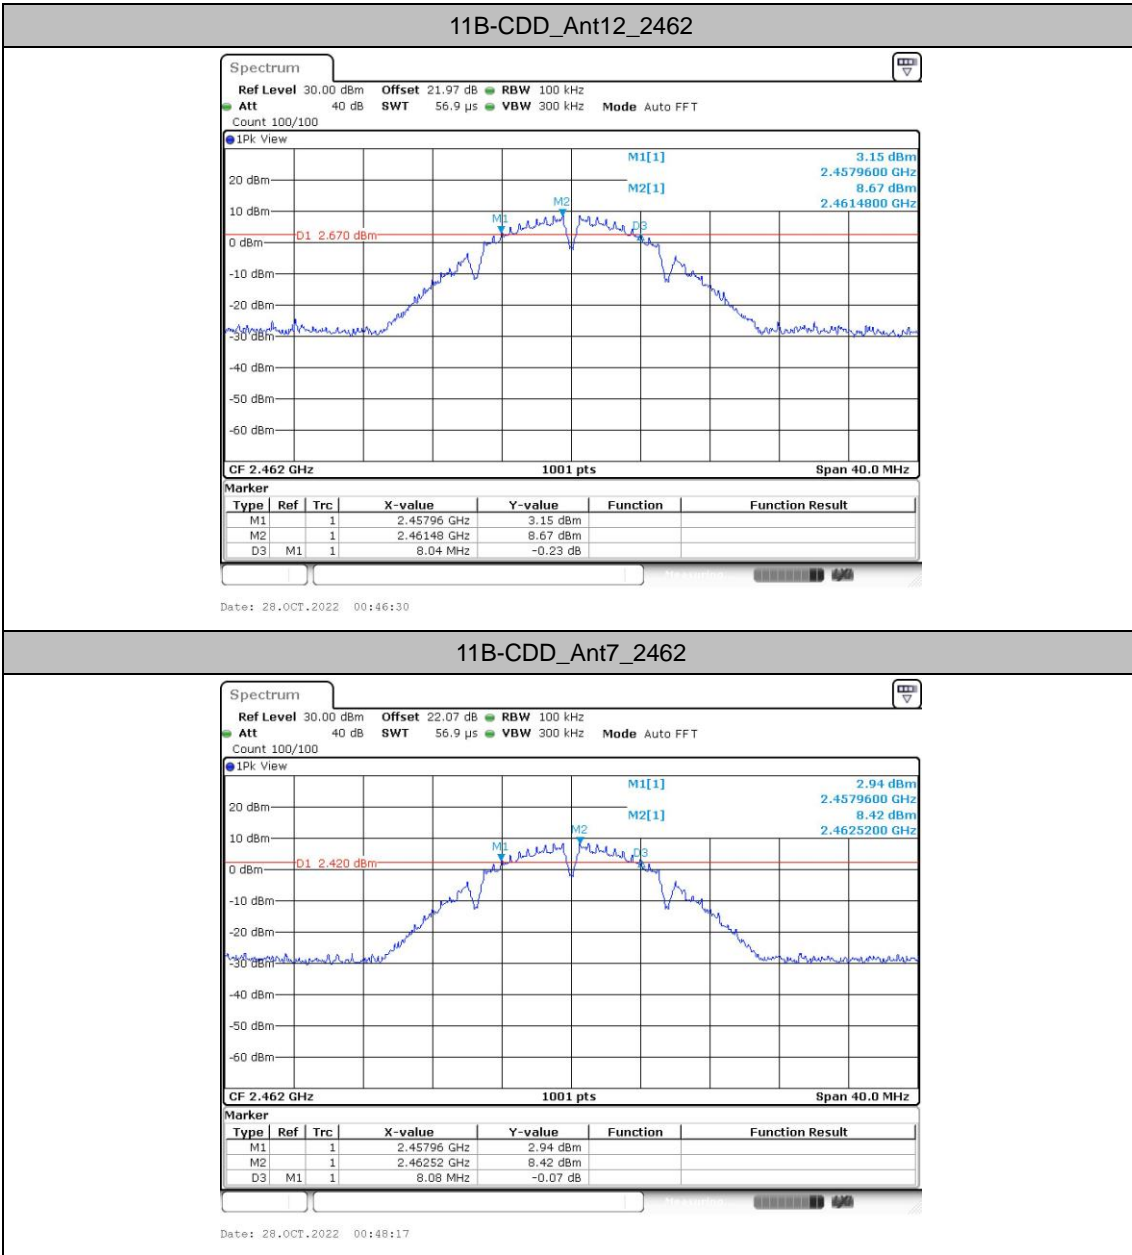


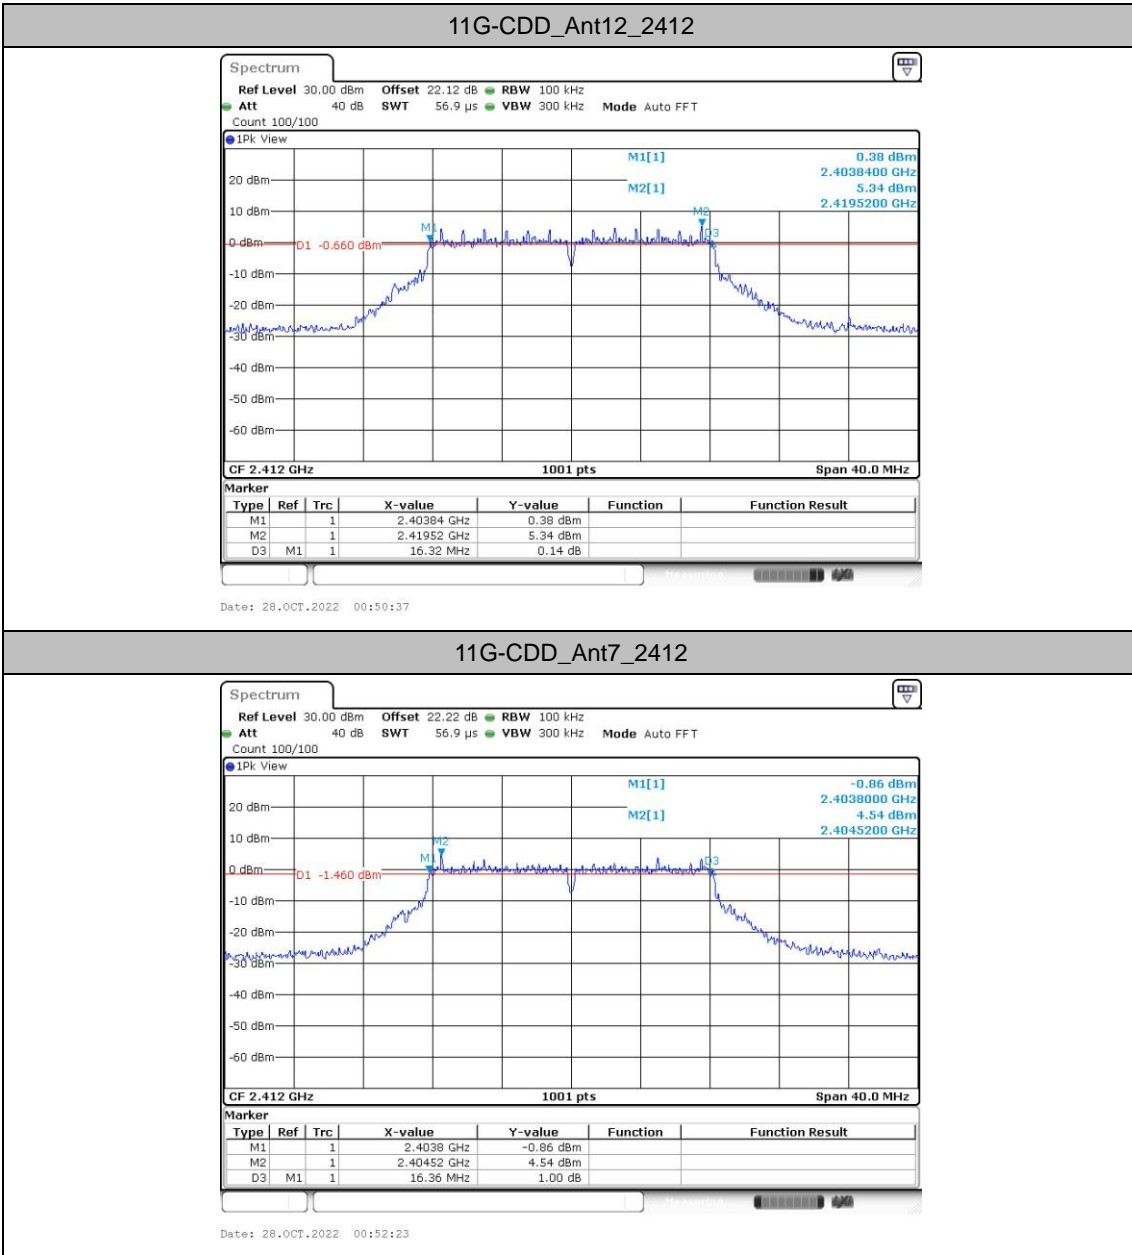





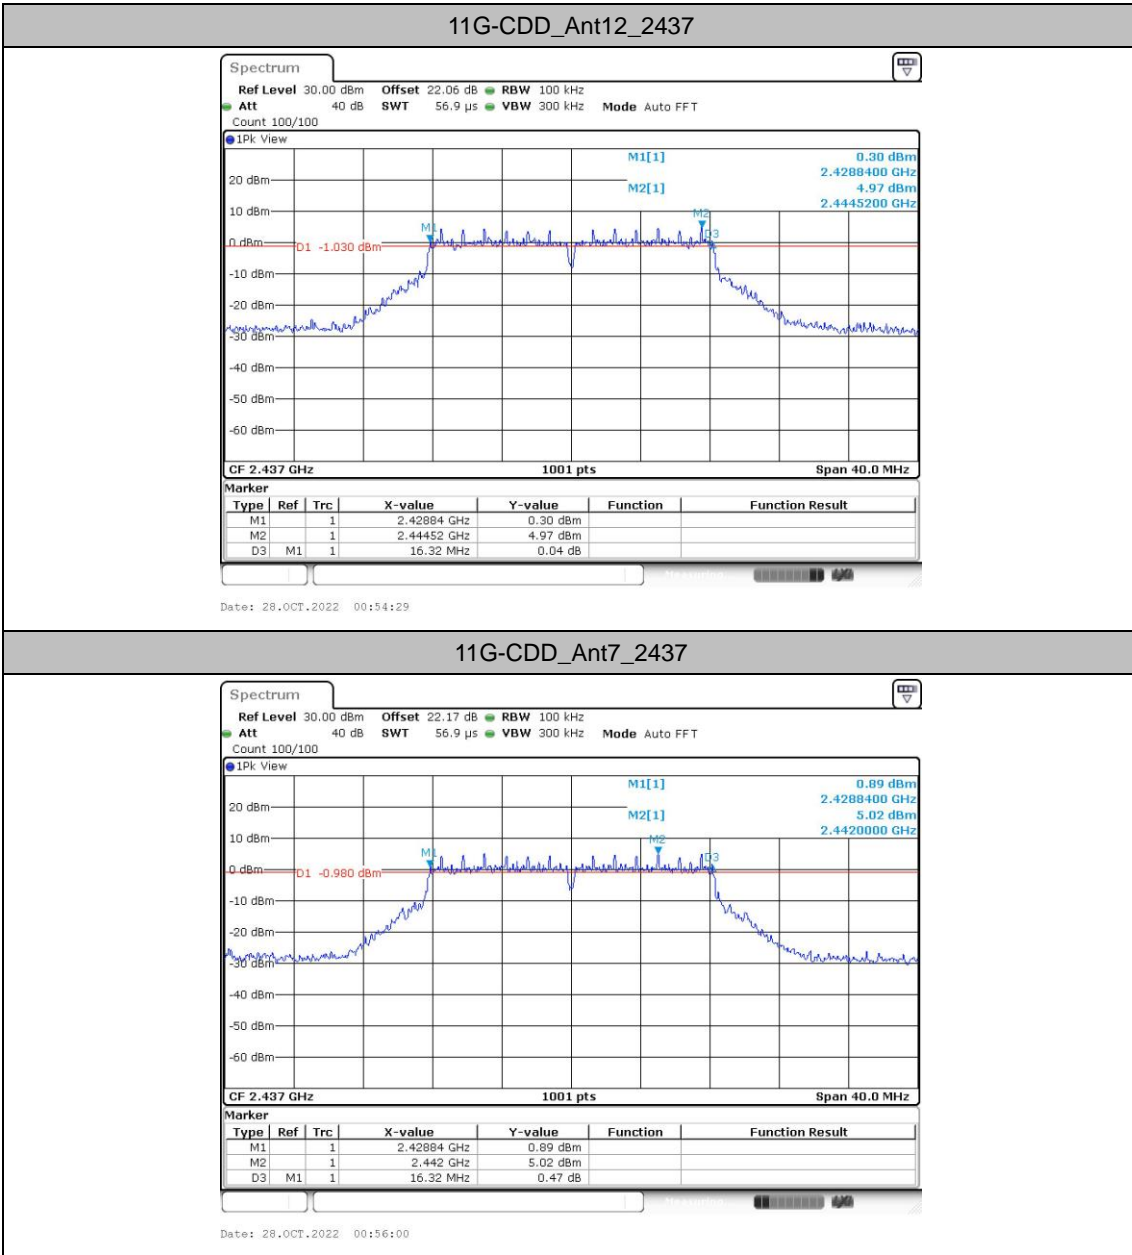


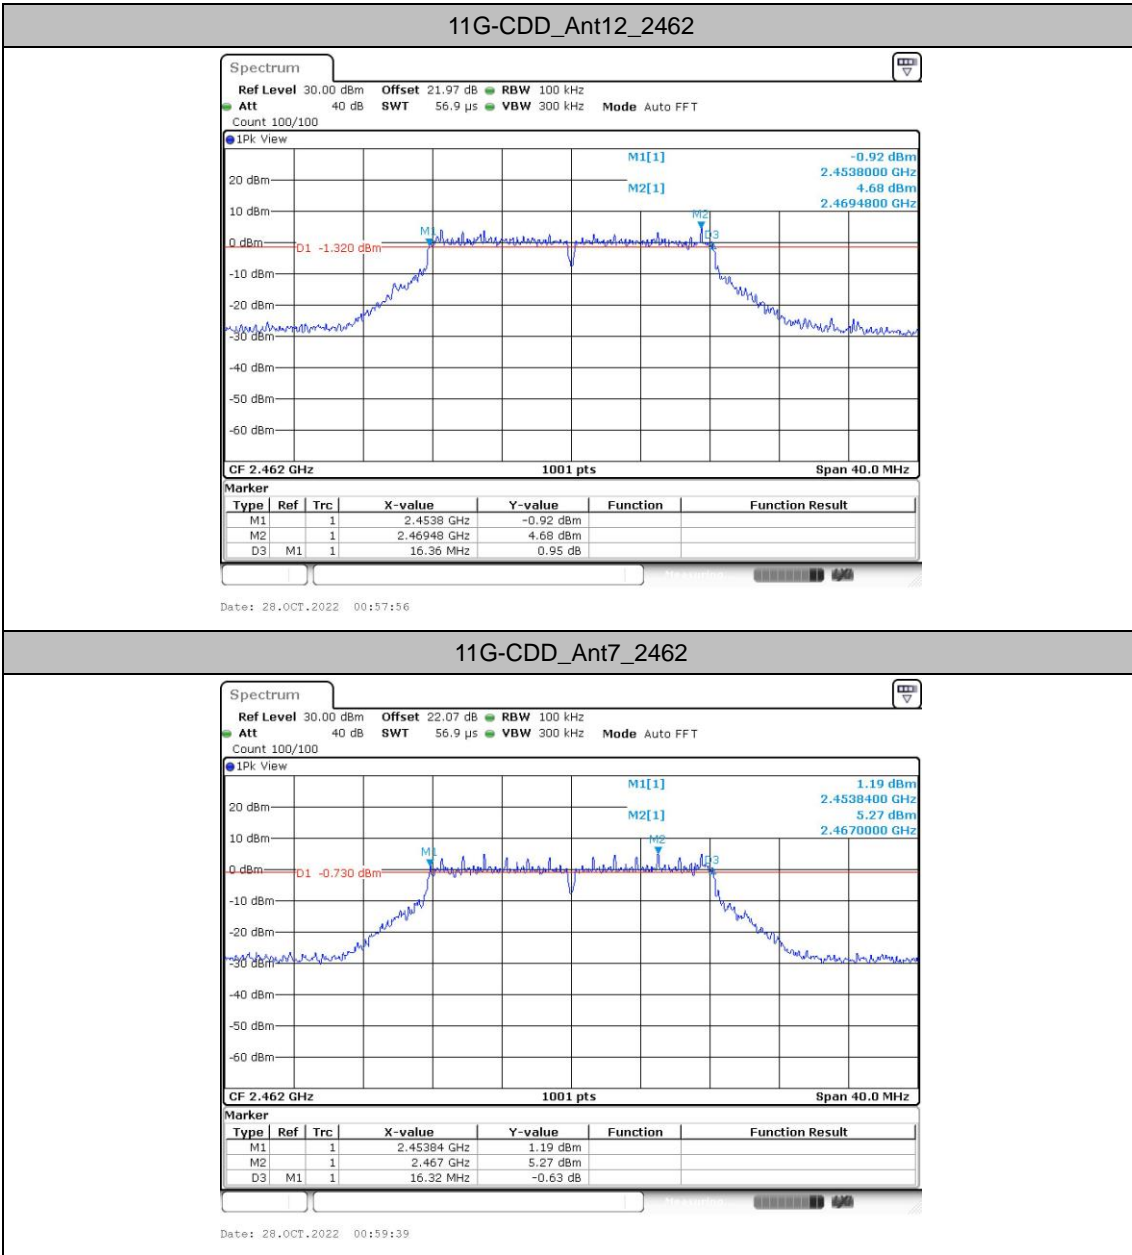


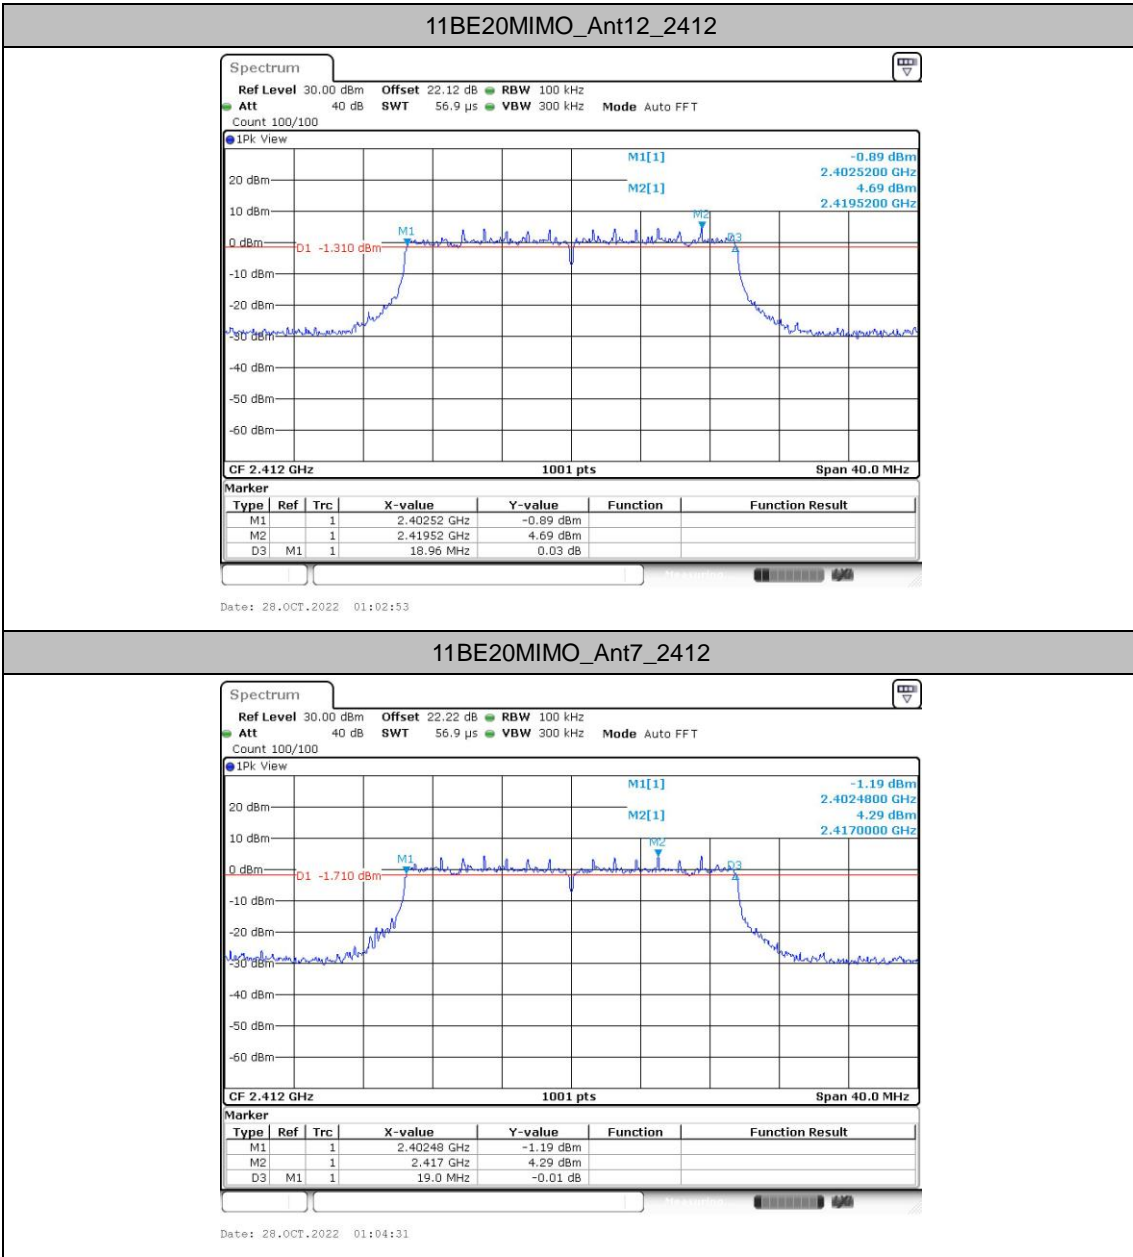


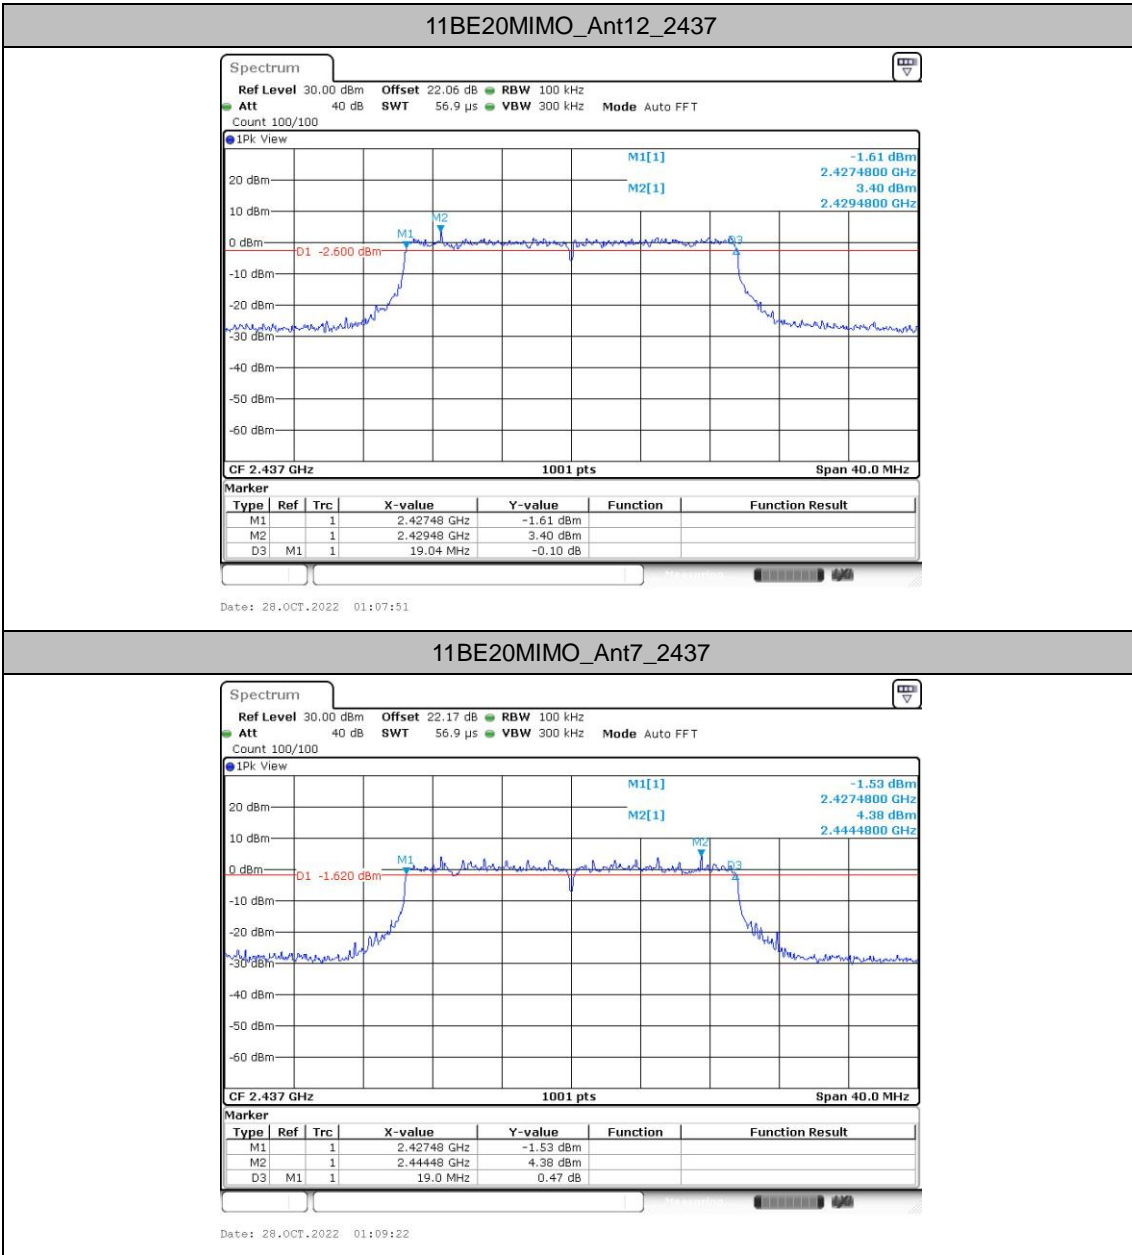

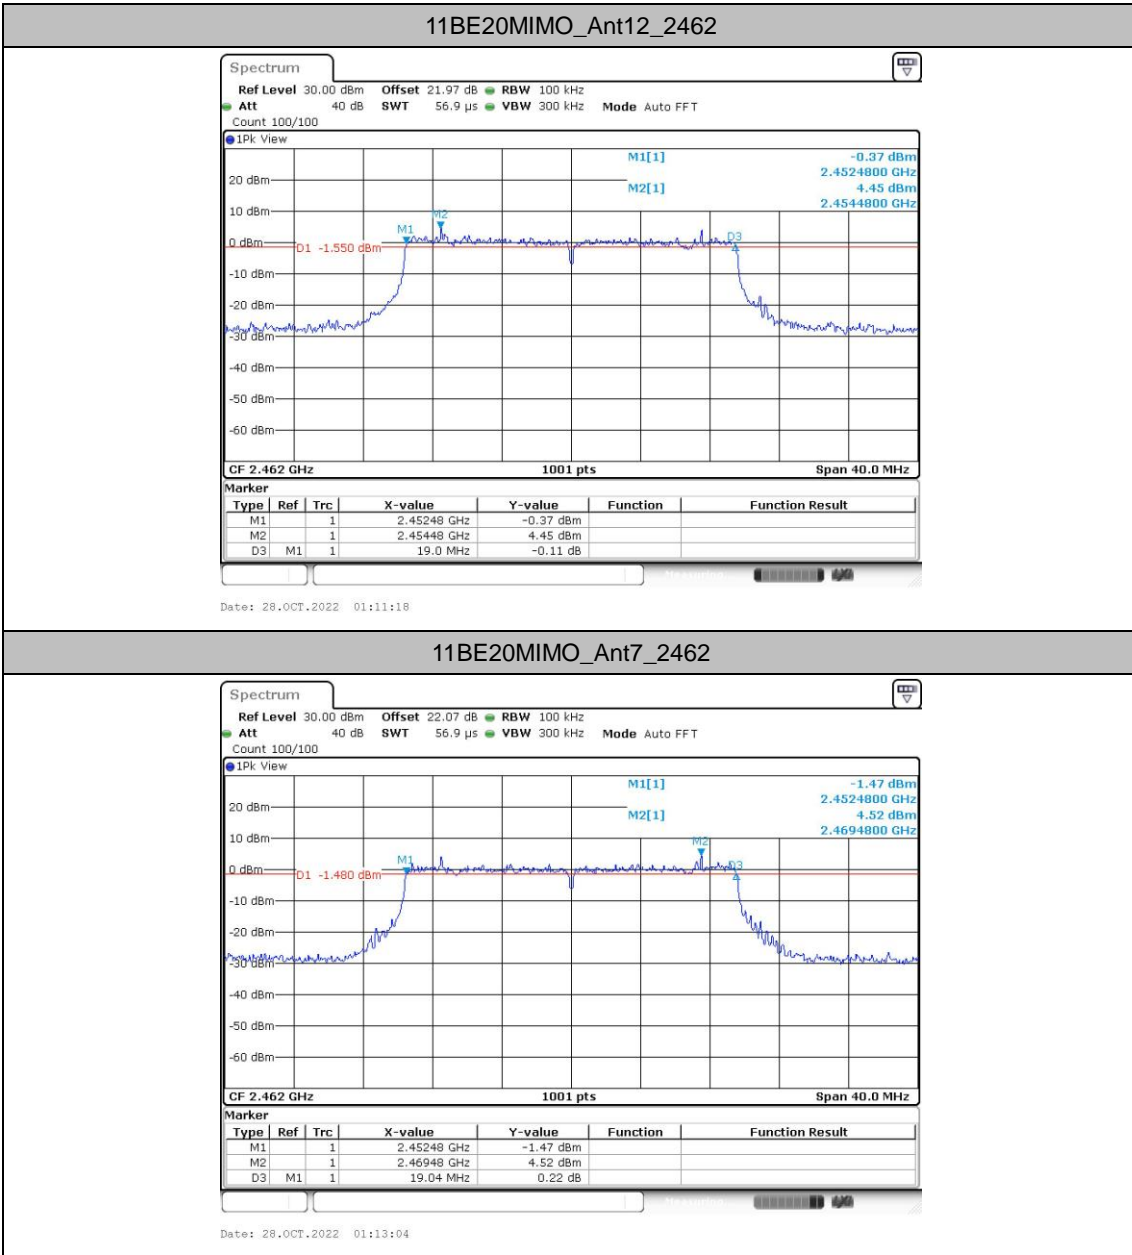

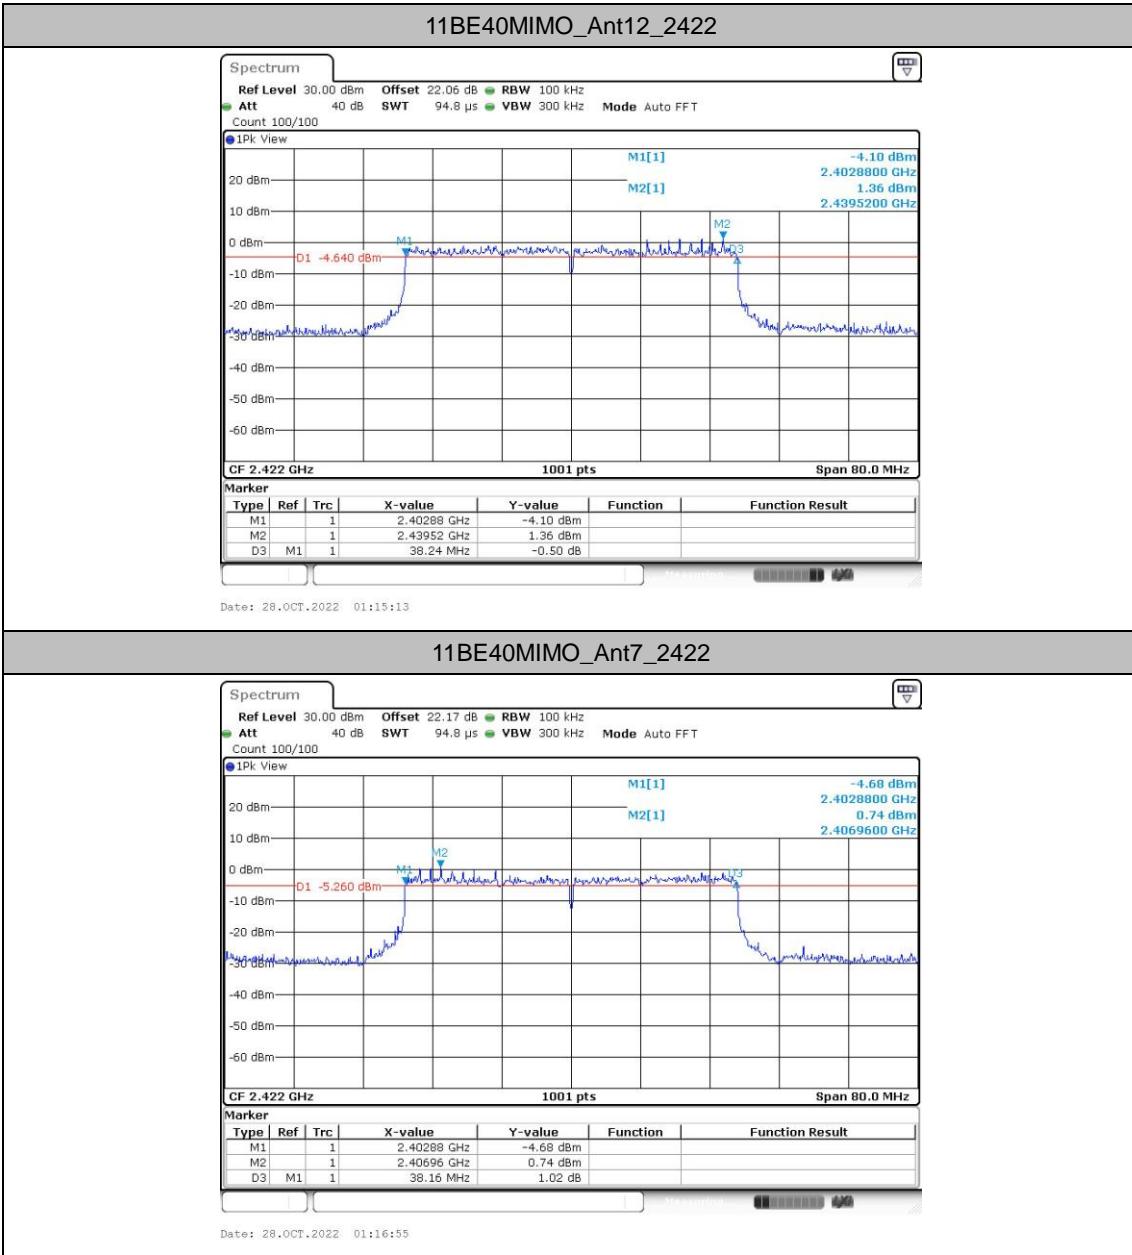

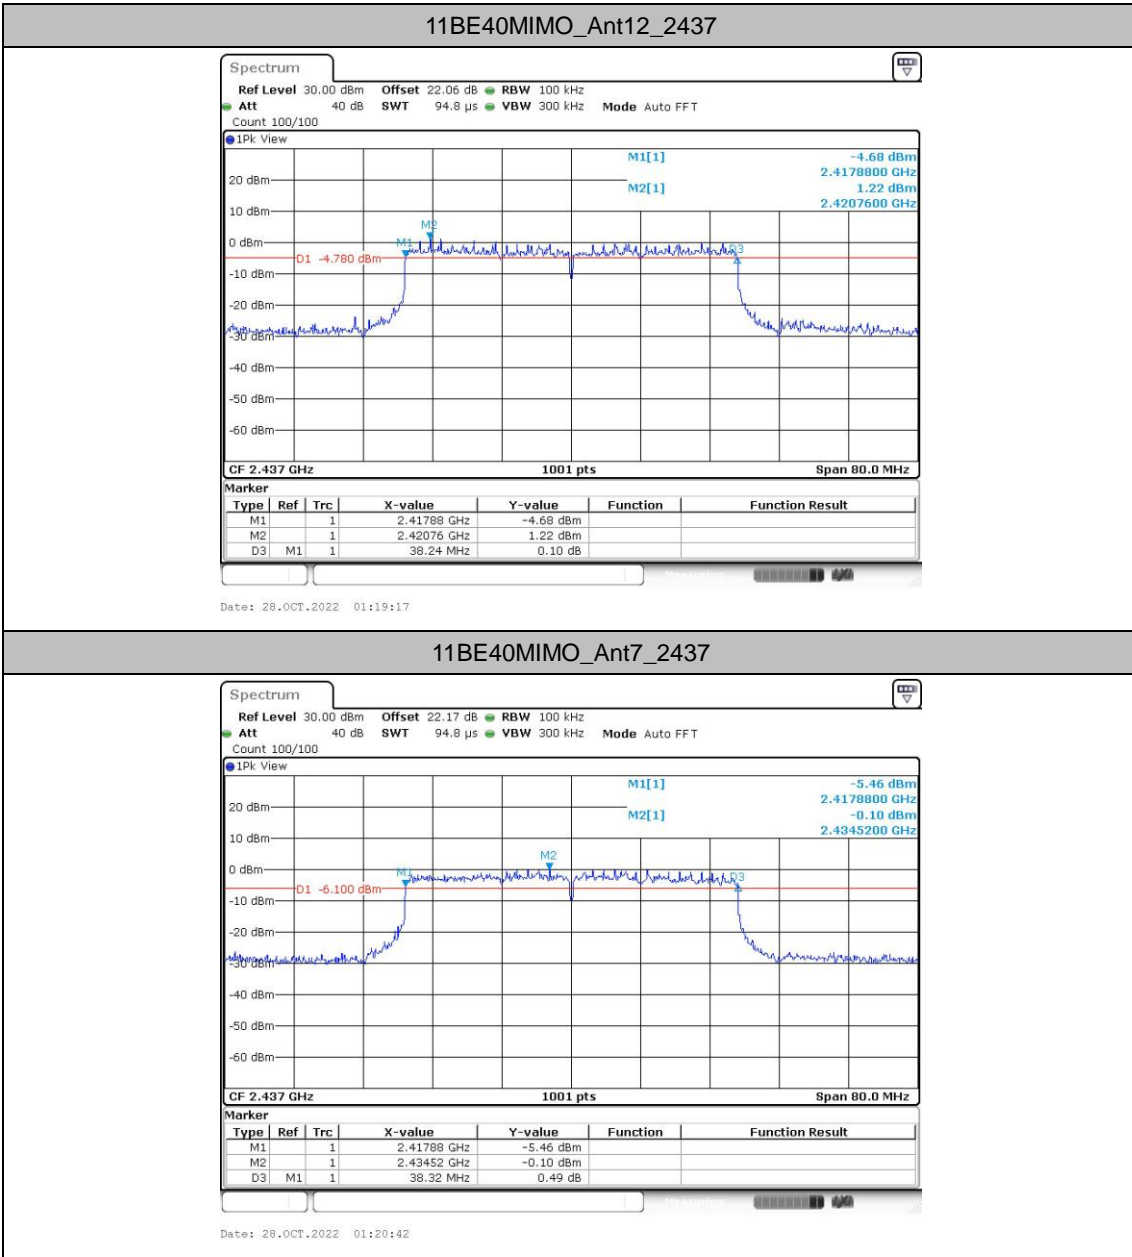

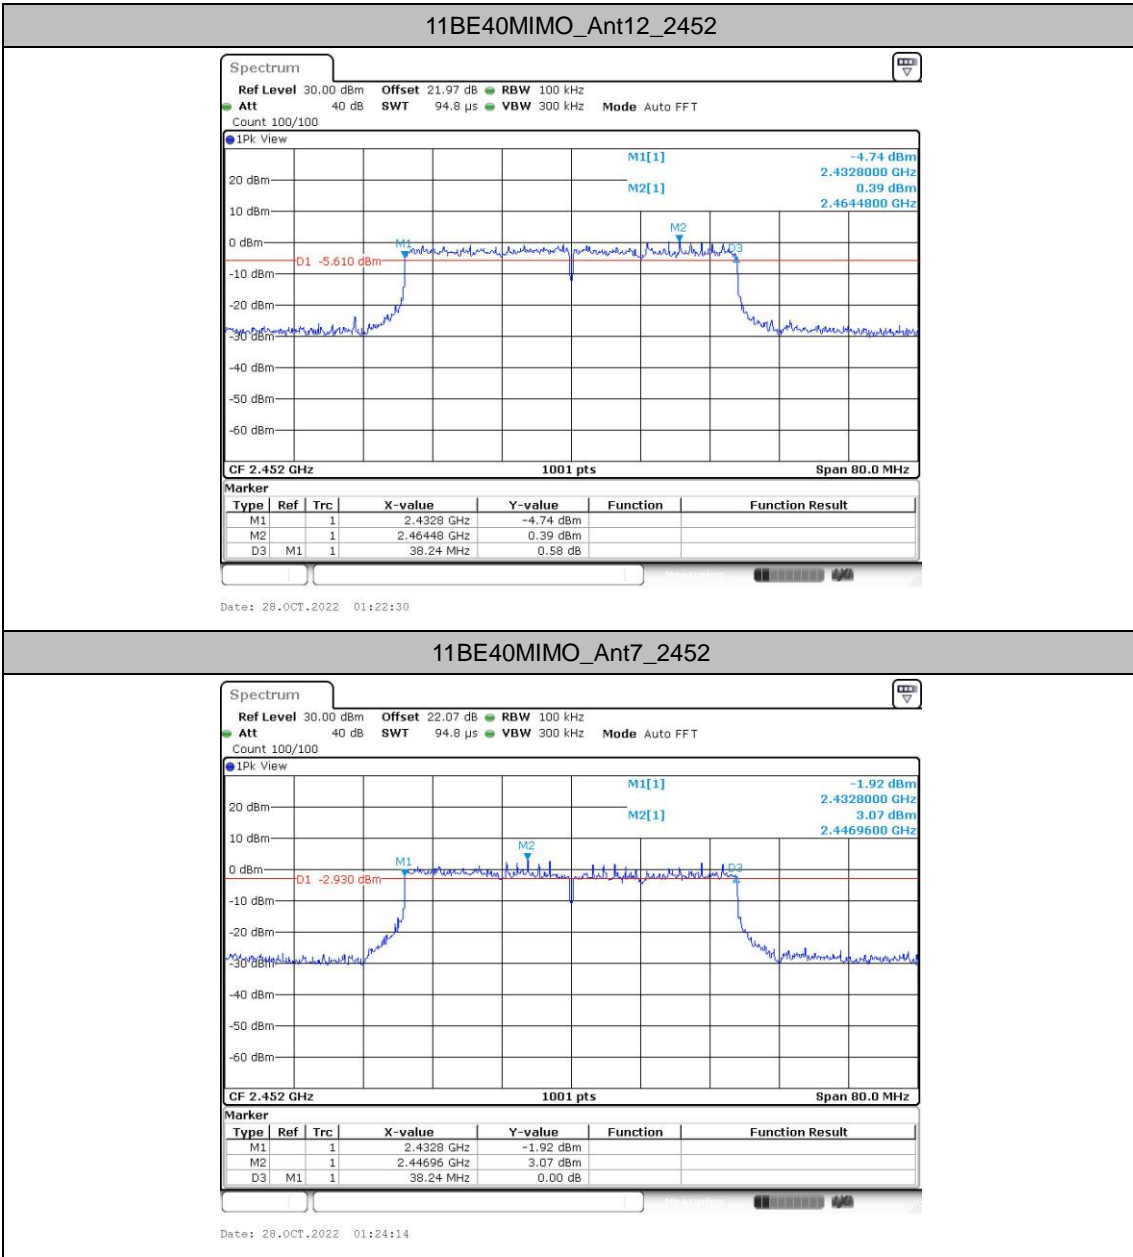






### Occupied Channel Bandwidth


#### Test Result


TestMode	Antenna	Freq(MHz)	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11B-CDD	Ant12	2412	14.026	2405.0470	2419.0729	---	---
	Ant7	2412	14.226	2404.8472	2419.0729	---	---
	Ant12	2437	14.186	2429.9271	2444.1129	---	---
	Ant7	2437	14.146	2429.9271	2444.0729	---	---
	Ant12	2462	14.226	2454.8472	2469.0729	---	---
	Ant7	2462	14.346	2454.8871	2469.2328	---	---
11G-CDD	Ant12	2412	17.942	2403.1688	2421.1109	---	---
	Ant7	2412	18.102	2402.9291	2421.0310	---	---
	Ant12	2437	18.462	2427.6893	2446.1508	---	---
	Ant7	2437	17.902	2427.9291	2445.8312	---	---
	Ant12	2462	18.342	2452.6094	2470.9510	---	---
	Ant7	2462	17.902	2452.8092	2470.7113	---	---
11BE20MIMO	Ant12	2412	19.301	2402.3696	2421.6703	---	---
	Ant7	2412	19.341	2402.3297	2421.6703	---	---
	Ant12	2437	19.341	2427.3297	2446.6703	---	---
	Ant7	2437	19.461	2427.2498	2446.7103	---	---
	Ant12	2462	19.700	2452.0899	2471.7902	---	---
	Ant7	2462	19.700	2451.9700	2471.6703	---	---
11BE40MIMO	Ant12	2422	38.601	2402.7393	2441.3407	---	---
	Ant7	2422	39.161	2402.4995	2441.6603	---	---
	Ant12	2437	38.521	2417.7393	2456.2607	---	---
	Ant7	2437	38.362	2417.8192	2456.1808	---	---
	Ant12	2452	38.362	2432.8192	2471.1808	---	---
	Ant7	2452	38.921	2432.2597	2471.1808	---	---





### Test Graphs

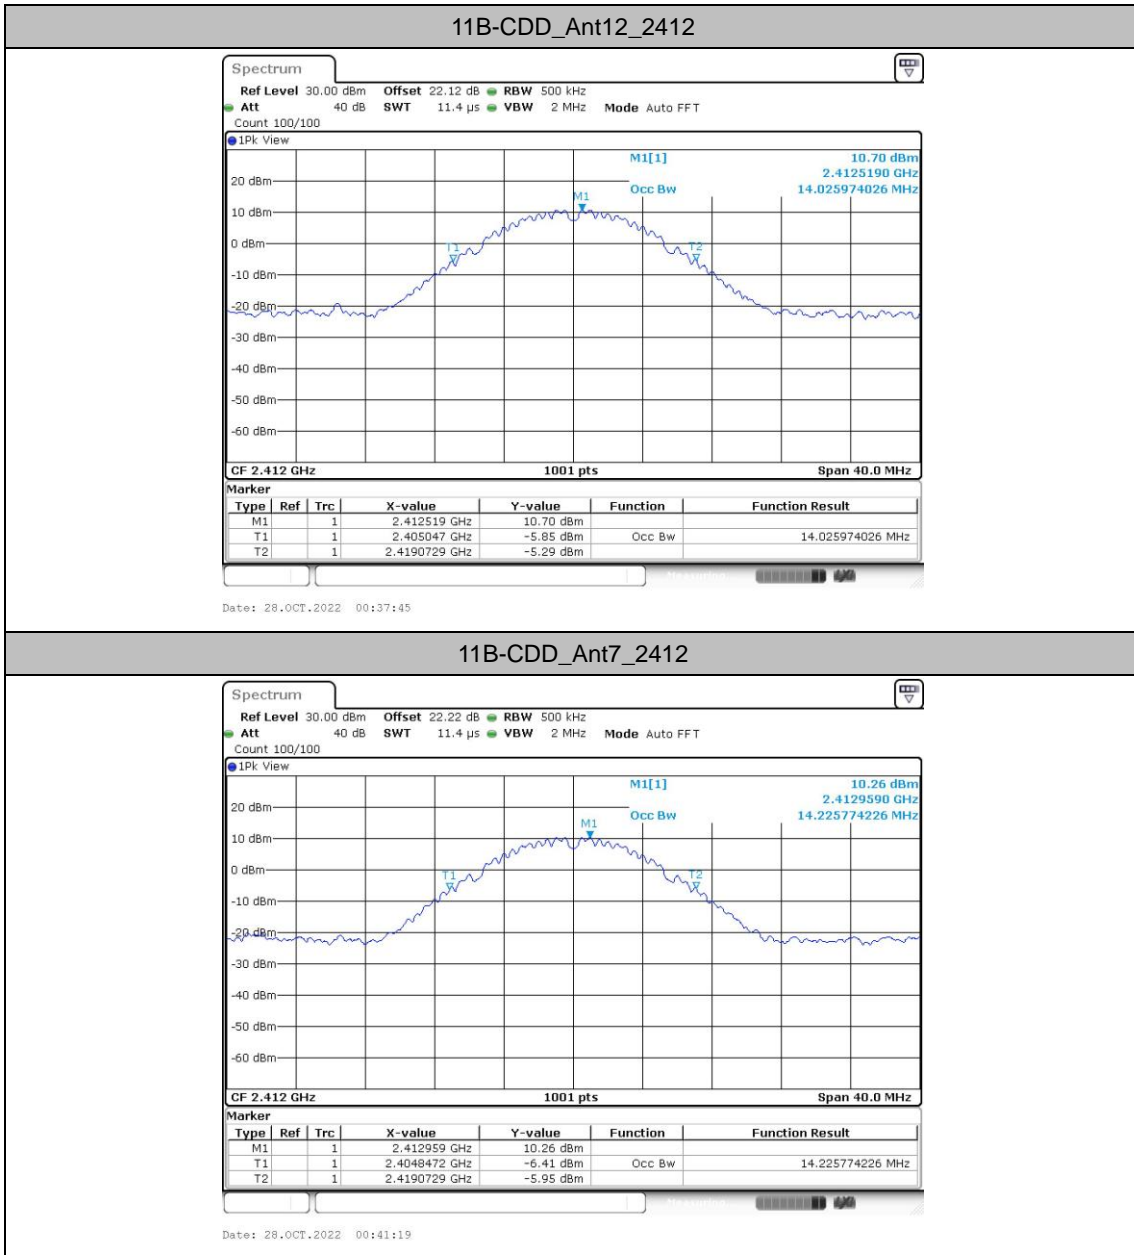


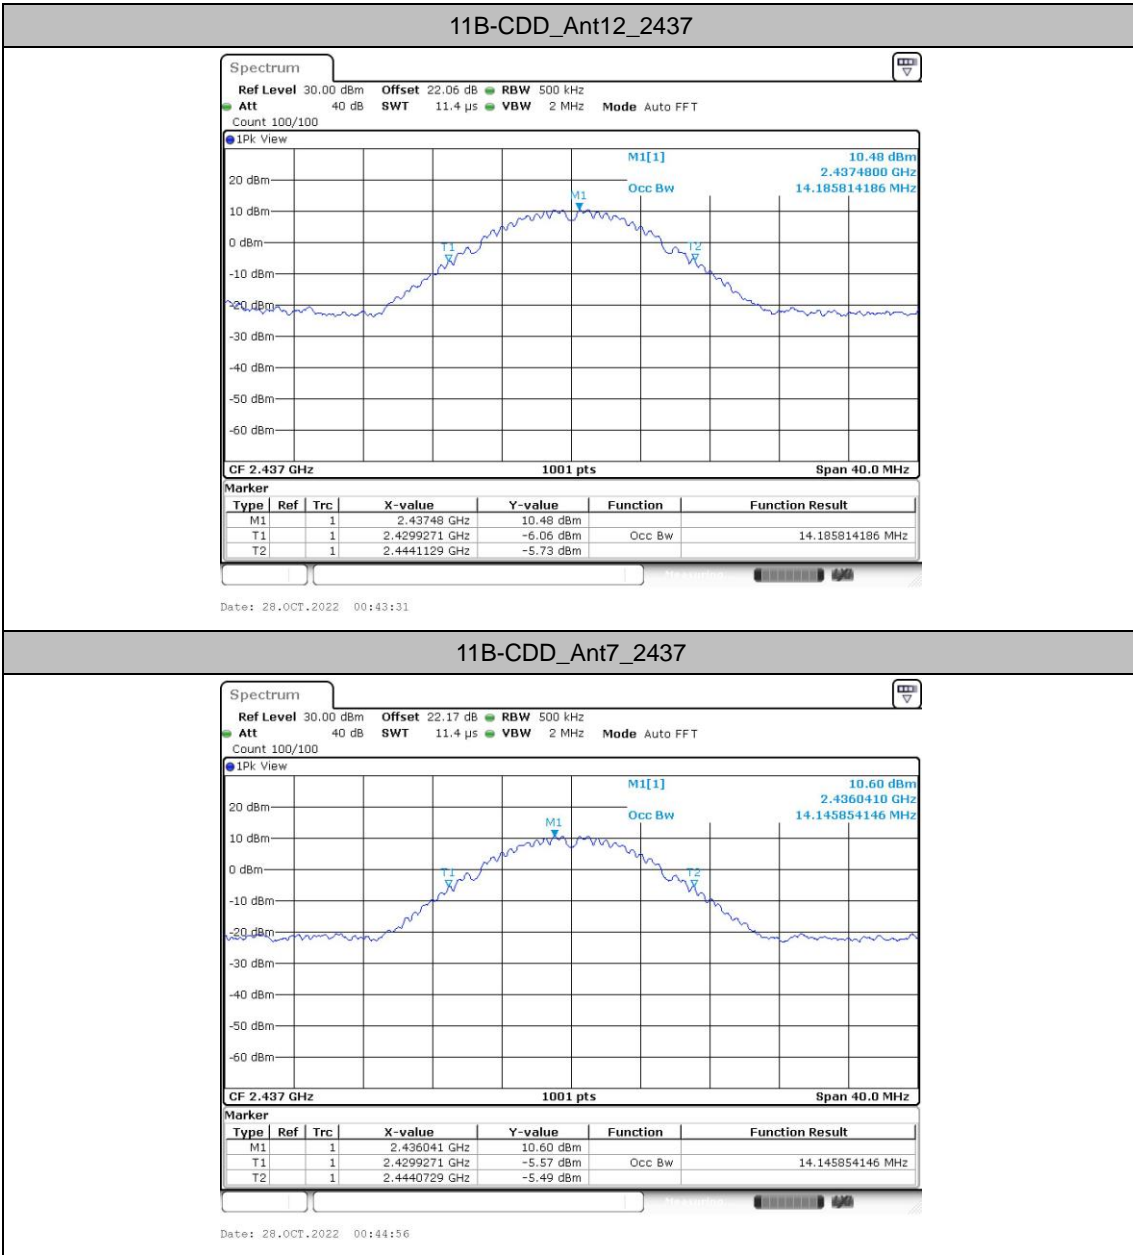


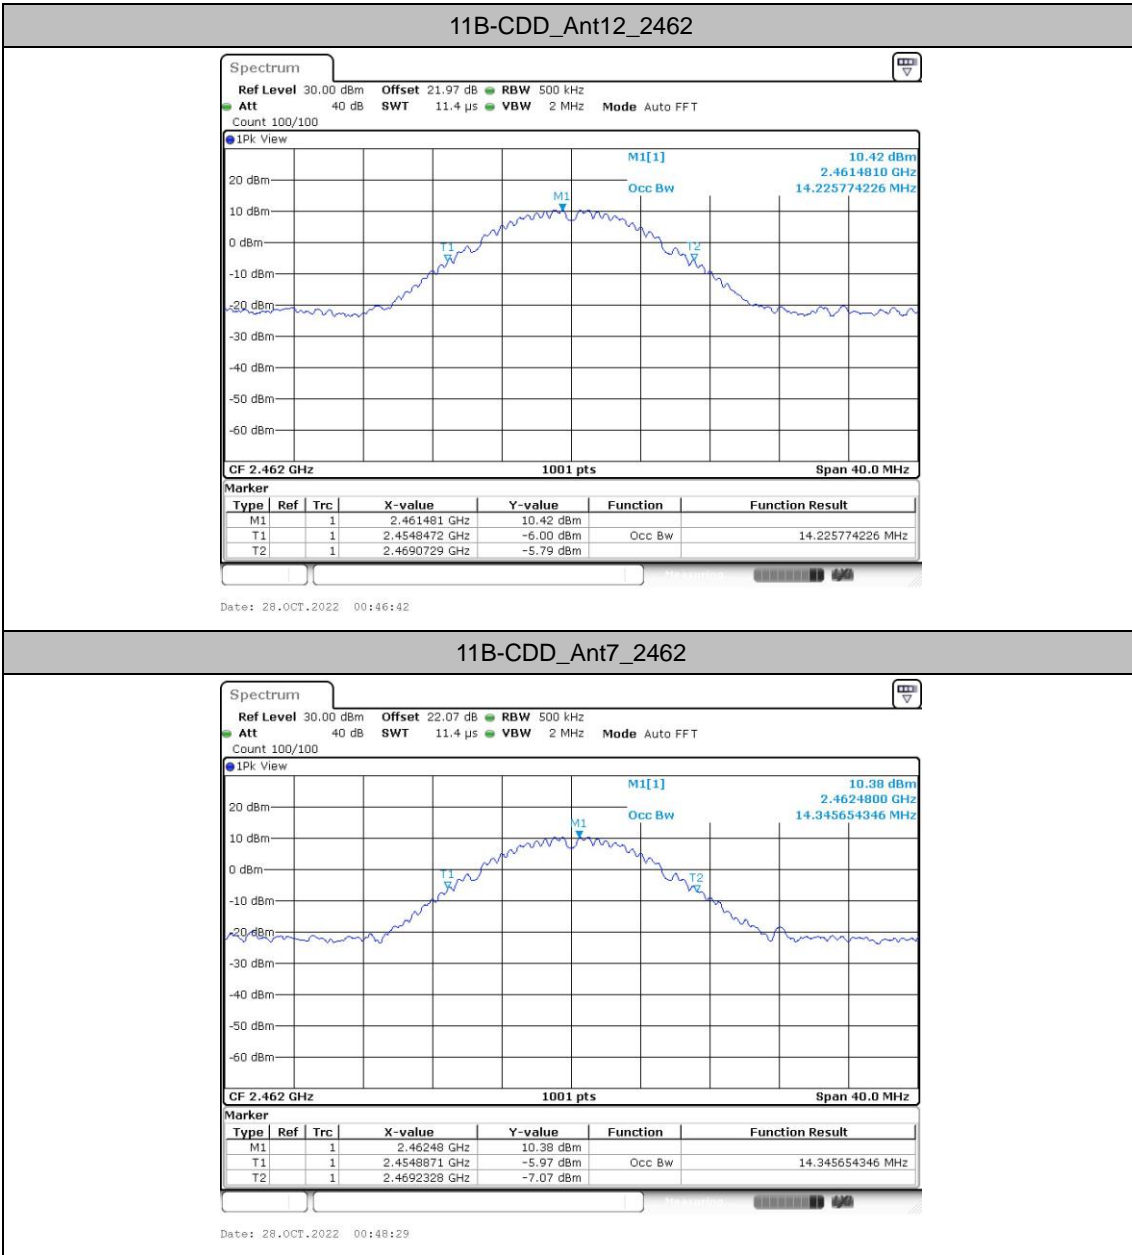

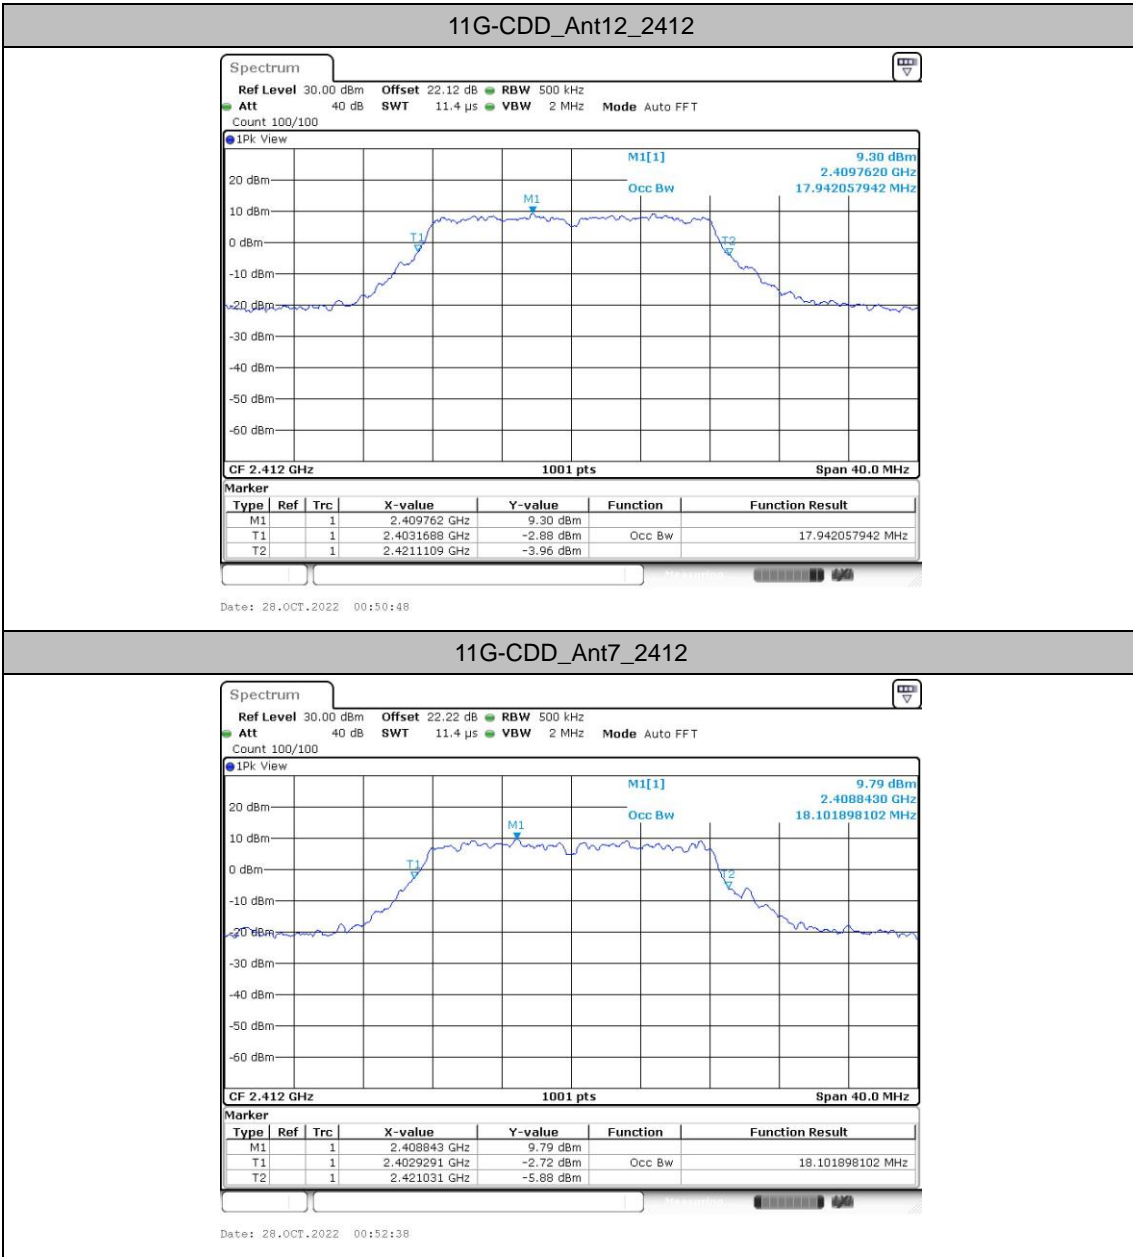


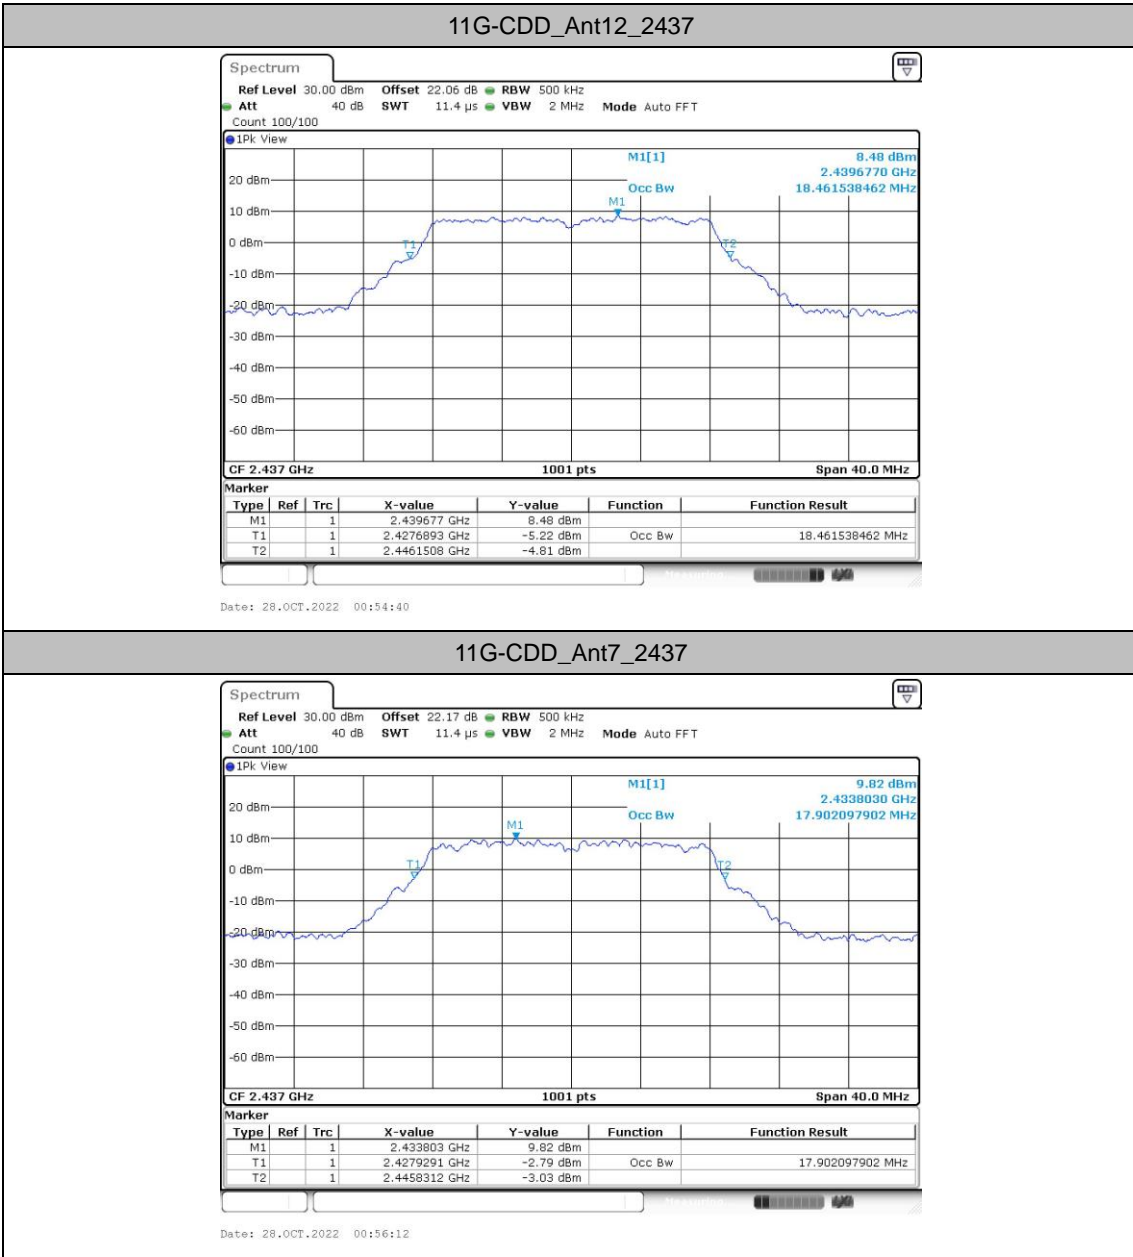


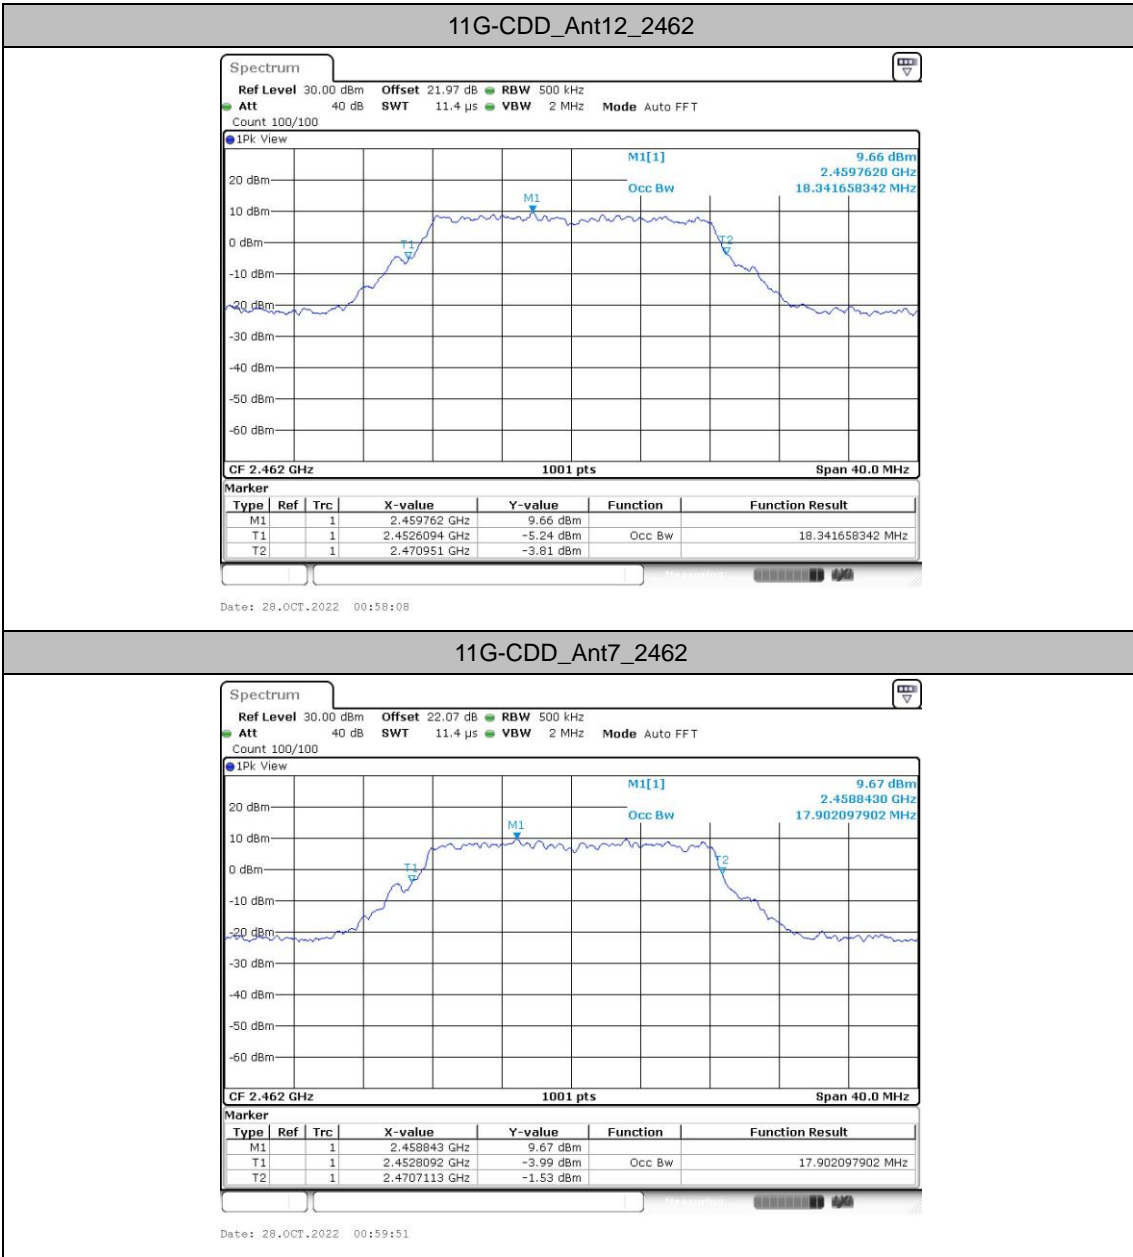


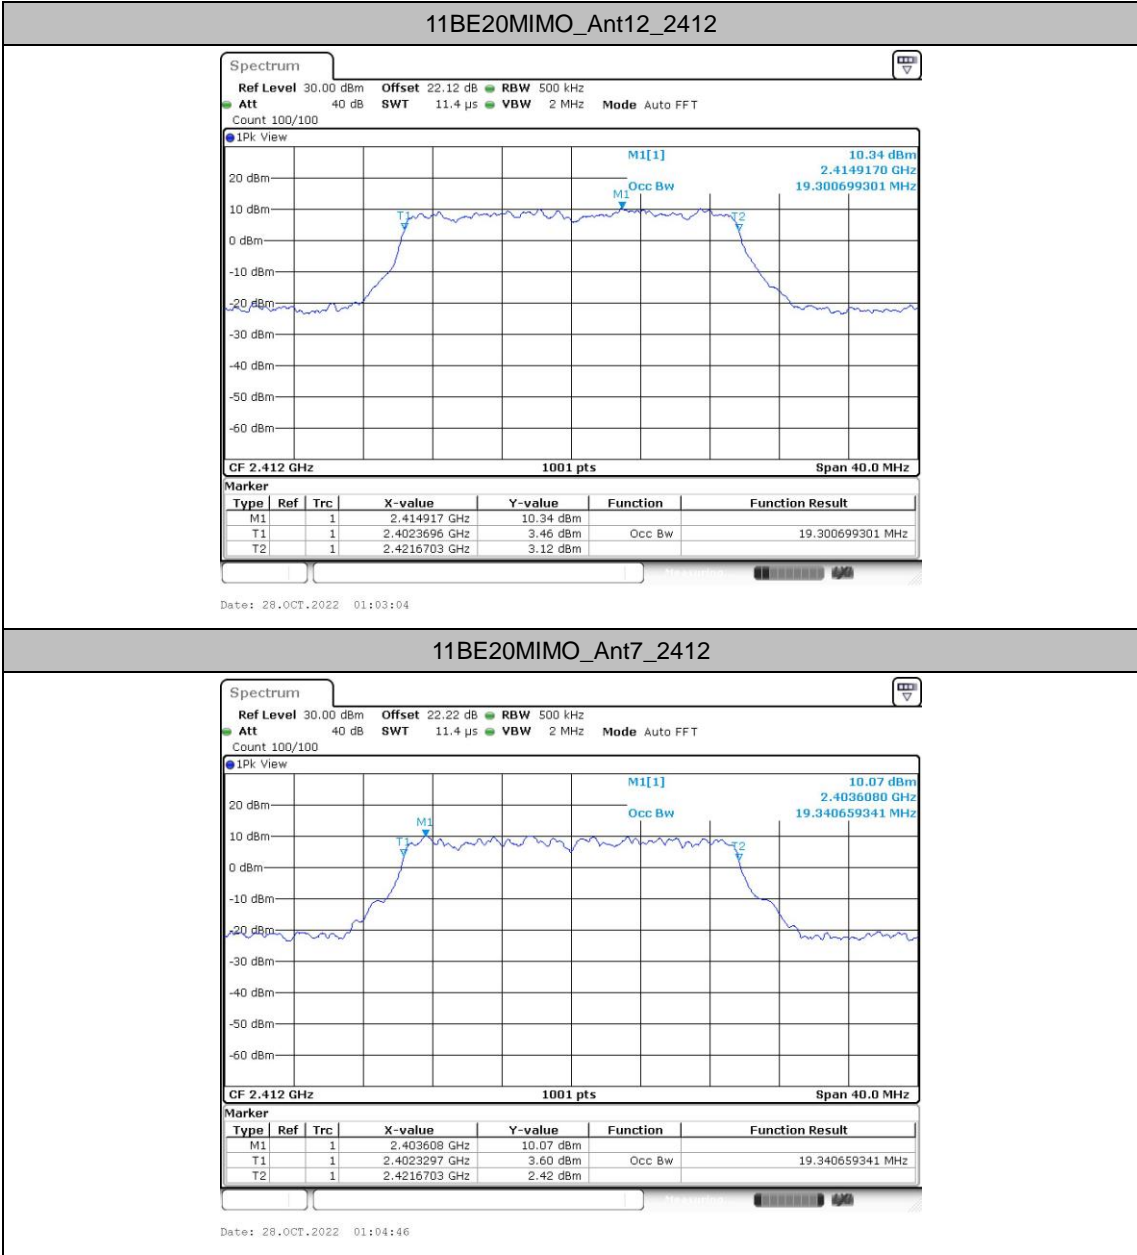





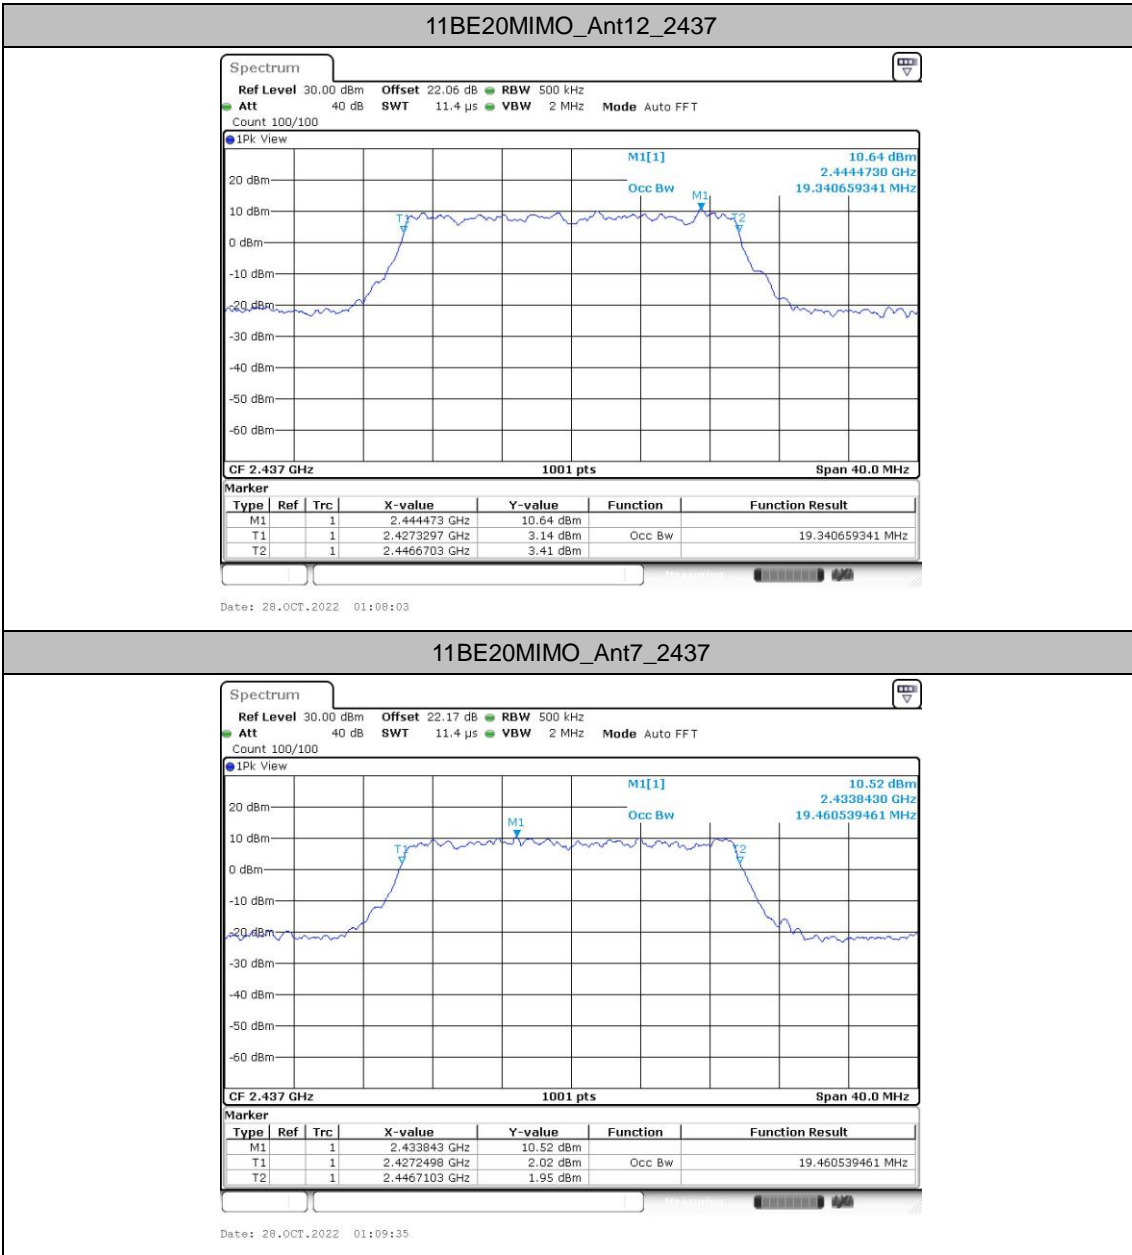

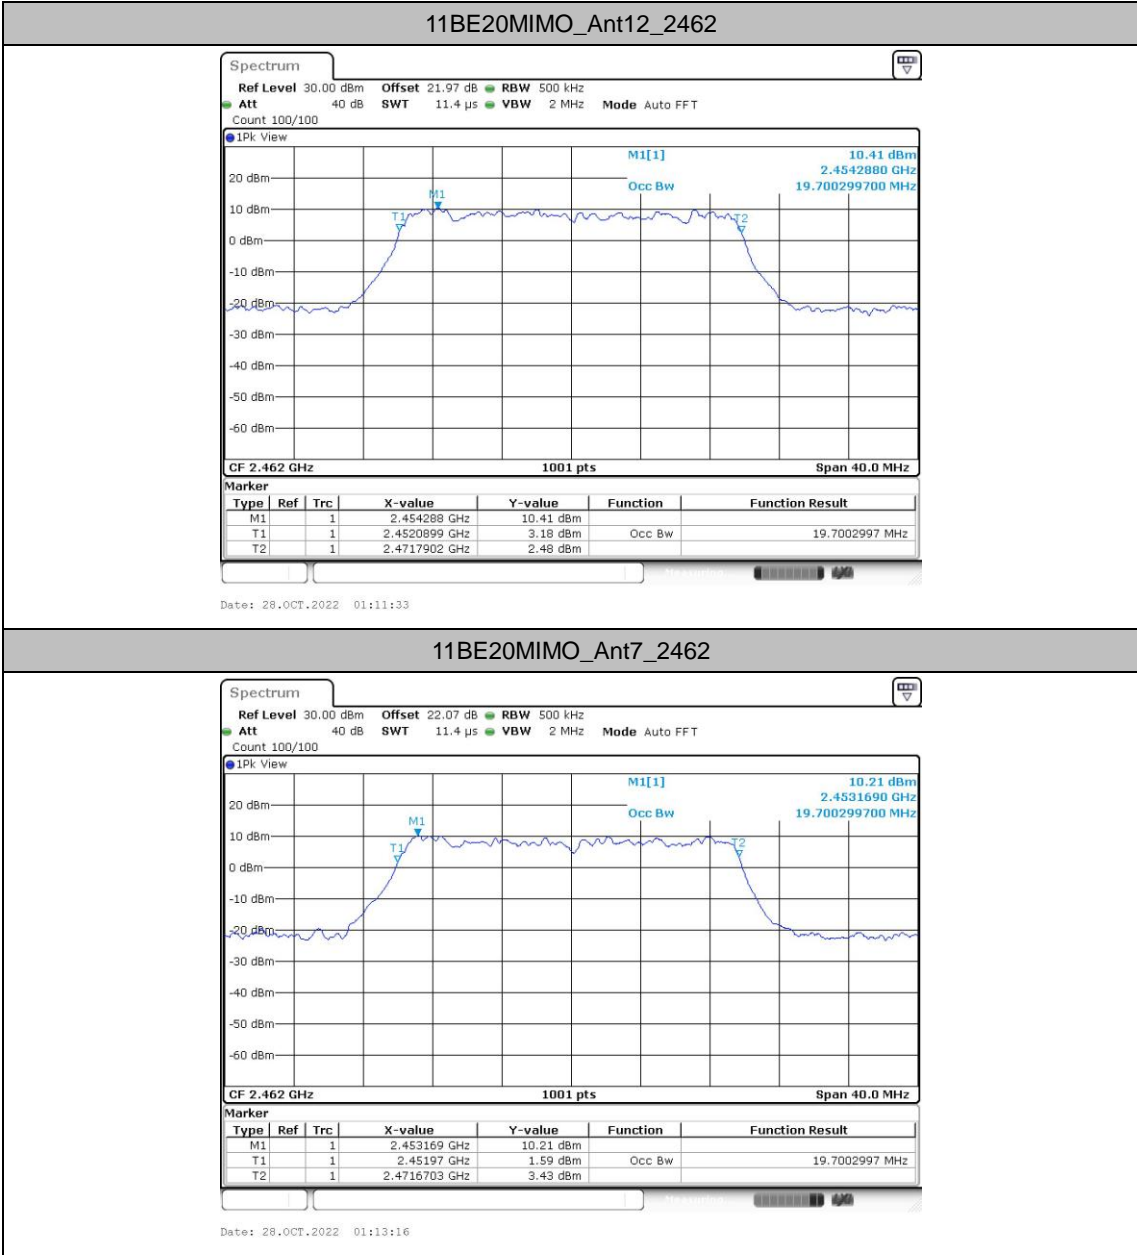

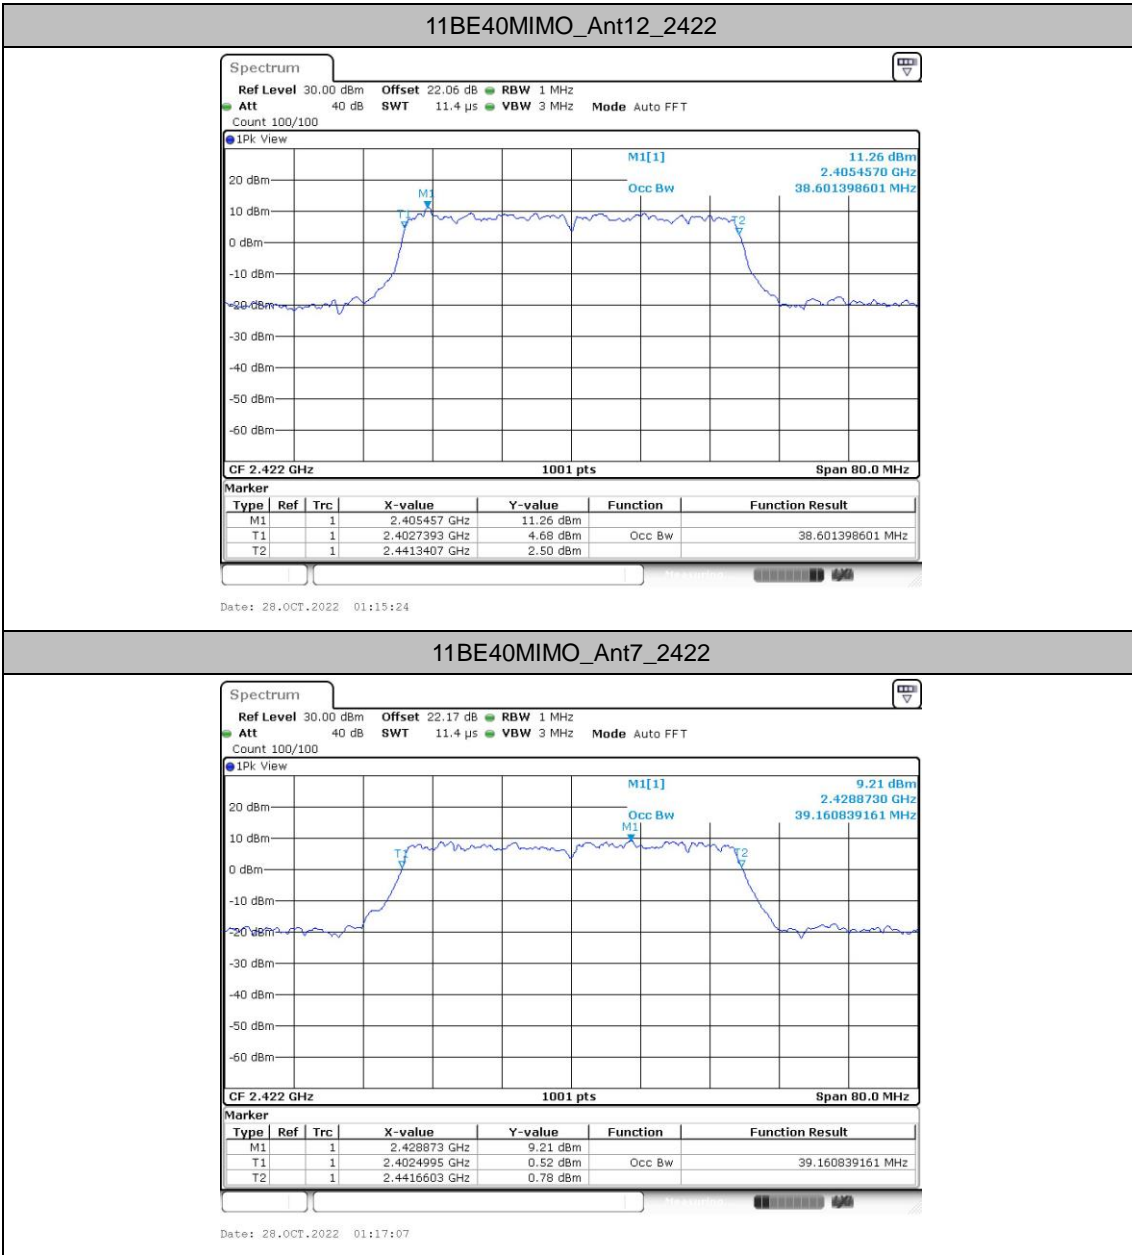

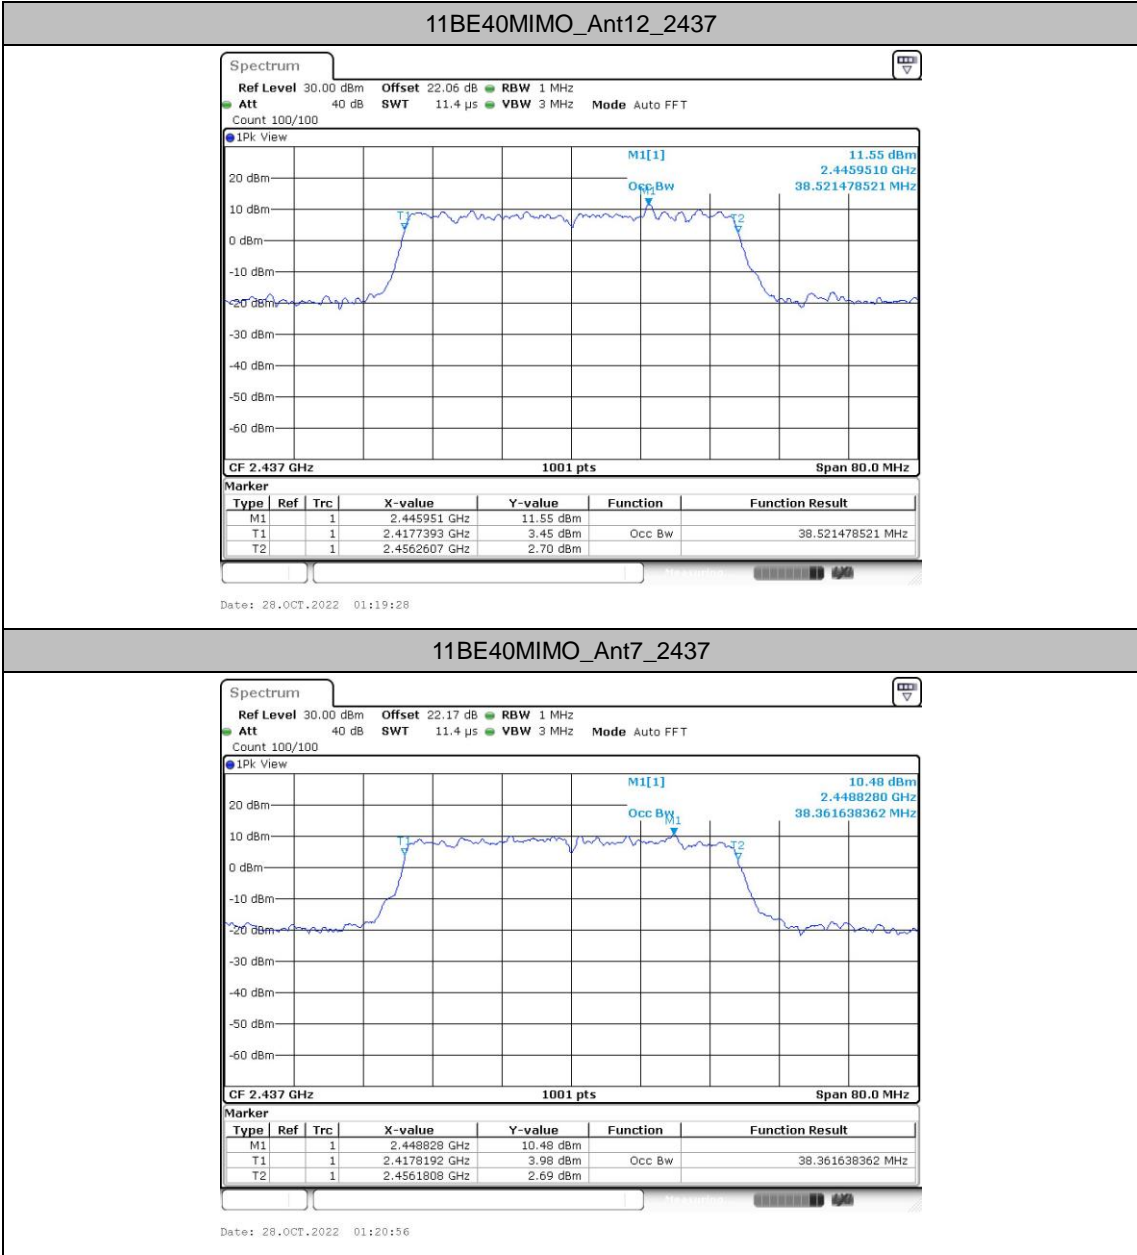

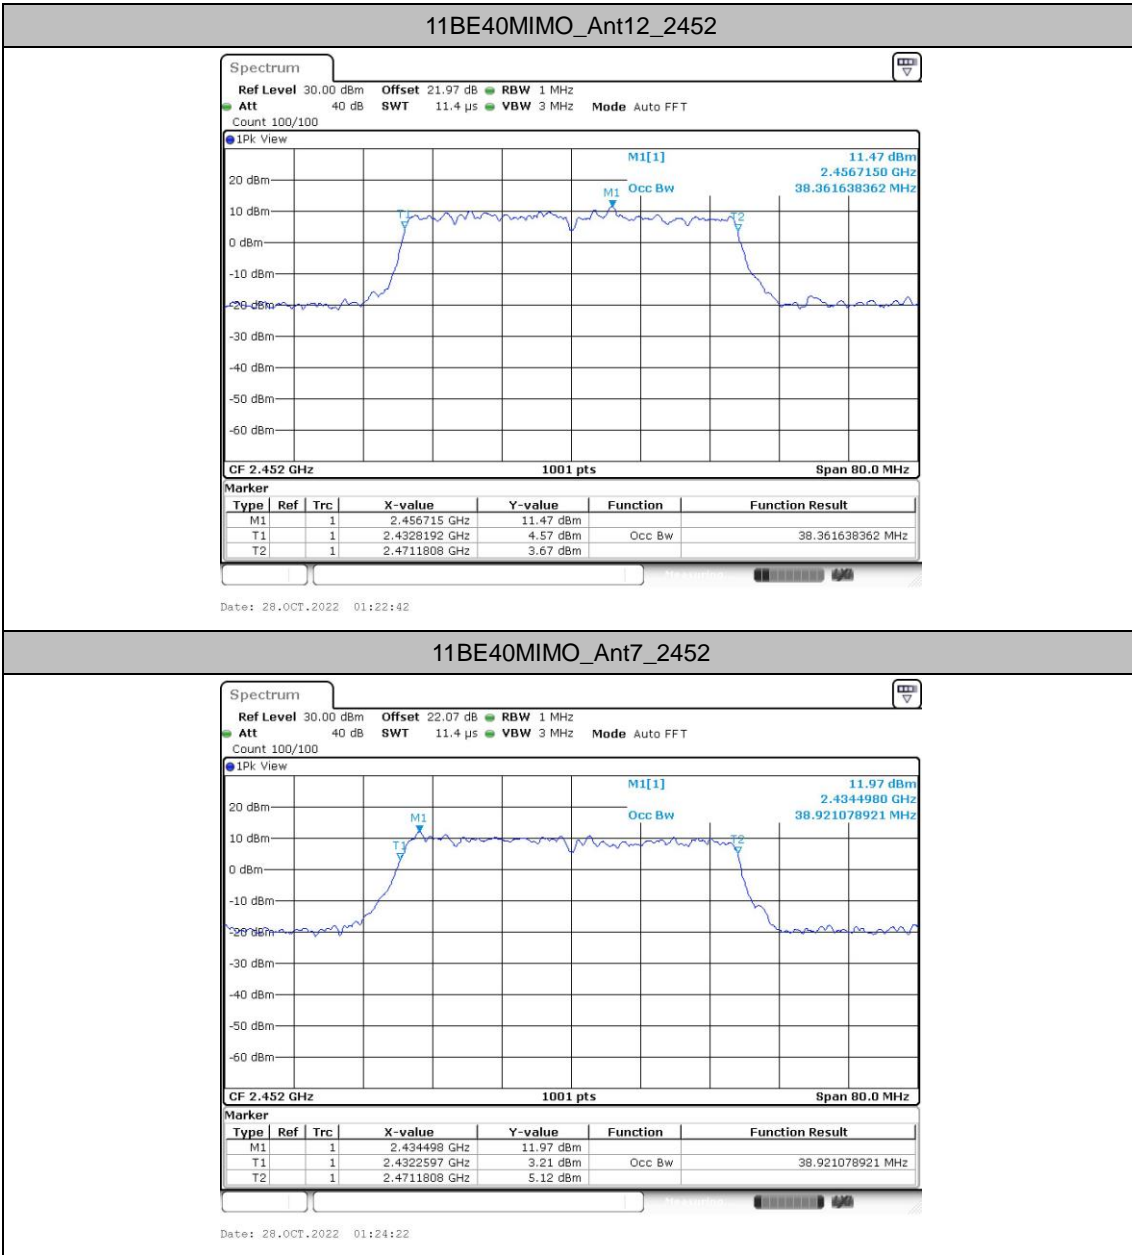



## Conducted output power

### Test Result Peak

TestMode	Antenna	Freq(MHz)	Set Power	Peak Power[dBm]	Conducted Limit[dBm]	EIRP [dBm]	EIRP Limit[dBm]	Verdict
11B-CDD	Ant12	2412	19	22.39	≤30.00	20.79	≤36.00	PASS
	Ant7	2412	19	21.94	≤30.00	18.54	≤36.00	PASS
	total	2412	---	25.18	≤30.00	22.82	≤36.00	PASS
	Ant12	2437	19	22.39	≤30.00	20.79	≤36.00	PASS
	Ant7	2437	19	22.46	≤30.00	19.06	≤36.00	PASS
	total	2437	---	25.44	≤30.00	23.02	≤36.00	PASS
	Ant12	2462	19	22.1	≤30.00	20.5	≤36.00	PASS
	Ant7	2462	19	21.71	≤30.00	18.31	≤36.00	PASS
	total	2462	---	24.92	≤30.00	22.55	≤36.00	PASS
11G-CDD	Ant12	2412	17	22.17	≤30.00	20.57	≤36.00	PASS
	Ant7	2412	17	20.71	≤30.00	17.31	≤36.00	PASS
	total	2412	---	24.51	≤30.00	22.25	≤36.00	PASS
	Ant12	2437	17.5	22.68	≤30.00	21.08	≤36.00	PASS
	Ant7	2437	17.5	22.38	≤30.00	18.98	≤36.00	PASS
	total	2437	---	25.54	≤30.00	23.17	≤36.00	PASS
	Ant12	2462	17.5	22.72	≤30.00	21.12	≤36.00	PASS
	Ant7	2462	17.5	21.86	≤30.00	18.46	≤36.00	PASS
	total	2462	---	25.32	≤30.00	23.00	≤36.00	PASS
11N20MIMO	Ant12	2412	9	15.89	≤30.00	14.29	≤36.00	PASS
	Ant7	2412	9	15.56	≤30.00	12.16	≤36.00	PASS
	total	2412	---	18.74	≤30.00	16.36	≤36.00	PASS
	Ant12	2417	12.5	18.57	≤30.00	16.97	≤36.00	PASS
	Ant7	2417	12.5	18.02	≤30.00	14.62	≤36.00	PASS
	total	2417	---	21.31	≤30.00	18.96	≤36.00	PASS
	Ant12	2422	17	23.26	≤30.00	21.66	≤36.00	PASS
	Ant7	2422	17	22.59	≤30.00	19.19	≤36.00	PASS
	total	2422	---	25.95	≤30.00	23.61	≤36.00	PASS
	Ant12	2437	17.5	22.32	≤30.00	20.72	≤36.00	PASS
	Ant7	2437	17.5	22.67	≤30.00	19.27	≤36.00	PASS
	total	2437	---	25.51	≤30.00	23.07	≤36.00	PASS
	Ant12	2462	16	22.11	≤30.00	20.51	≤36.00	PASS
Ant7	2462	16	22.02	≤30.00	18.62	≤36.00	PASS	



	total	2462	---	25.08	≤30.00	22.68	≤36.00	PASS
11N40MIMO	Ant12	2422	15	21.05	≤30.00	19.45	≤36.00	PASS
	Ant7	2422	15	20.26	≤30.00	16.86	≤36.00	PASS
	total	2422	---	23.68	≤30.00	21.36	≤36.00	PASS
	Ant12	2437	17	23.15	≤30.00	21.55	≤36.00	PASS
	Ant7	2437	17	23.28	≤30.00	19.88	≤36.00	PASS
	total	2437	---	26.23	≤30.00	23.81	≤36.00	PASS
	Ant12	2452	14	20.23	≤30.00	18.63	≤36.00	PASS
	Ant7	2452	14	20.55	≤30.00	17.15	≤36.00	PASS
	total	2452	---	23.40	≤30.00	20.96	≤36.00	PASS
11AC20MIMO	Ant12	2412	9	15.73	≤30.00	14.13	≤36.00	PASS
	Ant7	2412	9	15.44	≤30.00	12.04	≤36.00	PASS
	total	2412	---	18.60	≤30.00	16.22	≤36.00	PASS
	Ant12	2417	12.5	18.52	≤30.00	16.92	≤36.00	PASS
	Ant7	2417	12.5	17.96	≤30.00	14.56	≤36.00	PASS
	total	2417	---	21.26	≤30.00	18.91	≤36.00	PASS
	Ant12	2422	17	23.12	≤30.00	21.52	≤36.00	PASS
	Ant7	2422	17	22.46	≤30.00	19.06	≤36.00	PASS
	total	2422	---	25.81	≤30.00	23.47	≤36.00	PASS
	Ant12	2437	17.5	22.44	≤30.00	20.84	≤36.00	PASS
	Ant7	2437	17.5	22.39	≤30.00	18.99	≤36.00	PASS
	total	2437	---	25.43	≤30.00	23.02	≤36.00	PASS
	Ant12	2462	16	21.93	≤30.00	20.33	≤36.00	PASS
	Ant7	2462	16	21.86	≤30.00	18.46	≤36.00	PASS
	total	2462	---	24.91	≤30.00	22.51	≤36.00	PASS
11AC40MIMO	Ant12	2422	15	20.89	≤30.00	19.29	≤36.00	PASS
	Ant7	2422	15	20.13	≤30.00	16.73	≤36.00	PASS
	total	2422	---	23.54	≤30.00	21.21	≤36.00	PASS
	Ant12	2437	17	23.21	≤30.00	21.61	≤36.00	PASS
	Ant7	2437	17	23.21	≤30.00	19.81	≤36.00	PASS
	total	2437	---	26.22	≤30.00	23.81	≤36.00	PASS
	Ant12	2452	14	20.1	≤30.00	18.5	≤36.00	PASS
	Ant7	2452	14	20.35	≤30.00	16.95	≤36.00	PASS
	total	2452	---	23.24	≤30.00	20.80	≤36.00	PASS
11AX20MIMO	Ant12	2412	9	16.09	≤30.00	14.49	≤36.00	PASS
	Ant7	2412	9	15.62	≤30.00	12.22	≤36.00	PASS
	total	2412	---	18.87	≤30.00	16.51	≤36.00	PASS



	Ant12	2417	12.5	18.76	≤30.00	17.16	≤36.00	PASS
	Ant7	2417	12.5	18.16	≤30.00	14.76	≤36.00	PASS
	total	2417	---	21.48	≤30.00	19.13	≤36.00	PASS
	Ant12	2422	17	23.42	≤30.00	21.82	≤36.00	PASS
	Ant7	2422	17	22.66	≤30.00	19.26	≤36.00	PASS
	total	2422	---	26.07	≤30.00	23.74	≤36.00	PASS
	Ant12	2437	17	23.6	≤30.00	22	≤36.00	PASS
	Ant7	2437	17	23.4	≤30.00	20	≤36.00	PASS
	total	2437	---	26.51	≤30.00	24.12	≤36.00	PASS
	Ant12	2462	16	22.23	≤30.00	20.63	≤36.00	PASS
	Ant7	2462	16	22.15	≤30.00	18.75	≤36.00	PASS
	total	2462	---	25.20	≤30.00	22.80	≤36.00	PASS
11AX40MIMO	Ant12	2422	15	21.13	≤30.00	19.53	≤36.00	PASS
	Ant7	2422	15	20.48	≤30.00	17.08	≤36.00	PASS
	total	2422	---	23.83	≤30.00	21.49	≤36.00	PASS
	Ant12	2437	17	23.47	≤30.00	21.87	≤36.00	PASS
	Ant7	2437	17	23.29	≤30.00	19.89	≤36.00	PASS
	total	2437	---	26.39	≤30.00	24.00	≤36.00	PASS
	Ant12	2452	14	20.36	≤30.00	18.76	≤36.00	PASS
	Ant7	2452	14	20.62	≤30.00	17.22	≤36.00	PASS
total	2452	---	23.50	≤30.00	21.07	≤36.00	PASS	
11BE20MIMO	Ant12	2412	9	16.16	≤30.00	14.56	≤36.00	PASS
	Ant7	2412	9	15.86	≤30.00	12.46	≤36.00	PASS
	total	2412	---	19.02	≤30.00	16.65	≤36.00	PASS
	Ant12	2417	12.5	18.83	≤30.00	17.23	≤36.00	PASS
	Ant7	2417	12.5	18.32	≤30.00	14.92	≤36.00	PASS
	total	2417	---	21.59	≤30.00	19.24	≤36.00	PASS
	Ant12	2422	17	23.52	≤30.00	21.92	≤36.00	PASS
	Ant7	2422	17	22.78	≤30.00	19.38	≤36.00	PASS
	total	2422	---	26.18	≤30.00	23.84	≤36.00	PASS
	Ant12	2437	17	23.74	≤30.00	22.14	≤36.00	PASS
	Ant7	2437	17	23.48	≤30.00	20.08	≤36.00	PASS
	total	2437	---	26.62	≤30.00	24.24	≤36.00	PASS
	Ant12	2462	16	22.4	≤30.00	20.8	≤36.00	PASS
	Ant7	2462	16	22.31	≤30.00	18.91	≤36.00	PASS
	total	2462	---	25.37	≤30.00	22.97	≤36.00	PASS
11BE40MIMO	Ant12	2422	15	21.26	≤30.00	19.66	≤36.00	PASS





Ant7	2422	15	20.51	≤30.00	17.11	≤36.00	PASS
total	2422	---	23.91	≤30.00	21.58	≤36.00	PASS
Ant12	2437	17	23.72	≤30.00	22.12	≤36.00	PASS
Ant7	2437	17	23.33	≤30.00	19.93	≤36.00	PASS
total	2437	---	26.54	≤30.00	24.17	≤36.00	PASS
Ant12	2452	14	20.52	≤30.00	18.92	≤36.00	PASS
Ant7	2452	14	21	≤30.00	17.6	≤36.00	PASS
total	2452	---	23.78	≤30.00	21.32	≤36.00	PASS



**Test Result Average (Report only)**

Test Mode	Antenna	Freq(MHz)	Set Power	Average power [dBm]	Duty Cycle [%]	DC Factor [dBm]	Result [dBm]
11B-CDD	Ant12	2412	19	19.33	99.05	0.04	19.37
	Ant7	2412	19	19.03	99.84	0.01	19.04
	total	2412	---	---	---	---	22.22
	Ant12	2437	19	19.26	99.05	0.04	19.3
	Ant7	2437	19	19.48	99.84	0.01	19.49
	total	2437	---	---	---	---	22.41
	Ant12	2462	19	19.11	99.05	0.04	19.15
	Ant7	2462	19	19.21	99.84	0.01	19.22
	total	2462	---	---	---	---	22.20
11G-CDD	Ant12	2412	17	16.49	99.05	0.04	16.53
	Ant7	2412	17	16.12	99.05	0.04	16.16
	total	2412	---	---	---	---	19.36
	Ant12	2437	17.5	17.05	99.05	0.04	17.09
	Ant7	2437	17.5	17.27	99.05	0.04	17.31
	total	2437	---	---	---	---	20.21
	Ant12	2462	17.5	17.08	99.05	0.04	17.12
	Ant7	2462	17.5	17.06	99.05	0.04	17.1
	total	2462	---	---	---	---	20.12
11N20MIMO	Ant12	2412	9	9.66	99.63	0.02	9.68
	Ant7	2412	9	10.02	99.63	0.02	10.04
	total	2412	---	---	---	---	12.87
	Ant12	2417	12.5	12.45	99.63	0.02	12.47
	Ant7	2417	12.5	12.41	99.63	0.02	12.43
	total	2417	---	---	---	---	15.46
	Ant12	2422	17	17.08	99.63	0.02	17.1
	Ant7	2422	17	16.62	99.63	0.02	16.64
	total	2422	---	---	---	---	19.89
	Ant12	2437	17.5	17.06	99.63	0.02	17.08
	Ant7	2437	17.5	17.26	99.63	0.02	17.28
	total	2437	---	---	---	---	20.19
Ant12	2462	16	15.93	99.63	0.02	15.95	



	Ant7	2462	16	15.96	99.63	0.02	15.98
	total	2462	---	---	---	---	18.98
11N40MIMO	Ant12	2422	15	15.12	99.63	0.02	15.14
	Ant7	2422	15	14.89	99.63	0.02	14.91
	total	2422	---	---	---	---	18.04
	Ant12	2437	17	17.05	99.63	0.02	17.07
	Ant7	2437	17	17.44	99.63	0.02	17.46
	total	2437	---	---	---	---	20.28
	Ant12	2452	14	14.13	99.63	0.02	14.15
	Ant7	2452	14	14.88	99.63	0.02	14.9
	total	2452	---	---	---	---	17.55
	11AC20MIMO	Ant12	2412	9	9.62	99.63	0.02
Ant7		2412	9	9.99	99.63	0.02	10.01
total		2412	---	---	---	---	12.84
Ant12		2417	12.5	12.39	99.63	0.02	12.41
Ant7		2417	12.5	12.35	99.63	0.02	12.37
total		2417	---	---	---	---	15.40
Ant12		2422	17	17.03	99.63	0.02	17.05
Ant7		2422	17	16.59	99.63	0.02	16.61
total		2422	---	---	---	---	19.85
Ant12		2437	17.5	17.05	99.63	0.02	17.07
Ant7		2437	17.5	17.25	99.63	0.02	17.27
total		2437	---	---	---	---	20.18
Ant12		2462	16	15.89	99.63	0.02	15.91
Ant7		2462	16	15.92	99.63	0.02	15.94
total		2462	---	---	---	---	18.94
11AC40MIMO	Ant12	2422	15	15.11	99.63	0.02	15.13
	Ant7	2422	15	14.82	99.63	0.02	14.84
	total	2422	---	---	---	---	18.00
	Ant12	2437	17	17.04	99.63	0.02	17.06
	Ant7	2437	17	17.42	99.63	0.02	17.44
	total	2437	---	---	---	---	20.26
	Ant12	2452	14	14.09	99.63	0.02	14.11
	Ant7	2452	14	14.81	99.63	0.02	14.83
	total	2452	---	---	---	---	17.50
11AX20MIMO	Ant12	2412	9	9.66	99.82	0.01	9.67
	Ant7	2412	9	10.02	99.63	0.02	10.04



	total	2412	---	---	---	---	12.87
	Ant12	2417	12.5	12.42	99.63	0.02	12.44
	Ant7	2417	12.5	12.39	99.63	0.02	12.41
	total	2417	---	---	---	---	15.44
	Ant12	2422	17	17.09	99.63	0.02	17.11
	Ant7	2422	17	16.63	99.63	0.02	16.65
	total	2422	---	---	---	---	19.90
	Ant12	2437	17	17.07	99.82	0.01	17.08
	Ant7	2437	17	17.45	99.63	0.02	17.47
	total	2437	---	---	---	---	20.29
	Ant12	2462	16	15.92	99.82	0.01	15.93
	Ant7	2462	16	15.99	99.63	0.02	16.01
	total	2462	---	---	---	---	18.98
11AX40MIMO	Ant12	2422	15	15.14	99.63	0.02	15.16
	Ant7	2422	15	14.86	99.82	0.01	14.87
	total	2422	---	---	---	---	18.03
	Ant12	2437	17	17.05	99.63	0.02	17.07
	Ant7	2437	17	17.44	99.82	0.01	17.45
	total	2437	---	---	---	---	20.27
	Ant12	2452	14	14.16	99.63	0.02	14.18
	Ant7	2452	14	14.88	99.82	0.01	14.89
	total	2452	---	---	---	---	17.56
11BE20MIMO	Ant12	2412	9	9.73	99.63	0.02	9.75
	Ant7	2412	9	10.1	99.63	0.02	10.12
	total	2412	---	---	---	---	12.95
	Ant12	2417	12.5	12.51	99.63	0.02	12.53
	Ant7	2417	12.5	12.55	99.63	0.02	12.57
	total	2417	---	---	---	---	15.56
	Ant12	2422	17	17.13	99.63	0.02	17.15
	Ant7	2422	17	16.74	99.63	0.02	16.76
	total	2422	---	---	---	---	19.97
	Ant12	2437	17	17.1	99.63	0.02	17.12
	Ant7	2437	17	17.52	99.63	0.02	17.54
	total	2437	---	---	---	---	20.35
	Ant12	2462	16	15.97	99.63	0.02	15.99
	Ant7	2462	16	16.01	99.63	0.02	16.03
	total	2462	---	---	---	---	19.02



11BE40MIMO	Ant12	2422	15	15.16	99.63	0.02	15.18
	Ant7	2422	15	14.99	99.63	0.02	15.01
	total	2422	---	---	---	---	18.11
	Ant12	2437	17	17.09	99.63	0.02	17.11
	Ant7	2437	17	17.49	99.63	0.02	17.51
	total	2437	---	---	---	---	20.32
	Ant12	2452	14	14.18	99.63	0.02	14.2
	Ant7	2452	14	14.92	99.63	0.02	14.94
	total	2452	---	---	---	---	17.60

Note: Duty factor =10 log (1/x), where x is the measured duty cycle



### Power spectral density

#### Test Result

TestMode	Antenna	Freq(MHz)	Result [dBm/3kHz]	Limit [dBm/3kHz]	Verdict
11B-CDD	Ant12	2412	-4.75	≤8.00	PASS
	Ant7	2412	-5.21	≤8.00	PASS
	total	2412	-1.96	≤8.00	PASS
	Ant12	2437	-4.78	≤8.00	PASS
	Ant7	2437	-4.65	≤8.00	PASS
	total	2437	-1.70	≤8.00	PASS
	Ant12	2462	-5.90	≤8.00	PASS
	Ant7	2462	-5.80	≤8.00	PASS
	total	2462	-2.84	≤8.00	PASS
11G-CDD	Ant12	2412	-9.62	≤8.00	PASS
	Ant7	2412	-9.52	≤8.00	PASS
	total	2412	-6.56	≤8.00	PASS
	Ant12	2437	-8.74	≤8.00	PASS
	Ant7	2437	-8.92	≤8.00	PASS
	total	2437	-5.82	≤8.00	PASS
	Ant12	2462	-9.27	≤8.00	PASS
	Ant7	2462	-9.71	≤8.00	PASS
	total	2462	-6.47	≤8.00	PASS
11BE20MIMO	Ant12	2412	-14.98	≤8.00	PASS
	Ant7	2412	-16.90	≤8.00	PASS
	total	2412	-12.82	≤8.00	PASS
	Ant12	2437	-9.50	≤8.00	PASS
	Ant7	2437	-9.80	≤8.00	PASS
	total	2437	-6.64	≤8.00	PASS
	Ant12	2462	-9.96	≤8.00	PASS
	Ant7	2462	-9.77	≤8.00	PASS
	total	2462	-6.85	≤8.00	PASS



11BE40MIMO	Ant12	2422	-12.10	≤8.00	PASS
	Ant7	2422	-12.86	≤8.00	PASS
	total	2422	-9.45	≤8.00	PASS
	Ant12	2437	-12.91	≤8.00	PASS
	Ant7	2437	-11.70	≤8.00	PASS
	total	2437	-9.25	≤8.00	PASS
	Ant12	2452	-12.65	≤8.00	PASS
	Ant7	2452	-14.36	≤8.00	PASS
	total	2452	-10.41	≤8.00	PASS



### Test Graphs

